



— CONSTANT · LOW-POWER · FACTORY INSTALL

EM08-YTB/60DC

Y-Series T-Bracket Emergency LED Driver

8W constant-power emergency LED driver with T-bracket mount for planoARCH applications. Drives 25–48 VDC LED arrays. Universal 100–347 VAC input. Specify /XD adder for 120-minute extended runtime.

KEY FEATURES

- Universal 100–347 VAC input — one driver, every building voltage
- Operating range 41°F to 122°F
- Constant brightness for 90 min · 120 min (/XD) — no dimming as battery drains
- Self-protecting battery — overcharge / over-discharge / short-circuit
- /XD Extended Discharge option — 120 min runtime for AHJ requirements
- UL 924 listed for code-compliant emergency egress
- 5-year limited warranty on driver and battery
- CSA C22.2 No.141 + CEC Title 20 compliant

PERFORMANCE

Emergency Output Power	8 W
Emergency Runtime	90 min · 120 min (/XD)
Output Type	Constant power
Recharge Time	24 hours
Battery Type	LiFePO4
Battery Charging Current	0–250 mA

CONSTRUCTION

Battery Information	LiFePO4
Max. Application	150 W or 4 A
Operating Temperature	41°F to 122°F
Storage Temperature	158°F max
Location Rating	Dry, damp
Warranty	5-year limited

ELECTRICAL

Input Voltage	100–347 VAC
Input Frequency	50 / 60 Hz
Input Current	100 mA max
Input Power	6.0 W max
Output Voltage	DC 30–60 V (Class 2)
Output Current	320–600 mA

COMPLIANCE

Safety Listings	UL 924 · CSA C22.2 No.141
Energy Compliance	CEC Title 20
Installation Listing	UL listed for factory install
Compatibility	planoARCH series

INSTALLATION

Mounting Type	T-bracket
Test Switch	Test switch with indicator light
Wire Type	UL 2464, 24 AWG, 300 V, 80°C
Wire Length	550 mm (21.65")
Installation	Factory only
Power Factor	>0.80

COMPATIBILITY · CONSTANT APPLICATION QUICK GUIDE

planoARCH

See full Application Quick Guide for sensor & controller pairings.

ORDERING INFORMATION

EM08-YTB/60DC	Standard 8 W driver
EM08-YTB/60DC/XD	With Extended Discharge: 120-minute runtime

8W

OUTPUT POWER

90/120 min

STANDARD / /XD

100–347V

UNIVERSAL INPUT

41° to 122°F

OPERATING RANGE

LiFePO4

BATTERY

UL 924

LISTED




— CONST **A** NT · LOW-POWER · FACTORY/FIELD INSTALL

EM08-YTB/60DC

Page 2 of 2 · Dimensions, Wiring, and Operation Notes

— DIMENSIONS

DRIVER ENCLOSURE · Linear Strip

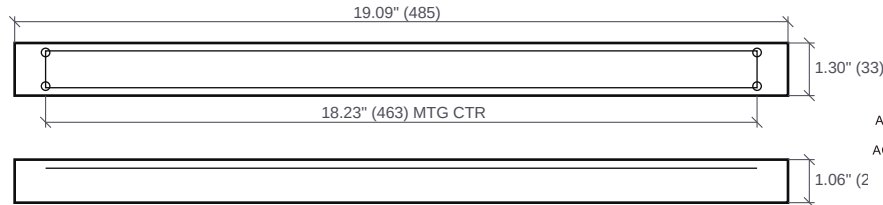


L 19.09" (485) · W 1.30" (33) · H 1.06" (27) · MtgCtr 18.23" (463)

Slim linear form factor · fits T8/T12 channel housings · 18.23" mounting center

All dimensions are inches (millimeters) unless otherwise indicated.

— WIRING DIAGRAM

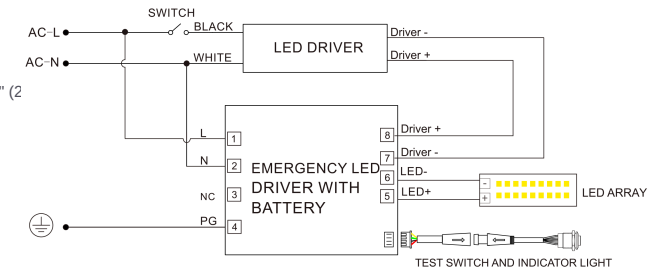

OPERATION

AC Operation:

AC power present · the AC LED driver supplies normal power; emergency driver charges in standby. Red LED indicator on = charging.

Emergency Operation:

On AC failure the emergency driver auto-detects the outage and powers the LED array for ~90 min. Red LED off during egress. AC restoration resumes charging.

— INSTALL REQUIREMENT

The AC LED driver **MUST** be on the same branch circuit as the emergency LED driver. An unswitched hot lead must connect to the emergency driver. Do not mate the battery connector until all other wiring is complete and AC power is on.

8W
OUTPUT POWER

90/120 min
STANDARD / 1XD

100-347V
UNIVERSAL INPUT

41° to 122°F
OPERATING RANGE

LiFePO4
BATTERY

UL 924
LISTED