Performance Study and Circuit Simulation for R12699-406-M4 Photomultiplier Tube Base

Peiyuan Chen, Houqi Huang, Ke Han, Jianglai Liu, Yang Liu, Guanbo Wang, Shaobo Wang, Weihao Wu, Binbin Yan, Peihua Ye, Haosong Yu, Jiaxu Zhou, and Zhizhen Zhou

***Abstract*—The next-generation liquid xenon experiments like PandaX-xT target an energy range from sub-keV to multi-MeV to address the requirement of multiple physics searches. The Hamamatsu R12699-406-M4 photomultiplier tubes (PMTs) were developed and selected as photon sensors for PandaX-xT. Their voltage-divider base is optimized for a broad dynamic range, from single-photoelectron (SPE) sensitivity to 30 nC collected charge (matching the 2.458 MeV Q-value of ^{136}Xe neutrinoless double beta decay (NLDBD)). Using a dedicated test bench, we characterize the saturation and suppression responses of R12699-406-M4 PMTs with this base design. Based on measured PMT-base responses, we develop a circuit simulation model that accurately reproduces the physical mechanisms underlying these effects with key parameters tuned via experimental data. The combined simulation and bench-test approach guides base design and optimization, enabling improved detector dynamic range and supporting future saturation and suppression correction studies in data analysis.**

Peiyuan Chen and Houqi Huang contributed equally to this work. (Corresponding authors: Shaobo Wang; Binbin Yan.)

Peiyuan Chen is with the State Key Laboratory of Dark Matter Physics, Key Laboratory for Particle Astrophysics and Cosmology (MoE), Shanghai Key Laboratory for Particle Physics and Cosmology, School of Physics and Astronomy, Shanghai Jiao Tong University, Shanghai 200240, China, and enrolled at the School of Physics, Jilin University, Changchun 130012, China

Houqi Huang, Shaobo Wang, and Jiaxu Zhou are with SJTU Paris Elite Institute of Technology (SPEIT), Shanghai Jiao Tong University, Shanghai 200240, China (e-mail:shaobo.wang@sjtu.edu.cn).

Ke Han, Jianglai Liu, Yang Liu, Guanbo Wang, Weihao Wu, Peihua Ye, and Zhizhen Zhou are with the State Key Laboratory of Dark Matter Physics, Key Laboratory for Particle Astrophysics and Cosmology (MoE), Shanghai Key Laboratory for Particle Physics and Cosmology, School of Physics and Astronomy, Shanghai Jiao Tong University, Shanghai 200240, China.

Jianglai Liu, Binbin Yan is with the State Key Laboratory of Dark Matter Physics, Key Laboratory for Particle Astrophysics and Cosmology (MoE), Shanghai Key Laboratory for Particle Physics and Cosmology, Tsung-Dao Lee Institute & School of Physics and Astronomy, Shanghai Jiao Tong University, Shanghai 201210, China (e-mail: yanbinbin@sjtu.edu.cn).

Ke Han, Jianglai Liu, Shaobo Wang and Binbin Yan are also with the Shanghai Jiao Tong University Sichuan Research Institute, Chengdu 610213, China.

Ke Han, Jianglai Liu, Shaobo Wang and Weihao Wu are also with the Jinping Deep Underground Frontier Science and Dark Matter Key Laboratory of Sichuan Province, Liangshan 615000, China.

Acknowledgment: This project is supported in part by grants from the National Key R&D Program of China (Nos. 2023YFA1606200, 2023YFA160620[1,2,3,4], 2024YFF0727503), National Science Foundation of China (Nos. 12090060, 12505132, 1209006[2], U23B2070), and by Office of Science and Technology, Shanghai Municipal Government (grant Nos. 21TQ1400218, 22JC1410100, 23JC1410200, ZJ2023-ZD-003), the Natural Science Foundation of Shanghai (No. 24ZR1437100), and the Innovation Funds of CNNC (Lingchuang Fund No. CNNC-LCKY-2025-051). We thank for the support by the Fundamental Research Funds for the Central Universities. We also thank the sponsorship from the Chinese Academy of Sciences Center for Excellence in Particle Physics (CCEPP), Thomas and Linda Lau Family Foundation, New Cornerstone Science Foundation, Tencent Foundation in China, and Yangyang Development Fund. Finally, we thank the CJPL administration and the Yalong River Hydropower Development Company Ltd. for indispensable logistical support and other help.

***Index Terms*—R12699-406-M4, PMT Base, Saturation, Suppression, Circuit Simulation.**

I. Introduction

LIQUID xenon (LXe) detectors are one of the most sensitive techniques for dark matter (DM) searches [1]. These searches primarily target weakly interacting massive particles (WIMPs) [2], hypothesized particles proposed to explain dark matter. With increasing target mass, LXe detectors become promising for rare-event studies, including solar neutrinos [3] and NLDBD [4], [5]. Thus, next-generation LXe detectors need to achieve sensitivity across an energy range from sub-keV to several MeV, which is imperative for simultaneous searches for DM and NLDBD.

Currently, large-scale LXe experiments, such as PandaX-4T [6], LZ [7], and XENONnT [8], have demonstrated the capability to search for both WIMPs and NLDBD using the same detector. For example, PandaX-4T contains 3.7 tonnes of natural xenon in the sensitive volume, and has achieved a WIMP-nucleon cross-section limit of $1.6 \times 10^{-47}\mathrm{cm}^2$ at a WIMP mass of 40 GeV/c^2 [6], a ^{136}Xe NLDBD half-life limit of $T_{1/2} > 2.1 \times 10^{24}$ yr [4], and the most stringent half-life limits on ^{134}Xe double beta decay to date [5]. Next-generation detectors, including XLZD [9], and PandaX-xT [10], will incorporate multi-ten-tonne active targets and reduced backgrounds, enabling WIMP sensitivity to reach the neutrino floor while significantly enhancing NLDBD sensitivity.

LXe detectors utilize a dual-phase xenon time projection chamber (TPC) [11], recording prompt scintillation (S1) and delayed electroluminescence (S2) signals simultaneously via top and bottom PMT arrays of the detector. This enables full three-dimensional position reconstruction and precise energy measurements of an event. The S1 signal, originating at the event vertex, is a prompt scintillation signal with a typical duration on the order of a few hundred nanoseconds, and it generates relatively uniform light distributions across both PMT arrays. By contrast, the S2 signal typically extends over about 10 μs. it is generated from ionization electrons drifting upwards to the liquid xenon surface, where they are extracted into the gaseous xenon (GXe) phase and undergo proportional electroluminescent amplification. Consequently, the top PMT array shows a concentrated hit pattern, with the brightest PMT typically collecting approximately one-third of the total charge. In PandaX-4T, the 3-inch R11410 PMTs in the top array suffered severe saturation effects at high energy range, degrading energy resolution and position reconstruction

accuracy [12]. We have achieved a linear response up to 32 nC at a gain of 5×10^6 by implementing upgraded PMT base circuits. To further extend the dynamic range up to the Q-value of ^{136}Xe NLDBD (about 2.458 MeV), we developed a waveform desaturation method that aligns the rising edges of saturated waveforms with those of reference waveforms. This approach improves the linearity by a factor of 5 [13].

The PMT array is a critical detector component, sitting closest to the detector's sensitive volume and directly collecting signals. For the next-generation PandaX-xT detector, the R12699-406-M4 PMT [14] (abbreviated R12699), was developed in collaboration with Hamamatsu Photonics K.K., featuring substantially reduced intrinsic radioactivity. As shown in Fig. 1, this 2-inch square PMT is a compact four-anode device employing a metal-channel dynode structure, integrating four identical 1-inch detection channels within a single housing, enhancing granularity. All four channels share a common dynode amplification system through the base circuit. Previous studies have reported that the R12699-406-M4 can achieve gains above 2×10^6 at a nominal bias of -1000 V in cold xenon environments, while with an optimized readout base, its cryogenic gain can further reach the level of 5×10^6 [14], [15]. For operation in liquid xenon detectors, the PMT is designed to work under cryogenic conditions around -100 $^\circ$C.

Based on the performance of the 3-inch R11410 PMTs in PandaX-4T and scaled by the photocathode area ratio, the R12699 PMT requires a linearity range of 30 nC to cover energies up to 2.5 MeV at the same gain.

In this work, we systematically investigate the base configurations for the R12699 PMT using bench tests and circuit simulation. Focusing on mitigating signal saturation and suppression effects, we propose an optimized design that meets the requirements of next-generation LXe detectors. Section II describes three versions of the PMT base with different numbers of capacitors. In Section III, we introduce a dedicated bench setup used to evaluate the saturation and suppression effects. Section IV presents the circuit-simulation framework for the PMT base and illustrates the mechanisms underlying saturation and suppression. Finally, a summary is given in Section V.

II. Base circuit design

The base denotes the voltage-divider circuit board, providing operating voltage division across the dynodes and enabling anode signal transmission. As illustrated in Fig. 2, the resistor chain ratio follows the base circuit design proposed by Hamamatsu [16]. The recommended operating voltage is 1000 V (photocathode-to-anode), with the anode grounded and -1000 V applied to the photocathode.

The resistance is selected as 1 MΩ by considering the thermal power tolerance in the LXe environment [10]. The current through the voltage-divider circuit, $I_{circuit}$, maintains a constant current of approximately 80 μA. Resistors R6–R18 establish an 80–112 V inter-stage voltage between adjacent dynodes. Three damping resistors (R19–R21) are placed at the last dynodes (Dy8-Dy10) to mitigate signal oscillation.

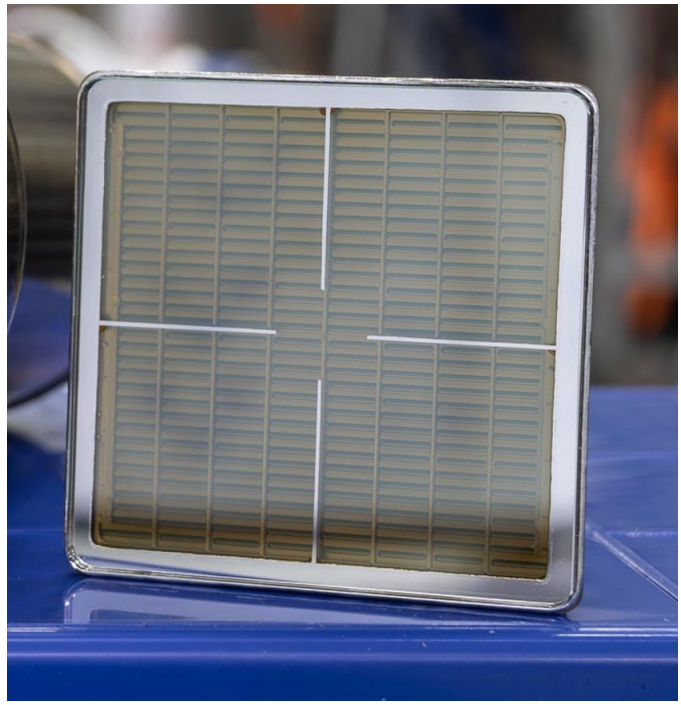

Fig. 1. The picture of 2-inch R12699 PMT. The square PMT integrates four identical 1-inch detection channels within a single housing.

Capacitors C1–C4 (22 nF each) suppress saturation effects, while C5 (10 nF) acts as a power-supply filter capacitor. The equivalent capacitance (C_{eq}) at each dynode stage is 95.6±7.6 pF, measured via a Keysight E4980A LCR meter at 1 kHz (similar value at 300 kHz) and 25°C [17].

The multiplication factor per dynode stage ranges from 3 to 8 and increases with higher voltage division. Electron multiplication at each stage exponentially amplifies the electron flux, producing progressively larger secondary currents (I_{dy1}, I_{dy2} ... I_{dy10}). The secondary currents flow opposite to $I_{circuit}$, causing deviations from the inter-stage voltage distribution, and this type of deviation can be mitigated by desaturation capacitors. The charge stored in C_{eq} and C1–C4 are approximately 8 nC and 1760 nC, respectively. Under small-signal conditions, such deviations are negligible. For large signals, however, significant charge trapping occurs when the secondary charge induced by the signal is comparable to the charge stored at each dynode. This leads to substantial voltage deviations that reduce the multiplication factors at later dynodes (typically from DY7 to DY10), thereby decreasing the output signal and manifesting as saturation effects. Signal waveforms distort during severe PMT saturation. Furthermore, when two light signals arrive within a short time interval, voltage deviations induced by the first signal persist, causing additional suppression of the subsequent signal.

Mitigation of saturation and suppression effects can be achieved by reducing PMT gain or optimizing the base circuit—specifically adding desaturation capacitors. However, given signal-to-noise ratio constraints for SPE detection, optimizing the number of desaturation capacitors in the base circuit is the only viable approach.

For instance, capacitors C1–C4 are connected in parallel

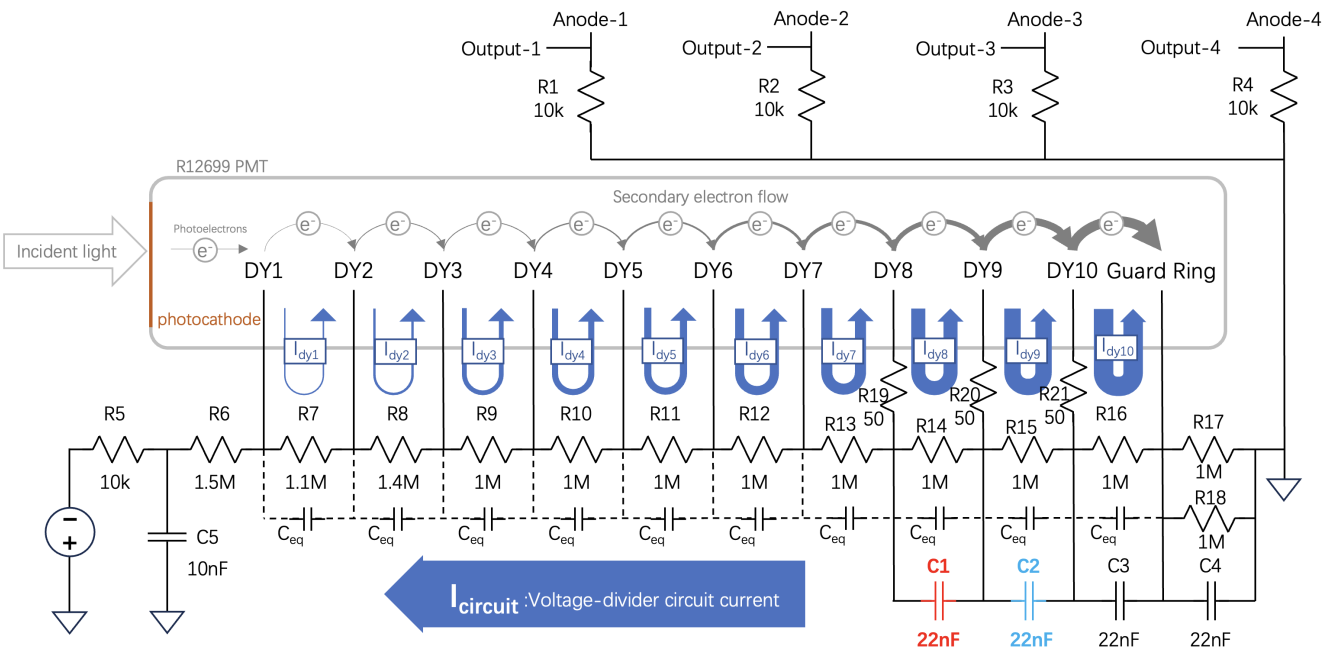

Fig. 2. The designed base circuit of the R12699 PMT, illustrating the electron flow and currents during operation. Please refer the text for detailed information.

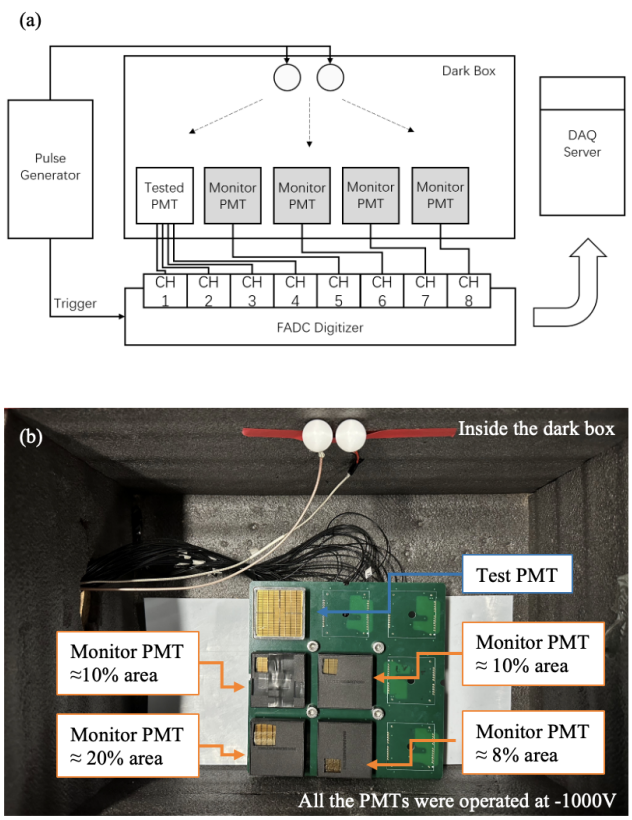

Fig. 3. (a) Schematic of the bench-test setup. (b) Picture of the test setup. The base PCB accommodates a 3×3 PMT array. 5 PMTs are placed inside, including 1 test PMT and 4 monitors.

with dynodes DY8, DY9, DY10, and the anode, respectively, to maintain stable inter-stage voltages under large-signal conditions. While such capacitors effectively alleviate saturation, their configuration requires careful optimization to avoid excessive radioactivity, as established in [18] . Active voltage divider designs [19], while offering potential improvements in voltage stability and gain drift compensation, are not implemented here due to the strict radiopurity constraints, and unvalidated cryogenic performance for our liquid xenon rare-event search experiment.

Finally, three base circuits (BASE-1, BASE-2, and BASE-3) have been designed and implemented for bench testing, as detailed in Table I and Fig. 2. Consequently, subsequent testing focuses exclusively on desaturation capacitor placement.

TABLE I
THREE PMT BASE DESIGNS (DYNAMIC RANGE DISCUSSED LATER)

Base	Description	Dynamic range
BASE-1	Full desaturation (C1-C4) for max dynamic range	286 nC
BASE-2	Remove C1 to balance dynamic range and radioactivity	83 nC
BASE-3	Remove C1-C2 for minimal radioactivity	25 nC

III. PERFORMANCE TEST

A. Bench test setup

As shown in Fig. 3, we set up a dedicated bench test for the PMT base to evaluate saturation and suppression effects. The

system consists of a dark box, five R12699 PMTs, a Tektronix AFG 31252 arbitrary waveform generator [20], two blue LEDs embedded in PTFE spherical diffusers, a CAEN R8033DM high-voltage power supply [21], and a set of electronics together with a data acquisition (DAQ) system [22].

The five PMTs are arranged as follows: one functions as the test PMT, equipped with the base under study. The saturation response is evaluated using the sum of the charges from all four channels.

In order to monitor the light intensity over a wide dynamic range, four monitor PMTs are installed next to the tested PMT. These monitor PMTs employ BASE-1 and are equipped with black masks covering the photocathode, reducing their effective light-sensitive area to 8–20% of full size, so that for any given LED signal, at least one of them operates in its linear regime. In the analysis, the monitor PMT with the highest signal-to-noise ratio that still lies in the linear regime is used to offer a reference.

Since the relative positions of the LED source and PMTs, as well as the light-receiving area of each PMT, are fixed in the bench-test setup, the proportion of light intensity received by each PMT can be determined. Therefore, the true response of the tested PMT is reconstructed by multiplying the charge of the chosen monitor PMT by the ratio of the tested PMT response to the monitor response measured in the linear regime.

The Tektronix AFG31252 drives the LEDs. Its two phase-synchronized channels generate timing correlated light-outputs, producing either S2-like waveforms using a 10 µs-wide square waveform. The diffuser attached to each LED makes the light output as isotropic as possible. Light intensity is adjusted via the generator's output amplitude. The DAQ operates in external-trigger mode, synchronized with the generator, and digitizes the PMT signals at a sampling rate of 500 MHz [22]. The DAQ digitizes the PMT waveforms with a dynamic range of ± 1.08 V with 14-bit resolution, corresponding to a voltage resolution of 0.132 mV.

The PMT performance measurements in this work were performed in a laboratory environment above room temperature (25 °C) without active temperature control. An additional low-temperature gain test showed only a small variation within the investigated range, indicating that temperature-dependent effects are limited and do not significantly affect the main comparative trends reported here. In this work, a total of eight R12699 PMTs are included in the test, labeled A through H. PMT-A operating at a gain of 2.7×10^6 serves as the main target device. SPE charge calibration precedes and follows each bench test to monitor PMT gain stability. Gain remained stable throughout all measurements. The collected charge is analyzed to determine the PMT gain, which is then used to infer input light intensity.

B. Saturation

Saturation effect manifests as waveform distortion and reduced PMT charge response. In Fig. 4 (a), the observed charge Q^{obs} matches the true input charge Q^{t}, which is reconstructed from the monitor PMT. In Fig. 4(b), with high light input, severe saturation occurs, waveforms distort significantly, and Q^{obs} is reduced by 63% compared to Q^{t}.

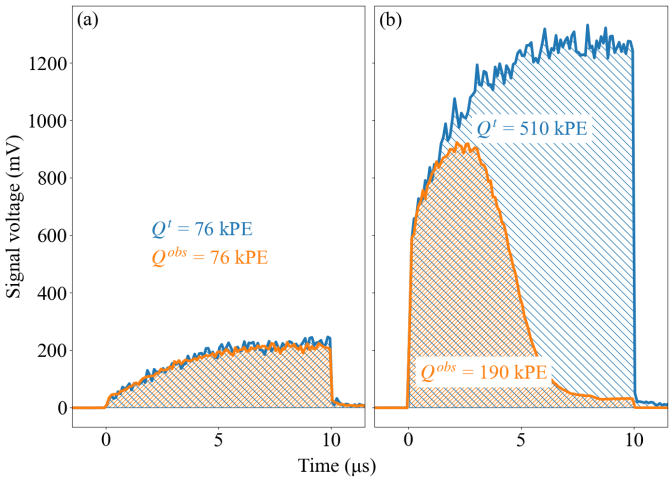

Fig. 4. PMT waveforms from bench test. The orange and blue waveforms represent the recorded signal from the test PMT and the reconstructed input signal from the monitor PMT, respectively. (a) the observed charge Q^{obs} matches the true input charge Q^{t}, (b) shows Signal with severe saturation effect.

Fig. 5 presents the saturation response curves of Q^{obs} as a function of Q^{t} for three bases. BASE-1 exhibits the widest dynamic range, with a maximum Q^{limit} of 662 kPE (286 nC). this parameter is defined as the mean value of the maximum observed collected anode charge at full PMT saturation (where the output charge no longer increases with input light intensity), averaged across repeated measurements.Compared to BASE-1, Q^{limit} of BASE-2 drops to one-third (83 nC), while that of BASE-3 decreases to one-tenth (25 nC). This limit arises from the complete depletion of the charge stored in $\mathrm{C_{eq}}$. Notably, the Q^{limit} ratio between BASEs directly indicates that the amplification factor of the subsequent dynodes is 3.4. Following this ratio, the charge at Dy9–D10 and DY8–DY9 reach about 24 nC and 7 nC at Q^{limit} for BASE-2, respectively. This value correlates strongly with the charge stored in $\mathrm{C_{eq}}$ (8 nC), confirming $\mathrm{C_{eq}}$'s role in limiting dynamic range. These results confirm that charge depletion of the $\mathrm{C_{eq}}$ capacitors, rather than space-charge effects in the metal-channel dynodes, is the dominant saturation mechanism within the dynamic range of this work.

As shown in Fig. 6, PMTs with BASE-2 deliver a measured Q^{limit}, in most cases, above 60 nC, thereby exceeding twice the aforementioned dynamic-range requirement. In the remainder of this work, we use BASE-2 as the default base configuration unless otherwise specified.

Saturation only suppresses the overall signal amplitude via the common dynode amplification system, with no distortion to inter-channel charge ratios, which supports reliable single-channel saturation correction; moreover, established correction methods can further desaturate PMT signals by utilizing waveform information [13].

C. Suppression

We characterize the suppression effect using the same bench-test setup with PMT-A and BASE-2. Fig. 7 illustrates a

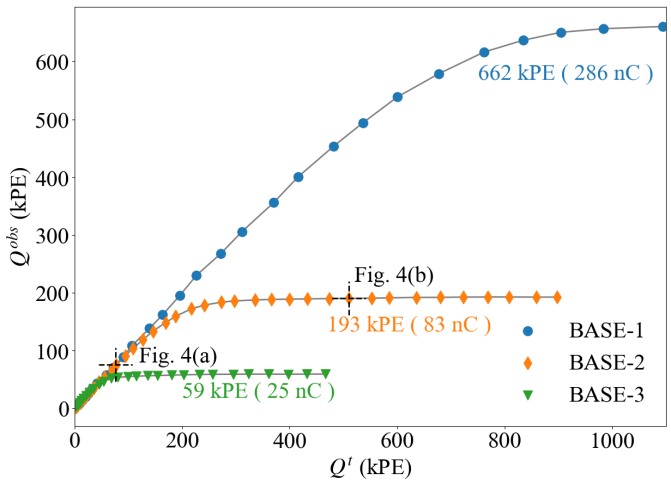

Fig. 5. The saturation response curves of PMT-A with different base circuits. The black markers denote the two specific cases presented in Fig. 4.

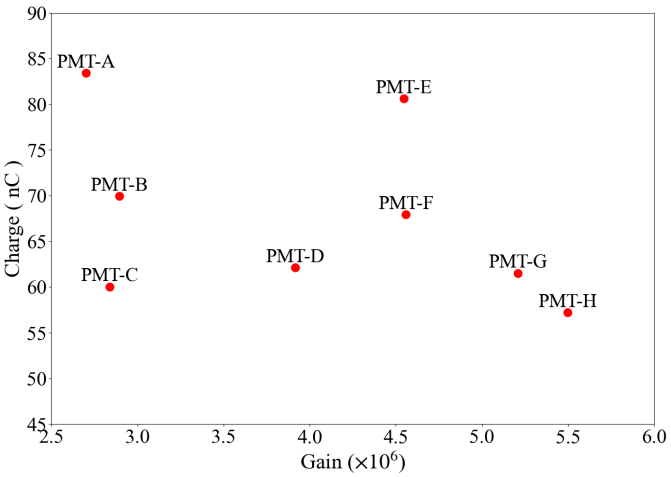

Fig. 6. Saturation limits for multiple PMTs with BASE-2 at different gains spanning 2.7×10^6 to 5.5×10^6.

suppression event where two 10-µs square pulses are separated by a time interval δ_t of 5 µs. In the first waveform, the observed signal corresponds well with the true signal, while the second waveform shows clear distortion, and its observed charge Q_2^{obs} is only 111 kPE, showing a significant reduction compared with the true input charge Q_2^{t} of 409 kPE.

The suppression effect depends on both Q_1^{obs} and δ_t. As shown in Fig. 8, for a given δ_t, the Q_2^{obs} response follows a saturation-like curve, approaching a limiting value that is inversely proportional to Q_1^{obs}, reflecting the capacitor discharging induced by Q_1^{obs}. Conversely, for a given Q_1^{obs}, a longer δ_t mitigates the suppression effect. By comparing Fig. 8 (a) and (b), at $\delta_t = 100$ µs, the Q_2^{obs} response curve corresponding to a given Q_1^{obs} exhibits a higher limiting value and approaches the saturation curve more closely, indicating enhanced capacitor recharging.

Compared to the saturation, the first waveform shifts the subsequent response, thereby altering the onset of the charge response in the saturation curve. Compared to the saturation, the first waveform shifts the subsequent response, thereby al-

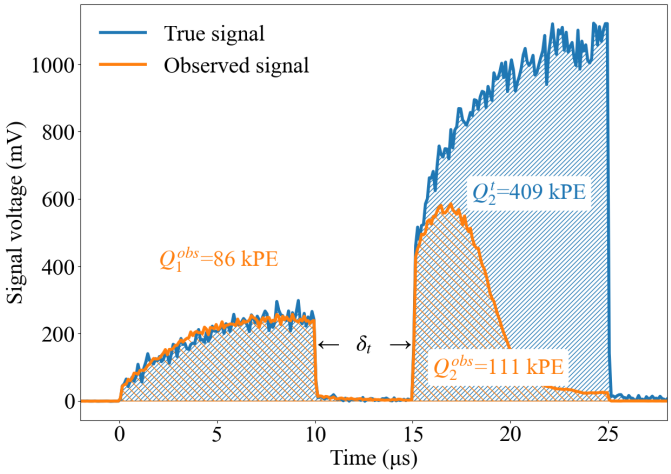

Fig. 7. Suppression response waveforms of PMT-A with BASE-2. The orange lines represent the recorded signal from the test PMT, and the blue lines represent the reconstructed true input signal from the monitor PMT. δ_t here is 5 µs.

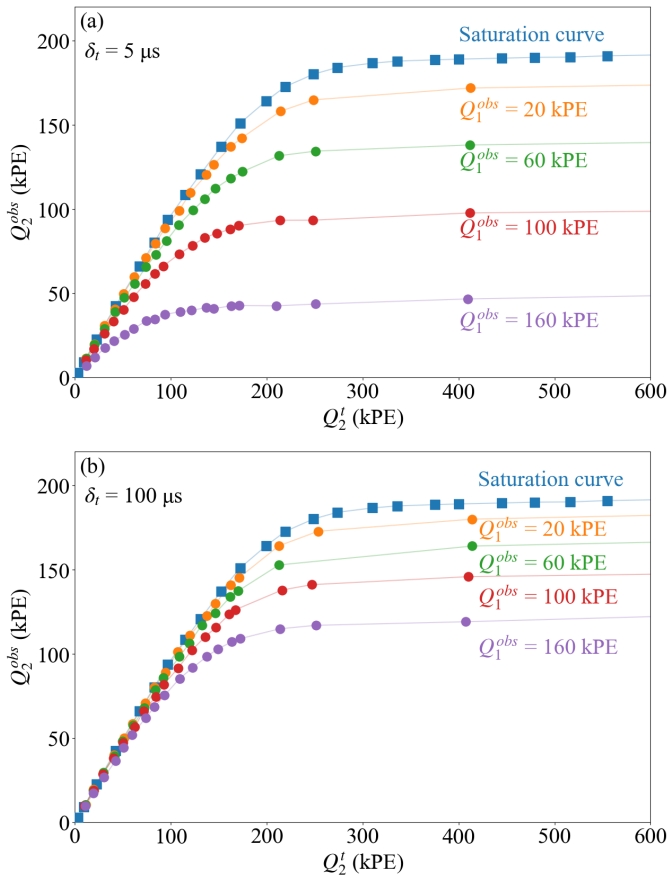

Fig. 8. PMT suppression curves of different Q_1^{obs} for δ_t of 5 µs (a) and 100 µs (b), the saturation curve is overlaid.

tering the onset of the charge response in the saturation curve. As shown in Fig. 9, the suppression-induced response curves and the saturated response curves are completely coincident, through shifting the suppression-induced response curve in both horizontal and vertical directions. This response shift is defined as a "start point" $\mathrm{P^{start}}$ to clarify the relationship between suppression and saturation response curves. The shifting procedure to determine $\mathrm{P^{start}}$ includes two steps: firstly, the horizontal shift is determined by comparing the difference between the maximum of Q_2^{obs} and Q^{limit}; then, a shift in the vertical direction is performed in order to completely overlap with the saturation curves. Ultimately, the zero point in the suppression-induced response curve is shifted to $\mathrm{P^{start}}$.Fig. 9 (a) compares response curves at given Q_1^{obs} of 140 kPE for two different δ_t of 5 µs and 100 µs. For larger δ_t, the start point shifts toward zero; as $\delta_t \to \infty$, the start point shifts to zero, thereby restoring the saturation scenario. Fig. 9 (b) displays curves at given δ_t of 50 µs for two different Q_1^{obs} of 83 kPE and 155 kPE. When $Q_1^{\mathrm{obs}} = 0$, the start point also shifts to zero. Therefore, the physical mechanism of the suppression effect resembles saturation.

For a given $Q_1^{\mathrm{obs}} = Q^{\mathrm{limit}}$, we further investigated the recovery time of the suppression effect. Fig. 10 illustrates the relationship between $\frac{Q_2^{\mathrm{obs}}}{Q^{\mathrm{limit}}}$ and δ_t: the recovery time consists of two components (fast shown as the red region and slow shown as the green region), corresponding to the equivalent capacitance $\mathrm{C_{eq}}$ and desaturation capacitors, respectively. The fitting function is defined as the product of two capacitor charging functions, each associated with the respective RC time constant of the two capacitors. Since the response of the PMT is non-linear with respect to the capacitor voltage, the fitting result should only be taken as a reference. After approximately four relaxation times (fitted τ_1=125 s, $\mathrm{C_{eq}}$ dominated), Q_2^{obs} reaches 90% of Q^{limit}; full recovery of the suppression effect requires 20 ms, governed by the slow relaxation of desaturation capacitors (fitted τ_2 = 12 ms, desaturation capacitor dominated). Consequently, for LXe detectors, the 20 ms period following a large signal should be treated as the circuit recovery time , as the PMT has not yet fully recovered during this interval. Additionally, the parameters derived from the fitted curve indicate that the characteristic capacitance of $\mathrm{C_{eq}}$ is approximately 0.1 nF, which is consistent with the value measured by the LCR meter.

Given values of Q_1^{obs} and δ_t, the response starting point can be determined, enabling correction for the suppression effect by following the saturation response curve. A correction factor $\mathcal{F}$ is defined as the ratio of the charge on the saturation curve to the observed charge of the second waveform. The correction performance is quantified by the relative residual $\mathcal{R} = \frac{Q_2^{\mathrm{c}} - Q_2^{\mathrm{t}}}{Q_2^{\mathrm{t}}}$, where Q_2^{t} denotes the true charge of the second signal and Q_2^{c} is the corrected charge ($Q_2^{\mathrm{c}} = \mathcal{F} \times Q_2^{\mathrm{obs}}$). For δ_t=5 s, 50 s, and 100 s, Gaussian fits to the corrected residual distributions give standard deviations of 4.2%, 2.3%, and 2.5%, respectively. The broader residual distribution at shorter δ_t indicates stronger suppression and consequently less reliable correction. These results support the development of a general PMT correction database, which may provide an additional tool for recovering suppressed signals in future experiments.

For shorter δ_t, suppression intensifies, leading to less reliable corrections. These results support developing a general PMT correction database, offering an additional tool to recover suppressed signals in future experiments.

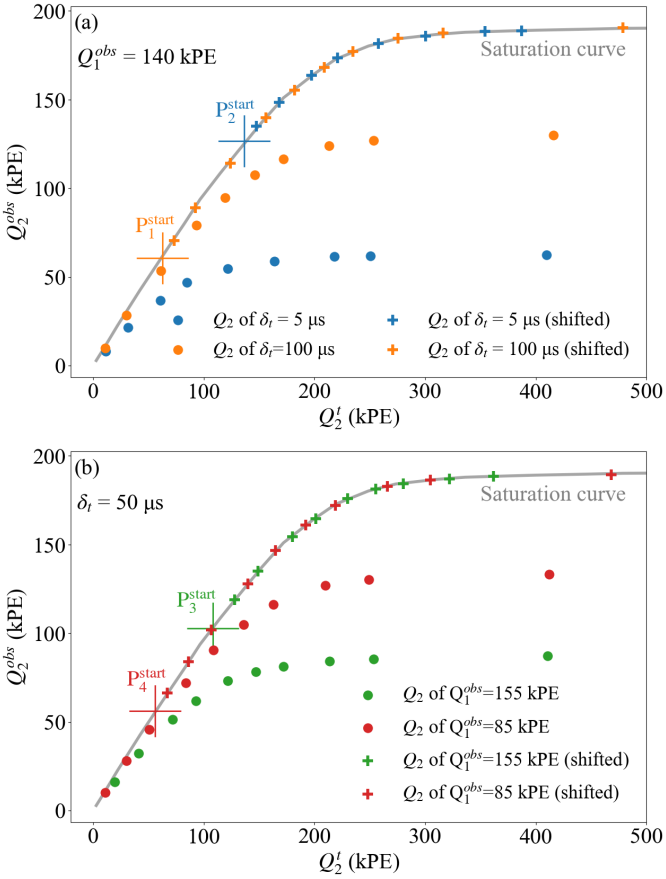

Fig. 9. Comparison between saturation and suppression response. (a) compares response curves at given Q_1^{obs} of 140 kPE for two different δ_t of 5 µs and 100 µs. (b) displays curves at given δ_t of 50 µs for two different Q_1^{obs} of 83 kPE and 155 kPE. The definition of $\mathrm{P^{start}}$ can be found in the text.

IV. Base Circuit Simulation

Circuit simulations provide deeper insight into the mechanisms of saturation and suppression effects. We employ the LTSpice software [23] to simulate the base circuit connected with R12699. Generally, the simulation needs to consider the entire system composed of PMT and base circuit simultaneously. The PMT response fluctuations can be taken into count through LTSpice-based, behavioral circuit modeling [24]–[27], or device-level Monte-Carlo modeling [28], [29], which mainly focus on the electron transport, transfer and emission process inside PMT. However, in this work we do not aim to build a complete microscopic model of the PMT; rather, we seek to study the effect of the base design while treating the PMT itself as a fixed, well-characterized device under test. Accordingly, we adopt a simplified, base-centric SPICE simulation framework that is sufficient to reproduce the saturation and suppression trends relevant to divider/base optimization.

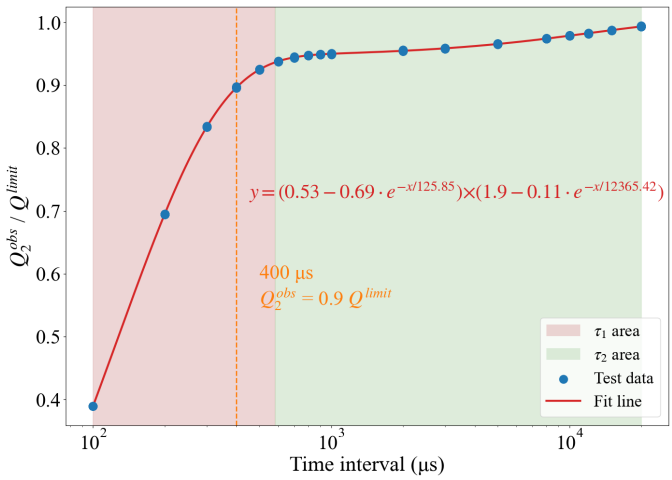

Fig. 10. Normalized charge recovery of the second charge when $Q_1^{\mathrm{obs}} = Q^{\mathrm{limit}}$. The recovery time consists of two components (a fast component shown as the red region and a slow component shown as the green region). The fitted function is $y = (0.53 - 0.69 \cdot \mathrm{e}^{-\mathrm{x}/125.85}) \times (1.9 - 0.11 \cdot \mathrm{e}^{-\mathrm{x}/12365.42})$.

The model of simulation is shown in Fig. 11, where $\mathrm{I_{in}}$ represents the current emitted from the PMT photocathode. Current sources are placed between adjacent dynodes to model signal transmission behavior, including voltage division, electron multiplication, and electron transport. The output signal $\mathrm{I_{out}}$ corresponds to the current extracted from the final dynode. The simulation also includes the equivalent capacitance $\mathrm{C_{eq}}$ of 0.1 nF between adjacent dynodes.

A data-driven method is employed to determine the current sources from $\mathrm{I_1}$ to $\mathrm{I_{out}}$ based on our bench test. Ideally, electron multiplication factors between dynodes are denoted by δ_n (from δ_1 to δ_{10}), with specific values provided by Hamamatsu Corporation as reference. At -1000 V voltage, the gain of PMT-A $G = \prod_{n=1}^{10} \delta_n$ is 2.7×10^6.

In practice, charge transport induces a proportional reverse bias ΔV_n primarily in the last dynode stages – especially Dy8–Dy9, where no desaturation capacitor is installed. This shift reduces the effective inter-stage multiplication voltage, lowers the stage gain by $\Delta\delta_n$, and introduces response nonlinearity that is concentrated in these final dynode stages. With the total cathode-to-anode supply voltage fixed, this voltage reduction in the final stages drives a corresponding increase in the inter-stage voltage across the earlier dynode stages, similar to the result in [29].

Thus, the output signal can be expressed as:

$$\mathrm{I_{out}} = \mathrm{I_{in}} \times \prod_{n=1}^{10} (\delta_n - \Delta\delta_n), \tag{1}$$

where $\Delta\delta_n$ is modeled with $A \times \Delta V_n^B$ in the simulation, where A = 8×10^{-11}, and B = 6. The proportional coefficient A and the constant B are tuned through bench test data.

The simulation reproduces the PMT response, including characteristic saturation and suppression effects. Fig. 12 shows two examples of simulated PMT waveforms; no waveform distortion occurred for an input signal of 100 kPE with a width of 10 µs. However, under a larger input of 400 kPE, significant saturation distortion is observed, yielding an observed charge Q^{obs} of 188 kPE. Fig. 13 shows the characteristic waveforms of the suppression effect, two input square pulses with a width of 10 µs are applied. Fig. 13 (a) shows an example under the small signal situation, where no suppression effect is observed. Fig. 13 (b) and (c) demonstrate the examples of suppression response with different time intervals δ_t between the two signals. In the case of δ_t = 5 µs, a significant suppression effect is observed. By increasing δ_t to 100 µs, the suppression effect is reduced, which is consistent with the bench test results in the experiment.

Fig. 14 presents the saturation response curves for BASE-1, BASE-2, and BASE-3. Simulation results closely match bench-test data in both waveform shapes and saturation limits, achieved solely through tuning factor A using the BASE-2 configuration. Simulations closely match experimental behavior, with slight deviation only in the saturation limit for BASE-1. It is also adopted in simulating the suppression effect. Fig. 15 shows the results for two different time intervals δ_t. These discrepancies may originate from multiple sources, including response variations between PMT stages or finite response times of base circuit components. They can be mitigated through additional parameter tuning using experimental data. For example, we can tune the δ_n or replace the constants in $A \times \Delta V_n^B$ by A_n and B_n to optimize the response simulation in each stage. Finally, the circuit simulation successfully captures the essential physical mechanisms underlying the response, while also providing a platform for the design and performance evaluation of base circuits.

V. Conclusion

We report the design study of the Hamamatsu R12699 PMT voltage divider base. The large-scale LXe experiments have demonstrated the capability to search for both WIMPs and NLDBD in the energy range from sub-keV up to several MeV. The Hamamatsu R12699 PMT has the advantages of low background and high granularity, making it the preferred candidate for the next generation of detectors. The optimized PMT base is a critical component of the detector for achieving a wide dynamic range and enhancing the imaging capability of particles.

Three bases with different numbers of desaturation capacitors were designed. A dedicated bench test system evaluated these bases and investigated saturation and suppression responses in Hamamatsu R12699 PMTs. The four-capacitor base (BASE-2) meets PandaX-xT requirements for PMTs at different gains from 2.7×10^6 to 5.5×10^6, and its saturation and suppression effects were tested and characterized. For a deeper understanding of the base response, an LTSpice-based circuit simulation model was developed; this model reproduces saturated/suppressed waveforms, captures the key physics of the responses, and facilitates base circuit design and evaluation. Finally, the combined simulation and bench test approach guides base design and optimization. The optimized base circuit can not only meet the energy coverage range from sub-keV to several MeV, but also reduce the background contribution and enhance the stability, improving detector

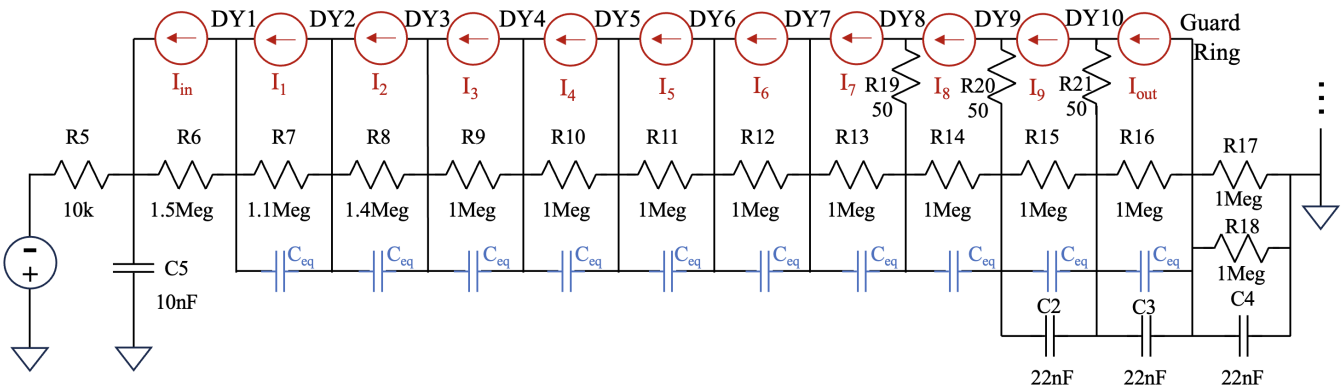

Fig. 11. LTSpice circuit model of PMT-A with BASE-2, including the dynode chain, current sources, and measured inter-dynode capacitances.

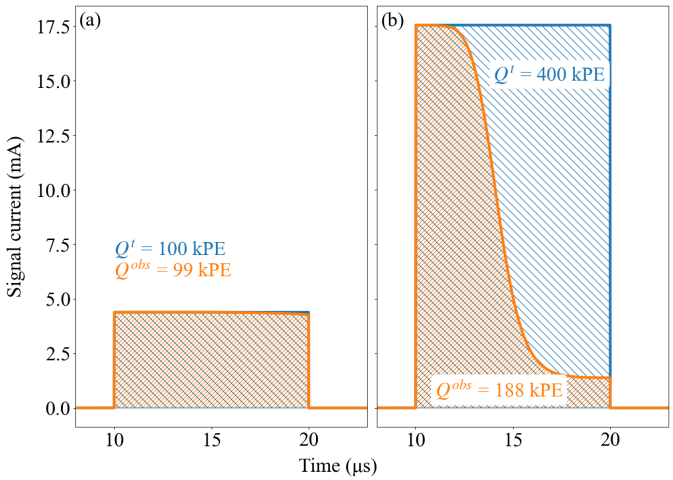

Fig. 12. Illustration of the simulated waveforms. (a) Simulation without saturation. (b) Simulation with saturation.

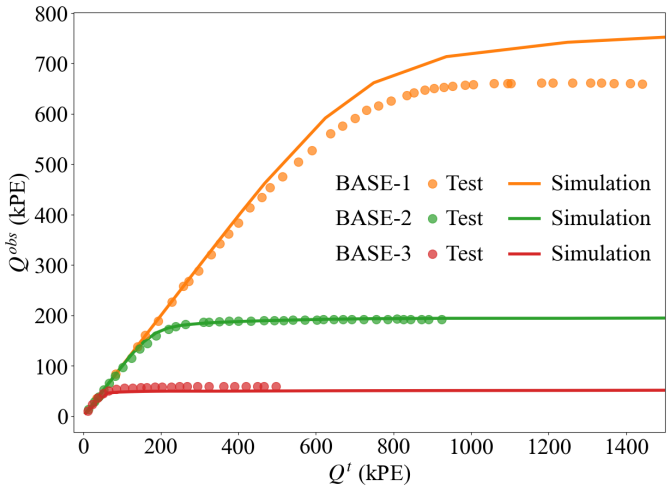

Fig. 14. Comparison of saturation response curves between simulation and bench test results for PMT-A on BASE-1, BASE-2, and BASE-3.

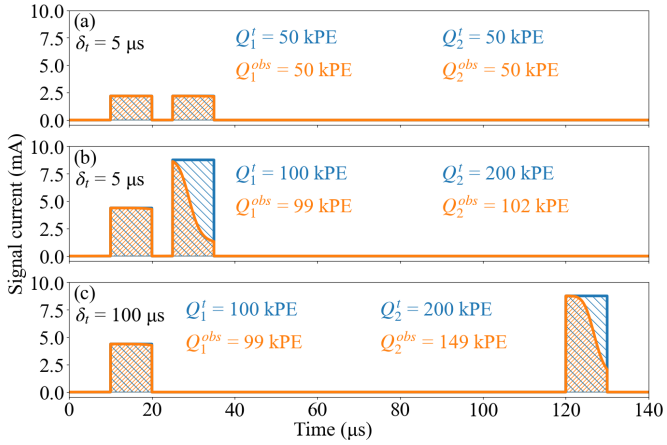

Fig. 13. Simulated examples for suppression for two consecutive inputs. (a) For small signals (Q_1^t = 50 kPE, Q_2^t = 50 kPE) with δ_t = 5 μs. (b) For larger signals (Q_1^t = 100 kPE, Q_2^t = 200 kPE) with the same interval. (c) With a longer interval of δ_t = 100 μs.

performance and promoting the large-scale LXe experiments, i.e., PandaX-xT to achieve the researches of multiple physical objectives.

Future work will focus on: (1) optimizing desaturation capacitor materials to reduce intrinsic radioactivity; (2) integrating the saturation/suppression correction model into the data analysis chain; (3) extending the simulation to other PMT models for cross-validation; (4) trying the dynode-by-dynode voltage monitoring method as validated by prior work [29] to localize PMT saturation origins.

References

[1] L. Baudis, "Dual-phase xenon time projection chambers for rare-event searches," *Phil. Trans. Roy. Soc. A*, vol. 382, no. 2266, Art. no. 20230083, 2023, doi: 10.1098/rsta.2023.0083.

[2] E. Aprile *et al.*, "The XENONnT dark matter experiment," *Eur. Phys. J. C*, vol. 84, no. 8, Art. no. 784, 2024, doi: 10.1140/epjc/s10052-024-12982-5.

[3] Z. Bo *et al.*, "First indication of solar ^{8}B neutrinos through coherent elastic neutrino–nucleus scattering in PandaX-4T," *Phys. Rev. Lett.*, vol. 133, Art. no. 191001, 2024, doi: 10.1103/PhysRevLett.133.191001.

[4] S. Zhang *et al.*, "Searching for neutrinoless double-beta decay of ^{136}Xe with PandaX-4T," *Sci. Bull.*, vol. 70, pp. 1779–1785, 2025, doi: 10.1016/j.scib.2025.03.009.

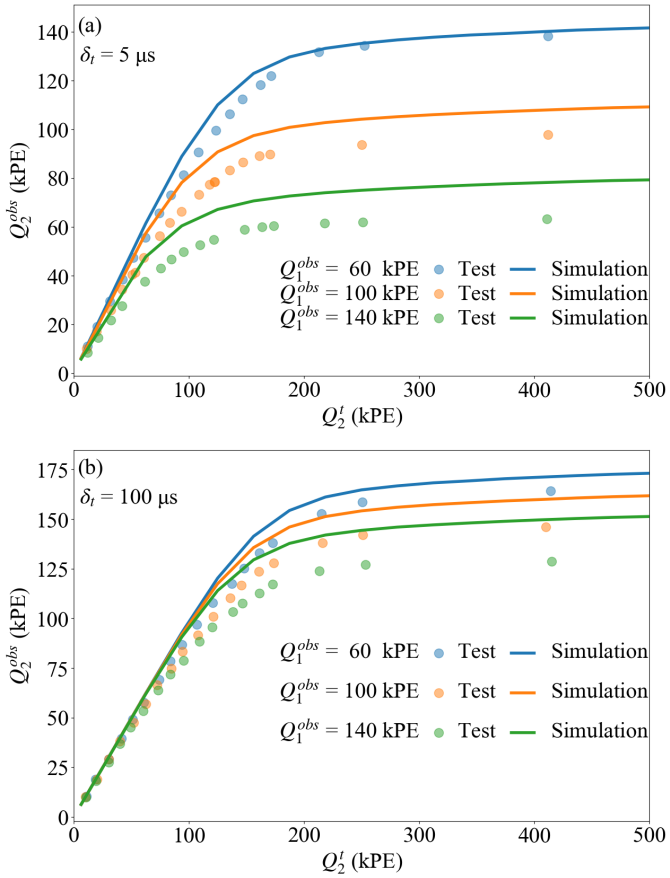

Fig. 15. Comparison of suppression response curves between simulation and bench test results for PMT-A on BASE-2 for time intervals of 5 µs and 100 µs.

[5] X. Yan *et al.*, "Searching for two-neutrino and neutrinoless double beta decay of ^{134}Xe with the PandaX-4T experiment," *Phys. Rev. Lett.*, vol. 132, no. 15, Art. no. 152502, 2024, doi: 10.1103/PhysRevLett.132.152502.

[6] Z. Bo *et al.*, "Dark matter search results from 1.54 tonne-year exposure of PandaX-4T," *Phys. Rev. Lett.*, vol. 134, no. 1, Art. no. 011805, 2025, doi: 10.1103/PhysRevLett.134.011805.

[7] J. Aalbers *et al.*, "Dark matter search results from 4.2 tonne-years of exposure of the LUX-ZEPLIN (LZ) experiment," *Phys. Rev. Lett.*, vol. 135, no. 1, Art. no. 011802, 2025, doi: 10.1103/PhysRevLett.135.011802.

[8] E. Aprile *et al.*, "WIMP dark matter search using a 3.1 tonne-year exposure of the XENONnT experiment," *Phys. Rev. Lett.*, vol. 135, no. 22, Art. no. 221003, 2025, doi: 10.1103/PhysRevLett.135.221003.

[9] L. Baudis, "DARWIN/XLZD: A future xenon observatory for dark matter and other rare interactions," *Nucl. Phys. B*, vol. 1003, Art. no. 116473, 2024, doi: 10.1016/j.nuclphysb.2024.116473.

[10] A. Abdukerim *et al.*, "PandaX-xT—a deep underground multi-ten-tonne liquid xenon observatory," *Sci. China Phys. Mech. Astron.*, vol. 68, Art. no. 221011, 2025, doi: 10.1007/s11433-024-2539-y.

[11] J. Aalbers *et al.*, "A next-generation liquid xenon observatory for dark matter and neutrino physics," *J. Phys. G*, vol. 50, no. 1, Art. no. 013001, 2023, doi: 10.1088/1361-6471/ac841a.

[12] L. Si *et al.*, "Determination of double beta decay half-life of ^{136}Xe with the PandaX-4T natural xenon detector," *Research*, vol. 2022, Art. no. 9798721, 2022, doi: 10.34133/2022/9798721.

[13] L. Luo, D. Fang, K. Han, *et al.*, "Improvement on the linearity response of PandaX-4T with new photomultiplier tube bases," *JINST*, vol. 19, no. 5, Art. no. P05021, 2024, doi: 10.1088/1748-0221/19/05/P05021.

[14] Y. Yun *et al.*, "A novel low-background photomultiplier tube developed for xenon-based detectors," *Nucl. Instrum. Methods Phys. Res. A*, vol. 1073, Art. no. 170290, 2025, doi: 10.1016/j.nima.2025.170290.

[15] M. Adrover *et al.*, "Characterization of the Hamamatsu R12699-406-M4 photomultiplier tube in cold xenon environments," *JINST*, vol. 20, Art. no. P12021, 2025, doi: 10.1088/1748-0221/20/12/P12021.

[16] Hamamatsu Photonics K.K., *Photomultiplier Tubes: Basics and Applications*, 4th ed. Hamamatsu, Japan: Hamamatsu Photonics K.K., 2017.

[17] Keysight Technologies, "E4980A precision LCR meter, 20 Hz to 2 MHz," [Online]. Available: https://www.keysight.com/in/en/product/E4980A/precision-lcr-meter-20-hz-2-mhz.html

[18] Z. Qian *et al.*, "Low radioactive material screening and background control for the PandaX-4T experiment," *JHEP*, vol. 6, Art. no. 147, 2022, doi: 10.1007/JHEP06(2022)147.

[19] A. Giaz *et al.*, "Characterization of large volume 3.5" × 8" $LaBr_3$:Ce detectors," *Nucl. Instrum. Methods Phys. Res. A*, vol. 729, pp. 910–921, 2013, doi: 10.1016/j.nima.2013.07.084.

[20] Tektronix, "AFG31252 arbitrary function generator," [Online]. Available: https://download.tek.com/datasheet/AFG31000-Datasheet-EN-US-75W-61444-3.pdf

[21] CAEN S.p.A., "R8033 high-voltage power supply (R803x series)," [Online]. Available: https://www.caen.it/products/r8033/

[22] C. He *et al.*, "A 500 MS/s waveform digitizer for PandaX dark matter experiments," *JINST*, vol. 16, no. 12, Art. no. T12015, 2021, doi: 10.1088/1748-0221/16/12/T12015.

[23] Analog Devices, "LTspice v24.0.12.0—SPICE simulation software," [Online]. Available: https://www.analog.com/en/resources/design-tools-and-calculators/ltspice-simulator.html

[24] D. Y. Akimov, E. P. Kozlova, and Y. A. Melikyan, "Computer modelling of the Hamamatsu R11410-20 PMT," in *J. Phys.: Conf. Ser.*, vol. 778, no. 1, Art. no. 012211, 2017, doi: 10.1088/1742-6596/778/1/012211.

[25] J. Peña-Rodríguez, S. Hernández-Barajas, Y. León-Carreño, and L. A. Núñez, "Modeling and simulation of the R5912 photomultiplier for the LAGO project," *IEEE Sens. J.*, vol. 21, no. 18, pp. 20184–20191, 2021, doi: 10.1109/JSEN.2021.3096426.

[26] M. E. Zaghloul and D. J. Rhee, "Computer-aided simulation study of photomultiplier tubes," *IEEE Trans. Electron Devices*, vol. 36, no. 9, pp. 2005–2010, Sep. 1989, doi: 10.1109/16.34284.

[27] N. Krihely, "SPICE model of photomultiplier tube under different bias conditions," *IEEE Sens. J.*, vol. 14, no. 10, pp. 3606–3610, Oct. 2014, doi: 10.1109/JSEN.2014.2329181.

[28] P. Martín-Luna *et al.*, "Simulation of electron transport and secondary emission in a photomultiplier tube and experimental validation," *Sens. Actuators A Phys.*, vol. 365, Art. no. 114859, 2024, doi: 10.1016/j.sna.2023.114859.

[29] P. Martín-Luna *et al.*, "Effects of the passive voltage divider in a photomultiplier tube: Analytical model, simulations and experimental validation," *Sens. Actuators A Phys.*, vol. 381, Art. no. 116057, 2025, doi: 10.1016/j.sna.2024.116057.