




SCHOOL OF COMPUTATION,
INFORMATION AND TECHNOLOGY —
INFORMATICS

TECHNISCHE UNIVERSITÄT MÜNCHEN

Master's Thesis in Computational Science and Engineering

**Fast Multipole Boundary Element Method
for Finite Periodic Structures**

Abhijeet Abhay Sutar





SCHOOL OF COMPUTATION,
INFORMATION AND TECHNOLOGY —
INFORMATICS


TECHNISCHE UNIVERSITÄT MÜNCHEN

Master's Thesis in Computational Science and Engineering

**Fast Multipole Boundary Element Method
for Finite Periodic Structures**

Titel der Abschlussarbeit

Author:	Abhijeet Abhay Sutar
Examiner:	Steffen Marburg, Prof. Dr.
Supervisor:	Arne Hildenbrand, M.Sc.
Submission Date:	Submission date



I confirm that this master's thesis is my own work and I have documented all sources and material used.

Munich, Submission date

Abhijeet Abhay Sutar

Acknowledgments

Abstract

Contents

Acknowledgments	iv
Abstract	v
1 Introduction	1
1.1 Section	1
1.1.1 Subsection	1
2 Mathematical Formulation of BEM	3
2.1 Acoustic Wave Equation	3
2.2 Boundary Element Method	4
2.2.1 Boundary Integral Formulation	4
2.3 Discretization	5
2.4 Burton-Miller Formulation	5
3 The Fast Multipole Method Framework	7
3.1 Fast Multipole Method	7
3.1.1 Mathematical Identities	8
4 Software Architecture and HPC Optimizations	9
5 Performance Analysis and Validation	10
6 Conclusion and Future Directions	11
Abbreviations	12
List of Figures	13
List of Tables	14
Bibliography	15

1 Introduction

1.1 Section

Citation test [Lam94].

Acronyms must be added in `main.tex` and are referenced using macros. The first occurrence is automatically replaced with the long version of the acronym, while all subsequent usages use the abbreviation.

For more details, see the documentation of the acronym package¹.

1.1.1 Subsection

See Table 1.1, Figure 1.1, Figure 1.2, Figure 1.3.

Table 1.1: An example for a simple table.

A	B	C	D
1	2	1	2
2	3	2	3

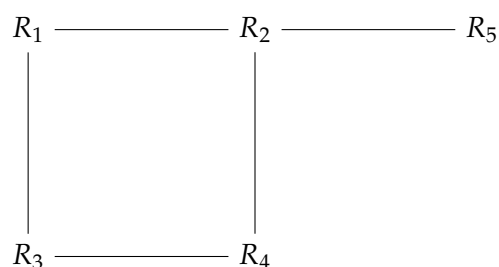


Figure 1.1: An example for a simple drawing.

¹<https://ctan.org/pkg/acronym>

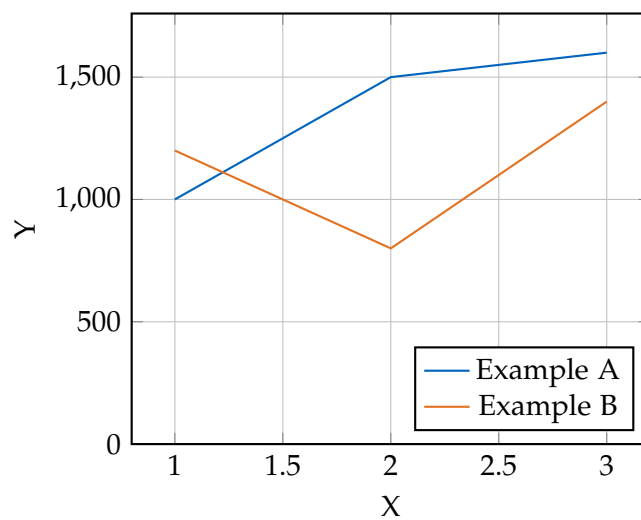


Figure 1.2: An example for a simple plot.

```
SELECT * FROM tbl WHERE tbl.str = "str"
```

Figure 1.3: An example for a source code listing.

2 Mathematical Formulation of BEM

Before we discuss the implementation of the Boundary Element Method (BEM) for the Acoustic Helmholtz equation, we first need

2.1 Acoustic Wave Equation

The propagation of acoustic waves in a homogeneous, inviscid fluid medium is governed by the linear wave equation for the acoustic pressure $p(\mathbf{x}, t)$:

$$\nabla^2 p(\mathbf{x}, t) - \frac{1}{c^2} \frac{\partial^2 p(\mathbf{x}, t)}{\partial t^2} = 0 \quad (2.1)$$

where $\mathbf{x}$ is the position vector, t is time, and c is the speed of sound in the medium.

To derive the Helmholtz equation, we consider a time-harmonic acoustic field. We assume the pressure can be represented as a complex function oscillating with angular frequency ω :

$$p(\mathbf{x}, t) = P(\mathbf{x})e^{-i\omega t} \quad (2.2)$$

where $P(\mathbf{x})$ is the spatial component of the pressure (the phasor) and $i = \sqrt{-1}$ is the imaginary unit.

Substituting Equation (2.2) into the wave equation (2.1):

$$\nabla^2 (P(\mathbf{x})e^{-i\omega t}) - \frac{1}{c^2} \frac{\partial^2}{\partial t^2} (P(\mathbf{x})e^{-i\omega t}) = 0 \quad (2.3)$$

Calculating the time derivatives:

$$\frac{\partial}{\partial t} (P(\mathbf{x})e^{-i\omega t}) = -i\omega P(\mathbf{x})e^{-i\omega t} \quad (2.4)$$

$$\frac{\partial^2}{\partial t^2} (P(\mathbf{x})e^{-i\omega t}) = (-i\omega)^2 P(\mathbf{x})e^{-i\omega t} = -\omega^2 P(\mathbf{x})e^{-i\omega t} \quad (2.5)$$

Substituting this back into the wave equation:

$$e^{-i\omega t} \nabla^2 P(\mathbf{x}) - \frac{1}{c^2} (-\omega^2 P(\mathbf{x})e^{-i\omega t}) = 0 \quad (2.6)$$

Dividing by the common time factor $e^{-i\omega t}$ (which is non-zero) and rearranging the terms:

$$\nabla^2 P(\mathbf{x}) + \frac{\omega^2}{c^2} P(\mathbf{x}) = 0 \quad (2.7)$$

Introducing the wavenumber $k = \omega/c$, we arrive at the homogeneous Helmholtz equation:

$$\nabla^2 P(\mathbf{x}) + k^2 P(\mathbf{x}) = 0 \quad (2.8)$$

2.2 Boundary Element Method

2.2.1 Boundary Integral Formulation

The Boundary Element Method (BEM) solves the Helmholtz equation by transforming it into an integral equation defined on the boundary of the domain. This transformation is typically achieved using Green's Second Identity.

Let Ω be the domain containing the fluid and Γ be its boundary. For two scalar fields P and G in Ω , Green's Second Identity states [Wu00]:

$$\int_{\Omega} (P \nabla^2 G - G \nabla^2 P) d\Omega = \int_{\Gamma} \left(P \frac{\partial G}{\partial n} - G \frac{\partial P}{\partial n} \right) d\Gamma \quad (2.9)$$

where n is the outward unit normal vector to the boundary.

We choose $P(\mathbf{x})$ to be the acoustic pressure, satisfying the Helmholtz equation derived in Equation (2.8):

$$\nabla^2 P(\mathbf{x}) + k^2 P(\mathbf{x}) = 0 \quad (2.10)$$

We choose $G(\mathbf{x}, \mathbf{y})$ to be the fundamental solution (Green's function) of the Helmholtz equation, which satisfies the inhomogeneous equation with a point source at $\mathbf{y}$:

$$\nabla^2 G(\mathbf{x}, \mathbf{y}) + k^2 G(\mathbf{x}, \mathbf{y}) = -\delta(\mathbf{x} - \mathbf{y}) \quad (2.11)$$

where δ is the Dirac delta function. For 3D acoustics, the free-space Green's function satisfying the Sommerfeld radiation condition is given by [Kir98]:

$$G(\mathbf{x}, \mathbf{y}) = \frac{e^{ikr}}{4\pi r} \quad \text{with} \quad r = |\mathbf{x} - \mathbf{y}| \quad (2.12)$$

Substituting these into Green's Second Identity for a source point $\mathbf{y}$ inside the domain Ω :

$$P(\mathbf{y}) = \int_{\Gamma} \left(G(\mathbf{x}, \mathbf{y}) \frac{\partial P}{\partial n}(\mathbf{x}) - P(\mathbf{x}) \frac{\partial G}{\partial n}(\mathbf{x}, \mathbf{y}) \right) d\Gamma(\mathbf{x}) \quad (2.13)$$

As the source point $\mathbf{y}$ is moved to the boundary Γ , the integrals become singular. Evaluating the singularity using a limiting process yields the Boundary Integral Equation (BIE) [Mar08]:

$$C(\mathbf{y})P(\mathbf{y}) = \int_{\Gamma} \left(G(\mathbf{x}, \mathbf{y}) \frac{\partial P}{\partial n}(\mathbf{x}) - P(\mathbf{x}) \frac{\partial G}{\partial n}(\mathbf{x}, \mathbf{y}) \right) d\Gamma(\mathbf{x}) \quad (2.14)$$

where $C(\mathbf{y})$ is the geometric coefficient (solid angle). For a smooth boundary, $C(\mathbf{y}) = 0.5$.

2.3 Discretization

To solve the BIE numerically, the boundary Γ is discretized into N boundary elements. The pressure P and its normal derivative $q = \partial P / \partial n$ are approximated using shape functions.

Applying the collocation method at the nodes leads to a system of linear algebraic equations:

$$\mathbf{H}\mathbf{P} = \mathbf{G}\mathbf{Q} \quad (2.15)$$

where $\mathbf{H}$ and $\mathbf{G}$ are the dense, nonsymmetric influence matrices resulting from the integration of the fundamental solution and its derivative, and $\mathbf{P}$ and $\mathbf{Q}$ are vectors containing the nodal values of pressure and normal velocity, respectively.

2.4 Burton-Miller Formulation

The Boundary Element Method (BEM) offers a highly elegant, mathematically rigorous, and computationally efficient alternative by reformulating the volumetric partial differential equation into a Boundary Integral Equation (BIE) mapped strictly over the surface of the scattering or radiating body. This approach intrinsically satisfies the Sommerfeld radiation condition at infinity, thereby reducing the dimensionality of the problem by one—transforming a three-dimensional volumetric domain into a two-dimensional surface mesh, or a two-dimensional problem into a one-dimensional contour [Lam94; Wu00; Mar08; Kir98].

However, as [BM71] showed, the standard BEM approach for exterior problems, gives rise to non-existence of unique solutions at wavenumbers coinciding with the resonances of the corresponding interior problem.

At these critical frequencies, also sometime referred to as *fictitious or irregular frequencies*, the matrix system resulting from the discretization of the BIE becomes ill-conditioned, leading to numerical instability and a spike in the error of the computed solution.

It must be noted that the original exterior problem does have a unique solution at these frequencies and that the connection to the interior problem has no physical significance. The non-uniqueness arises solely from the formulation of the problem in terms of a Boundary Integral Equation (BIE).[BM71]

3 The Fast Multipole Method Framework

The BEM lends itself naturally to modelling acoustic wave propagation. Transforming the volumetric governing differential equations into boundary integral equations allows finite structures to be treated in an infinite exterior domain without requiring special boundary conditions. However, the required mathematical transformation of the problem yields a full, complex, non-Hermitian matrix [CL07]. As the degrees of freedom increase to model larger problem, the memory requirements to hold the large full matrix and the cost to compute the matrix coefficients themselves, scale as $\mathcal{O}(N^2)$, and the computational cost of solving the resulting linear system using direct solvers scales as $\mathcal{O}(N^3)$, where N is the number of degrees of freedom [Liu09]. This makes the BEM computationally prohibitive for large-scale problems.

To overcome this computational bottleneck, we must employ a radically different numerical strategy. This chapter details the algorithmic design and the mathematical formulation of the Fast Multipole Method (FMM) framework. The FMM decouples far-field interactions through hierarchical spatial decomposition, truncated analytical basis expansions, and the application of complex mathematical translation operators [CRW93].

This chapter focuses on the mathematical and algorithmic design of the FMM implemented as a part of this thesis. It details the division of the mesh space into a topological tree data structure, the mathematics of the multi-stage multipole translations, and the implementation of near-field interactions.

3.1 Fast Multipole Method

The FMM was introduced in 1987 by Greengard and Rokhlin [GR87] to accelerate large-scale particle simulations involving long-range pairwise potential interactions. Later, it was extended to other problems, including the BEM for Acoustic Scattering [Rok90]. The FMM handles short-range interactions with direct computation, and uses multipole expansions to compute potentials for long-range interactions. By providing a method for the rapid computation of the matrix-vector product between the system matrix any arbitrary vector, the FMM enables the use of iterative solvers for solving the linear systems arising from the BEM discretization, reducing the computational

complexity from $\mathcal{O}(N^2)$ to $\mathcal{O}(N^{\frac{3}{2}})$ or even $\mathcal{O}(N \log N)$ for a multilevel implementation [CRW93].

3.1.1 Mathematical Identities

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

4 Software Architecture and HPC Optimizations

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

5 Performance Analysis and Validation

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Ut purus elit, vestibulum ut, placerat ac, adipiscing vitae, felis. Curabitur dictum gravida mauris. Nam arcu libero, nonummy eget, consectetur id, vulputate a, magna. Donec vehicula augue eu neque. Pellentesque habitant morbi tristique senectus et netus et malesuada fames ac turpis egestas. Mauris ut leo. Cras viverra metus rhoncus sem. Nulla et lectus vestibulum urna fringilla ultrices. Phasellus eu tellus sit amet tortor gravida placerat. Integer sapien est, iaculis in, pretium quis, viverra ac, nunc. Praesent eget sem vel leo ultrices bibendum. Aenean faucibus. Morbi dolor nulla, malesuada eu, pulvinar at, mollis ac, nulla. Curabitur auctor semper nulla. Donec varius orci eget risus. Duis nibh mi, congue eu, accumsan eleifend, sagittis quis, diam. Duis eget orci sit amet orci dignissim rutrum.

6 Conclusion and Future Directions

- Currently Burton - Miller is highly optimized for single dof per cell and for perfectly flat panels. That is, $FE_Degree = 0$ and $Mapping_Degree = 1$. To support higher degrees, we need to update the hypersingular calculation in the near field operator and the main assemble system method.
- There is some basic parallelization in the code for computing the translation matrices and for the matrix-vector multiplication done with OpenMP pragmas. But, Deal.ii has its native parallelization support using its native datatypes. The FMM also lends itself to parallelization where each node of the FMM tree may reside in an individual process and maintain its own near field matrix, with only the far-off node dipoles having to be passed around.
- The current implementation of the computation of the external field uses direct computations of the green's function. This can be upgraded to use the FMM approximation in the future, which will be faster for large problems.
- The current implementation is strictly for scattering off of sound hard objects. The next step would be to implement the option to set an arbitrary impedance boundary condition.
- The current implementation is strictly for a stationary mesh.

Abbreviations

BEM Boundary Element Method

FMM Fast Multipole Method

BIE Boundary Integral Equation

List of Figures

1.1	Example drawing	1
1.2	Example plot	2
1.3	Example listing	2

List of Tables

1.1	Example table	1
-----	-------------------------	---

Bibliography

- [BM71] A. J. Burton and G. F. Miller. “The Application of Integral Equation Methods to the Numerical Solution of Some Exterior Boundary-Value Problems.” In: *Proceedings of the Royal Society of London. A. Mathematical and Physical Sciences* 323.1553 (June 8, 1971), pp. 201–210. issn: 0080-4630, 2053-9169. doi: 10.1098/rspa.1971.0097.
- [CL07] S. Chandler-Wilde and S. Langdon. “Boundary Element Methods for Acoustics.” In: (July 18, 2007).
- [CRW93] R. Coifman, V. Rokhlin, and S. Wandzura. “The Fast Multipole Method for the Wave Equation: A Pedestrian Prescription.” In: *IEEE Antennas and Propagation Magazine* 35.3 (June 1993), pp. 7–12. issn: 1045-9243. doi: 10.1109/74.250128.
- [GR87] L. Greengard and V. Rokhlin. “A Fast Algorithm for Particle Simulations.” In: *Journal of Computational Physics* 73.2 (Dec. 1987), pp. 325–348. issn: 00219991. doi: 10.1016/0021-9991(87)90140-9.
- [Kir98] S. Kirkup. *The Boundary Element Method in Acoustics: A Development in Fortran. Integral Equation Methods in Engineering 1*. Hebden Bridge: Integrated Sound Software, 1998. 136 pp. isbn: 978-0-9534031-0-3.
- [Lam94] L. Lamport. *LaTeX : A Documentation Preparation System User’s Guide and Reference Manual*. Addison-Wesley Professional, 1994.
- [Liu09] Y. Liu. *Fast Multipole Boundary Element Method: THEORY AND APPLICATIONS IN ENGINEERING*. CAMBRIDGE UNIVERSITY PRESS, 2009.
- [Mar08] S. Marburg. “Boundary Element Method for Time-Harmonic Acoustic Problems.” In: *Computational Acoustics of Noise Propagation in Fluids*. Ed. by S. Marburg and B. Nolte. Berlin, Heidelberg: Springer, 2008.
- [Rok90] V. Rokhlin. “Rapid Solution of Integral Equations of Scattering Theory in Two Dimensions.” In: *Journal of Computational Physics* 86.2 (Feb. 1990), pp. 414–439. issn: 00219991. doi: 10.1016/0021-9991(90)90107-C.
- [Wu00] T. Wu. *Boundary Element Acoustics: Fundamentals and Computer Codes*. Southampton, UK: WIT Press, 2000.