

MADE IN INDIA



UNIK SURGICAL PVT. LTD.

Manufacturer, Importer, Exporter & Suppliers

Medical Furniture, Lab Furniture, Non Medical
Furniture, MOT, MGPS, Laundry Equipments, Kitchen Equipments, CSSD, TSSU,
BMW, Medical Equipments, Mortuary Equipments, Nurse Call System,
Lab Equipments & General Orders Supplier



LAUNDRY



QUALITY | TECHNOLOGY
COMMITMENT | SERVICES





UNIK SURGICAL PVT. LTD.

Founded in 1999, Unik Surgical Pvt. Ltd. has been at the forefront of healthcare infrastructure development in Eastern India. What began as a small enterprise has grown into a leading supplier and manufacturer of medical and surgical equipment and furniture.

With our headquarters in Patna, Bihar, a regional office in Greater Noida, Uttar Pradesh, and a manufacturing facility in Chapra, Bihar, we serve clients across the region with unmatched expertise and a strong commitment to quality. Our journey is defined by continuous innovation, strict adherence to international standards, and an unwavering dedication to improving healthcare facilities across India.

Contracting

Project Report

Layout

Configuration

Consulting

Installation

On-site Training

Startup

Costing

Technical Support

ABOUT DIRECTOR

Manoj Kumar Singh is a healthcare industry leader known for his practical approach and deep commitment to improving patient care. With years of hands-on experience in medical equipment manufacturing, he founded Unik Surgical with a simple goal — to make reliable, high-quality surgical solutions accessible to healthcare facilities of all sizes.

What began as a trader in Patna has now grown into a trusted name, serving hospitals and clinics across the country. Manoj's focus on precision engineering, transparent business ethics, and long-term client relationships has helped Unik Surgical earn the confidence of medical professionals.

His leadership continues to guide the company toward innovation and responsible growth, while staying rooted in the belief that every piece of equipment should ultimately contribute to better patient outcomes.



International & National Accreditation of Bodies



एन. एस. आई. सी.
NSIC
ISO 9001 : 2008

CERTIFICATIONS



QUALITY | TECHNOLOGY
COMMITMENT | SERVICES

Industrial Washing & Textile Processing Machine (Side Loading / Top Loading)

SPECIAL MACHINES FOR:

- Enzyme / Denim Wash
- Garment Washing
- Milling Machine for Cotton & Woolen Sweaters
- Bath Mat Dyeing
- For All Technical Washing
- Pigment Dyeing of Knitted Garments
- All Laundry Jobs
- Auto Timed
- Auto Reverse
- Auto Digital Temperature Control
- Fully Stainless Steel Grade Available 304, 316



Basket & Outer Drum

Fabricated out of 304/316 stainless steel plates, sheets, total argon welding, single joint drum, no visible joint in basket. Distance between drum & basket only 1.5". Minimum liquid ratio possible.

Programmable Logic Controller PLC & VFD (Optional Feature)


Micro processor based fully automation with variable frequency drive available. Desired software for enzyme/dyeing process available with closing pumps & tanks.



Indirect Oil / Gas Fired Heating System (Optional Feature)

Specially designed. All S.S. Heat exchanger with Automatic imported Oil / Gas burners, high efficiency, low cost & easy to install. Every equipment is an independent unit. No need to install boiler.

Drain Valves & Water Inlets with Level Gauges (Optional Feature)

Heavy duty automatic drain valve used for quick flushing of water, automatic ball valves or butterfly valves for quick filling of water into the basket. Glass tube level gauge with calibrated level indicator provided.

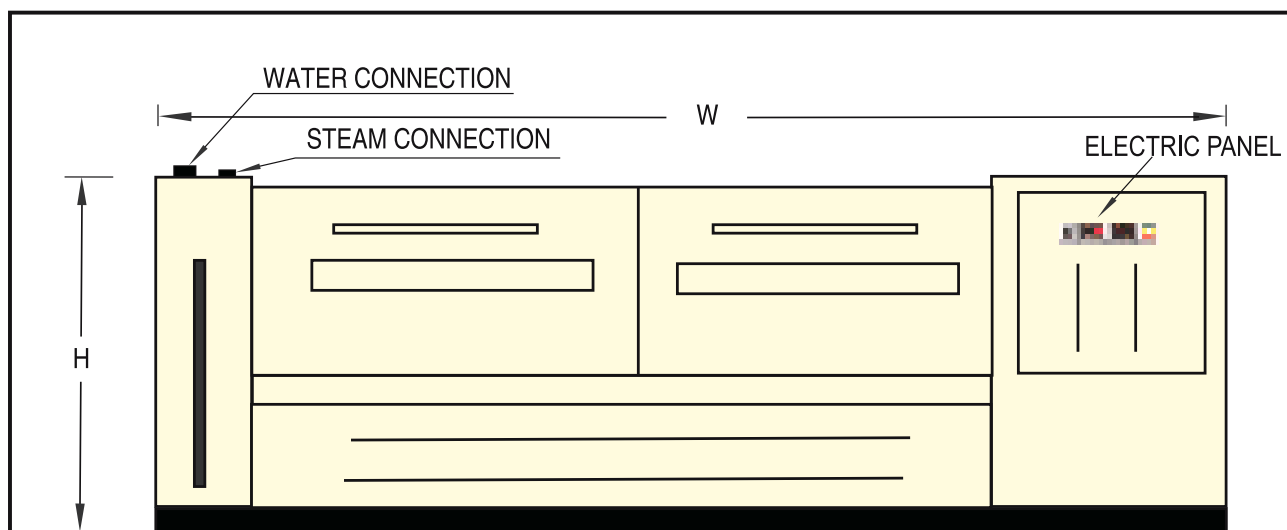

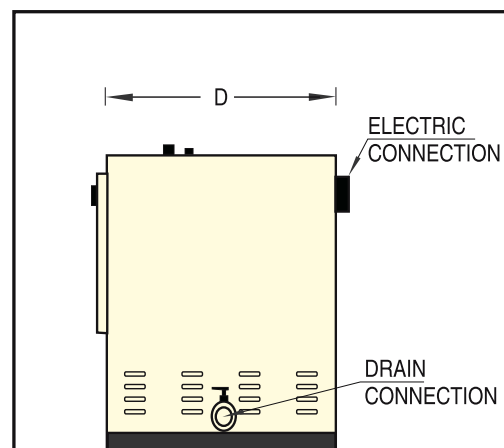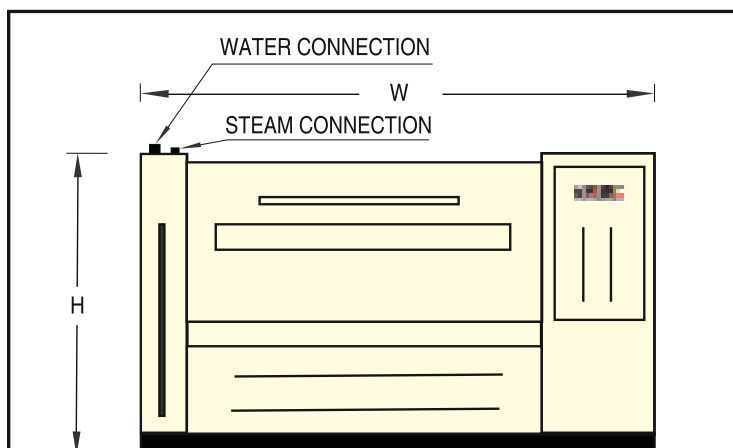

MODEL	CAPACITY	BASKET SIZE	LOADING DOOR	Drive motor	WATER CONNECT ION	DRAIN	HEATING				OVERALL DIMENTION SH (W X DX H)	NET WT / SHIPPI NGWT. SHIPPING SIZE
		(DIA X DEPTH)	OPENING		WATER CONSUMPT TION PERDIPIN LTRI .		STEAM CONNECTI ON	ELECTRIC	DIESEL FIRED	THERMIC FLUID CDNN.		SHIPPING VOLUME
		VOLUME							NO. OF DOOR	CONSUMPT ION		
USM-L-30-15S USM-L-30-15E USM-L-30-15D	15 KG	630 0 X 750 170 LTRS.	390 X 360 I	1 HP	1" BSP 85	2"	(0.5" BSP) 8-10KG./HR.	6-9 KW	1-1.5LTRS.	N.A.	1750 X 860 X 1070	500 KG./700KG. 1950X 1060 X 1270 2.3M'
USM-L-30-30S USM-L-30-30E USM-L-30-30D	30 KG.	7500X850 419 LTRS.	450 X 380 I	2 HP	1" BSP 210	2"	(0.5" BIP) 15-20 KG./HR.	6-12 KW	1.5- 2LTRI.DIESEL PER HR TEMP.RISE 2" PER MINUTE	N.A.	1900 X 960 X 1180	800 KG./1000KG. 2100 X 1160 X 1380 3.8M
USM-L-30-65S USM-L-30-65E USM-L-30-65D	65 KG.	950 0 X 1050 900 LTR S.	550 X 405 I	3 HP	1" BSP 450	2"	(0.5" BIP) 30-40 KG./HR.	12-24 KW	3-4LTRI. DIESEL PER HR TEMP.RISE 2°C PER MINUTE	1" X1" 22000 KCAL/HR.	2200X 1160X 1350	1000 KG./1200KG. 2400X 1360 X 1550 5.35M'
USM-L-30-80S USM-L-30-80E USM-L-30-80D	80 KG.	1050 0 X 1180 I	645X450 I	5 HP	2" BSP 540	2"	(0.5" BIP) 50-60 KG./HR.	12-24 KW	4-5LTRS. DIESEL PER HR TEMP.RISE 2°C PER MINUTE	1" X1" 27000 KCAL/H R.	2300XI 250XI 325	1100 KG./1400KG. 2500X1450 X15 25 7.65M'
USM-L-30-100S USM-L-30-100E USM-L-30-100D	100 KG.	1075 0X 1325 1432 LTRS.	645 X 450 I	7.5 HP	2"BSP 700	3"	(0.5" BIP) 60-80KG./HR.	36 KW	5- 6.5LTRS.OIEIE L PER HR. TEMP.RISE 2°C PER MINUTE	1"X1" 43000 K(AI/HR .	2650 X 1350 X 1400	1300 KG./1550KG 2850 X1550X16 00 8.95M'
USM-L-30-150S USM-L-30-150E USM-L-30-150D	150 KG.	1160 0 X 2440 2150 LTRS.	645 X 450 2	7.5 HP	2" BSPX 2 NOS. 1060	3" X 2 NOC	(0.75" BIP) 100-120 KG./HR.	N.A.	7-8LTRI. DIESEL PER HR TEMP.RISE 2" C PER MINUTE	1.5"X1.5" 65000 KCAL/H R.	3500 X 1240 X 1375	1750 KG./2150KG. 3700 X 1440 X 1575 11.17M
USM-L-30-200S USM-L-30-200E USM-L-30-200D	200 KG.	1150 0 X 3200 2850 LTRS.	645 X 450 2	10 HP	2" SIPX 2 NOS. 1400	3" X 2 NOC	(0.75" BIP) 160- 180KG./HR.	N.A.	8-10LTRS. DIESEL PER HR.TEMP. RISE 2" C PER MINUTE	1.5"X1.5" 95000 KCAL/H R.	3500 X 1300 X 1375	2350KG./3000 KG. 3700x1500x1575 13.1 M³

Note: a) All Dimensions are in MM. Standard Machines Operate on 415 ±10%, 3 Phase, 50HZ, CYS AC Electric Supply, Special Voltage on request.




b) Machines are also made to order as per customer's requirement & specifications.

S: Steam | **F:** Fuel | **E:** Electric | **D:** Diesel



Industrial Washing & Processing Machine (Front Loading)

- i** Unik Surgical 'Washing Machine' are designed for all types of Laundry Jobs, Technical and Enzyme Washing. Different machines in different sizes for different fabrics such as Denim, Cotton, Rayon, Knitted, Woollen Garments.
- ⌚** Automatic, Auto-Timed, Auto-Reverse, Auto-Digital Temperature Control, Heavy Stainless Steel Fabrication in Front Plate, Inner Basket & Outer Drum.
- ⚠** Heating System available in Electric/Steam Direct Injection/Indirect Steam through Seamless Pipe of SS 316 Quality Coils/Thermic Heat Transfer Fluids, Oil/Gas fired heated. Available in 15, 30, 60 & 100 kg dry weight per charge capacity.
- 🔧** Machine also available with Microprocessor based Programmable Logic Controller and AC Drives for variable speeds, storage of present programmed facility and possibility of supervisory control.

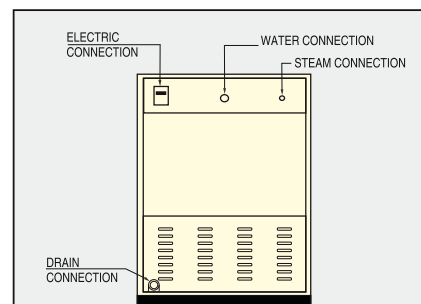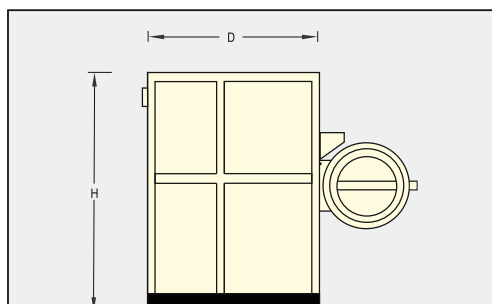

MODEL	CAPACITY DRY WT. IN KG.	BASKET SIZE	WASH MOTOR	MAIN DOOR OPENING	WATER CONNECTION CONSUMPTION APPX.	DRAIN	HEATING OPTIONS			OVERALL DIMENSIONS (W X D X H)	NET WT. / SHIPPING WT. SHIPPING SIZE (WxDxH) SHIPPING VOLUME
		VOLUME					STEAM CONSUMPTION	ELECTRIC LOAD	THERMAL FLUID CONSUMPTION		
USM-L-30IW15S	15 KG	750 X 400	1 HP	460	1.0" BSP	2"	0.5" BSP 15 KG/HR.	6 KW	-----	980 X 1210 X 1525	500 KG / 650 KG 1180 X 1410 X 1725 2.76M ³
USM-L-30IW15E	15 KG	180 LTRS.			**60 LTRS./FILL						
USM-L-30IW30S	30 KG	950 X 500	2 HP	500	1.0" BSP	2"	0.5" BSP 25 KG/HR.	12 KW	1"x1" BSP 10000 Kcal/Hr.	1150 X 1420 X 1780	840 KG / 1050 KG 1350 X 1620 X 1980 4.92M ³
USM-L-30IW30E	30 KG	362 LTRS.			**125 LTRS./FILL						
USM-L-30IW60S	60 KG	1100 X 750	3 HP	500	1.0" BSP	2"	0.5" BSP 50 KG/HR.	24 KW	1"x1" BSP 20000 Kcal/Hr.	1300 X 1720 X 1970	100 KG / 1350 KG 1500 X 1920 X 2170 6.90M ³
USM-L-30IW60E	60 KG	735 LTRS.			**250 LTRS./FILL						
USM-L-30IW100S	100 KG.	1250 X 1000	5 HP	600	2.0" BSP	2" X 2"	1.0" BSP 100 KG/HR.	N.A.	1"x1" BSP 40000 Kcal/Hr.	1530 X 2000 X 2200	1750 KG / 2050 KG 1730 X 2200 X 2400 10.6M ³
		1437 LTRS.			**500 LTRS./FILL						

Note: a) All Dimensions are in MM. Standard Machines Operate on 415 ±10%, 3 Phase, 50HZ, CYS AC Electric Supply, Special Voltage on request.
b) Machines are also made to order as per customer's requirement & specifications.

S: Steam | E: Electric

Industrial Washer Extractors | Hard Mount with Low Spin



EASY TO USE COMPUTER



Fully programmable computer captures all the features for any customized process. The pre-set programs can be easily modified or erased. Step by step LCD display provides cycle advance, variable time signal & diagnostic checks. Easy to understand & operate.

EFFICIENT INVERTER DRIVE






Single motor variable frequency drive (VFD) gets all precision speeds required for washing distribution, low & normal spin. The energy efficient drive consumes electric peak load demands.

> Available in 15 & 30kg. dry weight per charge capacity

MOTORIZED DRAIN VALVE



"Non Clog Full Clear Port" motorized drain valve flushes all the lint during drain. Easily accessible electric motor is splash proof. Manual lever to activate drain in case of motor failure. Fail safe, rust free operation through out its life.

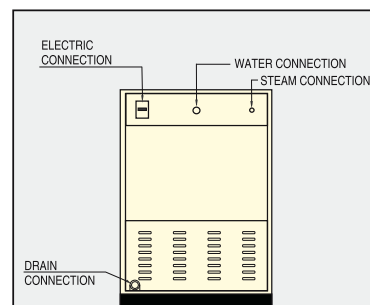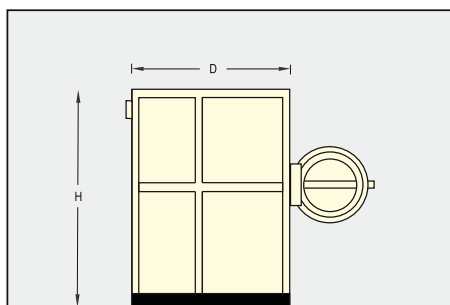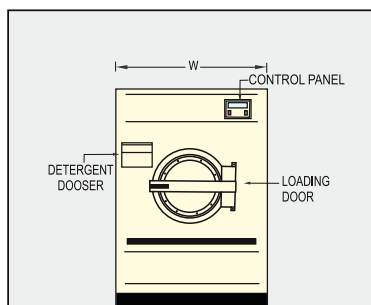

MODEL	CAPACITY DRY WT. IN KG.	BASKET SIZE VOLUME	WASH MOTOR	DRUM SPEEDS		MAIN DOOR	WATER CONNECTI ON CONSUMPT ION APPX.	DRAIN	HEATING OPTIONS			OVERALL DIMENSION S (W X DX H)	NET WT./ SHIPPING WT. SHIPPING SIZE (WxDxH) SHIPPING VOLUME
				WASH	FINAL EXTRAC				STEAM CONSUMPT ION	ELECTRIC LOAD	THERMAL FLUID CONSUMPT ION		
USM-L-30WE15S	15KG	750 X400 180 LTRS.	3 HP	451055RP M	500RPM	460	1.0" BSP **60LTRS./fill	3	0.5" BSP 15KG/HR.	6KW		980 X 1210 X1525	500 KG/ 650 KG 1180X1410X1725 2.76M ³
USM-L-30WE15E	15KG												
USM-L-30WE30S	30 KG	950 X500 362 LTRS.	7.5HP	451055RP M	500RPM	500	1.0" BSP **125LTRS./FIL L		0.5" BSP 25 KG/HR.	12KW	1"x1" BSP 10000 Kcal/Hr.	1150X1420 X1780	840 KG/ 1050 KG 1350 X1620 X198 4.92M ³
USM-L-30WE30E	30 KG												

Note: a) All Dimensions are in MM. Standard Machines Operate on 415 ±10%, 3 Phase, 50HZ, CYS AC Electric Supply, Special Voltage on request.
b) Machines are also made to order as per customer's requirement & specifications.

S: Steam | E: Electric




Hydro Extractor (Direct Drive)

Unik Surgical 'Hydro Extractor' is specially designed for centrifuge or garments after washing/dyeing. Special features are:

Direct drive, High speed, Self balancing, Auto DC injected brake, Auto Timed.

Stainless Steel Inner Basket & Outer Drum, Self Balancing Suspensions ensures Vibration free and Noiseless operations. The high speed of drum rotation ensures shorter time and consumes less energy.

Available in 15, 30, 50 Kg. Dry weight per charge capacity. Suitable for Garment Export Industry, Hosiery Dyeing Industry, all types of Textile Industries, Laundries of Hotels and Hospitals.

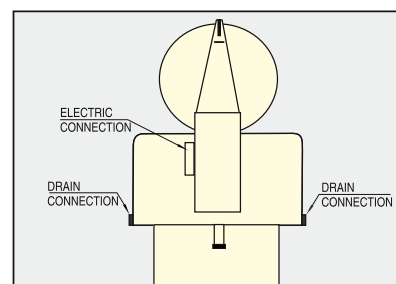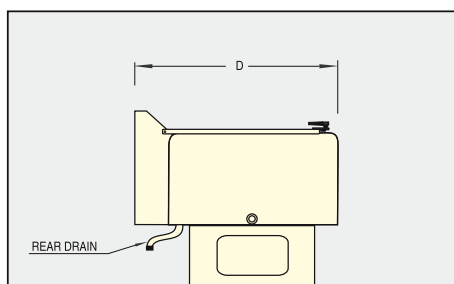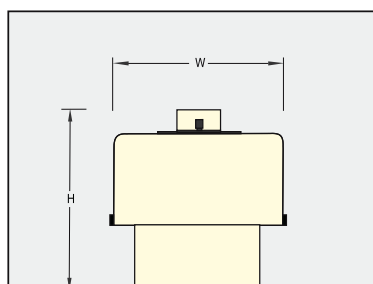

MODEL	CAPACITY DRY WEIGHT PER CHARGE	BASKET DIA X DEPTH	BASKET SPEED	MOTOR	DRAIN	DIMENSIONS (W x D x H)	NET WT.	SHIPPING WT. (APP.) SHIPPING SIZE (WxDxH) SHIPPING VOLUME
USM-L-30HE15	15 KG	Ø 550 X 300	1000 RPM	3.5 HP	Ø (2.5" BSP)	900 X 1150 X 980	320 KG.	450 KG. 1100 X 1350 X 1180 1.75 M ³
USM-L-30HE30	30 KG	Ø 700 X 300	1000 RPM	5 HP	75 Ø (3" BSP)	1150 X 1250 X 1120	395 KG.	520 KG. 1100 X 1350 X 1180 2.05 M ³
USM-L-30HE50	50 KG	Ø 1000 X 300	750 RPM	7.5 HP	100 Ø (4" BSP)	1370 X 1580 X 1210	820 KG.	820 KG. 1100 X 1150 X 980 3.95 M ³

Note: a) All Dimensions are in MM. Standard Machines Operate on 415 ± 10%, 3 Phase, 50HZ, CYS AC Electric Supply, Special Voltage on request.
b) Machines are also made to order as per customer's requirement & specifications.

Hydro Extractor (Shocker Type – Self Balancing)

The Complete machine is suspended by heavy duty three legs on universal oscillating steel pins with heavy steel springs and gun metal bushes. This arrangement removes the vibration while the machine is running.

The perforated basket is made of stainless steel in standard size and in different gauges according to the size of the machine. It consists of top flange made of stainless steel and bottom flange of robust cast iron lined with stainless steel sheet, which is well balanced statistically and dynamically. The outer body is also made of S.S.

MODEL	CAPACITY BASIS COTTON (KG.)	BASKET SIZE X DEPTH (MM)	BASKET REVOLUTION (RPM)	CENTRIFUGAL EFFECT(%)	ELECTRIC POWER(HP)	DRAINAGE (MM)
USM-L-30HES30	30	640 X 330	900	60-70	3 HP	75
USM-L-30HES50	50	850 X 390	850	50-60	5 HP	75
USM-L-30HES100	100	1220 X 380	750	50-60	10 HP	90
USM-L-30HES200	200	1525 X 510	600	50-60	20 HP	100



Note: a) All Dimensions are in MM. Standard Machines Operate on 415 ± 10%, 3 Phase, 50HZ, CYS AC Electric Supply, Special Voltage on request.
b) Machines are also made to order as per customer's requirement & specifications.

Industrial Drying Tumbler

Available in 10,15, 30, 60, 120 & 240 kg. dry weight per charge capacity. Unik Surgical 'Drying Tumbler is especially designed for Hosiery Dyeing Industry, Garment Export Industry, Denim Processing Units, Terry Towel plants, Home Furnishings. All types of Laundry Works for Hotels/Hospitals to get uniform drying, rapidity softness & shrinkage control.

Front loading, Open pocket, Large dia, Die pressed, Powder coated door Stainless Steel inner Basket, Outer Body Double walled Glass wool Insulated, Centrifugal High Suction Powerful Blower used, Automatic Control panel for Auto Reverse/Forward Auto Digital Temperature control functions.

Heating System in Electric/Steam/Thermic Heat Transfer Fluids/Indirect Oil/Gas Firing.



Indirect Diesel Fired Heating System



Specially designed heat exchanger with Automatic imported Diesel/Gas burners, High efficiency, Low cost & easy to install.

Tilt Feature




Available with forward tilt for easy unloading.



The forward tilt allows the linen to fall into a trolley, making unloading ergonomically correct, reducing work related injuries, and improving workflow.

Dryers are also available in:

- All S.S. Construction
- Cool Down Feature
- Humidity Control Meter
- Residual Moisture Control

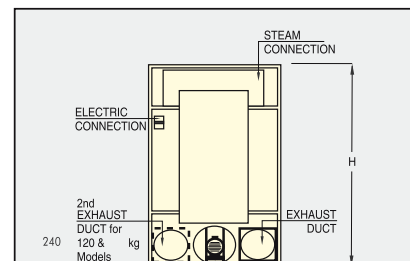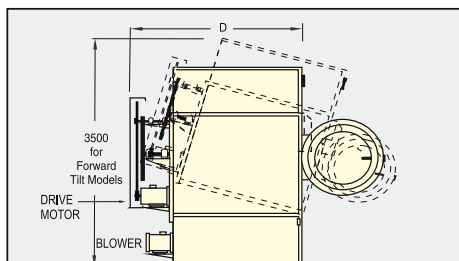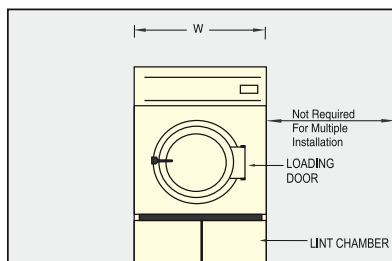

MODEL	CAPACITY	BASKET SIZE	DRIVE MOTOR	AIR DELIVERY	LOADING DOOR OPENING	HEATING (Options)				OVERALL DIMS. (W x D x H)	NETT. WT./SHIPPING WT. SHIPPING SIZE (WxDxH) SHIPPING VOLUME
		VOLUME	BLOWER MOTOR	AIR OUTLET		STEAM CONNECTION CONSUMPTION	ELECTRIC	THERMAL FLUID CONNECTION CONSUMPTION	INDIRECT DIESEL FIRED CONSUMPTION		
USM-L-30DT15S USM-L-30DT15E USM-L-30DT15F	15 Kg.	750 Ø x 500 380 Ltrs.	1 HP 1 HP	1500 ft ³ /Hr. 225 Ø	480	15 Ø (.5" BSP) 20 Kg./Hr.	9-12 KW	0.5" x 0.5" BSP 10000 K.Cal./Hr.	N. A.	1000 x 1240 x 1920	350 Kg. / 500 Kg. 1200 X 1440 X 2120 4.25 M ³
USM-L-30DT30S USM-L-30DT30E USM-L-30DT30F USM-L-30DT30D	30 Kg.	950 Ø x 825 670 Ltrs.	1 HP 1 HP	1500 ft ³ /Hr. 225 Ø	600	15 Ø (.5" BSP) 40 Kg./Hr.	18-24 KW	0.5" x 0.5" BSP 15000 K.Cal./Hr.	1.5-2 Ltrs. per Hr.	1050 x 1540 x 1980	600 Kg. / 825 Kg. 1250 X 1740 X 2180 5.4 M ³
USM-L-30DT60S USM-L-30DT60E USM-L-30DT60F USM-L-30DT60D	60Kg.	1250 Ø x 950 1214 Ltrs.	2 HP 2 HP	3000 ft ³ /Hr. 300 Ø	750	20 Ø (.75" BSP) 60-80 Kg./Hr.	24-36 KW	1" x 1" BSP 40000 K.Cal./Hr.	2.5-3.5 Ltrs. per Hr.	1350 x 1690 x 2300	950 Kg. / 1250 Kg. 1550 X 1890 X 2500 8.25 M ³
USM-L-30DT120S USM-L-30DT120F USM-L-30DT120D	120 Kg.	1600 Ø x 1200 2411 Ltrs.	3 HP 2 HP x 2 Nos.	6000 ft ³ /Hr. 300 Ø x 2	850	20 Ø x 2 Nos. or 25 Ø x 1 No. 100-150 Kg./Hr.	N. A.	1.5" x 1.5" BSP 80000 K.Cal./Hr.	5.5-6.5 Ltrs. per Hr.	1750 x 2050 x 2720	2050 Kg. / 2550 Kg. 1950 X 2250 X 2920 14.45 M ³
USM-L-30DT240S USM-L-30DT240F USM-L-30DT240D	240 Kg.	2000 Ø x 1450 4553 Ltrs.	7 HP 3 HP x 2 Nos.	12000 ft ³ /Hr. 370 Ø x 2	1050	20 Ø x 2 Nos. or 25 Ø x 1 No. 200-250 Kg./Hr.	N. A.	2" x 2" BSP 1,60000 K.Cal./Hr.	11-16 Ltrs. per Hr.	2250 X 2550 X 3250	4570 Kg. / 5050 Kg. 2450 X 2750 X 3450 29 M ³

Note: a) All Dimensions are in MM. Standard Machines Operate on 415 ±10%, 3 Phase, 50HZ, CYS AC Electric Supply, Special Voltage on request.
b) Machines are also made to order as per customer's requirement & specifications.





Washer Extractors, High Spin, Soft Mount.



**Stellar
Smart
Ergonomics**

- ✓ 7" Colour Touch Screen
- ✓ Available in Hindi & English Languages
- ✓ 50 Standard Programs for Wash & Dry
- ✓ Total Memory 90 Programs
- ✓ Auto Service & Maintenance Reminders
- ✓ Recipe Cycle Data Print Option
- ✓ Wireless Communication Programming Access


- Front Loading
- Stainless Steel Cabinet
- Computer Controlled
- 15, 30, 60 & 120kg. Capacity

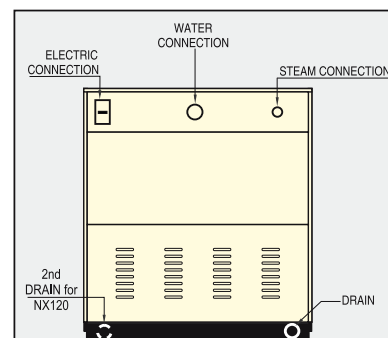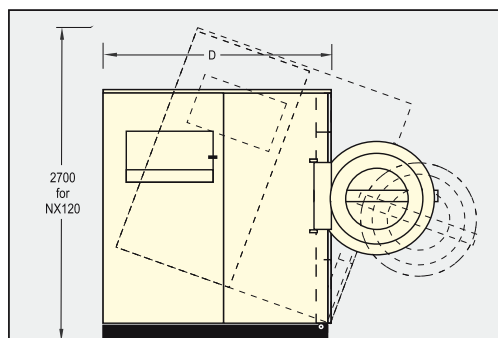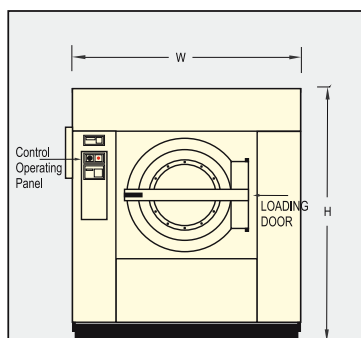



INVERTER DRIVE

Single motor variable frequency drive (VFD) gets all precision speeds required for washing, distribution, low & normal Spin. **The energy efficient drive consumes less energy & reduces electric peak load demands.**



TUNNEL SUSPENSION

Tunnel Suspension system that absorbs even severe out of balance load vibrations. Strategically placed centre of gravity and mass weight placement aid in controlling movement and results in 90% reduction of force transferred to floor.




MOTORIZED DRAIN VALVE

"Non Clog Full Clear Port" motorized drain valve flushes all the lint during drain. Easily accessible electric motor is splash proof. Manual lever to activate drain in case of motor failure. Fail safe, rust free operation through out its life.



AUTO CHEMICAL DISPENSER

A five compartment dispenser is mounted at the side of the machine at a convenient height and flushes automatically through powerful jets as and when supply signalled by the computer.



BEARING HOUSING

The housing has wide roller bearings to have large contact area to disperse dynamic forces. Packed with lubricants & Sealed. The self lubricating twin water seals & bearing seal are air separated. **Prevents contact of water with the bearings.**

MODEL	CAPACITY dry weight per charge (1:10)	CYLINDER SIZE VOLUME	DRIVE MOTOR	TILT MOTOR	FINAL EXTRACT SPEED (RPM)	LOADING DOOR OPENING	WATER CONNECTION CONSUMPTION	DRAIN	HEATING		DIMENSIONS W x D x H	NET WT / CRATED WT CRATED SIZE: WxDxH CRATED VOLUME
									STEAM CONN. STEAM CONSUMP.	ELECTRIC LOAD		
USM-L-30IWE15S USM-L-30IWE15E	15 Kg	Ø 710 x 380 154 Ltrs	3 HP	—	870 to 940 RPM 304 to 355 G	Ø 400	Ø20 (0.75" BSP) 200 Ltrs / cycle	3"	Ø15 (0.5" BSP) 15 Kg / hr	9 KW	1060 x 1130 x 1600	1000 KG/1250 KG 1360 x 1430 x 1900 3.5 M ³
USM-L-30IWE30S USM-L-30IWE30E	30 Kg	Ø 900 x 500 318 Ltrs	7.5 HP	—	780 to 840 RPM 305 to 354 G	Ø 500	Ø25 (1" BSP) 400 Ltrs / cycle	3"	Ø15 (0.5" BSP) 30 Kg / hr	12-18 KW	1370 x 1450 x 1725	1310 KG/1550 KG 1570 x 1650 x 1925 4.92 M ³
USM-L-30IWE60S USM-L-30IWE60E	60 Kg	Ø 1100 x 650 617 Ltrs	15 HP	—	700 to 760 RPM 301 to 355 G	Ø 500	Ø38 (1.5" BSP) 800 Ltrs / cycle	3"	Ø15 (0.5" BSP) 60 Kg / hr	24-36 KW	1610 x 1750 x 2000	2300 KG/2600 KG 1810 x 1950 x 2200 7.9 M ³
USM-L-30IWE120TS	120 Kg	Ø 1350 x 850 1216 Ltrs	23 HP	1.5 KW	635 to 685 RPM 304 to 353 G	Ø 800	Ø50 (2" BSP) 1600 Ltrs / cycle	3" 2 Nos	Ø25 (1" BSP) 120 Kg / hr	—	1950 x 2250 x 2300	4310 KG/4700 KG 2150 x 2450 x 2500 15.2 M ³

Note: a) All Dimensions are in MM. Standard Machines Operate on 415 ±10%, 3 Phase, 50HZ, CYS AC Electric Supply, Special Voltage on request.
b) Machines are also made to order as per customer's requirement & specifications.

S: Steam | E: Electric

Flat Bed Press

Unik Surgical 'Flat Bed Press' designed for fine pressing of Flat Linen like Table Covers, Pillow Covers, Napkins, Kitchen Linen, Staff Uniforms of Hotels and Hospitals. This may Press Textile Articles. The Suction Feature, Quality Padding and Teflon Lining on Hot Head Guarantee Fine Finishing or Pressing. Automatic, Auto Programmable with Reset Feature, Auto Temperature Control, Pneumatically Operated.

- ✓ Available in 30" x 60", Size (750x1500) sizes of Head & Bed.
- ✓ Also available as per customer requirement.
- ✓ Heating system available in Steam, Electric & Thermal Heat transfer Fluids.



Model	Head & Bed Size	Air Connection	Heating			Dimensions	Net Weight / Shipping Wt. (Appx.) Shipping Size (WxDxH) Shipping Value
			Fluid Connection Consumption	Steam Connection Consumption	Electric Load		
USM-L-30BP75S	1500 x 750	0.5" BSP	(0.5"x0.5") BSP	0.5"BSP	12 kw	1600 x 1600 x 1300	600 kg/800 kg
USM-L-30BP75E	1500 x 750	100 Lts/Min	BSP	30Kg/Hr.			1900 x 1900x 1600
USM-L-30BP75T	1500 x 750	6kg/Cm ³	16000 Kcal/Hr.				5.77 M

Note: a) All Dimensions are in MM. Standard Machines Operate on 415 ±10%, 3 Phase, 50HZ, CYS AC Electric Supply, Special Voltage on request.
b) Machines are also made to order as per customer's requirement & specifications.



General Utility Press

Unik Surgical General Utility Press is Pneumatic Operated with Automatic time release of the head at pre-set time.

- ✓ Head is spring suspended on rocker arms for self alignment with the buck.
- ✓ Pneumatic raising and lowering with push button.

Model	Steam Consumption	Vacuum Required	Air Consumption	Net. Weight	Machine Size	Shipping Size (WxDxH)
USM-L-30UP50	24	2	70 Lt./min	350 kg	1350x1300x1400	1500x1550x1600

Note: a) All Dimensions are in MM. Standard Machines Operate on 415 ±10%, 3 Phase, 50HZ, CYS AC Electric Supply, Special Voltage on request.
b) Machines are also made to order as per customer's requirement & specifications.

Flatwork Drying Ironer | Chest Heated

Unik Surgical latest **Rotary Ironers** have wide range to serve the **Textile, Export, Hotel & Hospital needs.**

The Rotary Ironers are manufactures using the state of the art technology to carry out the largest laundry job. Its flexible chest design causes uniform high pressure between the roller and the chest. The bed is technically designed to offer up to 180 degree Celsius of Surface which maintains pressure between the bed and the roll.

CHEST TYPE IRONERS:

These ironers guarantee optimal heat conductivity and even temperature distribution Steam. Chests are heated by direct steam injection via multiple steam chambers.

This hi-tech ironer is the ultimate in proficiency, efficiency and productivity. Aiming at mechanical perfection, the finish does not lack artistic touch. The overall effect is mechanical marvel. Ironing appears to be a creative heat and the result leaves nothing more to desire and XSONI's Rotary Ironers leave no room for complaint.

Salient Features:

- VFD optimizes rotational speeds of cylinder-ensuring flexibility and quality. Up to 30% less energy consumption.
- Higher out put than equally sized steam heated Ironer.
- Limited space requirement.
- All sizes 304(12"), 457(18"), 610(24"), 762(30"), 1219(48") mm roll diameter working width from 2 mtr. to 4.1 mtr. single or multi roll version.
- Steam, Electric and Thermal fluid heating.
- Temperature adjustable to 180" C.
- All classic Ironer features Guarantee outstanding quality.
- Proven reliability by many references nation wide.



CHEST TYPE IRONER

Optional Features:



- Imported S.S Spring padding with heat resistant double layer polyester padding
- Polyester conveyer belts with welded imported seam
- Imported comb hooks
- Rubberized conveyer feed roller with air blow feeding for perfect linen edge hold



Control Panel



Conveyer Feed Belts

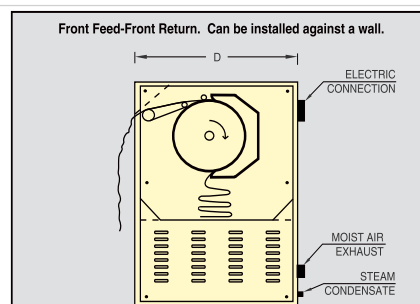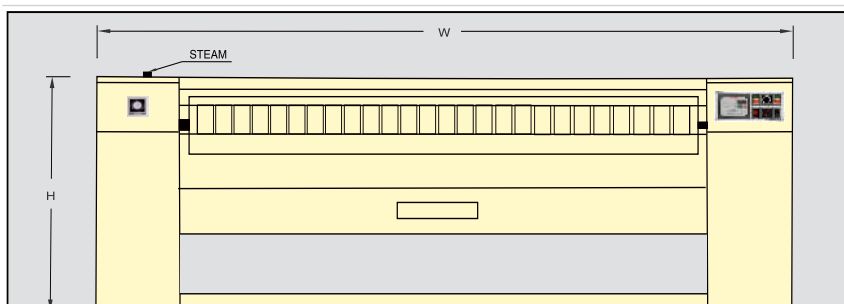

Model	Roller Dimensions (without Padding) Mm/inches	Normal Roller Speed At 50 Hz	AC Inverter (VFD) Variable Speed	Connections		Heating (Thermostatically Controlled)		Total electricity consumption		Suction pipe dimensions exhaust side	Overall dimensions (W x D x H) in mm	Net weight/Shipping weight
				Drive Motor	Suction Motor	Electric	Steam					Shipping size (W x D x H) in mm
USM-L-30CH80S USM-L-30CH80E	Ø 305 x 2134 (Ø 12" x 84")	4.66 RPM	2-5 RPM	2 HP	0.75 HP	9 KW	30 kg. per hr.	2 HP	11 KW	1/2 BSP (75MM)	2600 X 1050 X 1270	1450/1750kg 3400 X 1550 X 1450
USM-L-30CH83S USM-L-30CH83E	Ø 458x 2439 (Ø 18" x 96")	6.50 RPM	2-6 RPM	3 HP	0.75 HP	12 KW	72 kg. per hr.	3 HP	14.5 KW	1/2 BSP (75MM)	3520 X 1170 X 1310	2200/2650 kg 3520 X 1170 X 1310
USM-L-30CH283S USM-L-30CH283E	Ø 762 x 3048 (Ø 30" x 120")	10.1 RPM	3-10 RPM	3 HP	0.75 HP	24 KW	100 kg. per hr.	3 HP	26.5 KW	1/2 BSP (100MM)	4150 X 1170 X 1310	4500/4700 kg 4150 X 1170 X 1310

Note: a) All machines above specified are one side feeding and other side collection type.
b) Any Size Flat Work Ironer Roller between 300mm Dia. & 1600mm & any length up to 3300 long available in Single, Double or Triple rolls on request.
c) All offered Machines are chest type/Bed type only.



Vacuum Finishing Table

- ✓ More Productive, Sophisticated, Powerful
- ✓ Elegant look and rust-proof powder coated
- ✓ Ensure superior suction through noiseless working atmosphere
- ✓ Washable foam and heat proof cloth ensuring longer life & easy maintenance
- ✓ Detachable System for easy Transportation & Installation
- ✓ Specifically constructed impeller housing & Electronically Controlled operation, guaranteed safety and superior performance
- ✓ Powder coated perforation ensure instantaneous extremely powerful moisture extraction with low power consumption
- ✓ No immense of moisture and heat which ensure wrinkle free

CENTRIFUGAL SUCTION BLOWER





Connected to table top. Mounted on a high torque electric motor for quick start. Activated by spring loaded, full length foot pedal. Low noise & vibration less performance. **Efficient moisture suction. Quick drying of table top & padding.**

SILICON PADDING S.S TABLE HEATER



Perforated top has thermostatically controlled electric heating element underneath. On the top layers of Aluminium wire mesh, Silicon foam & heat resistant top cover form high porosity padding. Efficient airflow. Padding remains dry at all times.

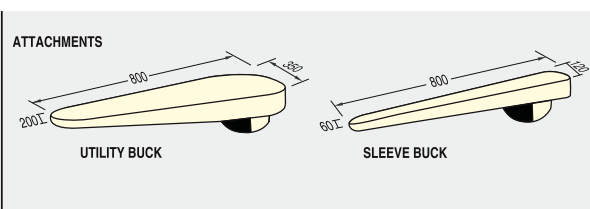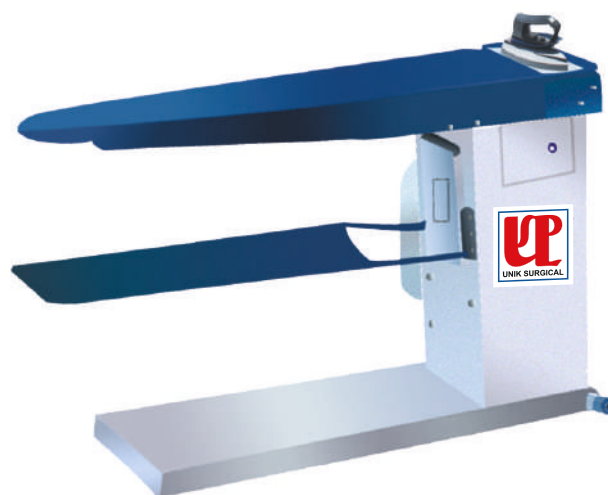

MODEL	No. of Motors	Power	DIMENSION (W x D x H) inches	WEIGHT(Kgs.)
USM-L-30VT2429	1	0.75 HP, 1PH/3PH	50 x 30 x 36	80
USM-L-30VT2427	1	0.75 HP Heater 5 KW	50 x 30 x 36	120
USM-L-30VT2429N	2	0.75 HP, 1PH/3PH	60 x 48 x 36	100

Note: a) All Dimensions are in MM. Standard Machines Operate on 415 $\pm 10\%$, 3 Phase, 50HZ, CYS AC Electric Supply, Special Voltage on request.
b) Machines are also made to order as per customer's requirement & specifications.

Steam Generator | Manual & Fully Automatic

CARBON STEEL PRESSURE VESSEL & BUILT IN WATER STORAGE TANK

Oil Fired Steam Generator

Fitted with imported burner. Imported float type water level electric/solenoid steam release safety valves & built in electric control panel.

Highlights of the Oil Fired Steam Generator:

- ✓ Fully automatic steam generator
- ✓ Modern design to be installed in the finishing hall w/o heating effect
- ✓ Based on simple shell & tube technology
- ✓ Works on principal of reverse technology where flame & gases reverse in air tight chamber & in the process result in complete commutation & absolute utilization of energy with output efficiency of 90%.

MODEL	CAPACITY	EFFICIENT (NCU)%	STEAM PRESSURE KG/CM ²	FEED WATER PUMP MOTOR	ELECTRICAL CONSUMTION (RUNNING AVG.)	OVERAL DIMENSION (MM)	DRY WEIGHT (APPX.)
USM-L-ST30-O	30 KG	90	8.00	0.75 KW	300 watt	889 x 889 x 762	300 Kg
USM-L-ST50-O	50 KG	90	10.85	0.75 KW	300 watt	1753 x 914 x 762	450 Kg
USM-L-ST100-O	100 KG	90	12.50	0.75 KW	300 watt	1753 x 914 x 762	550 Kg
USM-L-ST200-O	200 KG	90	12.50	0.75 KW	300 watt	1905 x 1143 x 1219	650 Kg

Note: a) All Dimensions are in MM. Standard Machines Operate on 415 10%, 3 Phase, 50HZ, CVS AC Electric Supply, Special Voltage on request.
b) Machines are also made to order as per customer's requirement & specifications.



Electric Steam Generator

PRESSURE VESSEL: Boiler quality steel construction S.S. heavy duty electric heaters, Imported water level regulator, electric solenoid steam release safety valve, water into the water vessel.

Fully Automatic pressure control, temperature control, water inlet. Dry cutout device excessive steam pressure release

MODEL	HEATER	IRON CAPACITY		STEAM PRESSURE	DIMENSION W x D x H (Inches)	WEIGHT (APPX.)
		ELECTRIC	STEAM			
USM-L-30ST2426-E	6/9 KW	3	2	5-6 BAR	24" x 36" x 36"	90 Kg
USM-L-30ST2427-E	12/18 KW	6	4	5-6 BAR	30" x 40" x 36"	95 Kg
USM-L-30ST2428-E	18/27 KW	12	8	5-6 BAR	30" x 40" x 36"	96 Kg
USM-L-30ST2406-E	45/63 K	25	16	5-6 BAR	36" x 70" x 54"	130 Kg

Note: a) All Dimensions are in MM. Standard Machines Operate on 415 10%, 3 Phase, 50HZ, CVS AC Electric Supply, Special Voltage on request.
b) Machines are also made to order as per customer's requirement & specifications.



Portable Steam Generator

- ✓ Imported Portable Steam Ironing System
- ✓ High pressure steam can be generated by simply plugging to single phase point
- ✓ 4 Level safety mechanism incorporated with advance features
- ✓ Light in weight, maintenance free, sleek look, single phase



Electronic Heated Steam Press

- ✓ Widely used due to its temperature tolerance (+/-20 deg. C) & light weight
- ✓ Precision thermostatic controls and heat proof Bakelite handle
- ✓ Non-Rub & Non-Sticky base
- ✓ Brass base can be used for extra weight as per your convenient

All Steam Press Finishing Iron


Excellent for all Flatwork, Extra wide sole plate speeds Ironing for Large Area.

- ✓ Adjustable bolt on the steam valve to adjust the steam quantities
- ✓ Parallel steam hotels on the edge of iron base extensively makes spreading steam hard to press easy. Adjustable venturi valve draws any condensate that may form assuring 100% dry steam and no water spots. Long life steam valve is almost maintenance free.

Flat Work Ironer (Roller Heated) with Automatic Feeder, Folder & Stacker

Machine features

- Additional roll can be added with minor modification to increase productivity in the future according to business growth.
- The rolls made of high quality stainless steel 304 with large contact area of 300 degree maximize the heat exchange to evaporate faster at lower energy cost.
- Use NOMEX belts and can set temperature up to 200 degree
- The roll ironer can be connected to any brand folder to fold the sheets automatically after ironing
- Come with Finger guard protection for safety
- Two stop button for emergency stop

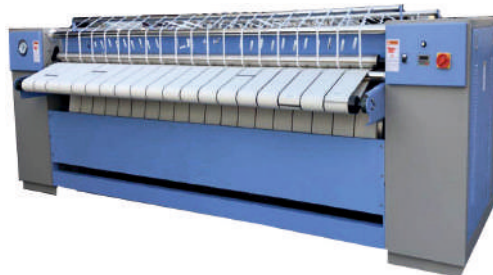

- Standard 2 primary folds and 3 cross folds meet most laundry needs worldwide. Primary fold and first cross fold by air-jet, second and third cross fold by blade for long lasting reliable folding while give maximum protection to fabrics.
- Speed synchronization between ironer and folder thru communication between inverters automatically adjust the speed of folder when the speed of ironer changes, ensure the flatwork coming out from ironer is feeding smoothly to the folder
- Easy access 6 programs for 1 lane folding, 4 programs for 2 lanes folding, 4 programs for 4 lanes folding, Simple parameter setting to fine tune the folding midpoints and blowing time for perfect folding. Special interface to check input and output signals for easy maintenance and trouble shooting. Automatic reject the flatwork if the primary is not folded properly to eliminate jam-ups in cross fold area. The folder can be connected to most ironers in the market.

- High-speed automatic feeding, save time, improve work efficiency, increase production more than 50%. Reduce the cost of manual operation of steam and electricity and increase profits.
- Pre-emptively remove part of the water, improve work efficiency, reduce energy consumption and wages, and increase profits.
- Simultaneous suction and air feeding, and tightly sucking the quilt cover to prevent the sheets or quilt from being sucked into the bottom and being unable to feed, regardless of 100% successful delivery of the quilt cover.
- Automatic shake leveling, the industry's only positive and negative brush automatically brushed on both sides, the only on the sheets, quilt cover, pillowcase can be flat feed (completely solve the other feeding machine hair brush can only send sheet is still uneven), efficiency And the effect is better than any spreader (the machine is single-sided brushing), improve the ironing quality of the sheets, duvet cover, pillowcase, enhance the image, improve the competitiveness, improve customer satisfaction and competitiveness, and more easily increase business profits.



When the design requirements are met, the single-line treatment hotel linens will reach 1,000 per hour.



- Automatic regulation, according to The folding discharge range
- Adjustable stacking pieces, maximum Stacking number is 20 parts
- The combined mode of operation, Set the operation and statistics in the folding machine controller

Supporting Equipment & Accessories

> Trolleys, Tables & Scrub Station

Washroom Trolley

Model : USM-L-WLT50

(50 Kg. Capacity)

It was formed out of Stainless Steel Tubes & Bars. Electro treated. It was fitted with 4 Nos, swivelling type ball-bearing wheels.



MODEL	HOLDING CAPACITY	DIMENSIONS WXDXH	NET WEIGHT CRATED WEIGHT
USM-L-WLT50	50 Kg	762x609x863	26 Kg

Shelf Trolley

Model : USM-L-ST100

(100 Kg. Capacity)

Formed out of Stainless Steel Tubes & Bars. Electro treated. Fitted with three no. Shelves & 4 no.s Swivelling type ball bearing wheels



MODEL	HOLDING CAPACITY	DIMENSIONS WXDXH	NET WEIGHT CRATED WEIGHT
USM-L-ST100	100 Kg	850x650x7680	55 Kg 95 Kg

Laundry Scrub Station with 2 Sinks

Model : USM-L-SS100

Stainless steel construction. Separate Sinks for wash and Rinse. Hot & Cold water Mixers with both sinks. SS. It has a Scrubbing board underneath the Shelf.



MODEL	HOLDING CAPACITY	DIMENSIONS WXDXH	NET WEIGHT CRATED WEIGHT
USM-L-SS100	100 Kg	850x650x7680	55 Kg 95 Kg

Ironing Table

Model : USM-L-IT25



MODEL	DIMENSIONS WXDXH	NET WEIGHT CRATED WEIGHT
USM-L-IT25	1270x762x762	60 Kg

NOTE: ALL DIMENSIONS ARE IN MM. & ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Dry Linen Trolley

Model : USM-L-DLT50
(50 Kg. Capacity)

It was formed out of Stainless Steel Tubes & Bars. Electro treated. Foldable front. It was filled with 4 Nos, swivelling type ball-bearing wheels.



MODEL	HOLDING CAPACITY	DIMENSIONS WXDxH	NET WEIGHT CRATED WEIGHT
USM-L-DLT50	50 Kg	762x809x836	19 Kg

Mobile Tables

Model : USM-L-MT100

Stainless steel polished top. They formed Stainless Steel Tubes and Bars. Electro treated Filled with four no.s swivelling type ball bearing wheels.



MODEL	HOLDING CAPACITY	DIMENSIONS WXDxH	NET WEIGHT CRATED WEIGHT
MT 50	50 Kg	1130x720x800	36 Kg / 56 Kg
MT 100	100 Kg	2350x880x800	78 Kg / 120 Kg

Thermopatch (USA)

A temporary identification system is very suitable for laundry / Dry cleaning industries. The combination of colour code and printed code makes sorting easier and faster. Suitable for heavy use. This machine enables you to produce and heat-seal a label within a few seconds.



Garment Packaging Machine

Packaging Machine

- For Clothing & Linen
- For Dry Cleaners
- For Laundries



Washer Extractor & Dryer Combo | Fully Automatic

Features:

- ✓ Fully Automatic Rigid Mounted Industrial Washer Extractor & Dryer COMBO in which inner and outer cylinder interface adopt a face to face mode can effectively prevent accidental damage to cloth and leather
- ✓ It adopts SS304 stainless steel panels and inner pot for longer service life, and also much easier to be cleaned
- ✓ Liquid cylinder is with a special anti-corrosion treatment, very durable
- ✓ The whole washing tank system is installed hard mounted on the base frame heavy plate and damping devices, heavy duty bearing housing drive through pulley with belt driven type
- ✓ It is with automatic detergent separation container, neither washing powder accumulates nor the washing additives cannot fully dissolve and then rot the cloth and leather
- ✓ It is fully controlled by the computer, with VFD Drive to adjust the speed, with man-machine conversation to adjust washing program, with clear LCD 7" Touch screen display. With failure and functional self-checking system to make it easier to maintain
- ✓ Electrical control components all adopt high-quality components, motor adopts high-quality special motor



USM-L-30C40

Rated Capacity	40 KG	Weight	1150 KG
Model Number	NXCE-40	Voltage	3 Phase – 415
Loading Type	Front Loading	Drum Size	Dia 1000 x 850 mm
Usage / Application	24 Hours	Processing Time	1 Hour 15 Minutes
Motor Power	7.5 HP	Air Pressure Bar	N/A
Size / Dimension	1450 x 1920 x 2040 mm	Phase	3 Phase / 50 Hz
Cycle Timing	1 Hour 15 Minutes	Rotation Speed (RPM)	650 (G-Force 250)
Design	Front Load / Electric Heated	Rotor Speed (RPM)	N/A
Water Heater Load	18 KW	Working Capacity (KG/Hr.)	KG
Dryer Heater Load	15 KW	Display	YES (PLC SYSTEMS)
Water Inlet Valve	1½"	Door Size	640 x 640 mm
Water Drain Valve	3"	Express Wash	YES
Washing Type	Forward & Reverse	Fabric	All Type Fabric
Water Consumption	1:9 / 1:10	Automation Grade	Automatic

Fully Automatic Barrier Washer Extractor

Description:

- ✓ Heating Type: Electricity or Steam
- ✓ Meets the requirement of germ-free, dust-free, anti-static washing needs
- ✓ Installed between "Clean" area and "Non-Clean" area. Prevents the clean launderette from being contaminated and infected again
- ✓ Widely used in hospital, food and pharmaceutical factories, nuclear power plants etc. where extreme dust and germ-free environmental requirement for ideal laundry equipment for cleaning room.



Model	USM-L-30BW30	USM-L-30BW50	USM-L-30BW100
Washing Capacity (KG)	30	50	100
Rolling Container Dimension (mm)	Ø 800 x 680	Ø 800 x 1050	Ø 1067 x 1130
Washing Speed (R/min)	36	36	32
Middle Extract Speed (R/min)	370	370	425
High Extract Speed (R/min)	700	700	800
Rated Voltage (V)	220 / 240 / 380 / 415 / 440		
Motor Power (KW)	5.5	7.5	11
Cold / Hot Water & Steam Inlet (Inch)	1	1	1
Drainage (Inch)	4	4	4
Dimensions (mm)	1370 x 1150 x 1820	1720 x 1100 x 1820	1850 x 1330 x 2200
N.W. (KG)	1800	2200	2400



UNIK SURGICAL PVT. LTD.

Head Office : Ground Floor, Angad Apartment,
GD Mishra Path, New Patliputra Colony, Patna - 800013, Bihar (India)

Phone : 0612-3562111

Email : info@uniksurgical.com | uniksurgicalpvtltd@gmail.com

Website: www.uniksurgical.com

Authorized Dealer