

Koopman DCM: Unstable Eigenfunctions as Data-driven Representations for Legged Balancing

Stéphane Caron

Institute for Intelligent Systems and Robotics
CNRS and Sorbonne University, Paris, France
stephane.caron@isir.upmc.fr

Abstract: In legged locomotion, divergent components of motion (DCMs) have emerged as characteristic states for balance control. They isolate the unstable mode of the dynamics but, in existing formulations, apply only to reduced models such as the linear inverted pendulum. In this study, we show how DCMs can be more generally formulated as Koopman eigenfunctions. Whereas Koopman analysis typically targets eigenvalues near zero, which capture conserved or slowly varying quantities, our investigation leads us to deliberately search for unstable eigenpairs with large eigenvalues. The resulting Koopman DCMs are data-driven observables trained using only real-robot data. On a real biped, DCMs learned from one hour of robot data improve tracking of reference walking patterns. We further show how learned DCMs provide state-based viability constraints when combined with model predictive control.

Keywords: Koopman Operator, Legged Robots, Control

1 Introduction

Balance control of legged robots has long been organized around reduced models: low-dimensional templates of the robot’s dynamics that admit tractable control laws. The most widely used is the linear inverted pendulum [1], around which the natural control coordinate is the divergent component of motion (DCM) [2] that isolates the unstable mode and reduces balance to the regulation of a single quantity. Two features of this template limit its applicability. First, the DCM is only defined for the reduced model. Second, its natural frequency $\omega = \sqrt{g/h}$ is a model-based quantity defined from the center-of-mass height h , rather than a quantity tuned to the real system. In this study, we address both points by re-deriving the DCM as a Koopman eigenfunction of the full dynamics, and learning it directly from real-robot data.

We propose four main contributions. First, we re-cast divergent components of motion from legged locomotion as unstable eigenfunctions of the Koopman operator, framing the search for new DCMs as an eigenfunction search problem. Second, we propose a data-driven training pipeline that learns Koopman DCMs from closed-loop measurement-action data. Third, we deploy the method on a real robot under proportional DCM feedback, improving pattern tracking against the model-based baseline. Finally, we show how learned DCMs can be used in model predictive control as hard viability constraints, which we evaluate on a humanoid in simulation.¹

2 From DCMs to Koopman eigenfunctions

Following the walking and stair climbing performances of the Honda humanoid robot in 1998 [3], legged locomotion control has long been organized around *reduced models*: low-dimensional templates that capture the unstable part of the dynamics and admit tractable control laws.

¹After peer review of this manuscript, we will release its accompanying code as open-source software.

2.1 Divergent component of motion of the linear inverted pendulum

The most studied reduced model, the linear inverted pendulum (LIP) [1], rests on two key motion constraints: no angular-momentum variations around the center of mass (CoM), and a constant CoM height above ground. Under these assumptions, the articulated equations of motion of a legged robot boil down to:

$$\ddot{c} = \omega^2(c - z), \quad \omega := \sqrt{g/h}, \quad (1)$$

where $c \in \mathbb{R}^2$ is the (horizontal) CoM position, $z \in \mathbb{R}^2$ the zero-tipping moment point (ZMP), $g \approx 9.81 \text{ m/s}^2$ is standard gravity and h is the vertical CoM position above ground. The appeal of this control system is that it is linear, with constant natural frequency ω , and a single control input z . The input is linearly constrained to lie in a polygon defined by contact geometry $Cz \leq d$.

While studying this system, the same quantity $c + \dot{c}/\omega$ appeared under different names and motivations. In biomechanics, Hof [4] identified it as the *extrapolated center of mass*, as a predictor of balance in human walking. In humanoid robotics, Pratt et al. [5] framed it as the *capture point*, the location on the ground where the robot should step in order to come to a stop. Engelsberger et al. [2] promoted it to a three-dimensional control point, the 3D *divergent component of motion* (DCM), around which a line of walking controllers has since been developed [6, 7, 8].

One way to derive the DCM is to perform an eigendecomposition of the linearized pendulum dynamics. Writing Equation (1) as a first-order linear system over a horizontal coordinate:

$$\frac{d}{dt} \begin{bmatrix} c \\ \dot{c} \end{bmatrix} = \underbrace{\begin{bmatrix} 0 & 1 \\ \omega^2 & 0 \end{bmatrix}}_A \begin{bmatrix} c \\ \dot{c} \end{bmatrix} + \underbrace{\begin{bmatrix} 0 \\ -\omega^2 \end{bmatrix}}_B z. \quad (2)$$

The system matrix A has eigenvalues $\pm\omega$ whose left eigenvectors define two coordinates: $\xi := c + \frac{\dot{c}}{\omega}$ and $\zeta := c - \frac{\dot{c}}{\omega}$, the *divergent* and *convergent* components of motion. A direct computation gives their (controlled) dynamics:

$$\dot{\xi} = \omega(\xi - z), \quad \dot{\zeta} = -\omega(\zeta - z). \quad (3)$$

These equations show how the component ζ associated with the stable eigenvalue $-\omega$ converges on its own, regardless of the control input. If the task is to walk without falling, then spending control authority on the CCM would be wasteful. The DCM ξ , on the other hand, represents a quantity that *must* be controlled to avoid falling.

2.2 Koopman eigenfunctions for control systems

In contrast to linear systems, there is no generally applicable and scalable framework for the control of nonlinear systems. The Koopman operator framework approaches this question by seeking coordinate transformations that embed nonlinear dynamics in a globally linear representation. Koopman [9] observed in 1931 that a nonlinear system $\dot{x} = f(x)$ may be represented exactly by an infinite-dimensional *linear* operator $\mathcal{K}$ acting on observable functions $g : x \mapsto g(x)$ rather than states x . In discrete time, $\mathcal{K}$ advances measurements along the flow map $F : x_k \mapsto x_{k+1}$ of f between consecutive times, so that:

$$\mathcal{K}g = g \circ F, \text{ or equivalently, } \forall(x_k, x_{k+1}), (\mathcal{K}g)(x_k) = g(x_{k+1}) \quad (4)$$

In continuous time, the infinitesimal generator $\mathcal{L}$ of the Koopman operator (known as the Lie operator) satisfies $\mathcal{L}g = \dot{g}(x) = \nabla g(x) \cdot f(x)$. The price to pay for linearity is infinite dimension, which has led to the investigation of finite-dimensional approximations of $\mathcal{K}$ for a variety of systems. Key among them are dynamic mode decomposition (DMD) [10], which best-fits a linear operator advancing measurements one step at a time, and Extended DMD (EDMD) [11], which generalizes DMD to nonlinear observables. These methods rely on a finite dictionary of observables that is rarely closed under system transitions. When this happens, the finite-dimensional approximation exhibits *spurious* eigenfunctions that do not evolve as their eigenvalues predict [12].

One way to circumvent this issue is to restrict our observables to a Koopman-*invariant* subspace spanned by *eigenfunctions* φ of the operator [13]. A Koopman eigenfunction associated with the eigenvalue λ satisfies:

$$\mathcal{L}\varphi = \frac{d}{dt}\varphi(x) = \lambda\varphi(x), \quad (5)$$

It thus evolves linearly along trajectories, providing an intrinsic coordinate in which the dynamics are, by construction, closed and linear. For control-affine systems $\dot{x} = f(x) + B(x)u$, applying the chain rule to an eigenfunction of the *unforced* dynamics [12] yields:

$$\mathcal{L}\varphi = \frac{d}{dt}\varphi(x) = \lambda\varphi(x) + \nabla\varphi(x) \cdot B(x)u. \quad (6)$$

The dynamics in eigenfunction coordinates thus split into a linear part inherited from the unforced flow and a control term $\nabla\varphi(x) \cdot B(x)$ that is, in general, state-dependent.

2.3 The DCM as a Koopman eigenfunction

For a linear system $\dot{x} = Ax$, the Koopman eigenfunctions are the linear functionals $\varphi(x) = v^\top x$ given by the left eigenvectors v of A , with eigenvalues equal to those of A . Comparing with the eigendecomposition (3) of the LIP, we see that the convergent and divergent components of motion match the two Koopman eigenfunctions of the inverted pendulum: ζ with the stable eigenvalue $-\omega$, and ξ with the unstable eigenvalue $+\omega$. The controlled DCM law (3) then matches the eigenfunction-control equation (6):

$$\dot{\xi} = \underbrace{\omega}_{\lambda} \xi + \underbrace{(-\omega z)}_{\nabla\xi \cdot Bu}, \quad (7)$$

with eigenvalue ω , a linear observable $\varphi(x) = \xi(x) = [1 \ \omega^{-1}]x$, and a state-independent control term reflecting the linear dynamics of the LIP.

3 Learning Divergent Components of Motion

In this work, we consider the problem of balancing a legged robot, which is in general a nonlinear control-affine system $\dot{x} = f(x) + B(x)u$. Our objective is to control it around its unstable equilibrium, where the CoM is up and should not fall down. To characterize the dynamics around this equilibrium, we deliberately seek the *largest* Koopman eigenvalue ω of the unforced dynamics, and its associated observable ξ . In this regard, our setting departs from prior Koopman-control studies such as Kaiser et al. [12], which targets zero or lightly damped eigenvalues associated with conserved quantities and persistent dynamics.

3.1 Eigenfunction Search

We formulate the eigenfunction search as a first-order nonlinear optimization over the pair (ω, θ) , where ω is the eigenvalue and θ is the vector of parameters of a multilayer perceptron (MLP) that computes the observable ξ . We adopt a model-free formulation where, rather than committing to a state space as the domain of our observable, we input a delay embedding of measurements and actions:

$$\xi_\theta : \mathcal{Z}_H \rightarrow \mathbb{R}^{n_u}, \quad (8)$$

$$z_k = (y_{k-H}, u_{k-H}, \dots, y_{k-1}, u_{k-1}, y_k) \mapsto \xi_\theta(z_k), \quad (9)$$

where y_k denotes the measurement vector at time k , $u_k \in \mathbb{R}^{n_u}$ the control input, and H the history length. Note that the DCM and control input live in the same vector space of dimension n_u .

We impose two constraints on the eigenpair (ω, ξ_θ) . First, the eigenvalue should be positive, $\omega > 0$, so that the learned observable targets the *unstable* mode of the dynamics. Second, inspired by the LIP DCM dynamics (3), we require that the learned DCM satisfies the linear differential equation:

$$\dot{\xi}_\theta = \omega (\xi_\theta - u), \quad (10)$$

which constrains the bilinear control term of Equation (6) to be state-independent, and serves as our inductive bias. Rather than a requirement, this choice is a first step that will be sufficient for the purpose of this study. We discuss in Section 6 how future works can select more general DCM dynamics at this stage.

3.2 DCM Dynamics Loss

We assume a dataset D of measurement-action episodes $(y_k, u_k)_k$ collected on the real robot under an existing controller. Let δt denote the discrete time between any two steps t_k and t_{k+1} . Then, integrating Equation (10) under a zero-order-hold of the input $u = u_k$ over $[t_k, t_{k+1}]$ yields the discrete-time DCM recursion:

$$\xi_{k+1} = e^{\omega \delta t} \xi_k + (1 - e^{\omega \delta t}) u_k \quad (11)$$

We can check how $e^{\omega \delta t} > 1$ amplifies ξ_k across one step, reflecting the unstable mode. Substituting the encoder $\xi_k := \xi_\theta(z_k)$ into the ℓ_2 -residual of this equation, we obtain the one-step DCM loss of our optimization problem as:

$$\ell_{\text{DCM}}^{(0)} = \mathbb{E}_{(z_k, z_{k+1}) \sim \mathcal{U}_{H+1}(D)} \left[\left\| \xi_\theta(z_{k+1}) - e^{\omega \delta t} \xi_\theta(z_k) - (1 - e^{\omega \delta t}) u_k \right\|^2 \right] \quad (12)$$

where $\mathcal{U}_{H+1}(D)$ denotes uniform sampling over the set of measurement-action sequences $(y_{k-H}, u_{k-H}, \dots, y_{k-1}, u_{k-1}, y_k, u_k, y_{k+1})$ from D , of length $H + 1$, that do not cross episode boundaries. Since these sequences include the embeddings and action (z_k, z_{k+1}) , and that u_k appears in z_{k+1} , we use the abbreviation $(z_k, z_{k+1}) \sim \mathcal{U}_{H+1}(D)$ for notational convenience.

3.3 CoM Prediction Loss

The DCM dynamics loss itself admits a trivial minimum at $(\omega, \xi_\theta) \equiv (0, 0)$ that zeroes the DCM loss in (12) identically, and that gradient descent reaches from a significant set of initial values (ω_0, θ_0) . A general remedy to this issue is to learn a joint decoder that reconstructs a known state from encoded features, adding a corresponding reconstruction loss [14, 15, 16]. Rather than reconstructing a full state, which for a legged robot would typically involve generalized position and momentum coordinates, we exploit a second piece of LIP structure: the DCM anchors the (stable) CoM dynamics through:

$$\dot{c} = \omega (\xi - c). \quad (13)$$

Under the zero-order hold on $u = u_k$, we already know the analytical solution to $\xi(t)$ illustrated in Equation (11). Using it, one can then check that the analytical solution to Equation (13) over $[t_k, t_{k+1}]$ yields the discrete-time CoM recursion:

$$c_{k+1} = e^{-\omega \delta t} c_k + (1 - e^{-\omega \delta t}) \frac{\xi_k + \xi_{k+1}}{2}, \quad (14)$$

in which $e^{-\omega \delta t} < 1$ reflects the stable convergence of c towards ξ . Note that the mid-point expression $\frac{1}{2}(\xi_k + \xi_{k+1})$ in this expression is not an approximation.

We now make a third assumption on our training pipeline: the measurement vector y_k , and by extension the embedding z_k , should contain measurements from which we can estimate the CoM position $c_k = c(z_k)$ with respect to ground contact points. With this assumption, we add a one-step CoM prediction loss to our optimization problem:

$$\ell_{\text{CoM}}^{(0)} = \mathbb{E}_{(z_k, u_k, z_{k+1}) \sim \mathcal{U}_{H+1}(D)} \left[\left\| c_{k+1} - e^{-\omega \delta t} c_k - (1 - e^{-\omega \delta t}) \frac{\xi_\theta(z_k) + \xi_\theta(z_{k+1})}{2} \right\|^2 \right]. \quad (15)$$

When $\omega \rightarrow 0$, the residual in this loss collapses to $c_{k+1} - c_k$ irrespective of ξ_θ , leaving a non-vanishing floor $\mathbb{E}[\|c_{k+1} - c_k\|^2] > 0$. With a conic combination $\ell_{\text{DCM}}^{(0)} + w_{\text{CoM}} \ell_{\text{CoM}}^{(0)}$ of the two one-step losses, we can thus reduce the attractivity of the trivial minimum $(\omega, \xi_\theta) \equiv 0$ by increasing the relative CoM-loss weight $w_{\text{CoM}} > 0$. We validate this effect on the LIP model in Appendix A.

3.4 Eligibility Traces

While the weighted one-step loss $\ell^{(0)} = \ell_{\text{DCM}}^{(0)} + w_{\text{CoM}} \ell_{\text{CoM}}^{(0)}$ is sufficient to recover the exact DCM of a LIP model, we found empirically that it tends to converge to overly low eigenvalues ω on real-robot data. To mitigate this effect, we evaluate the encoder against multi-step predictions, following the idea behind eligibility traces in reinforcement learning [17].

By defining $\gamma := e^{-\omega \delta t} \in (0, 1)$, we can rewrite the DCM recursion from Equation (11) as:

$$\xi_k = (1 - \gamma)u_k + \gamma \xi_{k+1}, \quad (16)$$

Coordinate by coordinate, this equation has the form of the Bellman equation of a Markov reward process, with value $V(x_k) = \xi_k$, (scaled) reward $(1 - \gamma)u_k$, and discount factor γ . On a chunk of $m + 1$ consecutive embeddings $(z_k, \dots, z_{k+m})$, iterating Equation (16) n times yields the n -step DCM residual:

$$\delta_{\text{DCM}}^n(z_k, \dots, z_{k+n}) := \xi_\theta(z_k) - \gamma^n \xi_\theta(z_{k+n}) - (1 - \gamma) \sum_{j=0}^{n-1} \gamma^j u_{k+j}, \quad (17)$$

Weighting squared residuals by geometrically with coefficients $(1 - \lambda)\lambda^{n-1}$ defines the TD(λ) variant of the DCM loss:

$$\ell_{\text{DCM}}^{(\lambda)} := \mathbb{E}_{(z_k, \dots, z_{k+m}) \sim \mathcal{U}_{H+m}(D)} \left[\sum_{n=1}^m (1 - \lambda) \lambda^{n-1} \|\delta_{\text{DCM}}^n(z_k, \dots, z_{k+n})\|^2 \right], \quad (18)$$

Iterating similarly the CoM recursion (14) forward yields the n -step CoM residual $\delta_{\text{CoM}}^n := c_{k+n} - \gamma^n c_k - \frac{1-\gamma}{2} \sum_{j=0}^{n-1} \gamma^{n-1-j} (\xi_\theta(z_{k+j}) + \xi_\theta(z_{k+j+1}))$ and the TD(λ) variant of the CoM loss $\ell_{\text{CoM}}^{(\lambda)} := \mathbb{E}_k \left[\sum_{n=1}^m (1 - \lambda) \lambda^{n-1} \|r_n^{\text{CoM}}\|^2 \right]$. We finally combine the two losses into our final training objective $\ell^{(\lambda)} = \ell_{\text{DCM}}^{(\lambda)} + w_{\text{CoM}} \ell_{\text{CoM}}^{(\lambda)}$.

When $\lambda = 0$, only the one-step residuals contribute and we recover (up to a γ^{-2} rescaling that preserves minimizers) the TD(0) loss previously defined. We treat λ as a hyperparameter and set the chunk length to $m = 5/(1 - \lambda)$ so that the truncation tail λ^m carries less than 1% of the geometric weight. Chunks crossing an episode boundary are discarded, since the recursions (11) and (14) only hold within an episode.

4 Application to Legged Balancing

Historically, walking has been formalized as tracking of a precomputed trajectory, the walking pattern, prescribing both CoM and ZMP [18]. Learning-based locomotion controllers switch the explicit pattern for rewards that typically include CoM-velocity tracking and behavior-regularization terms [19]. Both formulations mix state components (CoM position, velocity) with input components (joint torques, ZMP). In what follows, we define the walking task as the indefinite tracking of a ZMP reference u_t^{ref} , evaluated by $\ell^{\text{walk}} = \|u_t - u_t^{\text{ref}}\|^2$.²

4.1 Data Collection

We instantiate the Koopman DCM learning pipeline on the lateral dynamics of a Cookie wheeled biped (Figure 1, right). Cookie belongs to the open-source Upkie family [20] and has three motors per leg: flexion-extension joints at hips and knees, plus active wheels at the end each leg. The robot has no abduction-adduction joint, so the lateral CoM can only be controlled indirectly by varying leg extensions, which in turn tilt the trunk and shift the center of mass through gravity.

The encoder ξ_θ in (9) outputs a scalar coordinate in the lateral direction ($n_u = 1$). It consists of a two-hidden-layer MLP of width 128 with tanh activations, receiving as input the delay-embedded

²This is not a decoupling of input from state: a ZMP advancing without falling at constant velocity v forces a CoM advancing at the same velocity, without specifying the latter explicitly.

Delay-embedding horizon H	10 samples
Initial frequency ω_0	5.0 rad/s
CoM-loss weight w_{CoM}	1.0
Adam learning rate	3×10^{-4}
Batch size	1024 chunks
Validation fraction	10%
Training duration	100 epochs
TD(λ) effective horizon $1/(1-\lambda)$	10
Chunk length m	$5H$

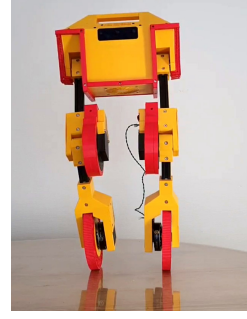


Figure 1: Left: hyperparameter values. Right: Cookie wheeled biped robot on which we learn divergent components of motion. With only three joints per leg, the robot is underactuated and cannot track linear inverted pendulum references.

measurement-action history z_k . The natural frequency is parametrized as $\omega = \exp(\tilde{\omega})$ with $\tilde{\omega} \in \mathbb{R}$ to enforce $\omega > 0$. In this experiment, we selected the input as the normalized lateral ZMP $u = z \in [-1, 1]$, and collected closed-loop training data under a proportional DCM feedback law at the ZMP [5]:

$$z = z^{\text{ref}} - (1 + k_p/\omega) (\xi^{\text{ref}} - \xi^{\text{obs}}), \quad (19)$$

This commanded ZMP then drove a foot-force-difference control loop Kajita et al. [21] on leg extensions. During data collection, the observed DCM ξ^{obs} was the kinematic LIP estimate $c + \dot{c}/\omega$, while the learned ξ_θ was only substituted in at evaluation time. Note that any controller can be used for data collection.

Training the encoder requires online estimates of two quantities not directly sensed: the CoM for the CoM prediction loss (15), and the ZMP for the input u_k in the DCM residuals (17). We obtain both with a quadratic-programming (QP) state estimator, as outlined in Xinjilefu et al. [22]. At every control cycle, the floating-base configuration q is reconstructed by differential inverse kinematics from joint encoders, IMU base orientation, and rolling-contact tasks at the two wheels. The CoM position c_k follows by forward kinematics. The three-dimensional contact forces (f_L, f_R) are estimated by a QP that minimizes the squared residual between predicted and observed generalized forces, subject to unilateral-contact constraints $f_L^z, f_R^z \geq 0$. The ZMP is finally evaluated as the vertical-force-weighted barycenter of the two contact points.

4.2 Training

We train the encoder ξ_θ jointly with $\log \omega$ on a corpus of $N = 330\,000$ transitions, corresponding to 1 hour of real-robot data at 100 Hz (with a corresponding timestep $\delta t = 10$ ms). Each iteration samples a mini-batch of length- $(m+1)$ chunks from the training split, builds the multi-step residuals (17), and updates $(\theta, \log \omega)$ by one gradient step on $\ell_{\text{DCM}}^{(\lambda)} + w_{\text{CoM}} \ell_{\text{CoM}}^{(\lambda)}$.

Figure 1 (left) summarizes the hyperparameter values used in this study. Unlike with the LIP model where one-step losses are sufficient to pin the natural frequency ω to the analytical value, on real-robot data the one-step loss $\ell_{\text{DCM}}^{(0)} + w_{\text{CoM}} \ell_{\text{CoM}}^{(0)}$ fails to identify ω . In practice, training collapses to $\tilde{\omega} \approx 0.05$ rad/s from every initialization we tested, despite the effect of the CoM-loss on reshape the basin of attraction of the trivial attractor. We recover identifiability by extending to the multi-step TD(λ) loss with $\lambda > 0$. We selected the delay-embedding horizon $H = 10$ based on ZMP tracking performance of the resulting controllers.

4.3 Results

We close the loop with each candidate DCM in the controller and measure ZMP tracking on a sinusoidal reference $u_t^{\text{ref}} = A \sin(2\pi t/T)$ at zero offset. Trials run for at least ten periods; we report the tracking root mean square error (RMSE) over the last two periods. The kinematic baseline uses

$\xi = c + \dot{c}/\omega$ with $\omega = \sqrt{g/z_{\text{CoM}}}$ recomputed each control cycle from the instantaneous CoM height z_{CoM} . We compare the $H = 10$ encoder against this baseline and against the $H = 5$ and $H = 20$ encoders.

Table 1: ZMP tracking error on the real robot, mean $\pm$ half-range across three sessions.

A	kinematic	$H = 5$	$H = 10$	$H = 20$
0.1	0.11 ± 0.06	0.13 ± 0.05	0.08 ± 0.05	0.09 ± 0.05
0.2	0.12 ± 0.01	0.08 ± 0.01	0.05 ± 0.01	0.06 ± 0.01
0.3	0.20 ± 0.06	0.11 ± 0.02	0.11 ± 0.02	0.10 ± 0.01

On three real-robot sessions at $T = 1.2$ s and $A \in \{0.1, 0.2, 0.3\}$, the $H = 10$ encoder roughly halves the RMSE of the kinematic baseline at every amplitude we tested (Table 1, Figure 2 left). The improvement is largest at $A = 0.2$, where the learned DCM tracks $2.4\times$ better than the kinematic baseline (0.05 vs 0.12). The $H = 5$ and $H = 20$ encoders are competitive but don't beat $H = 10$ strictly across the three amplitudes.

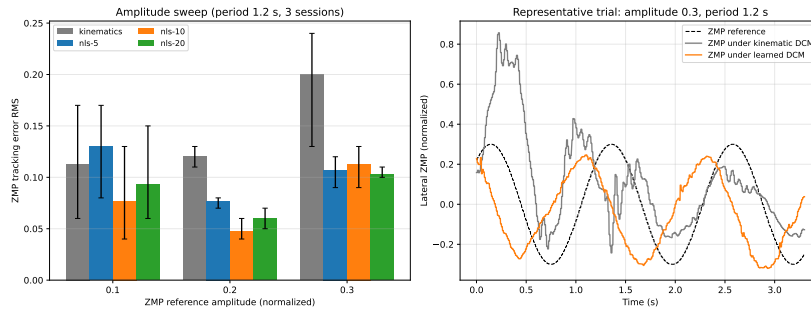


Figure 2: Real-robot ZMP tracking. *Left*: amplitude sweep at period 1.2 s, mean RMSE across three sessions, error bars span min/max. *Right*: representative trial at amplitude 0.3, period 1.2 s; the commanded ZMP under the kinematic baseline (gray) lags the reference (dashed black), while the commanded ZMP under the learned $H = 10$ encoder (orange) tracks it closely.

We also evaluate the period parameter: holding $A = 0.3$ and varying $T \in \{0.8, 1.6\}$ s, we observed that the $H = 10$ encoder again has the lowest RMSE: 0.05 vs 0.14 for the kinematic baseline at $T = 0.8$ s, 0.08 vs 0.13 at $T = 1.6$ s. The $H = 20$ encoder loses its low-amplitude advantage at both periods (0.12 and 0.14), and $H = 5$ matches $H = 10$ at the short period but degrades at the long one.

5 Model Predictive Control over Learned DCMs

Sugihara [23] pinpointed two key aspects of the divergent component of motion in the linear case: its optimality for feedback control, and its viability condition in the resulting closed-loop dynamics. The former is a control quantity while the latter is a safety guarantee. We now investigate how the design decisions we made in our learned DCMs allow us to formulate viability conditions and enforce them as state constraints in optimal control problems.

Viability is a property of states that is well-suited to the locomotion task [24]. A state is viable as long as there exists a future evolution of the system, starting from it, that avoids fallen states. In the case of the linear inverted pendulum, the input inequality constraint $Cz \leq d$ translates directly to a viability constraint when it is applied to the linear DCM [23]: the robot will be able to regulate its future center-of-mass positions if and only if $C\xi \leq d$.

We formulate the lateral walking task as a constrained linear-quadratic optimal control problem over a finite horizon of N steps. The state is the (scalar) DCM ξ_k , the input is the (scalar) ZMP u_k , and the dynamics are the discrete-time DCM recursion of (11),

$$\xi_{k+1} = \alpha \xi_k + (1 - \alpha) u_k, \quad \alpha := e^{\omega \delta t}, \quad (20)$$

where δt is the control timestep and ω the eigenvalue of the unforced dynamics. The reference trajectories follow the sinusoidal walking pattern $u_t^{\text{ref}} = A \sin(\nu t)$, with angular frequency $\nu := 2\pi/T$; the analytic DCM reference consistent with (20) being $\xi_t^{\text{ref}} = \frac{A\omega}{\sqrt{\omega^2 + \nu^2}} \sin(\nu t + \arctan(\nu/\omega))$. The cost is quadratic, with stage tracking on both ξ and u plus a terminal state cost:

$$J = \sum_{k=0}^{N-1} [Q (\xi_k - \xi_k^{\text{ref}})^2 + R (u_k - u_k^{\text{ref}})^2] + Q_T (\xi_N - \xi_N^{\text{ref}})^2. \quad (21)$$

The stage input-tracking term is the walking-task loss. The stage state-tracking and terminal terms keep the planned ξ trajectory close to the analytic reference and stabilize the receding-horizon solution. The horizon N and weights Q, R, Q_T are design parameters. Viability enters through hard inequality constraints on the DCM and control input:

$$|\xi_k| \leq \xi_{\max} \quad (k = 0, \dots, N), \quad (22)$$

$$|u_k| \leq u_{\max} \quad (k = 0, \dots, N-1). \quad (23)$$

The input box $|u_k| \leq u_{\max} = 1$ is the support polygon: the lateral ZMP must lie between the two wheel contacts, at ± 1 in normalized units. The state box $|\xi_k| \leq \xi_{\max}$ is Sugihara’s viability condition. We set $\xi_{\max}$ strictly inside the polygon edge to leave a safety margin. Together, (20), (21), and (23) form a strictly convex quadratic program in the decision variables $(\xi_1, \dots, \xi_N, u_0, \dots, u_{N-1})$ given the initial state ξ_0 .

We set up a lateral-balancing simulation in PyBullet [25] on the Unitree G1 humanoid in static double-stance. The control pipeline mirrors the real-robot architecture of Section 4, except the DCM controller for which we compare proportional feedback control to the constrained MPC. Both consume the same encoder ξ_θ , trained on PyBullet G1 trajectories collected under the MPC with a kinematic DCM estimate, with trained eigenvalue $\hat{\omega} = 1.91$ rad/s. The MPC parameters are $N = 50$ (a 0.5 s lookahead at 100 Hz), $Q = R = Q_T = 1$, $\xi_{\max} = 0.85$, $u_{\max} = 1$; the QP is solved at each control cycle with ProxQP [26].

Table 2: G1 lateral-balancing evaluation (90 trials per controller, 5 seeds per cell).

Controller	Fall rate	ZMP tracking error
Proportional DCM	33% (30/90)	0.73 (0.48, 1.11)
MPC	0% (0/90)	0.59 (0.47, 0.76)

We sweep walking-pattern references over amplitudes $A \in \{0.3, 0.6, 0.9\}$, offsets $\{0, 0.5\}$, and periods $T \in \{1.3, 1.6, 1.9\}$ s, repeated for five seeds: 90 trials per controller, each lasting up to 19 s. The larger amplitudes and the non-zero offset push the reference DCM toward the support polygon edge, stressing the controllers’ viability margin. Under the proportional DCM law the robot falls in 30/90 trials, whereas it doesn’t fall under the MPC (Table 2).

6 Limitations

The most consequential choice in this study was to fix the input coupling from the start: in our DCM dynamics (10), the input enters linearly and at the same rate ω as the state. In the general control-affine setting (6) the coupling can be any $\nabla \xi \cdot B(x)$, and more general DCM dynamics have already been studied, notably the bilinear form $\dot{\xi} = \omega \xi - \lambda z$ in the variable-height inverted pendulum, where the height stiffness λ enters multiplicatively [27]. Learning their data-driven counterparts is left to future work.

A second area of improvement is that our setup follows the DCM-feedback convention that the ZMP is controlled instantaneously: the commanded ZMP u_k enters the dynamics directly as the input, with no model of how it is actuated. Significant improvements have already been observed in DCM-state MPC by adding a ZMP lag model [8]. A natural extension of our pipeline is to fit, alongside the DCM factor ω , a corresponding factor on the ZMP side from the same empirical closed-loop data, enriching the input coupling beyond the LIP form.

7 Conclusion

We presented an approach that treats divergent components of motion as data-driven Koopman eigenfunctions, learned from closed-loop measurement-action histories without committing to a reduced-order kinematic model. The pipeline recovers the analytical LIP DCM, improves ZMP tracking on a real wheeled biped, and supplies a state on which model predictive control can enforce a viability constraint. Our pipeline can be trained directly from closed-loop data on the real robot, sidestepping the domain-adaptation question that arises when training in simulation and transferring to hardware.

References

- [1] S. Kajita, F. Kanehiro, K. Kaneko, K. Yokoi, and H. Hirukawa. The 3d linear inverted pendulum mode: A simple modeling for a biped walking pattern generation. In *Proceedings 2001 IEEE/RSJ International Conference on Intelligent Robots and Systems. Expanding the Societal Role of Robotics in the the Next Millennium (Cat. No. 01CH37180)*, volume 1, pages 239–246. IEEE, 2001.
- [2] J. Engelsberger, C. Ott, and A. Albu-Schäffer. Three-dimensional bipedal walking control based on divergent component of motion. *Ieee transactions on robotics*, 31(2):355–368, 2015.
- [3] K. Hirai, M. Hirose, Y. Haikawa, and T. Takenaka. The development of honda humanoid robot. In *Proceedings. 1998 IEEE international conference on robotics and automation (Cat. No. 98CH36146)*, volume 2, pages 1321–1326. IEEE, 1998.
- [4] A. L. Hof. The ‘extrapolated center of mass’ concept suggests a simple control of balance in walking. *Human movement science*, 27(1):112–125, 2008.
- [5] J. Pratt, J. Carff, S. Drakunov, and A. Goswami. Capture point: A step toward humanoid push recovery. In *2006 6th IEEE-RAS international conference on humanoid robots*, pages 200–207. Ieee, 2006.
- [6] S. Caron, A. Kheddar, and O. Tempier. Stair climbing stabilization of the hrp-4 humanoid robot using whole-body admittance control. In *2019 International conference on robotics and automation (ICRA)*, pages 277–283. IEEE, 2019.
- [7] N. Scianca, D. De Simone, L. Lanari, and G. Oriolo. Mpc for humanoid gait generation: Stability and feasibility. *IEEE Transactions on Robotics*, 36(4):1171–1188, 2020.
- [8] A. Dallard, M. Benallegue, N. Scianca, F. Kanehiro, and A. Kheddar. Robust bipedal walking with closed-loop mpc–adios stabilizers. *IEEE Transactions on Robotics*, 2025.
- [9] B. O. Koopman. Hamiltonian systems and transformation in hilbert space. *Proceedings of the National Academy of Sciences*, 17(5):315–318, 1931.
- [10] P. J. Schmid. Dynamic mode decomposition of numerical and experimental data. *Journal of fluid mechanics*, 656:5–28, 2010.
- [11] M. O. Williams, I. G. Kevrekidis, and C. W. Rowley. A data-driven approximation of the koopman operator: Extending dynamic mode decomposition. *Journal of Nonlinear Science*, 25(6):1307–1346, 2015.
- [12] E. Kaiser, J. N. Kutz, and S. L. Brunton. Data-driven discovery of koopman eigenfunctions for control. *Machine Learning: Science and Technology*, 2(3):035023, 2021.
- [13] S. L. Brunton, B. W. Brunton, J. L. Proctor, and J. N. Kutz. Koopman invariant subspaces and finite linear representations of nonlinear dynamical systems for control. *PloS one*, 11(2): e0150171, 2016.

- [14] M. Korda and I. Mezić. Linear predictors for nonlinear dynamical systems: Koopman operator meets model predictive control. *Automatica*, 93:149–160, 2018.
- [15] H. Yin, M. C. Welle, and D. Kragic. Embedding koopman optimal control in robot policy learning. In *2022 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 13392–13399. IEEE, 2022.
- [16] O. Bounou, J. Ponce, and J. Carpentier. Learning system dynamics from sensory input under optimal control principles. In *2024 IEEE 63rd Conference on Decision and Control (CDC)*, pages 1885–1892. IEEE, 2024.
- [17] R. S. Sutton and A. G. Barto. *Reinforcement Learning: An Introduction*. Adaptive computation and machine learning series. The MIT Press, Cambridge, Massachusetts, second edition, 2018. ISBN 978-0-262-03924-6.
- [18] S. Kajita, F. Kanehiro, K. Kaneko, K. Fujiwara, K. Harada, K. Yokoi, and H. Hirukawa. Biped walking pattern generation by using preview control of zero-moment point. In *2003 IEEE international conference on robotics and automation (Cat. No. 03CH37422)*, volume 2, pages 1620–1626. IEEE, 2003.
- [19] J. Hwangbo, J. Lee, A. Dosovitskiy, D. Bellicoso, V. Tsounis, V. Koltun, and M. Hutter. Learning agile and dynamic motor skills for legged robots. *Science robotics*, 4(26):eaau5872, 2019.
- [20] S. Caron, N. Perrin-Gilbert, V. Ledoux, U. B. Gökbakan, P.-G. Raverdy, A. Raffin, V. Tordjman--Levavasseur, E. Arlaud, and M. Duclaud. Upkie open source wheeled biped robot, 2026. URL <https://github.com/upkie/upkie>.
- [21] S. Kajita, M. Morisawa, K. Miura, S. Nakaoka, K. Harada, K. Kaneko, F. Kanehiro, and K. Yokoi. Biped walking stabilization based on linear inverted pendulum tracking. In *2010 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 4489–4496. IEEE, 2010.
- [22] X. Xinjilefu, S. Feng, and C. G. Atkeson. Dynamic state estimation using quadratic programming. In *2014 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 989–994. IEEE, 2014.
- [23] T. Sugihara. Standing stabilizability and stepping maneuver in planar bipedalism based on the best com-zmp regulator. In *2009 IEEE International Conference on Robotics and Automation*, pages 1966–1971. IEEE, 2009.
- [24] P.-B. Wieber. Viability and predictive control for safe locomotion. In *2008 IEEE/RSJ International Conference on Intelligent Robots and Systems*, pages 1103–1108. IEEE, 2008.
- [25] E. Coumans and Y. Bai. Pybullet, a python module for physics simulation for games, robotics and machine learning, 2016.
- [26] A. Bambade, F. Schramm, S. El-Kazdadi, S. Caron, A. Taylor, and J. Carpentier. Proxqp: an efficient and versatile quadratic programming solver for real-time robotics applications and beyond. *IEEE Transactions on Robotics*, 2025.
- [27] S. Caron, A. Escande, L. Lanari, and B. Mallein. Capturability-based pattern generation for walking with variable height. *IEEE Transactions on Robotics*, 36(2):517–536, Apr. 2020.

A Evaluation on the Linear Inverted Pendulum Model

In this Appendix, we evaluate our Koopman DCM learning pipeline on a linear inverted pendulum (LIP) model. Our goal is to assess how the method behaves in an ideal setting, with less confounding factors than on real-robot data.

We select a ground-truth natural frequency $\omega^* = \sqrt{g/h} = 5$ rad/s. We set the observation vector to $y_k = (c_k, \dot{c}_k)$, with c the position of the center of mass in the inertial frame. We then collect a dataset of 200 000 closed-loop steps tracking a sinusoidal ZMP reference with period $T \in \{0.3, 0.5, 0.8, 1.2, 2.0\}$ s, amplitude (normalized in $[-1, 1]$) $A \in \{0.1, 0.2, 0.3, 0.4, 0.5\}$ and stationary offset $o \in \{-0.2, -0.1, 0, 0.1, 0.2\}$.

These parameters are re-drawn every 2 000 steps uniformly at random from their corresponding sets. The encoder ξ_θ has the same architecture as in the main paper, a two-hidden-layer MLP of width 128 with tanh activations, and is optimized jointly with $\log \omega$ by the Adam algorithm, with a learning rate of 10^{-3} and a batch size of 1024, over 100 epochs. The CoM-loss weight is set to $w_{\text{CoM}} = 1$ in this trial.

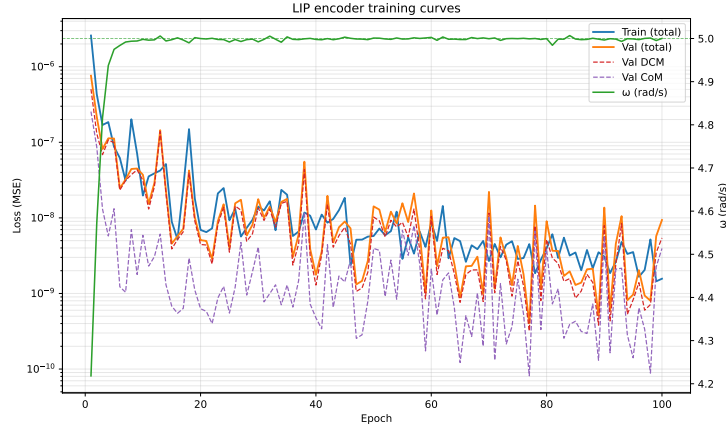


Figure 3: Training of a Koopman DCM estimator on a LIP model. Training and validation losses (solid), unweighted DCM and CoM sub-losses (dashed), and learned ω on the right axis (green).

Figure 3 shows an instance of training a Koopman DCM estimator (ω, ξ_θ) , starting from an initial guess $\omega_0 = 4.0$ rad/s. Training converges to $\hat{\omega} = 4.9992$ rad/s, with a relative error of 1.6×10^{-4} over the ground truth ω^* . The final validation residuals are $\ell_{\text{DCM}}^{(0)} = 5.4 \times 10^{-9}$ and $\ell_{\text{CoM}}^{(0)} = 3.9 \times 10^{-9}$, with both losses decreasing at similar rates over training. This confirms that the CoM residual lifts ω off the trivial $(\omega, \xi_\theta) \equiv (0, 0)$ minimum of the one-step DCM loss $\ell_{\text{DCM}}^{(0)}$.

A.1 Weight of the CoM Prediction Loss

We investigate the effect of the CoM prediction loss by sweeping the corresponding weight $w_{\text{CoM}} \in \{0.1, 1, 10, 100\}$, starting training from an initial guess $\omega_0 = 1.0$ rad/s close to the trivial minimum. We use three seeds for each value of the weight:

w_{CoM}	$\hat{\omega}$ (rad/s)	val. loss (MSE)
0.1	0.352 ± 0.007	7.35×10^{-7}
1	4.975 ± 0.003	1.30×10^{-8}
10	4.878 ± 0.021	7.46×10^{-8}
100	3.800 ± 0.051	4.66×10^{-6}

We can identify three regimes in the resulting curves in Figure 4. At $w_{\text{CoM}} = 0.1$, the DCM term dominates and $\hat{\omega}$ remains in the trivial $\omega \rightarrow 0$ basin. At $w_{\text{CoM}} = 1$, $\hat{\omega}$ matches ω^* to three decimal

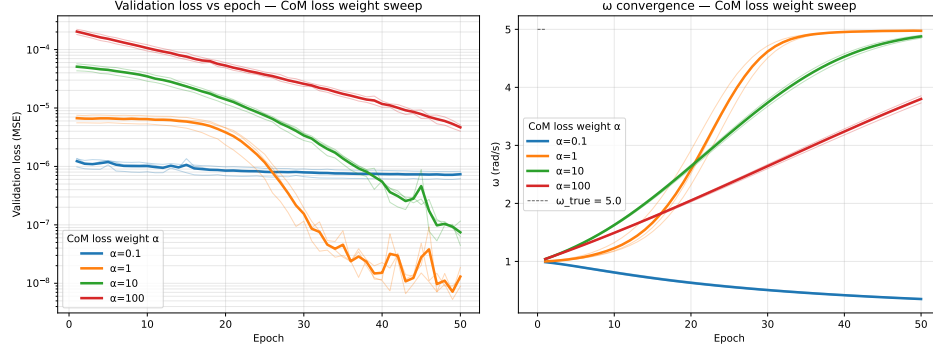


Figure 4: CoM-weight sweep at $\omega_0 = 1.0$ rad/s, three seeds each. Left: validation loss vs epoch; right: learned ω vs epoch. Only $w_{\text{CoM}} = 1$ recovers ω^* from this initialization.

places at the lowest validation loss. Finally, at $w_{\text{CoM}} \in \{10, 100\}$, the CoM term dominates, $\hat{\omega}$ eventually converges to the same value but at a slower rate. Our conclusion is that the CoM prediction loss regularizes training away from the trivial attractor but at the cost of slower convergence.

A.2 Delay-embedding Horizon

We investigate the choice of the delay-embedding horizon h in Table A.2, where we sweep $h \in \{1, 3, 5, 10, 20\}$. We train the corresponding DCM estimators with 10 different seeds for each horizon, training for 50 epochs over 50 000 closed-loop steps each. The remaining hyperparameters are identical to the rest of this section:

h	$\hat{\omega}$ (rad/s)	validation loss (MSE)
1	4.997 ± 0.005	2.37×10^{-8}
3	4.997 ± 0.005	6.02×10^{-8}
5	4.999 ± 0.002	1.90×10^{-8}
10	4.995 ± 0.005	2.79×10^{-8}
20	4.994 ± 0.003	4.12×10^{-8}

All five history sizes recover $\hat{\omega}$ within 0.006 rad/s of $\omega^* = 5.0$ rad/s, with final validation losses of the same order of magnitude. We therefore conclude that, with the ideal linear model, the performance of DCM estimation is not sensitive to the length of the delay-embedding horizon. This insensitivity is expected, as the observation vector $y_k = (c_k, \dot{c}_k)$ already contains both coordinates from which the eigenfunction $\xi = c + \dot{c}/\omega$ is built. We did find that the conclusion differs on the real robot (Section 4 of the paper), where we found empirically best performance at $h = 10$.