

Sensorless State Estimation and Control for Agile Cable-Suspended Payload Transport by Quadrotors

Ana Maria P. S. Nascimento, *Member, IEEE*, Augusto V. Sales, *Student Member, IEEE*, Antonio Marcus N. Lima, *Senior Member, IEEE* and Tiago P. Nascimento, *Senior Member, IEEE*

Abstract—This work proposes a novel control and estimation approach for aerial manipulation of a cable-suspended load using Unmanned Aerial Vehicles (UAVs). Common approaches in the state of the art have practical limitations, relying on direct load measurements and Lagrangian methods for dynamic modeling. The lack of a straightforward dynamic model of the system led us to propose adopting the Udwadia–Kalaba method to explicitly incorporate the cable’s geometric constraints. This formulation allowed for the consistent derivation of the tension force and its direct integration into the Nonlinear Model Predictive Control (NMPC) prediction model. Additionally, we propose a sensorless load state estimation based on the same geometric constraints. Results from real-robot experiments demonstrated that the explicit inclusion of load dynamics in the optimization problem significantly reduces trajectory-tracking errors and yields better overall performance compared to strategies based on incomplete models.

Index Terms—Aerial Systems: Mechanics and Control, Aerial Systems: Applications, UAV, NMPC.

I. INTRODUCTION

THE multirotor Unmanned Aerial Vehicles (UAVs) have played an increasingly important role in industrial, security, inspection, and rescue applications [1]. One particularly promising, yet technically challenging, application is the transportation of cargo by UAVs (Figure 1). This problem has been extensively studied in recent literature [2], [3], both in the context of cargo rigidly coupled to the vehicle and in the transport of cargo suspended by cables. This work focuses primarily on the latter case, where a quadrotor transports cargo connected by an inelastic cable.

The main challenge in transporting suspended cargo using UAVs lies in the pendulum dynamics induced by the cable, which can degrade control performance and compromise flight stability [4]. These oscillations not only hinder accurate trajectory tracking but also introduce additional forces into the system, resulting in strongly coupled and nonlinear dynamics. Developing robust and predictive control strategies is therefore essential to mitigate these effects and ensure safe and efficient operation [5].

In control theory, NMPC optimizes future control actions for a nonlinear system over a prediction horizon by minimizing a cost function subject to state and input constraints. Its ability to handle nonlinearities and constraints explicitly makes it well suited to controlling UAVs such as quadrotors [6]. In this work, we make the following contributions for quadrotor-based payload transportation:



Fig. 1: UAV at 2 m/s transporting a 0.5 kg payload through a 1 m length cable.

- An NMPC approach for quadrotor payload transportation based on the Udwadia–Kalaba formulation, integrating cable dynamics and external-force estimation into the prediction model.
- A payload state-estimation method for a single quadrotor that does not require additional sensors on the cable or payload.
- Real-world experimental validation with a quadrotor carrying a slung payload, demonstrating performance in outdoor conditions with varying illumination and random wind disturbances.

II. RELATED WORK

Existing approaches in the literature use simplified models of the cable-load system and assume ideal constraints. Furthermore, they rely on high-frequency load and cable measurements for closed-loop control, typically requiring additional sensors mounted on the load, such as reflective markers for a motion capture system, or on the quadrotor, such as downward-facing cameras, cable tension sensors, and cable direction sensors [7].

Accurate system modeling is essential for developing effective control strategies. Early studies investigated approaches such as geometric control [4] and adaptive control [8] for a quadrotor UAV transporting a cable-suspended payload, assuming the cable behaved as a rigid link. Later, Kotaru et al. [9] studied the dynamics and control of a quadrotor carrying a load suspended by an elastic cable modeled with spring stiffness and damping. In 2018, Guo et al. [5] designed an optimal control system for a quadcopter transporting a

cable-suspended load through a narrow window, using Low Equivalent System (LOES) identification for the system model.

Recent studies have examined the modeling and control of quadrotor-payload systems. Sun et al. [10] modeled the payload as a point mass connected to a UAV by a rigid cable, which simplifies the equations of motion. Lv et al. [11] extended this framework by modeling cable flexibility to capture oscillations and vibrations that can degrade performance. Chang et al. [12] proposed a model that includes damping and time-varying parameters to adapt to changing operating conditions. Belguith et al. [13] investigated payload aerodynamics and its interaction with the UAV structure, yielding a more complete model. Goodman et al. [14] showed that Lie-group-based geometric control can improve trajectory tracking accuracy.

Load oscillations during transport remain a major challenge and motivate robust control strategies. Urbina-Brito et al. [15] proposed a Model Predictive Control (MPC) scheme for quadrotors transporting suspended loads that accounts for load dynamics, full 3D vehicle motion, and attitude dynamics. In the same year, Li et al. [16] introduced Perception-Constrained Model Predictive Control (PCMPC), which incorporates perception constraints alongside nonlinear dynamics and actuator limits. Later, Belguith et al. [13] applied a sliding-mode controller for oscillation compensation and stability. Outeiro et al. [17] proposed a control architecture for transporting suspended loads with uncertain mass, addressing both load dynamics and parametric uncertainty. Li et al. [18] proposed AutoTrans, an integrated planning and control framework for aerial payload transport that combines real-time spatiotemporal planning with an adaptive NMPC guidance layer and hierarchical disturbance compensation, including an online external force estimator, although it relies on IMU data mounted on the cable.

In 2024, Panetsos et al. [19] implemented an NMPC scheme for disturbance anticipation and load-transport optimization, using vision-based state estimates. Wang et al. [20] proposed an impact-aware planning and control framework for aerial robots with suspended payloads, targeting impacts induced by cable mode transitions (taut/slack). More recently, Sun et al. [7] presented a trajectory-centric framework that solves the whole-body kinodynamic motion planning problem online while accounting for dynamic coupling and physical constraints between the UAVs and the suspended load.

III. PRELIMINARIES

We first define the main variables used in this work, expressed in the *world frame* and in SI units. In our model, $\mathbf{p}_Q \in \mathbb{R}^3$, $\dot{\mathbf{p}}_Q \in \mathbb{R}^3$, and $\ddot{\mathbf{p}}_Q \in \mathbb{R}^3$ denote the UAV position, velocity, and acceleration, respectively, and $\mathbf{q}_Q \in \mathbb{S}^3$ denotes its attitude quaternion. Part of the dynamic formulation is expressed in the *robot frame*, where forces and torques are applied. Accordingly, $\mathbf{v}_Q \in \mathbb{R}^3$, $\boldsymbol{\omega} \in \mathbb{R}^3$, and $\dot{\boldsymbol{\omega}} \in \mathbb{R}^3$ denote the linear velocity, angular velocity, and angular acceleration of the UAV in the robot frame, respectively; $\boldsymbol{\delta} \in \mathbb{R}^4$ denotes the propeller rotational speeds; $T = \sum_{i=1}^4 T_i$ denotes the total thrust; and $\boldsymbol{\tau} \in \mathbb{R}^3$ denotes the torque vector for roll, pitch, and yaw. Finally, the models in Sections III-A and III-B are

jointly used as the prediction model for the proposed NMPC in Section V.

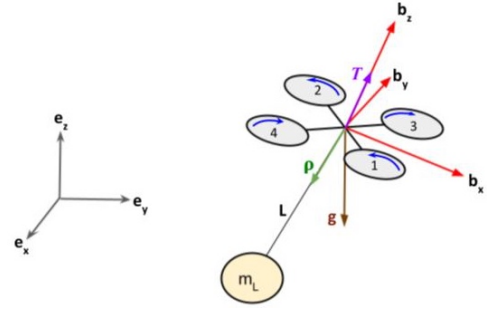


Fig. 2: Schematic of a UAV carrying a payload via a cable with axis convention.

A. Cable-Suspended Payload Aerial System Dynamic Model

Let us now also consider a dynamic system consisting of a UAV carrying a payload of mass m_L by means of a rigid, inextensible, and massless cable of length L_c , assumed to be always taut throughout the operation, as described in Fig. 2. At the same time, let $\mathbf{p}_L \in \mathbb{R}^3$, and $\dot{\mathbf{p}}_L \in \mathbb{R}^3$ be the position of the payload, and the linear velocity of the payload, respectively, all expressed in the *world frame*. Furthermore, the direction of the cable is represented by the unit vector $\boldsymbol{\rho} \in \mathbb{S}^2$, oriented from the quadcopter to the payload. In this UAV-payload system, $\mathbf{R}(\mathbf{q}_Q)$ is the quaternion rotation that transforms vectors from the robot's frame to the world frame, the operation $\otimes$ is the Hamilton multiplication (quaternion multiplication), m_Q is the total mass of the UAV, $\hat{\mathbf{e}}_z$ is the vertical unit vector in the world frame, $\hat{\mathbf{b}}_z$ is the vertical unit vector (in the robot frame), $\mathbf{I}_Q$ is the inertia matrix of the UAV body (robot frame), and the gravity vector is such that $\mathbf{g} = [0, 0, -9.8]^\top$. Finally, let us also initially consider that the quadcopter-payload system is not bounded by a holonomic constraint imposed by the cable. Then, the overall model of the UAV-payload system for cable transport is given by

$$\dot{\mathbf{p}}_Q = \mathbf{R}(\mathbf{q}_Q)\mathbf{v}_Q, \quad (1)$$

$$m_Q \ddot{\mathbf{p}}_Q = \mathbf{R}(\mathbf{q}_Q)(T\hat{\mathbf{b}}_z) - m_Q \mathbf{g}\hat{\mathbf{e}}_z + \mathbf{F}_L, \quad (2)$$

$$\dot{\mathbf{q}}_Q = \frac{1}{2} \mathbf{q}_Q \otimes \begin{bmatrix} 0 \\ \boldsymbol{\omega} \end{bmatrix}, \quad (3)$$

$$\mathbf{I}_Q \dot{\boldsymbol{\omega}} = -\boldsymbol{\omega} \times \mathbf{I}_Q \boldsymbol{\omega} + \boldsymbol{\tau}, \quad (4)$$

$$\dot{\mathbf{p}}_L = \frac{d\mathbf{p}_L}{dt}, \quad (5)$$

$$m_L \ddot{\mathbf{p}}_L = -m_L \mathbf{g}\hat{\mathbf{e}}_z - \mathbf{F}_L. \quad (6)$$

Note that, in the above dynamic model, the components for the orientation and angular velocity of the load are missing. This is because, without sensors, it is only possible to calculate these components if we have a multi-robot system that acts directly influencing it [7]. Thus, the full state vector can be written as follows

$$\boldsymbol{\xi}_k = [\boldsymbol{\xi}_{Q,k}, \boldsymbol{\xi}_{L,k}]^\top, \quad (7)$$

where the state of the quadrotor is such that $\xi_{Q,k} = [\mathbf{p}_{Q,k}^\top, \dot{\mathbf{p}}_{Q,k}^\top, \mathbf{q}_{Q,k}^\top, \boldsymbol{\omega}_{Q,k}^\top]^\top$.

Additionally, the force and torque vector can also be expressed compactly as

$$\begin{bmatrix} T \\ \boldsymbol{\tau} \end{bmatrix} = \mathbf{G}_1 \mathbf{u} + \mathbf{G}_2 \ddot{\boldsymbol{\delta}} + \mathbf{G}_3(\boldsymbol{\omega}) \dot{\boldsymbol{\delta}}, \quad (8)$$

where $\mathbf{u} = c_t \ddot{\boldsymbol{\delta}}^2$ is the individual thrust vector of the engines, with c_t being the thrust coefficient. The matrices $\mathbf{G}_1$, $\mathbf{G}_2$, and $\mathbf{G}_3$ describe, respectively, the input coupling, the inertia of the rotors, and the resultant of the gyroscopic effect between the rotors and the UAV body, such that

$$\mathbf{G}_1 = \begin{bmatrix} 1 & 1 & 1 & 1 \\ -l_d \sin \beta & l_d \sin \beta & l_d \sin \beta & -l_d \sin \beta \\ l_d \sin \beta & -l_d \sin \beta & -l_d \sin \beta & l_d \sin \beta \\ -c_q/c_t & -c_q/c_t & c_q/c_t & c_q/c_t \end{bmatrix}, \quad (9)$$

$$\mathbf{G}_2 = \begin{bmatrix} 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ 0 & 0 & 0 & 0 \\ -I_p & -I_p & I_p & I_p \end{bmatrix}, \quad (10)$$

and

$$\mathbf{G}_3 = \begin{bmatrix} 0 & 0 & 0 & 0 \\ -I_p \omega_\theta & -I_p \omega_\phi & I_p \omega_\theta & I_p \omega_\phi \\ I_p \omega_\phi & I_p \omega_\theta & -I_p \omega_\phi & -I_p \omega_\theta \\ 0 & 0 & 0 & 0 \end{bmatrix}, \quad (11)$$

where l_d is the distance from the center of mass to the rotor [m], β is the angle between $\hat{\mathbf{b}}_x$ and the arm of rotor 3, c_q the torque coefficient, and I_p the rotor's inertia around $\hat{\mathbf{e}}_z$. Furthermore, the matrices above can be derived from the convention shown in Fig. 2. It is worth mentioning that both matrices $\mathbf{G}_2$ and $\mathbf{G}_3$ are disregarded for the NMPC controller design.

B. External Force Estimator

In order to estimate the external force exerted by the payload-cable system on the UAV, let us now consider that the payload and the vehicle are treated as rigid bodies coupled by a holonomic constraint imposed by the cable. Then, the generalized coordinates are defined as $\mathbf{P} = [\mathbf{p}_Q, \mathbf{p}_L]^\top \in \mathbb{R}^6$.

The mass matrix of the free system is given by

$$\mathbf{M} = \begin{bmatrix} m_Q \mathbf{I}_3 & 0 \\ 0 & m_L \mathbf{I}_3 \end{bmatrix}. \quad (12)$$

The generalized force vector of the free system can be written as

$$\mathbf{F}_s = \begin{bmatrix} \mathbf{R}(\mathbf{q}_Q)(T\hat{\mathbf{b}}_z) - m_Q \mathbf{g} \hat{\mathbf{e}}_z \\ -m_L \mathbf{g} \hat{\mathbf{e}}_z \end{bmatrix}, \quad (13)$$

and the translational dynamics of the system are described as being $\mathbf{M}\ddot{\mathbf{P}} = \mathbf{F}_s$.

In this system, the cable is modeled as rigid, inextensible, and of constant length, which imposes the following holonomic motion constraint

$$\zeta(\mathbf{P}) = \|\mathbf{p}_L - \mathbf{p}_Q\|^2 - L_c^2 = 0. \quad (14)$$

By deriving this constraint twice in time, we obtain the acceleration constraint as being

$$\boldsymbol{\rho}_N^\top (\ddot{\mathbf{p}}_L - \ddot{\mathbf{p}}_Q) = -\frac{\|\dot{\mathbf{p}}_L - \dot{\mathbf{p}}_Q\|^2}{L_c}, \quad (15)$$

with

$$\boldsymbol{\rho}_N = \frac{\boldsymbol{\rho}}{\|\boldsymbol{\rho}\|} = \frac{\mathbf{p}_L - \mathbf{p}_Q}{\|\mathbf{p}_L - \mathbf{p}_Q\|}, \quad (16)$$

$$\boldsymbol{\rho} = \mathbf{p}_L - \mathbf{p}_Q, \quad (17)$$

$$L_c = \|\boldsymbol{\rho}\| = \|\mathbf{p}_L - \mathbf{p}_Q\|, \quad (18)$$

$$\mathbf{V}_R = \dot{\mathbf{p}}_L - \dot{\mathbf{p}}_Q, \quad (19)$$

where $\mathbf{V}_R$ is the relative velocity of the payload with respect to the UAV.

Once the UAV-load system model is obtained without explicitly imposing the cable constraint, the challenge lies in extending it to account for this constraint, which is non-trivial under the standard Newton–Euler formulation due to its complexity and configuration-specific nature. While the Lagrange–d’Alembert principle is widely used in the literature to model drone–cargo systems with eight degrees of freedom, including underactuated ones, it relies on the assumption of ideal constraints and can become cumbersome when multiple configurations are considered [1], [20]. In contrast, the Udwadia–Kalaba formulation [21] provides a more recent and explicit approach for deriving system dynamics, is applicable to both compact and augmented systems, and offers a simpler extension of Newton–Euler models. Consequently, this is particularly suitable for practical UAV applications that employ nonlinear and predictive control strategies.

Thus, we can then apply the constraint seen in the equation (14) using the method proposed by Udwadia–Kalaba, as

$$\mathbf{A}(\mathbf{P})\ddot{\mathbf{P}} = \mathbf{b}(\mathbf{P}, \dot{\mathbf{P}}), \quad (20)$$

with $\mathbf{A} = [\boldsymbol{\rho}^\top, -\boldsymbol{\rho}^\top] \in \mathbb{R}^{1 \times 6}$, and $\mathbf{b} = -\frac{\|\dot{\mathbf{p}}_L - \dot{\mathbf{p}}_Q\|^2}{L_c}$.

Accordingly, the generalized constraint force ($\mathbf{F}_{RS}$) is given by

$$\mathbf{F}_{RS} = \mathbf{M}^{1/2} \mathbf{A}^+ (\mathbf{b} - \mathbf{A} \mathbf{M}^{-1} \mathbf{F}_s), \quad (21)$$

where $\mathbf{A}^+$ denotes the Moore–Penrose pseudo-inverse of the matrix $\mathbf{A} \mathbf{M}^{-1/2}$.

Note here that the restraining force acts exclusively along the direction of the cable. Therefore, $\mathbf{F}_{RS}$ can be physically interpreted as the tension force in the cable ($\mathbf{F}_L$), such that

$$\mathbf{F}_{RS} = \mathbf{F}_L = [\boldsymbol{\rho}_N \lambda, -\boldsymbol{\rho}_N \lambda]^\top, \quad (22)$$

where $\lambda \geq 0$ is the magnitude of the tension in the cable, which must be estimated.

Note also that the total dynamics of the system (UAV + cable + load) with constraint is now given by

$$\mathbf{M}\ddot{\mathbf{P}} = \mathbf{F}_s + \mathbf{F}_L. \quad (23)$$

Which, in turn, we can rewrite this equation such that

$$m_Q \ddot{\mathbf{p}}_Q = \mathbf{R}(\mathbf{q}_Q)(T\hat{\mathbf{b}}_z) - m_Q \mathbf{g} \hat{\mathbf{e}}_z + \mathbf{F}_L, \quad (24)$$

$$m_L \ddot{\mathbf{p}}_L = -m_L \mathbf{g} \hat{\mathbf{e}}_z - \mathbf{F}_L. \quad (25)$$

In the Udwadia–Kalaba formulation, the cable tension force ($\mathbf{F}_L$) is not explicitly modeled, but is instead derived from the dynamics of the free system. Specifically, this force is identified as the minimal correction required to modify the free system dynamics, which in turn occur in the absence of

a cable, such that the trajectory strictly satisfies the specific holonomic constraint.

Let us now initially consider the free accelerations of the quadcopter and the payload, obtained from equations (24) and (25). Then, we have that

$$\ddot{\mathbf{p}}_Q^{\text{free}} = \frac{1}{m_Q} (\mathbf{R}(\mathbf{q}_Q) T \hat{\mathbf{e}}_z) - \mathbf{g} \hat{\mathbf{e}}_z, \quad (26)$$

$$\ddot{\mathbf{p}}_L^{\text{free}} = -\mathbf{g} \hat{\mathbf{e}}_z. \quad (27)$$

The relative acceleration along the direction of the cable ($\mathbf{a}_R$) is given by

$$\mathbf{a}_R = \rho_N^\top (\ddot{\mathbf{p}}_L^{\text{free}} - \ddot{\mathbf{p}}_Q^{\text{free}}). \quad (28)$$

However, the holonomic constraint of the cable imposes that the relative acceleration along ρ be satisfied, such that

$$\rho_N^\top (\ddot{\mathbf{p}}_L^{\text{free}} - \ddot{\mathbf{p}}_Q^{\text{free}}) = -\frac{1}{L_c} \|\dot{\mathbf{p}}_L - \dot{\mathbf{p}}_Q\|^2. \quad (29)$$

It is observed that the free dynamics generally do not satisfy this constraint. Consequently by referring to (19), we define a scalar discrepancy function ($\mathbf{E}$) as follows

$$\mathbf{E} = \mathbf{a}_R + \frac{1}{L_c} \|\mathbf{V}_R\|^2, \quad (30)$$

which quantifies how much the free dynamics violates the cable's holonomic constraint.

The Udwadia-Kalaba formulation demonstrates that the violation of the holonomic constraint is effectively neutralized by a cable tension force ($\mathbf{F}_L$) acting along the constraint's direction. This force induces corrections to the quadrotor and payload accelerations required to ensure that

$$\ddot{\mathbf{p}}_Q = \ddot{\mathbf{p}}_Q^{\text{free}} + \frac{1}{m_Q} \lambda \rho_N, \quad \ddot{\mathbf{p}}_L = \ddot{\mathbf{p}}_L^{\text{free}} - \frac{1}{m_L} \lambda \rho_N. \quad (31)$$

Thus, by substituting these expressions into the acceleration constraint (29), the magnitude of the cable tension (λ) is found to be

$$\lambda = \frac{\rho_N^\top (\ddot{\mathbf{p}}_L^{\text{free}} - \ddot{\mathbf{p}}_Q^{\text{free}}) + \frac{1}{L_c} \|\dot{\mathbf{p}}_L - \dot{\mathbf{p}}_Q\|^2}{\frac{1}{m_Q} + \frac{1}{m_L}}. \quad (32)$$

The resulting tension force acting on the system ($\mathbf{F}_L$) is given by

$$\mathbf{F}_L = \lambda \rho_N. \quad (33)$$

Notably, the Udwadia-Kalaba method allows for the explicit and consistent calculation of the cable tension force, ensuring strict compliance with the holonomic constraint while circumventing the numerical singularities often encountered in steady-state flight regimes. Within this framework, tension is not treated as an independent state or an arbitrary external input; rather, it emerges analytically as the force required to maintain compatibility between the system dynamics and the geometric inextensibility of the cable.

IV. PROPOSED SYSTEM

The UAV navigation system used here was developed by our team¹, and it is implemented in a quadrotor's onboard computer. As mentioned above, our work proposes a new NMPC-based control formulation and a payload state estimator, which are represented by the **green blocks** in Figure 3.

Within this diagram, we can note as green blocks the proposed control system, which is composed of an NMPC with an external force estimation using the Udwadia-Kalaba formulation [21] and the load state estimation. Besides the NMPC, our UAV also uses an Incremental Non-linear Dynamic Inversion (INDI) controller from our original system.

V. MOTION CONTROL SYSTEM

In our work, we propose an NMPC to improve the UAV's ability to track a desired trajectory despite payload-induced disturbances while traveling at high speeds. As above mentioned, the UAV-payload system was modeled according to the Udwadia-Kalaba formulation and used as the motion controller's prediction model. The prediction model also uses the model of the external force ($\mathbf{F}_L$) induced by the load with the Udwadia-Kalaba formulation, which in turn is treated as a disturbance within the prediction horizon.

Let us then first consider the vectors u_D , u_N , and u_I in Fig. 3, where these represent the desired motor thrust, the NMPC control input, and the INDI control input, respectively. Note that all three vectors have the same structure in which $u_s = [T_1, T_2, T_3, T_4]$, with $u_s \in [u_D, u_N, u_I]$ and where T_i are the individual thrusts of each motor of the quadcopter. Thus, the NMPC will compute a control input in the same format as this vector, now denoted by u_N .

The NMPC is an optimal controller whose problem formulation is expressed as follows

$$\mathbf{u}_N = \underset{\mathbf{u}}{\operatorname{argmin}} \sum_{j=0}^{N-1} (\|\hat{\xi}_{Q,j} - \xi_{DQ,j}\|_{S_Q}^2 + \|\hat{\xi}_{L,j} - \xi_{DL,j}\|_{S_L}^2 + \|\mathbf{u}_j - \mathbf{u}_{D,j}\|_C^2) + \|\hat{\xi}_N - \xi_{D,N}\|_{S_N}^2 \quad (34)$$

subject to

$$\xi_{j+1} = \mathbf{f}(\xi_j, \mathbf{u}_j), \quad \xi_0 = \xi_{init} \quad (35)$$

$$\omega \in [\omega_{\min}, \omega_{\max}], \quad \mathbf{u} \in [\mathbf{u}_{\min}, \mathbf{u}_{\max}] \quad (36)$$

where j corresponds to the discrete instant of the prediction horizon, $\mathbf{f}$ corresponds to equations (1)-(6), $\xi_{DQ,k}$ and $\xi_{DL,k}$ are the reference state vector for the UAV and Load, respectively, $\hat{\xi}_{Q,k}$ and $\hat{\xi}_{L,k}$ are the current state vector for the UAV and Load, respectively, $\mathbf{u}_k$ is the control input (the thrust vector of the four thrusters), N is the system prediction horizon, $\hat{\xi}_N$ is the drone state vector at the end of the prediction horizon, and where the input constraints $\mathbf{u}_{\min}$ and $\mathbf{u}_{\max}$ are the minimum and maximum thrust limits of the individual propellers, in which, for drone control, $\mathbf{u}_{\min}$ is typically $\mathbf{0}$ and $\mathbf{u}_{\max}$ is the maximum thrust of each propeller. Additionally, the matrices S_Q , S_L , and C are weight matrices that map the UAV's state, the payload's state, and the control

¹suppressed for blind revision

Depending on the value of $t_{\alpha,k}$, the status of the cable is taut or slack. Hence, we need to chose the value of $\ddot{\mathbf{p}}_{L,k}$, f_ρ and f_ω , accordingly. Therefore, if $t_{\alpha,k} \leq 0$ (slack mode) then

$$\ddot{\mathbf{p}}_{L,k} = \mathbf{g}, \quad f_{\rho,k} = \rho_k, \quad f_{\omega,k} = (1 - t_s c_\omega) \boldsymbol{\omega}_{L,k}, \quad (45)$$

otherwise, if $t_{\alpha,k} > 0$ (taut mode) then

$$\ddot{\mathbf{p}}_{L,k} = \mathbf{g} - t_{\alpha,k} \rho_k, \quad (46)$$

$$f_\rho = \rho_k + t_s (\boldsymbol{\omega}_{L,k} \times \rho_k), \quad (47)$$

$$f_\omega = \boldsymbol{\omega}_{L,k} - \frac{t_s}{L} (\rho_k \times (\ddot{\mathbf{p}}_{Q,k} - \mathbf{g})) - t_s c_\omega (\mathbf{I}_3 - \rho_k \rho_k^\top) \boldsymbol{\omega}_{L,k}, \quad (48)$$

Furthermore, the Jacobian F_k can be calculated as

$$F_k = \begin{bmatrix} \mathbf{I}_3 & t_s \mathbf{I}_3 & f_{pp} & 0 \\ 0 & \mathbf{I}_3 & f_{vp} & f_{v\omega} \\ 0 & 0 & \mathbf{I}_3 + t_s [\boldsymbol{\omega}_{L,k}]_\times & -t_s [\rho_k]_\times \\ 0 & 0 & f_{\omega\rho} & f_{\omega\omega} \end{bmatrix}, \quad (49)$$

where $[\cdot]_\times$ is the skew-symmetric matrix, and here again the value of some functions will depend on the value of $t_{\alpha,k}$.

Hence, if $t_{\alpha,k} \leq 0$ (slack mode) then $f_{pp} = f_{vp} = f_{v\omega} = f_{\omega\rho} = 0$, and $f_{\omega\omega} = ((1 - t_s c_\omega) \mathbf{I}_3)$, otherwise, if $t_{\alpha,k} > 0$ (taut mode) then

$$f_{pp} = \frac{t_s}{2} f_{vp}, \quad (50)$$

$$f_{vp} = t_s (\rho_k (\ddot{\mathbf{p}}_{Q,k} - \mathbf{g})^\top - (\rho_k^\top (\ddot{\mathbf{p}}_{Q,k} - \mathbf{g}) - L \|\boldsymbol{\omega}\|^2) \mathbf{I}_3), \quad (51)$$

$$f_{v\omega} = -2L t_s (\rho_k \boldsymbol{\omega}_{L,k}^\top), \quad (52)$$

$$f_{\omega\rho} = \frac{t_s}{L} [(\ddot{\mathbf{p}}_{Q,k} - \mathbf{g})]_\times + t_s c_\omega ((\rho_k^\top \boldsymbol{\omega}_{L,k}) \mathbf{I}_3 + \rho_k \boldsymbol{\omega}_{L,k}^\top), \quad (53)$$

$$f_{\omega\omega} = \mathbf{I}_3 - t_s c_\omega (\mathbf{I}_3 - \rho \rho^\top). \quad (54)$$

Now, we project the state, such that we normalize $\hat{\rho}_{k+1|k}$, since it must remain on $\mathbb{S}^2$, and project $\boldsymbol{\omega}_L$. Thus, if $\|\hat{\rho}_{k+1|k}\| > 1e^{-6}$, then

$$\hat{\rho}_{k+1|k} = \frac{\hat{\rho}_{k+1|k}}{\|\hat{\rho}_{k+1|k}\|}, \quad (55)$$

otherwise $\hat{\rho}_{k+1|k} = \rho_0$.

The projection also influences $\hat{\boldsymbol{\omega}}_{L,k+1|k}$, thus

$$\hat{\boldsymbol{\omega}}_{L,k+1|k} = (\mathbf{I}_3 - \hat{\rho}_{k+1|k} \hat{\rho}_{k+1|k}^\top) \hat{\boldsymbol{\omega}}_{L,k+1|k}. \quad (56)$$

We also need to calculate the covariance matrix of the process as follows

$$\mathbf{Q}_k = \mathbf{G}_k \mathbf{Q}_a \mathbf{G}_k^\top, \quad (57)$$

where $\mathbf{Q}_k \in \mathbb{R}^{3 \times 3}$ is the process covariance matrix, in which $\mathbf{Q}_a = \sigma_a^2 \mathbf{I}_3$, with $\mathbf{Q}_a \in \mathbb{R}^{3 \times 3}$, and where $\mathbf{G}_k$ depends on the value of $\hat{t}_{\alpha,k}$, which in turn must be with respect to the estimated states.

Hence, if $\hat{t}_{\alpha,k} \leq 0$ (slack mode) then

$$\mathbf{G}_k = \begin{bmatrix} \frac{t_s^2}{2} \hat{\rho}_{k+1|k} \hat{\rho}_{k+1|k}^\top \\ \mathbf{0}_{9 \times 3} \end{bmatrix}, \quad (58)$$

otherwise, if $\hat{t}_{\alpha,k} > 0$ (taut mode) then

$$\mathbf{G}_k = \begin{bmatrix} \frac{t_s^2}{2} \hat{\rho}_{k+1|k} \hat{\rho}_{k+1|k}^\top \\ t_s \hat{\rho}_{k+1|k} \hat{\rho}_{k+1|k}^\top \\ \mathbf{0}_{3 \times 3} \\ -\frac{t_s}{L} [\hat{\rho}_{k+1|k}]_\times \end{bmatrix}. \quad (59)$$

The error covariance propagation can then be calculated as

$$\mathbf{P}_k^+ = \mathbf{F}_k \mathbf{P}_k \mathbf{F}_k^\top + \mathbf{Q}_k. \quad (60)$$

We also need to fix the covariance projection with respect to $\hat{\rho}_{k+1|k}$. Thus,

$$\hat{\mathbf{P}}_{k+1|k} = \mathbf{B} \hat{\mathbf{P}}_k^+ \mathbf{B}^\top, \quad (61)$$

where

$$\mathbf{B} = \begin{bmatrix} \mathbf{I}_3 & 0 & 0 & 0 \\ 0 & \mathbf{I}_3 & 0 & 0 \\ 0 & 0 & (\mathbf{I}_3 - \hat{\rho}_{k+1|k} \hat{\rho}_{k+1|k}^\top) & 0 \\ 0 & 0 & 0 & (\mathbf{I}_3 - \hat{\rho}_{k+1|k} \hat{\rho}_{k+1|k}^\top) \end{bmatrix}. \quad (62)$$

Now, before performing the update, we also need to define the sensor models. With **no direct cable/load sensors**, our option is to use the quadrotor estimated states from the MEKF. Therefore, we can build up the measurement vector as

$$\mathbf{z}_k = [\mathbf{p}_{Q,k}^{odom}, \dot{\mathbf{p}}_{Q,k}^{odom}]^\top. \quad (63)$$

The measurement function is then

$$h(\hat{X}_{k+1|k}) = \begin{bmatrix} \hat{\mathbf{p}}_{L,k+1|k} - L \hat{\rho}_{k+1|k} \\ \hat{\mathbf{p}}_{L,k+1|k} - L(\hat{\boldsymbol{\omega}}_{L,k+1|k} \times \hat{\rho}_{k+1|k}) \end{bmatrix}. \quad (64)$$

Then, we have the innovation such that

$$\mathbf{y}_k = \begin{bmatrix} \mathbf{p}_{Q,k}^{odom} - (\hat{\mathbf{p}}_{L,k+1|k} - L \hat{\rho}_{k+1|k}) \\ \dot{\mathbf{p}}_{Q,k}^{odom} - (\hat{\mathbf{p}}_{L,k+1|k} - L(\hat{\boldsymbol{\omega}}_{L,k+1|k} \times \hat{\rho}_{k+1|k})) \end{bmatrix} \in \mathbb{R}^6. \quad (65)$$

Finally, the Jacobian H is as follows

$$\mathbf{H}_k = \begin{bmatrix} \mathbf{I}_3 & 0 & -L \mathbf{I}_3 & 0 \\ 0 & \mathbf{I}_3 & -L [\boldsymbol{\omega}_{L,k}]_\times & L [\rho_k]_\times \end{bmatrix}. \quad (66)$$

Now, let's summarize the update as

$$\mathbf{K}_k = \hat{\mathbf{P}}_{k+1|k} \mathbf{H}_k^\top (\mathbf{H}_k \hat{\mathbf{P}}_{k+1|k} \mathbf{H}_k^\top + \mathbf{R}_k)^{-1}, \quad (67)$$

$$\hat{\boldsymbol{\xi}}_{L,k+1} = \hat{\boldsymbol{\xi}}_{L,k+1|k} + \mathbf{K}_k \mathbf{y}_k, \quad (68)$$

We also need, at the end, to perform the re-projection of ρ_{k+1} by using equations (55-56). Furthermore, to calculate the covariance update, we first apply Joseph's form, such that

$$\mathbf{P}_{k+1}^+ = (\mathbf{I}_{12} - \mathbf{K}_k \mathbf{H}_k) \hat{\mathbf{P}}_{k+1|k} (\mathbf{I}_{12} - \mathbf{K}_k \mathbf{H}_k)^\top + \mathbf{K}_k \mathbf{R}_k \mathbf{K}_k^\top, \quad (69)$$

$$\mathbf{P}_{k+1} = 0.5 [\mathbf{P}_{k+1}^+ (\mathbf{P}_{k+1}^+)^T], \quad (70)$$

with $\mathbf{R}_k \in \mathbb{R}^{3 \times 3}$ being the measurement covariance matrix, written as follows

$$\mathbf{R}_k = \begin{bmatrix} \sigma_p^2 \mathbf{I}_3 & 0 \\ 0 & \sigma_v^2 \mathbf{I}_3 \end{bmatrix}. \quad (71)$$

Finally, we also need to apply the same projection into the covariance $\mathbf{P}_{k+1}$ with respect to $\rho_{k+1|k}$ using equation (61).

VII. RESULTS

To analyze the robustness of the controllers, we conducted real-robot experiments with the explicit objective of stressing the UAV-payload system dynamics (see Fig. 4 and Video²). The parameters used in the experiment are in Table I. Regarding computational capacity and control-loop efficiency, the experiment was conducted on an UAV equipped with an onboard computer featuring a 12th-generation Intel Core i7

²Video of the Experiment:



Fig. 4: Hardware UAV platform used in the experiments.

TABLE I: Parameters: Physical Model and Controller.

Description	Symbol	Value
UAV Model Parameters		
UAV Mass (kg)	m_Q	2.9
	I_{xx}	0.03166
Moments of Inertia (kg·m ²)	I_{yy}	0.03166
	I_{zz}	0.04610
Thrust Constant (N·s ² /rad ²)	c_t	27.6e-6
Torque Constant (N·m·s ² /rad ²)	c_q	16.28e-6
Arm Geometry (m; °)	l_d, β	0.258, 44.22
Quadratic Motor Model	a, b	0.240572, -0.135153
Max Thrust per Motor (N)	$u_{\max}$	17.6
Load Model Parameters		
Load Mass (kg)	m_L	0.5
Cable length (m)	L_c	1.0
Load Estimator		
Dumping Constant	c_ω	0.4
Acceleration Variance	σ_a^2	0.15
Variances for Measurement Matrix	σ_p^2, σ_v^2	0.0025; 0.0025
NMPC Controller		
Prediction Horizon (-; s)	N, dt	20; 0.05
UAV State Error Weight	$\mathbf{S}_Q$	diag(100; 80; 0.3; 1.0)
Load State Error Weight	$\mathbf{S}_L$	diag(0.3; 0.3; 20.0; 0.3)
Control Effort Weight	$\mathbf{C}$	I_8

processor and 32 GB of DDR4 RAM. It was verified that the processing load during flight was approximately 8% for this project's modules, thereby validating the computational efficiency of the ACADOS framework used to solve the NMPC Optimal Control Problem (OCP). The UAV was equipped with a RealSense camera, which was used in the Visual Inertial Odometry algorithm to estimate the UAV's state during flight.

In this work, we compare our approach (NMPC with a complete load model, or NMPC-Load) with the classic NMPC approach by conducting the following experiment: an UAV transported a payload along a square trajectory via a massless cable at a constant altitude of 1.8 m. On the payload, a Livox Mid 360 sensor was installed, **only to measure the payload's ground truth in the XY-axis**. The waypoints that define the route were $P_1 = [0.0, 0.0, 1.8]$, $P_2 = [4.0, 0.0, 1.8]$, $P_3 = [4.0, 4.0, 1.8]$, $P_4 = [0.0, 4.0, 1.8]$, and $P_5 = [0.0, 0.0, 1.8]$. The executed trajectory contains four straight segments and four abrupt 90° changes of direction, introducing significant

transverse accelerations whenever the UAV executes each turn. Under suspended-load conditions, these lateral accelerations are particularly relevant, as they induce large cable deflections and excite natural oscillatory modes of the load. Thus, this simulation scenario was selected to evaluate each controller's ability to handle load-induced oscillations, reject dynamic disturbances during rapid changes of direction, track the reference trajectory under heavy load, and assess the system's sensitivity to UAV-payload dynamic coupling. Finally, the UAV performed this trajectory three times, each time with increasing speed of 0.5 m/s, 1.0 m/s, and 2.0 m/s. The increase in trajectory reference speed significantly intensifies dynamic coupling, increasing the amplitude and persistence of payload oscillations and posing additional challenges for the controller.

Figure 5 compares the classical NMPC approach with our NMPC-Load approach by showing the executed trajectories (top view) for both approaches. We also evaluate both controllers using Root Mean Square Error (RMSE) and its Standard Deviation (STD), even when the estimated and reference trajectories are sampled at different times [22]. The method is based on evaluating sub-trajectories, enabling distinction between local errors, dominated by rapid oscillations and instantaneous variations, and accumulated errors, which are more sensitive to the controller's ability to maintain stability over extended paths. By analyzing both Figure 5 and the results presented in Table II, we can perceive that our proposed **NMPC-Load** controller outperforms the **NMPC** controller in all metrics.

TABLE II: Relative errors for the square trajectory.

Metrics	NMPC	NMPC-Load
RMSE Drone	0.5251	0.3732
STD Drone	0.3384	0.1928
RMSE Payload	0.8034	0.7797
STD Payload	0.5444	0.4719

The second reason for this performance is due to our proposed load estimator. Fig. 6 shows the behavior of our estimation compared with the ground-truth data of the payload. It is worth highlighting that the estimator was able to, **without any external sensor on the cable or the load** (only using the UAV's IMU data), correctly estimate the load's position during the flight.

These results show that, even in short sections, the controller that incorporates load dynamics is more effective in suppressing oscillations induced by pendulum motion. Furthermore, the NMPC-Load control incorporates the complete load system model, reducing accumulated errors and ensuring accuracy during the tracking of challenging trajectories.

VIII. CONCLUSION

In this work, we hope to have pushed the boundaries of the state-of-the-art of sensorless estimation and control for agile cable-suspended aerial payload transportation. By introducing a method to model both the external force induced by the load and the UAV within the Newton-Euler formulation through the principle of Udwadia-Kalaba, we were able the use of both

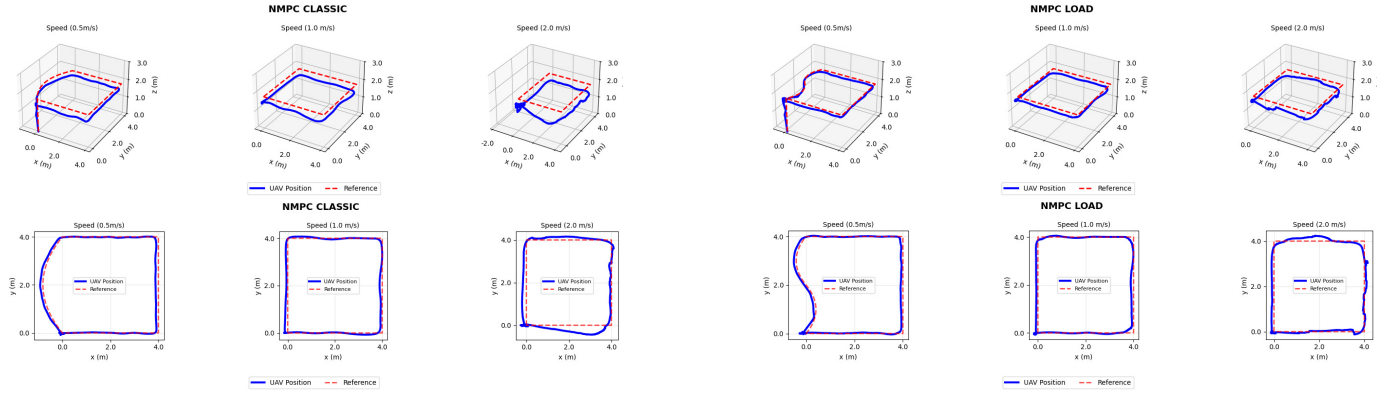


Fig. 5: Executed trajectories with the classic NMPC (left) and our proposed NMPC-Load (right) with trajectory speeds of 0.5 m/s, 1.0 m/s, and 2.0 m/s, respectively

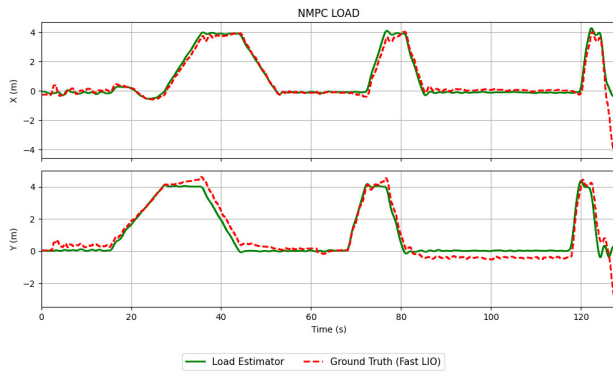


Fig. 6: Schematic of a UAV carrying a payload via a cable with axis convention.

models within a NMPC control system in a more straightforward manner. Furthermore, the load model was enhanced with a load estimator that only used the UAV's IMU as control input and the UAV state estimation as measurement, resulting in a numerically robust and physically coherent controller. No additional sensor was needed. The results showed that taking these considerations into account enabled better load-carrying performance (i.e., reduced load swing, improved motion tracking, etc.) while also enabling agile flight.

REFERENCES

- [1] D. K. D. Villa, A. S. Brandão, and M. Sarcinelli-Filho, "A survey on load transportation using multirotor uavs," *J Intell Robot Syst*, vol. 98, no. 2, pp. 267–296, 2020.
- [2] S. Y. Lee, S. R. Han, and B. D. Song, "Simultaneous cooperation of refrigerated ground vehicle (rgv) and unmanned aerial vehicle (uav) for rapid delivery with perishable food," *Applied Mathematical Modelling*, vol. 106, pp. 844–866, 2022.
- [3] J. Estevez, G. Garate, J. M. Lopez-Guede, and M. Larrea, "Review of aerial transportation of suspended-cable payloads with quadrotors," *Drones*, vol. 8, no. 2, 2024.
- [4] K. Sreenath, T. Lee, and V. Kumar, "Geometric control and differential flatness of a quadrotor uav with a cable-suspended load," in *52nd IEEE Conference on Decision and Control*, 2013, pp. 2269–2274.
- [5] M. Guo, D. Gu, W. Zha, X. Zhu, and Y. Su, "Controlling a quadrotor carrying a cable-suspended load to pass through a window," *J Intell Robot Syst*, vol. 98, p. 387–401, 2020.
- [6] T. P. Nascimento and M. Saska, "Position and attitude control of multirotor aerial vehicles: A survey," *Annual Reviews in Control*, pp. 129–146, 2019.
- [7] S. Sun, X. Wang, D. Sanalidro, A. Franchi, M. Tognon, and J. Alonso-Mora, "Agile and cooperative aerial manipulation of a cable-suspended load," *Science Robotics*, vol. 10, no. 107, p. eadu8015, 2025.
- [8] S. Dai, T. Lee, and D. S. Bernstein, "Adaptive control of a quadrotor uav transporting a cable-suspended load with unknown mass," in *53rd IEEE Conference on Decision and Control*, 2014, pp. 6149–6154.
- [9] P. Kotaru, G. Wu, and K. Sreenath, "Dynamics and control of a quadrotor with a payload suspended through an elastic cable," in *2017 American Control Conference (ACC)*, 2017, pp. 3906–3913.
- [10] J. Sun, H. Zheng, L. Pan, F. Fan, Y. Ren, and B. Han, "Quadrotor uav with a cable-suspended load: A fixed-time integral sliding mode control," *Aerospace Science and Technology*, vol. 118, p. 107038, 2021.
- [11] Z. Lv, Q. Zhao, S. Li, and Y. Wu, "Finite-time control design for a quadrotor transporting a slung load," *Control Engineering Practice*, vol. 122, p. 105082, 2022.
- [12] Z. Chang, B. Zhou, X. Yu, and L. Song, "Adaptive tracking control for a quadrotor uav with unknown cable-suspended load and disturbances," *Aerospace Science and Technology*, vol. 132, p. 107775, 2023.
- [13] R. Belguith and M. B. Othman, "Modeling and control of a quadrotor uav carrying a cable-suspended payload with aerodynamic effects," *Journal of the Franklin Institute*, vol. 360, no. 10, pp. 7406–7427, 2023.
- [14] J. R. Goodman, T. Beckers, and L. J. Colombo, "Geometric control for load transportation with quadrotor uavs by elastic cables," *IEEE Transactions on Control Systems Technology*, vol. 31, no. 6, pp. 2848–2862, November 2023.
- [15] N. Urbina-Brito, M.-E. Guerrero-Sánchez, G. Valencia-Palomo, O. Hernández-González, F.-R. López-Estrada, and J. A. Hoyo-Montaño, "A predictive control strategy for aerial payload transportation with an unmanned aerial vehicle," *Mathematics*, vol. 9, no. 15, p. 1822, 2021.
- [16] G. Li, A. Tunchez, and G. Loianno, "Pempc: Perception-constrained model predictive control for quadrotors with suspended loads using a single camera and imu," in *2021 IEEE International Conference on Robotics and Automation (ICRA)*, 2021, pp. 2012–2018.
- [17] P. Outeiro, C. Carreira, and P. Oliveira, "Control architecture for a quadrotor transporting a cable-suspended load of uncertain mass," *Drones*, vol. 7, no. 3, p. 201, 2023.
- [18] H. Li, H. Wang, C. Feng, F. Gao, B. Zhou, and S. Shen, "AutoTrans: A complete planning and control framework for autonomous uav payload transportation," *IEEE Robotics and Automation Letters*, vol. 8, no. 10, pp. 6859–6866, 2023.
- [19] F. Panetsos, G. C. Karras, and K. J. Kyriakopoulos, "An nmpc framework for tracking and releasing a cable-suspended load to a ground target using a multirotor uav," in *2024 IEEE International Conference on Robotics and Automation (ICRA)*, 2024, pp. 10057–10063.
- [20] H. Wang, H. Li, B. Zhou, F. Gao, and S. Shen, "Impact-aware planning and control for aerial robots with suspended payloads," *IEEE Transactions on Robotics*, vol. 40, pp. 2478–2497, 2024.
- [21] F. E. Udwarda and R. E. Kalaba, "What is the general form of the explicit equations of motion for constrained mechanical systems?" *Journal of Applied Mechanics*, vol. 69, no. 3, pp. 335–339, 05 2002.
- [22] Z. Zhang and D. Scaramuzza, "A tutorial on quantitative trajectory evaluation for visual(-inertial) odometry," in *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2018.