

Dense Soft Weighting for Radar Ego-Velocity Estimation

Atar Babgei, Chenyu Zhao, Michael Breza, Julie A. McCann
Imperial College London
{a.babgei22,chenyu.zhao25,michael.breza04,j.mccann}@imperial.ac.uk

Abstract

Sensing ego-velocity estimation is fundamental to state estimation in visually degraded environments, where camera- and LiDAR-based pipelines can become unreliable. Millimetre-wave radar is well suited to these conditions because it provides direct Doppler velocity sensing and remains robust to poor illumination, textureless scenes, and airborne particulates. However, conventional radar ego-velocity pipelines typically apply constant false alarm rate (CFAR) thresholding to convert dense radar spectra into sparse point clouds, prematurely discarding sub-threshold returns that may still retain useful Doppler motion cues. We present *Dense Soft Weighting*, an analytic radar front-end that maps every range-Doppler cell to a continuous confidence metric rather than enforcing a binary detection threshold. Ego-velocity is then estimated using a deterministic robust weighted least-squares formulation, while the same weighted measurements provide a closed-form, measurement-derived velocity covariance for integration with a shared inertial back-end. The method requires no platform-specific training data or learning-based uncertainty model, supporting transfer across single-chip radar configurations. Across two public datasets and one self-collected dataset, Dense Soft Weighting reduces mean absolute pose error by 31–45% relative to the strongest CFAR point-cloud baseline under an identical inertial back-end, while running in real time on embedded hardware.

Keywords

FMCW radar, Doppler radar, ego-velocity estimation, radar-inertial odometry, sensor fusion, embedded sensing

1 Introduction

Millimeter-wave frequency-modulated continuous-wave radar sensing offers valuable range, angle, and radial-velocity information for robots in darkness, fog, dust, and smoke [1]. Therefore, radar-inertial odometry can support robust motion estimation when visual sensing becomes unreliable. For single-chip radar, ego-velocity estimation must turn dense range-Doppler-angle spectra into trustworthy velocity and uncertainty measurements. Existing methods usually handle this either by first reducing the spectrum to sparse detections, or by learning dense weights, motion, or uncertainty from training data matched to the sensing platform.

Conventional pipelines apply constant false alarm rate (CFAR) detection, an adaptive thresholding rule whose output is a binary keep/discard decision, and then estimate ego-velocity with least squares or random sample consensus (RANSAC) [2–5]. While this design is efficient and established, the binary output removes non-forward facing weak cells before estimation (Fig. 1). Sparse refinements sharpen angle estimates, upsample detections, reweight point clouds, or add inertial constraints [6–10]. These methods improve the surviving detections. However, they still depend on a detector to decide which spectral cells reach the estimator. Only recently,

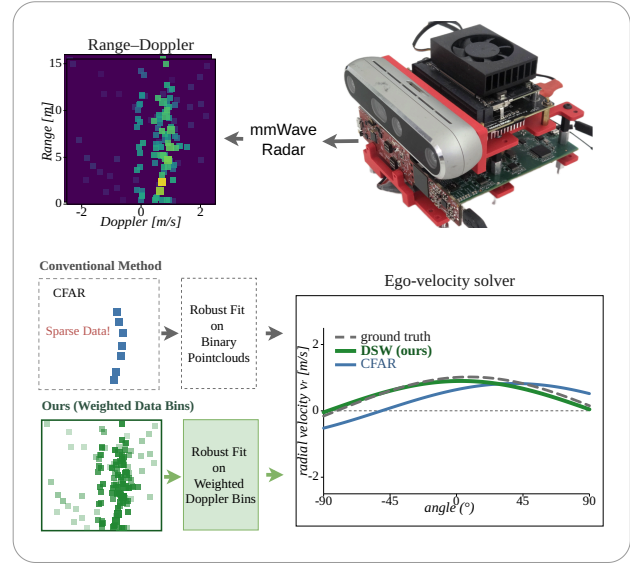


Figure 1: Motivating example for the dense radar ego-velocity front end. CFAR reduces a range-Doppler frame to sparse binary detections before fitting ego-velocity. The proposed system instead fits ego-velocity from dense weighted Doppler evidence, producing a robust fit closer to the ground-truth velocity relation in this representative frame.

learning-based dense systems replace the detector with learning-based weights or motion regression [11–14], reaching strong accuracy when trained on data matched to the radar chip, antenna layout, and environment. In contrast, Doppler-aware radar odometry aligns whole scans analytically. However, it targets scan-to-local-map registration on a spinning radar [15], a different hardware family from single-chip mmWave.

These trade-offs expose three practical challenges for deployable single-chip radar-inertial odometry. First, the front-end should retain weak off-boresight Doppler evidence because these cells improve velocity geometry and can reduce drift after inertial fusion. Second, it should report a usable velocity covariance so the measurement can plug into a standard inertial back-end, rather than requiring a private pose regressor. Third, it should remain lightweight enough for embedded platforms by avoiding per-platform training and heavy network inference. The research problem is therefore to assign per-cell confidence, robust ego-velocity, and covariance directly from dense range-Doppler-angle spectra without collapsing them to sparse detections.

In this work, we introduce *Dense Soft Weighting* (DSW), an analytic radar front-end for direct ego-velocity estimation from dense range-Doppler spectra.

- We introduce a dense per-cell confidence field for radar ego-velocity estimation. The confidence is derived from beam-domain power and concentration, turning each range-Doppler cell into a weighted motion cue instead of a binary detector output. This keeps sub-threshold Doppler evidence available while reducing confidence in ambiguous cells, producing a dense measurement population rather than a detector-selected point cloud.
- We produce a robust ego-velocity measurement with covariance for a standard inertial back-end. Robust weighted least squares lets weak returns contribute at reduced confidence while suppressing residual outliers. The covariance exposes residual, geometric, and Doppler-bin uncertainty to the filter.
- We show that the same dense front-end transfers across radar configurations and antenna layouts. The evaluation spans two public datasets and our sensor rig, compares against point-cloud RIO and learning-based odometry baselines, and keeps a shared inertial back-end for the analytic methods so front-end effects remain isolated.

The remainder of this paper is organized as follows. Section 2 positions DSW against sparse point-cloud and learned dense radar front ends. Section 3 derives the dense weighting, robust ego-velocity solver, and covariance, while Sections 4 and 5 describe the evaluation protocol and report accuracy, ablation, and runtime results. Section 6 concludes with limitations and deployment directions.

2 Related Work

2.1 Sparse Point-Cloud Ego-Velocity Estimation

Sparse radar ego-velocity front-ends share a common interface: the radar spectrum is first reduced to a small set of detections, and motion is then estimated from the Doppler values attached to those points. This detector-first design is widely used because it gives the estimator a compact geometric measurement set and fits naturally into robust least-squares pipelines. Kellner et al. [2] established the single-scan formulation by relating radial velocity measurements to three-dimensional ego-velocity and solving the resulting linear system on automotive radar detections. Across Doer et al.’s radar-odometry work [3, 4, 16, 17], the front end remains a sparse point-cloud velocity estimator: three detections generate a RANSAC hypothesis, least squares refines the inlier set, and the velocity covariance is fitted from the inlier residuals. CREVE [9] and VGC-RIO [10] retain this point-cloud interface while changing the robustification mechanism, using IMU-derived acceleration constraints and spatial density-based weighting, respectively. MRIO uses a robust Cauchy cost optimized by Levenberg–Marquardt in place of RANSAC sampling [18], while RIV-SLAM adds multi-strategy weighted least squares and azimuth-dependent weighting [19].

These methods improve the estimator, the robust loss, or the fusion around the detected points, but the measurement population is still fixed by CFAR or a related detector before velocity estimation begins. Sub-threshold cells, weak off-boresight returns, and useful sidelobe structure have already been discarded, and covariance must be calibrated from a comparatively small residual set.

The limitation is also practical. In single-chip systems the point cloud is typically generated by the radar’s onboard DSP rather than by host-side processing of the full ADC cube; compute, memory, and bandwidth budgets favor simplified CFAR and angle estimation, reduced-precision intermediates, and quantised output. The range-Doppler-angle spectrum is thus pruned or compressed before it reaches the estimator, and CFAR tuning becomes a sensitive, scene-dependent trade-off between admitting clutter and discarding weak but geometrically useful cells. The estimator inherits both the detector’s sparsity and the signal processor’s implementation choices.

2.2 Dense and Direct Radar Front-Ends

A complementary direction is to reduce the information loss introduced by detector-first pipelines by operating closer to the radar spectrum. Existing analytic approaches follow two main paths: improving the signal processing before point-cloud extraction, or formulating odometry directly on radar intensity.

Digital-beamforming-enhanced radar odometry [6] follows the first path, using raw ADC captures and host-side digital beamforming to produce higher-quality point clouds for ego-velocity estimation. However, DBE retains the point-cloud interface: improved signal processing raises detection quality, but the detector still determines which spectral cells reach the estimator. DRO [15] follows the second path by aligning dense radar intensity scans without learned components. It is designed for mechanically scanning automotive radar and performs Doppler-aware SE(2) scan-to-local-map registration on dense 360° scans. This formulation is effective for spinning radar, but it does not directly transfer to compact single-chip mmWave phased arrays, which provide range-Doppler-angle spectra rather than planar panoramic scans. Dense single-chip ego-velocity estimation therefore presents a different interface problem: spectral evidence must be converted into velocity weights and covariance without first reducing the radar cube to detector-selected points.

2.3 Learning-Based Radar Ego Motion Approaches

Recent work on single-chip radar ego-motion has increasingly used learning to predict motion, weights, or uncertainty directly from radar data. milliEgo [11] studies learning-based single-chip radar-inertial ego-motion, fusing mmWave radar and inertial measurements in an end-to-end network that regresses ego-motion. Its input is the detected point cloud rather than the dense spectrum, so the network operates on the same sparse interface as conventional pipelines. Learning has also been applied at the measurement level: RadarHD [7] trains a network with lidar ground truth to convert low-resolution single-chip radar heatmaps into lidar-like high-resolution point clouds, improving the detections that downstream estimators consume rather than the motion estimate itself. BatMobility [12] instead estimates ego-velocity from the dense range-Doppler spectrum, learning a radar-flow representation from Doppler-angle data without intermediate detection. Radarize [13] extends this line to the full spectrum, training separate translation and rotation networks on the same dense range-Doppler input to produce odometry. 4DEgo [20] and S³E [21] likewise learn

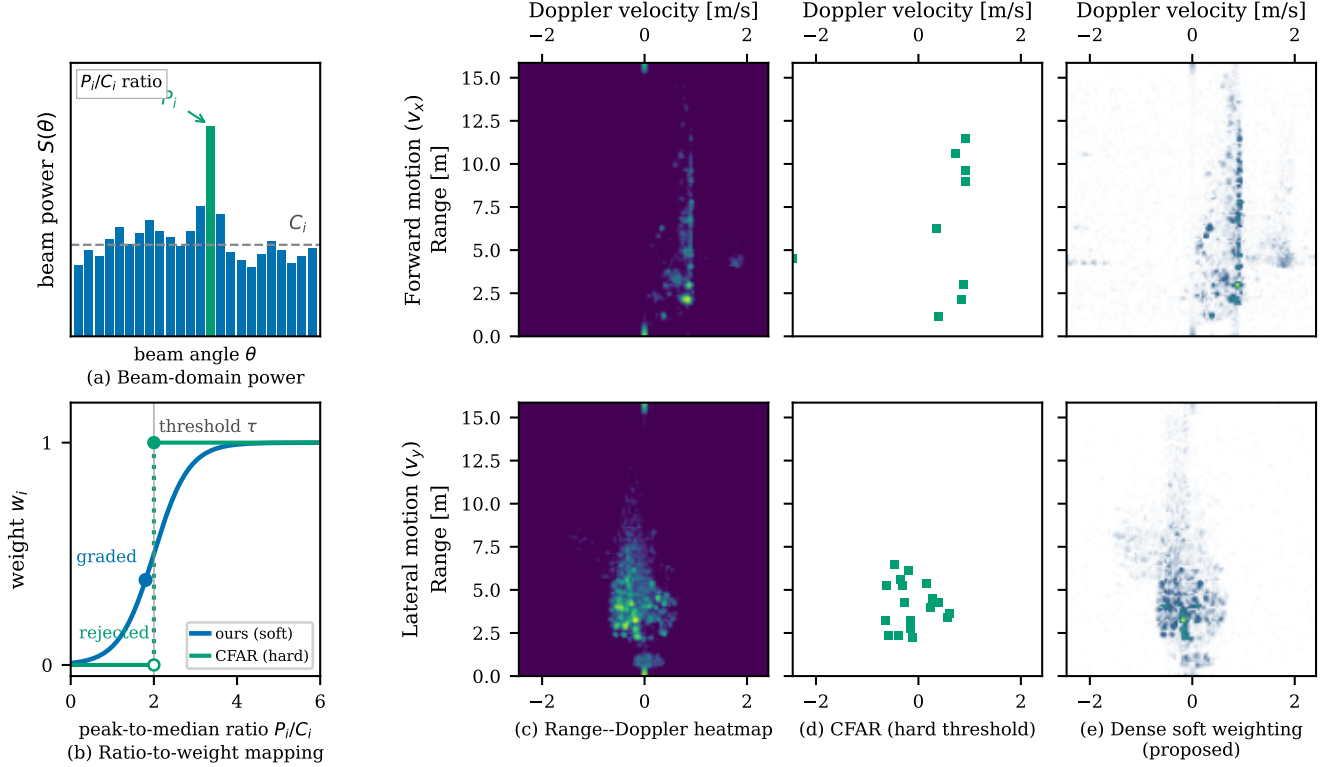


Figure 2: Soft weighting versus binary thresholding. Left: (a) beam-domain power at one (r, d) range-Doppler cell and (b) the mapping from peak-to-median ratio to cell weight. Right: real ColoRadar frames (arpg_lab_run0, forward-dominant top and lateral-dominant bottom; Doppler velocity on the horizontal axis, range on the vertical axis), showing (c) range-Doppler power, (d) CASO-CFAR binary detections used by the point-cloud baseline, and (e) a continuous per-cell soft weight normalised to the per-frame maximum.

from radar heatmaps or spectra fused with inertial data, while UNRIO [14] is closest in estimator structure: it predicts a Doppler image with a transformer, estimates velocity with weighted least squares, and learns an uncertainty head for the downstream graph. Together, these methods show that pre-detection radar data carries useful motion information.

Despite this progress, several deployment issues remain open for learning-based front-ends. Models trained for a particular radar chip and chirp configuration may not transfer directly to other sensors, since the learned representation depends on the antenna geometry and range-Doppler resolution of the training platform. Performance can also depend on the training environment, as clutter and multipath statistics vary across scenes. In addition, real-time operation on the embedded platforms typically paired with single-chip radar remains comparatively unexplored. These considerations distinguish learning-based dense front-ends from analytic formulations in which per-cell weights and covariance are derived from the radar spectrum itself.

2.4 Radar-Inertial Odometry Backends

Once a radar front-end produces an ego-velocity measurement, radar-inertial odometry becomes a fusion problem: the backend

must combine that velocity with inertial propagation, calibration states, and temporal alignment. A substantial body of RIO work therefore focuses on the downstream estimator. The EKF-RIO family places a sparse radar velocity front-end inside an ESKF and extends the filter with online extrinsic calibration [3, 16], Manhattan-world yaw aiding [17], and multi-radar fusion [4]. Other backends refine the state and coupling: Kim et al.’s online temporal-calibration formulation [5] and temporal-delay analysis for RIO [22] estimate the radar-to-IMU temporal offset t_d , tightly-coupled EKF-RIO [23] updates the filter with individual radar detections rather than a single per-scan velocity, while Yang et al. [24] and Huang et al. [25] add ground-plane and IMU-aided velocity priors.

These methods advance the fusion and filtering stage, but they generally treat the radar ego-velocity input as an upstream measurement supplied by a front-end. The resulting odometry is therefore still constrained by the quality and covariance calibration of that input, independently of the backend formulation.

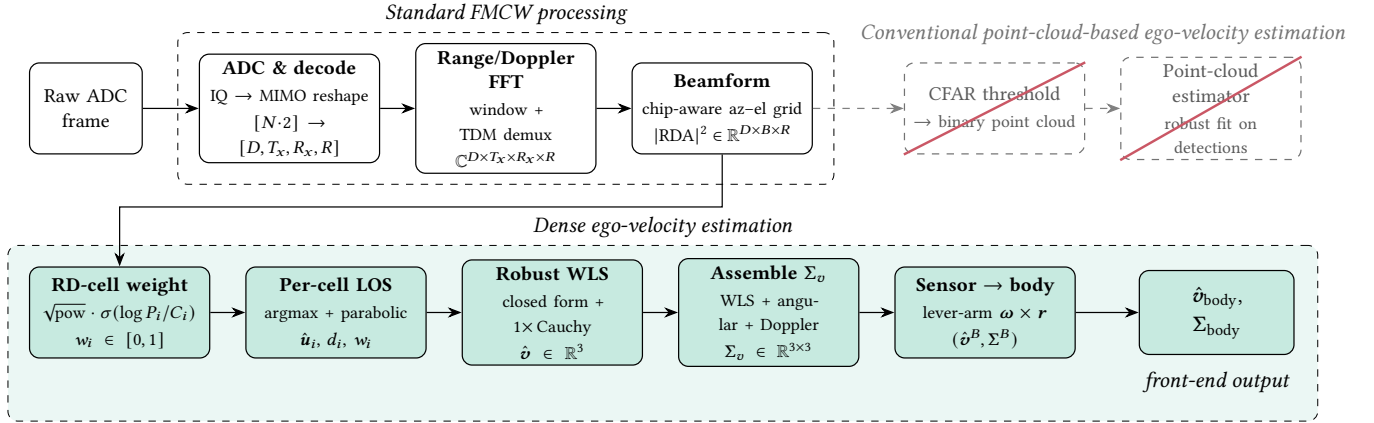


Figure 3: System overview of a dense radar front-end. A standard FMCW chain produces a dense range-Doppler-angle representation. The greyed branch shows the conventional CFAR-to-point-cloud route; the dense branch keeps the dense representation, assigns per-cell weights, constructs line-of-sight vectors, estimates velocity with robust WLS, assembles a covariance, and expresses the result in the body frame. The front-end emits only $(\hat{\mathbf{v}}_{\text{body}}, \Sigma_{\text{body}})$.

3 Method

3.1 System Overview

The proposed system maps a raw single-chip radar frame and IMU stream to an inertially fused trajectory. Figure 3 summarises this data flow: the radar branch decodes an ADC frame into MIMO channels, applies range and Doppler FFTs with TDM demultiplexing, beamforms onto a chip-aware azimuth-elevation grid, and reduces the result to a dense power tensor. DSW assigns each range-Doppler cell a continuous confidence, refines its line-of-sight (LOS) vector, estimates sensor-frame velocity with robust WLS, assembles a covariance, and maps the result to the body frame using the calibrated sensor-to-body transform and the gyro-driven lever-arm term $\omega \times \mathbf{r}$. The front-end emits only $(\hat{\mathbf{v}}^B, \Sigma^B)$; the ESKF fuses this body-frame measurement with IMU propagation to produce the evaluated odometry trajectory. Unlike sparse Doppler pipelines that detect a point cloud and reject outliers with three-point RANSAC [2–5], DSW retains every range-Doppler cell at a continuous weight and resolves outliers with a single analytic reweighting; we examine the implications of this choice in Section 5.7.

3.2 Radar Signal Processing Front-End

We decode each FMCW frame from IQ samples and reshape it into D chirps, T_x transmitters, R_x receivers, and R range samples. Applying a range FFT along fast time and a Doppler FFT along slow time, together with TDM demultiplexing, yields $\mathbb{C}^{D \times T_x \times R_x \times R}$. We then beamform over the virtual array onto a two-dimensional grid of $B = B_\alpha B_\beta$ beams, using the chip’s TX/RX layout rather than a generic transform; α and β denote azimuth and elevation. DSW consumes the dense power tensor

$$\mathcal{P}(d, b, r) = |RDA(d, b, r)|^2 \in \mathbb{R}^{D \times B \times R}, \quad (1)$$

where d indexes Doppler bins, $b = (b_\alpha, b_\beta)$ indexes the azimuth-elevation beam, and r indexes range. From Eq. (1), each range-Doppler cell $i = (d_i, r_i)$ supplies a beam-domain power spectrum

over b , from which DSW extracts the Doppler velocity d_i , the LOS vector $\hat{\mathbf{u}}_i$, and the weight w_i .

3.3 Radar Ego-Velocity Measurement Model

Each range-Doppler cell contributes one LOS Doppler constraint. For a cell i , let d_i be its Doppler radial velocity and $\hat{\mathbf{u}}_i \in \mathbb{R}^3$ be the unit LOS vector in the radar sensor frame. We model

$$d_i = -\hat{\mathbf{u}}_i^T \mathbf{v}^R + \epsilon_i, \quad (\text{per cell } i) \quad (2)$$

where $\mathbf{v}^R \in \mathbb{R}^3$ is the sensor-frame ego-velocity and ϵ_i aggregates thermal noise, clutter, sidelobes, and the radial velocity of any moving reflector contributing to the cell. Because a single cell constrains $\mathbf{v}^R$ only along $\hat{\mathbf{u}}_i$, we estimate three-dimensional velocity from many weighted LOS directions across the azimuth-elevation grid. Concatenating the per-cell constraints over all N cells yields the stacked system

$$\mathbf{d} = -\mathbf{U} \mathbf{v}^R + \boldsymbol{\epsilon}, \quad (\text{stacking } N \text{ dense cells}) \quad (3)$$

where $\mathbf{U} = [\hat{\mathbf{u}}_1, \dots, \hat{\mathbf{u}}_N]^T \in \mathbb{R}^{N \times 3}$ stacks the per-cell LOS directions and $\mathbf{d}, \boldsymbol{\epsilon} \in \mathbb{R}^N$ stack the corresponding Doppler velocities and noise terms, while the shared unknown $\mathbf{v}^R \in \mathbb{R}^3$ couples every cell.

3.4 Range-Doppler Cell Confidence Weight

A detector commits to a binary keep/discard decision before the velocity geometry is known. We instead score each cell by the two quantities a CFAR detector already inspects—how much power the cell carries and how tightly it concentrates in one beam—and map them to a continuous weight.

For cell $i = (d_i, r_i)$, the beam-domain power spectrum is $S_i(b) = \mathcal{P}(d_i, b, r_i)$. We take its peak $P_i = \max_b S_i(b)$ and its cross-beam median $C_i = \text{med}_b S_i(b)$ and form

$$w_i = u_i v_i, \quad (4)$$

where w_i is the confidence assigned to the range-Doppler cell. The first factor is the normalized power score

$$u_i = \sqrt{P_i / \max_j P_j}, \quad (5)$$

where the maximum $\max_j P_j$ runs over all range-Doppler cells in the current frame. The score $u_i \in [0, 1]$ makes the weighting scale-invariant and, through the square root, limits the leverage of a single bright reflector. The second factor is the concentration gate

$$v_i = \sigma\left(\frac{\log(P_i/C_i) - \log \tau}{\kappa}\right), \quad (6)$$

where $\sigma(x) = 1/(1 + e^{-x})$. The gate $v_i \in [0, 1]$ is a sigmoid of the log peak-to-median ratio: τ is the ratio at which $v_i = 1/2$ and κ sets the slope. We fix $\tau = 200$ and $\kappa = 0.5$ on every dataset, with no per-platform tuning.

The ratio P_i/C_i is the cross-beam analogue of a cell-averaging CFAR test statistic, with the median C_i standing in for the local noise-floor estimate; the sigmoid turns the detector's hard threshold into a soft gate centred at τ . A cell whose energy concentrates in one direction has $P_i \gg C_i$ and $v_i \rightarrow 1$, whereas a sidelobe- or clutter-dominated cell spreads its energy across beams, giving $P_i \sim C_i$ and $v_i \rightarrow 0$. Cells below a detector's threshold can thus still contribute at reduced weight when they improve the velocity geometry (Fig. 2(a,b)), which on real frames yields a dense weighted measurement set rather than the sparse CFAR detections of Fig. 2(d,e). Because the peak-to-median ratio rarely exceeds $\sim 100\times$, below $\tau = 200$, a hard threshold at τ would retain too few cells and can make the dense estimate degenerate (quantified by the ablation in Section 5.2, Table 4).

3.5 Per-Cell Line of Sight and Robust Velocity Estimation

Each weighted cell contributes one LOS Doppler constraint, but the beam grid quantises its direction, most severely along the axis with the smallest aperture and hence the coarsest angular resolution; on azimuth-dominant arrays this is elevation. We therefore refine each peak to sub-bin resolution before forming $\hat{\mathbf{u}}_i$. We locate the dominant beam

$$\hat{b}_i = (\hat{b}_{\alpha,i}, \hat{b}_{\beta,i}) = \arg \max_b S_i(b), \quad (7)$$

and refine it independently along the azimuth and elevation axes of the beam grid by standard three-point parabolic interpolation on the peak bin power and its two neighbours. Refinement matters most along whichever axis the array resolves most coarsely—elevation on azimuth-dominant chips, but equally any poorly resolved direction on an antenna array with a sparse aperture—where bin-quantised angles would otherwise leave the corresponding velocity component poorly observed. Converting the refined angles from spherical to Cartesian coordinates gives the unit line-of-sight vector $\hat{\mathbf{u}}_i$.

With per-cell directions and confidences in hand, we stack the rows of Eq. (3), weight each by its cell confidence, and solve the resulting weighted least-squares problem in closed form,

$$\hat{\mathbf{v}}^{(0)} = -(\mathbf{U}^T \mathbf{W} \mathbf{U})^{-1} \mathbf{U}^T \mathbf{W} \mathbf{d}, \quad \mathbf{W} = \text{diag}(w_1, \dots, w_N). \quad (8)$$

The confidence weights already suppress sidelobe-dominated cells, but moving reflectors and multipath can still inject residual outliers.

To reject them, we run a single iteratively-reweighted-least-squares pass with a Cauchy loss. From the residuals

$$\mathbf{r}_i = \mathbf{d}_i + \hat{\mathbf{u}}_i^T \hat{\mathbf{v}}^{(0)}, \quad (9)$$

we estimate a robust scale $\hat{\sigma}_r$ from the median absolute deviation of $\mathbf{r}$ and form the Cauchy weights

$$\rho_i = \frac{1}{1 + (r_i / c \hat{\sigma}_r)^2}, \quad (10)$$

collected in $\boldsymbol{\rho} = \text{diag}(\rho_1, \dots, \rho_N)$. We then re-evaluate Eq. (8) with $\mathbf{W}\boldsymbol{\rho}$ in place of $\mathbf{W}$. We use a single fixed cutoff $c = 2$ for both apertures, and we stop after one pass because further iterations changed per-frame RMSE by less than 10^{-4} m s^{-1} in our pilot studies.

3.6 Velocity Covariance Assembly

The proposed system reports the sensor-frame covariance Σ_v^R alongside each velocity estimate. We follow sparse Doppler ego-velocity estimators [2, 3] in reporting the closed-form least-squares covariance of the velocity fit, and extend it with beam-direction uncertainty and Doppler-bin quantisation:

$$\Sigma_v^R = \Sigma_v^{\text{wls}} + \Sigma_v^{\text{ang}} + \Sigma_v^{\text{dop}}, \quad (11)$$

with the terms

$$\Sigma_v^{\text{wls}} = \hat{\sigma}_r^2 (\mathbf{U}^T \mathbf{W} \boldsymbol{\rho} \mathbf{U})^{-1}, \quad (12)$$

$$\Sigma_v^{\text{ang}} = \|\hat{\mathbf{v}}^R\|^2 \mathbf{J} \text{diag}(\sigma_\alpha^2, \sigma_\beta^2) \mathbf{J}^T, \quad (13)$$

$$\Sigma_v^{\text{dop}} = \sigma_{\text{dop}}^2 \mathbf{I}. \quad (14)$$

The three terms account, respectively, for the uncertainty of the velocity fit (the residual variance $\hat{\sigma}_r^2$ carried through the least-squares geometry), the angular uncertainty of the beam directions (the per-axis pointing deviations $\sigma_\alpha, \sigma_\beta$ mapped through the line-of-sight Jacobian $\mathbf{J}$ and growing with speed $\|\hat{\mathbf{v}}^R\|$), and a floor σ_{dop}^2 set by the radar's finite Doppler resolution, the quantisation noise of reading the radial velocity to the nearest Doppler bin of width Δv_{bin} . All three are computed in closed form from the radar configuration and the measured cells, with no per-platform tuning, so the covariance transfers across radars; the vertical term is enlarged on arrays with few elevation rows, where v_z is weakly observed.

The resulting estimate is first obtained in the radar sensor frame. Before fusion, the front-end maps both the velocity mean and covariance to the body frame shown in Fig. 3. For a radar mounted at a fixed lever arm $\mathbf{r}$ from the body origin, platform rotation induces the sensor-frame apparent velocity $\boldsymbol{\omega} \times \mathbf{r}$. We remove this term using the measured gyroscope rate and then apply the calibrated sensor-to-body rotation. This conversion is performed once, at the front-end output, so the ESKF receives $(\hat{\mathbf{v}}^B, \Sigma^B)$ directly and applies no additional lever-arm correction.

3.7 IMU Fusion Back-End

To fuse each radar velocity measurement $(\hat{\mathbf{v}}^B, \Sigma^B)$ with inertial propagation and recover the full trajectory, we use a loose-coupled ESKF. The filter, its process noise, and its innovation gate are identical across every analytic method evaluated, so trajectory-level differences are attributable to the front-end. We follow the loose-coupled radar-velocity formulation of EKF-RIO [3] and add online radar-to-IMU temporal calibration following Kim et al. [5]. We

parameterise the attitude error in the quaternion-error form of Solà [26]. The nominal state

$$\mathbf{x} = [\mathbf{p}^\top, \mathbf{v}^\top, \mathbf{q}^\top, \mathbf{b}_a^\top, \mathbf{b}_g^\top, t_d]^\top \quad (15)$$

holds position, velocity, attitude quaternion, accelerometer and gyroscope biases, and a radar-to-IMU temporal offset t_d that we estimate online following Kim et al. [5]; because the quaternion error lives in the 3-DoF tangent space, the propagated error state $\delta\mathbf{x}$ is 16-dimensional. We calibrate the radar-to-IMU spatial extrinsic offline; the proposed front-end consumes its lever-arm velocity correction before the measurement reaches the filter, as described in Section 3.6. We propagate the error state with inertial measurements through the standard discrete-time dynamics

$$\begin{aligned} \delta\mathbf{x}_{k|k-1} &= \mathbf{F}_k \delta\mathbf{x}_{k-1|k-1}, \\ \mathbf{P}_{k|k-1} &= \mathbf{F}_k \mathbf{P}_{k-1|k-1} \mathbf{F}_k^\top + \mathbf{G}_k \mathbf{Q} \mathbf{G}_k^\top, \end{aligned} \quad (16)$$

and at each radar epoch we apply the body-frame velocity estimate as a partial-state measurement update,

$$\mathbf{z}_k = \hat{\mathbf{v}}_k^B = \mathbf{H} \delta\mathbf{x}_k + \mathbf{n}_k, \quad \mathbf{n}_k \sim \mathcal{N}(\mathbf{0}, \Sigma_k^B), \quad (17)$$

where $\mathbf{H}$ is the velocity-measurement Jacobian for the body-frame velocity implied by the inertial state; it applies no second lever-arm correction. We gate each update with a Mahalanobis χ_3^2 test at the 0.95 level, rejecting innovations inconsistent with Σ_k^B . We adopt the IMU process-noise parameterisation of Kim et al. [5], so every analytic method evaluated in this paper shares an identical $\mathbf{Q}$ specification and the comparison reduces to the choice of front-end.

4 Evaluation

Our evaluation examines the dense ego-velocity front-end from four angles. We first ask whether dense soft weighting improves per-frame velocity and trajectory accuracy relative to sparse point-cloud front-ends (Sections 5.1 and 5.4). We then isolate which weighting, robustness, and covariance components drive the fused odometry accuracy (Section 5.2). Next, we test whether the same fixed front-end transfers across radar chirp configurations, devices, and a comparison with learning-based methods without retuning (Sections 5.3 and 5.5). Finally, we measure whether dense ego-velocity estimation remains practical on desktop and embedded compute targets (Section 5.6).

4.1 Experimental Setup

Datasets. We evaluate the dense ego-velocity front-end on three mmWave FMCW radar datasets. All three use TI single-chip radars and provide DCA1000 raw ADC captures, which dense soft weighting requires because it operates on the full range-Doppler cube rather than on detected point clouds. Table 1 summarises the sensing platforms, ground-truth sources, and chirp configurations. Unless otherwise stated, all front-end hyperparameters are fixed across datasets and sequences (Section 4.3).

ColoRadar Dataset [27] contains 52 handheld sequences totalling more than 145 min of radar, lidar, and IMU data from a single-chip AWR1843BOOST with DCA1000 capture, recorded in indoor and outdoor environments.

Each sequence provides both raw ADC captures and on-chip DSP point clouds from the same radar frames, so the dense front-end and

Table 1: Datasets and radar chirp configuration used for evaluation.

Property	Dataset		
	ColoRadar [27]	Radarize [13]	Self-collected Dataset
Platform	Handheld	Handheld, cart, robot	Handheld
Radar chip	AWR1843 BOOST	AWR1843 BOOST	AWR6843 AOP-EVM
Data capture IMU	DCA1000 3DM-GX5-25	DCA1000 Bosch BMI055	DCA1000 Xsens MTi-320 MoCap
Ground truth	LiDAR, MoCap	VIO	MoCap
Environment	Indoor, outdoor	Indoor	Indoor
Motion	2D	2D	3D
Center freq. f_c [GHz]	77.6	78.7	61.0
Bandwidth B [GHz]	1.20	3.36	1.91
ADC rate f_s [MHz]	10.67	2.29	4.68
Ramp T_{ramp} [μs]	20.0	50.0	63.75
Idle T_{idle} [μs]	110	122	38.44
Chirp rep. T_{PRT} [μs]	130	172	102.19
Frame T_f [ms]	100	33.3	100
Samples/chirp N_s	128	96	255
Chirps/frame N_c	128	32	60
Antenna $N_{\text{tx}}/N_{\text{rx}}$	3×4	3×4	3×4
Az./El. FoV [$^\circ$]	60/15	60/15	60/60

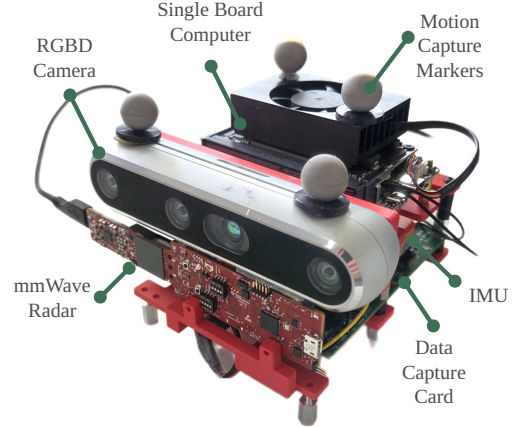


Figure 4: Sensor acquisition rig comprising a TI AWR6843AOP-EVM mmWave FMCW radar, DCA1000 data-capture card, NVIDIA Jetson Orin NX single-board computer, and Xsens MTi-320-3A IMU. Retro-reflective markers provide indoor motion-capture ground truth. (RGB-D camera not used in this evaluation.)

the sparse point-cloud baselines run on identical recordings. The dataset provides two ground-truth sources: a lidar-SLAM trajectory for every sequence and motion-capture poses for the sequences recorded in the ASPEN laboratory. Because the evaluated sequences span indoor and outdoor environments, we use the lidar-SLAM reference for all of them. We use three sequences, covering 336.8 s

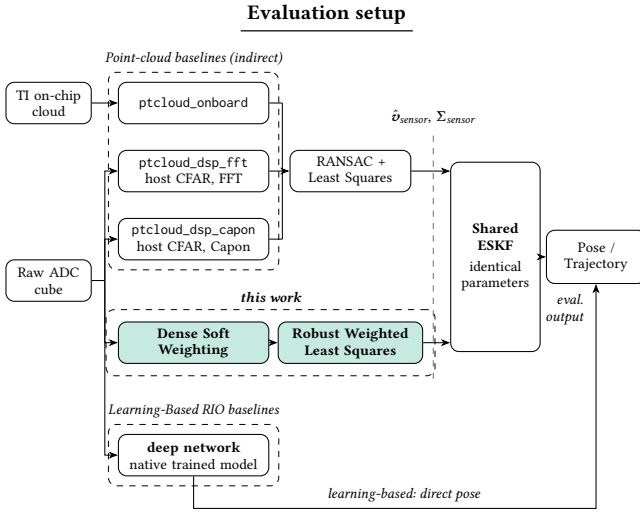


Figure 5: Cross-method comparison harness (left to right); only *this work* (DSW and its robust WLS) is shaded. The model-based paths hand the back-end the same ($\hat{v}_{\text{sensor}}, \Sigma_{\text{sensor}}$) across the dashed interface, and the shared ESKF uses identical parameters, so trajectory differences attribute to the front-end alone. The learning-based baseline regresses pose directly, bypassing this interface and the ESKF.

and 300.34 m in the cached ground-truth trajectories; these forward-driving, predominantly planar sequences are the longest in our evaluation.

Radarize dataset. The second dataset is the evaluation data released with the Radarize radar-SLAM system [13], comprising 146 indoor handheld, cart, and robot sequences acquired with an AWR1843BOOST radar and an Intel RealSense T265. We select it because it provides raw ADC captures and is the native training and evaluation setting of the learning-based radar odometry baselines, making it the closest available basis for comparing the dense analytic front-end against learned methods. The dataset provides no dedicated ground-truth system or standalone IMU: following the original protocol, we use the T265 visual-inertial trajectory as pseudo-ground truth and the T265’s internal IMU as the inertial input, and all compared methods are evaluated against the same locally associated pseudo-ground-truth poses. The held-out split contains 89 sequences totalling 92.9 min and 3.28 km in the pseudo-ground-truth trajectories.

Self-collected dataset. The third dataset was recorded using our own sensor rig (Section 4.2, Fig. 4), which also defines the embedded deployment class used in the runtime study. Unlike the two public datasets, this dataset uses a different radar platform and configuration: the antenna-on-package AWR6843AOP. Although both the AWR1843BOOST and AWR6843AOP use twelve-element virtual arrays, the two antenna layouts produce different effective apertures: the AWR1843BOOST configurations used in ColoRadar and Radarize are optimized primarily for azimuth, whereas the AWR6843AOP provides a more balanced azimuth–elevation field of view. Combined with strongly three-dimensional handheld motion,

this configuration explicitly exercises the elevation axis, which remains largely planar in the public benchmarks.

The rig records radar and IMU data together, and all sequences were collected inside a motion-capture volume to obtain reference poses. The dataset comprises 50 sequences, totalling approximately $\sim 30,000$ radar frames at a frame rate of 10 Hz, together with motion-capture ground truth. The sequences span a range of three-dimensional handheld motions.

4.2 Self-Collected Hardware Platform

For self-collected rig (Fig. 4), we use an NVIDIA Jetson Orin NX single-board computer, a TI AWR6843AOP-EVM radar, a DCA1000 capture card, and an Xsens MTi-320-3A AHRS. The AOP-EVM virtual array provides a $60^\circ/60^\circ$ azimuth/elevation field of view (Table 1), substantially wider in elevation than the AWR1843BOOST apertures used by the public datasets. This configuration is the main reason the self-collected sequences exercise full 3D ego-velocity rather than primarily planar motion.

Ground truth is provided by a 10-camera Vicon Vero v2.2 system tracking retro-reflective markers on the rig; the Vicon trajectory is aligned to the estimator clock using an offline per-trajectory time-offset estimate [5]. The same platform motivates the embedded-runtime measurements in Section 5.6: the front-end must run within the 10 Hz frame budget on a deployable compute target, not only on a development laptop.

Runtime measurements use two compute platforms. The development laptop has an Intel Core i9-14900HX CPU, 64 GB of RAM, and an NVIDIA RTX 4090 Mobile GPU. The embedded target uses an NVIDIA Jetson Orin NX Module 16GB on a Saeed reComputer Mini Carrier Board; the module has an 8-core Arm Cortex-A78AE CPU, 16 GB of LPDDR5 memory, and a 1024-core NVIDIA Ampere GPU with 32 Tensor Cores.

4.3 Baselines

We compare Dense Soft Weighting against two families of baselines: analytic point-cloud ego-velocity pipelines and learning-based radar-odometry networks. Figure 5 illustrates how both families connect to the shared inertial back-end. The setup is designed so that, for the analytic methods, the radar front-end is the only component that varies. All front-ends consume the same recordings: the raw ADC cube feeds the host-CFAR baselines, the dense front-end, and the learning-based networks, while `ptcloud_onboard` consumes the TI on-chip point cloud distributed with the same frames. Every model-based front-end, sparse or dense, outputs a sensor-frame ego-velocity estimate and covariance; the dashed line in Fig. 5 marks this common interface.

Downstream of this interface, every model-based front-end feeds the same loose-coupled ESKF (Section 3.7) with identical parameters and the same process-noise matrix $\mathbf{Q}$, the same online radar–IMU temporal-offset state t_d , and the same χ^2_3 outlier gate. We apply no per-method or per-sequence filter tuning; the exact settings are listed under Reproducibility. Trajectory-level differences therefore attribute to the front-end, not to filter design. The learning-based baselines (Section 5.5) regress pose directly from the radar stream and bypass both the velocity interface and the filter; they are compared at the pose level on the same sequences and metrics.

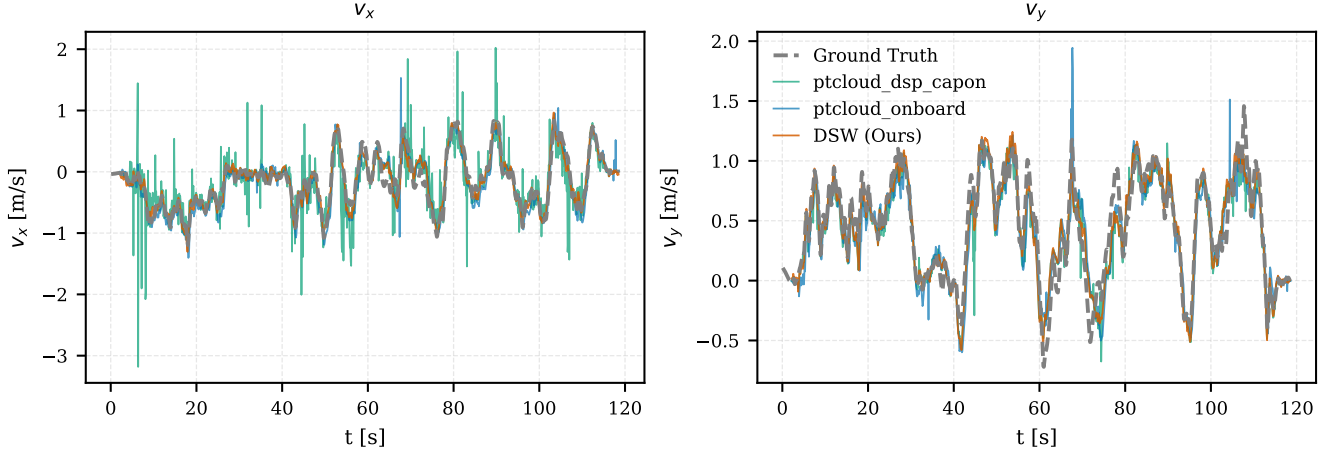


Figure 6: Per-frame body-frame v_x and v_y over time on one ColoRadar sequence `arpg_lab_run1`. The proposed system matches the ground-truth velocity most closely, attaining the lowest per-frame error among the compared methods.

Point-cloud baselines. We compare the dense front-end with sparse, point-cloud-based ego-velocity pipelines that follow the RANSAC family [3–5]: 3-point RANSAC rejects gross Doppler outliers, after which a least-squares fit to the consensus set, refined by orthogonal distance regression when enough inliers survive, recovers the ego-velocity. The three point-cloud variants differ only in how the cloud is detected (Table 2): `ptcloud_onboard` reuses the TI on-chip cloud distributed with the frames, whereas `ptcloud_dsp_capon` and `ptcloud_dsp_fft` are detected host-side from the same raw ADC frames with Capon digital beamforming [6] and FFT/Bartlett angle-of-arrival estimation, respectively. On ColoRadar we compare against `ptcloud_onboard` and `ptcloud_dsp_capon`; on the self-collected sequences the on-chip cloud is unavailable, so we substitute `ptcloud_dsp_fft` for `ptcloud_onboard`. All point-cloud baselines and the dense front-end feed the same ESKF described above.

Learning-Based baselines. On Radarize, we compare at the pose level with Radarize [13], a Doppler-flow network, and milliEgo [11], a radar-inertial ego-motion network. Both use the Radarize radar stream and dataset protocol and are evaluated on the same held-out split as the dense front-end.

Reproducibility. We fix every front-end hyperparameter across all sequences and report them here so the comparison can be reproduced. The point-cloud detector applies cascaded cell-averaging smallest-of CFAR, an adaptive threshold with binary output, to the range-Doppler power map (range axis, then Doppler axis) at a false-alarm rate of 10^{-2} on each axis, with 8 guard and 8 training cells along range, 0 guard and 4 training cells along Doppler, and peak grouping disabled; surviving detections are projected over an azimuth/elevation field of view of $60^\circ/15^\circ$ on the AWR1843BOOST configurations used by ColoRadar and Radarize, and $60^\circ/60^\circ$ on the AWR6843AOP-EVM self-collected configuration. The sparse estimator draws 100 minimal three-point hypotheses, counts a cell as an inlier when its Doppler residual falls below 0.15 m s^{-1} , requires a three-point consensus, performs unweighted least squares

on the inlier set, and refines with orthogonal distance regression whenever at least six inliers remain; its covariance is the residual sandwich floored by the geometric term $\sigma_d^2(\mathbf{U}^T\mathbf{U})^{-1}$. The dense front-end fixes the gate parameters $\tau = 200$ and $\kappa = 0.5$ (Eq. (4)), takes a single Cauchy pass with a fixed cutoff $c = 2$ on both apertures (Section 3.5), and adds only a per-platform scalar floor to the covariance (Section 3.6). Both front-ends feed the identical ESKF, whose IMU process noise follows EKF-RIO [5] (accelerometer and gyroscope noise densities of 0.03 m/s^2 and $0.2^\circ/\text{s}$ per $\sqrt{\text{Hz}}$, bias random walks of 10^{-5} in SI units) under a χ^2_3 innovation gate at the 0.95 confidence level.

4.4 Metrics and Protocol

Absolute pose error (APE) and relative pose error (RPE) are computed with `evo` [28]. For ColoRadar and the self-collected dataset, the cached evaluator uses `evo-compatible` SE(3) origin alignment (`-align_origin`); map overlays use Umeyama SE(3) alignment only for visualisation. ColoRadar uses a 10 m. Radarize is evaluated with Umeyama alignment after 0.01 s trajectory association and native per-frame RPE ($\Delta = 1$ frame), which is retained for comparability with its published evaluation protocol and learning-based baselines. Per-axis velocity RMSE is computed from time-associated body-frame velocity samples after the same offline ground-truth time alignment used for the pose trajectory.

5 Results

5.1 Per-Frame Ego-Velocity Accuracy

Trajectory accuracy is reported after inertial integration. However, the front-end contribution appears one step earlier in the per-frame body-velocity estimate. Figure 6 compares the two horizontal velocity components on a representative ColoRadar sequence. The dense estimate matches the reference most closely and attains the lowest per-frame error; the Capon point-cloud baseline follows the same trend with higher error, and the on-chip point-cloud baseline has the highest. The Δv column of Table 2 reports the same quantity

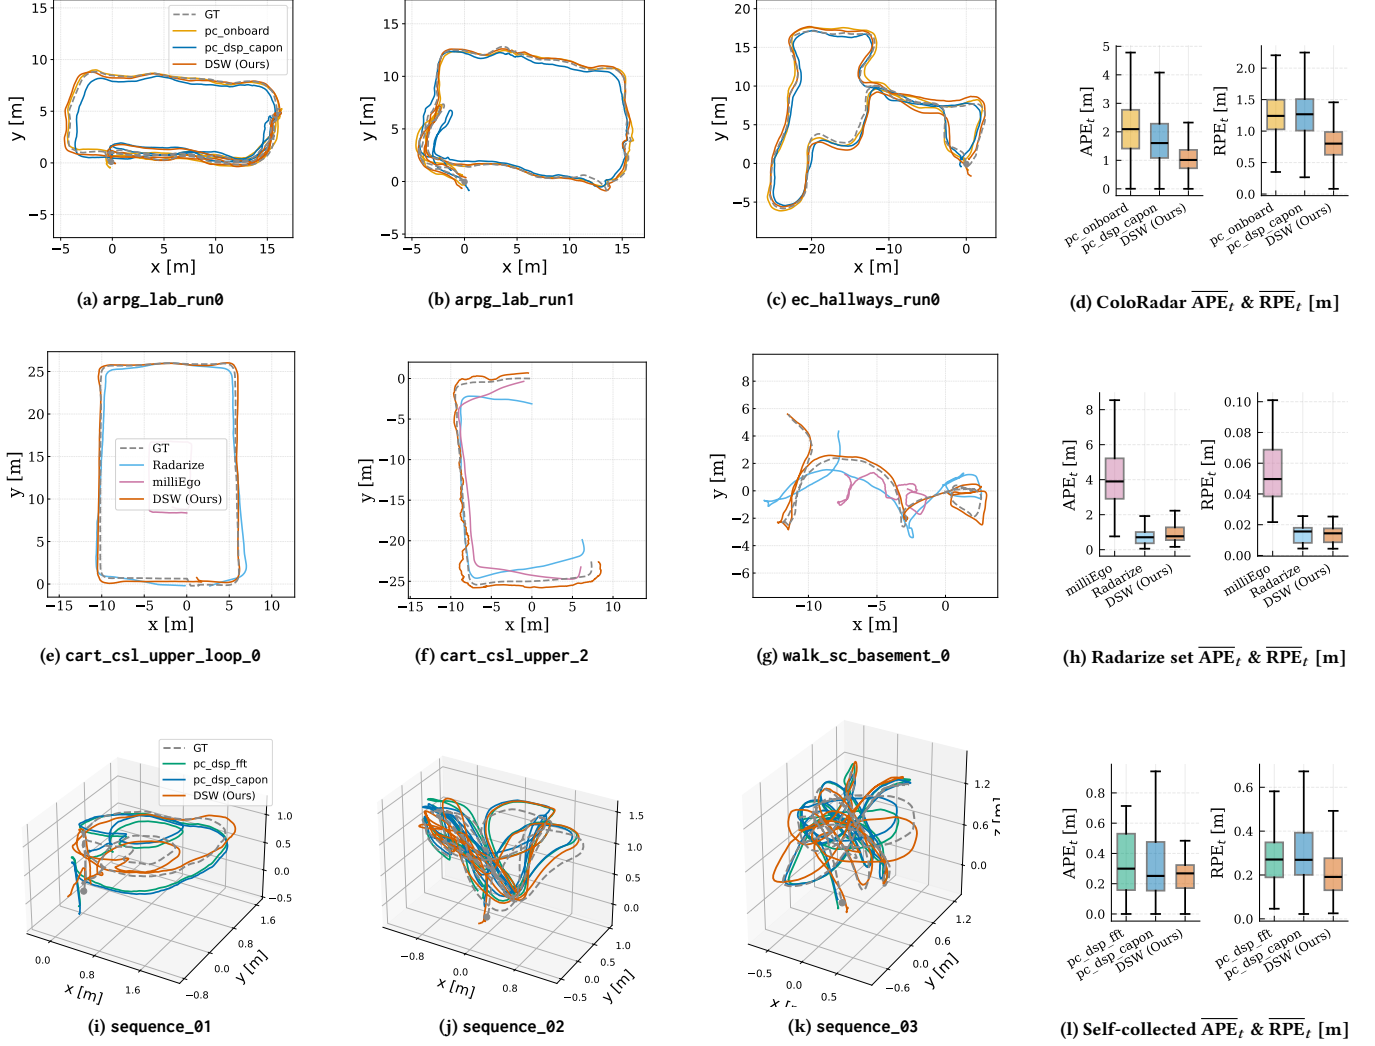


Figure 7: Estimated trajectories across the three evaluation datasets: ColoRadar (top, XY view), Radarize (middle), and the self-collected rig (bottom, XYZ view). The first three panels in each row show representative sequences; the fourth panel summarises $\overline{APE}_t$ and $\overline{RPE}_t$.

over all sequences, and dense soft weighting attains the lowest per-frame ego-velocity RMSE on every ColoRadar row.

Figure 2(c–e) links this velocity improvement to the front-end representation. CASO-CFAR adapts its threshold to the local range-Doppler neighbourhood. However, its output remains a sparse, boresight-biased binary detection set. The dense front-end assigns a continuous weight to every range-Doppler cell and retains off-boresight evidence that the detector removes. Under forward motion the boresight detections are often sufficient to constrain v_x ; under lateral motion the off-boresight cells are the measurements that constrain v_y . The improvement is therefore present before the ESKF receives the measurement, rather than being introduced by back-end tuning.

5.2 Front-End Component Ablation

We ablate the front-end on the six primary sequences by toggling one element at a time and re-running the shared ESKF (Table 4). The two factors in Eq. (4) are both necessary: using only the power score or only the concentration gate raises mean $\overline{APE}_t$ to 2.47 m and 2.97 m, against 0.76 m for the full weight. Replacing the soft gate with a hard threshold at the same operating point makes the trajectory diverge, as too few cells remain to condition the normal matrix. This supports the central design choice: weak cells should be treated neither as full inliers nor removed categorically.

The remaining variants concern robustness rather than the main accuracy gain. The default slope $\kappa = 0.5$ outperforms the sharper and smoother alternatives, and the result is insensitive to τ over a

Table 2: Per-sequence ego-velocity and trajectory error on ColoRadar, Radarize, and the self-collected dataset.

Dataset	Sequence	Baseline		Δv	APE		RPE	
		Method [†]	Family	[m/s]	t [m]	r [°]	t [m]	r [°]
ColoRadar	arpg_lab_run0	ptcloud_onboard	Point-cloud	0.54	2.16	1.56	1.40	1.40
		ptcloud_dsp_capon	Point-cloud	0.35	1.48	1.37	1.51	1.61
		DSW (ours)	Direct	0.30	0.86	1.36	0.85	1.56
	arpg_lab_run1	ptcloud_onboard	Point-cloud	0.34	2.02	2.36	1.36	3.11
		ptcloud_dsp_capon	Point-cloud	0.51	1.66	2.45	1.25	2.03
		DSW (ours)	Direct	0.32	1.04	2.08	1.04	1.91
	ec_hallways_run0	ptcloud_onboard	Point-cloud	0.45	2.88	2.29	1.38	1.57
		ptcloud_dsp_capon	Point-cloud	0.57	3.21	1.99	1.52	1.53
		DSW (ours)	Direct	0.34	1.60	2.22	0.88	1.44
Radarize	cart_csl_upper_loop_0	milliEgo	Learning-Based	–	8.17	12.3	0.083	0.29
		Radarize	Learning-Based	–	0.66	7.1	0.026	3.62
		DSW (ours)	Direct	0.24	0.29	4.3	0.021	0.28
	cart_csl_upper_2	milliEgo	Learning-Based	–	1.60	172.2	0.163	0.37
		Radarize	Learning-Based	–	1.38	6.4	0.019	1.68
		DSW (ours)	Direct	0.08	0.55	6.5	0.022	0.29
	walk_sc_basement_0	milliEgo	Learning-Based	–	3.10	16.7	0.049	0.95
		Radarize	Learning-Based	–	1.21	28.4	0.016	3.25
		DSW (ours)	Direct	0.09	0.40	8.0	0.015	0.73
Self-collected	sequence_01	ptcloud_dsp_fft	Point-cloud	0.16	0.37	3.24	0.10	2.35
		ptcloud_dsp_capon	Point-cloud	0.12	0.48	3.22	0.11	2.44
		DSW (ours)	Direct	0.08	0.28	3.20	0.16	2.61
	sequence_02	ptcloud_dsp_fft	Point-cloud	0.12	0.34	3.02	0.08	2.41
		ptcloud_dsp_capon	Point-cloud	0.12	0.29	3.04	0.08	2.51
		DSW (ours)	Direct	0.10	0.27	2.92	0.10	2.33
	sequence_03	ptcloud_dsp_fft	Point-cloud	0.14	0.45	3.51	0.11	3.19
		ptcloud_dsp_capon	Point-cloud	0.14	0.39	3.40	0.11	3.35
		DSW (ours)	Direct	0.12	0.25	2.90	0.09	2.88

[†]“–” = not available; best per sequence and metric in **bold**.

Metrics. Δv is per-frame body-velocity RMSE; $APE_{t/r}$ and $RPE_{t/r}$ are absolute and relative pose error (translation / rotation).

Methods. *Point-cloud* (host CFAR detection $\rightarrow$ RANSAC + LS + ODR): ptcloud_onboard TI on-chip DSP cloud; ptcloud_dsp_fft FFT/Bartlett AoA cloud; ptcloud_dsp_capon Capon digital-beamforming cloud (DBE [6]). *Direct*: DSW (ours) dense range-Doppler soft weighting + robust WLS. *Learning-based* (end-to-end pose regression): Radarize [13] Doppler-flow network; milliEgo [11] radar-inertial network. All analytic methods share one ESKF.

2 $\times$ range. The single Cauchy pass is roughly neutral on these low-outlier sequences; however, it protects the estimator in dynamic scenes, and the three-component covariance, while only a modest APE_t gain here, prevents overconfidence along geometrically weak axes.

5.3 Cross-Configuration Transfer

The self-collected sequences test whether the same front-end transfers across hardware and motion regime. The dense front-end is run unchanged on a TI AWR6843AOP-EVM, whose twelve-element virtual array provides a 60°/60° azimuth/elevation field of view, rather than the 60°/15° aperture of the AWR1843BOOST configurations used by the public datasets. This is the only dataset with substantial elevation coverage, and therefore the only one that exercises the vertical axis that the per-cell elevation refinement of Section 3.5 is designed to recover. Despite the change in chip, aperture, and dominant motion, dense soft weighting attains the lowest per-frame ego-velocity RMSE (0.08–0.12 m s^{−1}) on every

sequence (Table 2), confirming that the front-end transfers without retuning. The downstream trajectory benefit of this improved velocity is examined next.

5.4 From Ego-Velocity to Trajectory Accuracy

Figure 7 and Table 2 report the fused-trajectory results across the three evaluation datasets. On ColoRadar, the dense front-end attains the lowest translational APE and RPE on all three sequences (Fig. 7(a)–(d)). Mean APE_t decreases from 2.12 m for the strongest point-cloud baseline, ptcloud_dsp_capon, to 1.17 m, corresponding to a 45 % reduction. Mean RPE_t is also reduced to 0.92 m, compared with 1.38 and 1.43 m for the two point-cloud baselines.

Similar trends are observed on Radarize and the self-collected dataset. On the Radarize sequences in Fig. 7(e)–(g), Dense Soft Weighting achieves the lowest translational APE in Table 2, while the held-out summary in Fig. 7(h) shows performance close to the Radarize network and substantially better than milliEgo. On the self-collected rig (Fig. 7(i)–(l)), the dense front-end again gives the lowest translational APE on every sequence, reducing mean APE_t

Table 3: Per-frame latency (median, ms) by dataset and platform.

Dataset	RD cells	Device	Method	CPU cores		
				1×	4×	GPU
ColoRadar	16 384	Laptop	DSW (ours)	17.8	8.8	2.0
			ptcloud_dsp_fft	10.1	6.6	3.2
			ptcloud_dsp_capon	12.3	9.7	4.1
		Orin NX	DSW (ours)	71	35	12
			ptcloud_dsp_fft	40	26	19
			ptcloud_dsp_capon	49	39	25
Self-collected	15 300	Laptop	DSW (ours)	17.7	8.9	2.1
			ptcloud_dsp_fft	10.4	6.9	4.0
			ptcloud_dsp_capon	13.5	10.4	4.9
		Orin NX	DSW (ours)	71	36	13
			ptcloud_dsp_fft	42	28	24
			ptcloud_dsp_capon	54	42	29
Radarize	3072	Laptop	DSW (ours)	3.8	1.9	1.8
			ptcloud_dsp_fft	3.9	2.6	3.1
			ptcloud_dsp_capon	4.9	3.8	3.8
			Learning-Based (Radarize)	54.9	32.8	3.4
			Learning-Based (milliEgo)	20.2	11.7	1.2
		Orin NX	DSW (ours)	15	8	11
			ptcloud_dsp_fft	16	11	19
			ptcloud_dsp_capon	20	15	23
			Learning-Based (Radarize)	220	134	21
			Learning-Based (milliEgo)	81	48	7

Laptop and Orin NX specifications are given in Section 4.2.

RD cells is the dataset’s range-Doppler FFT cell count per frame. CPU columns are core counts; GPU uses CUDA.

Learning-Based rows are the per-frame network inference of the learned baselines (PyTorch FP32)

Table 4: Ablation of the front-end design choices, mean over the six primary sequences.

Variant	Mean error	
	APE_t [m]	Δv [m/s]
DSW (default)	0.76	0.23
power score only	2.47	0.32
concentration gate only	2.97	0.36
hard gate (vs. soft)	diverges	–
scalar Σ_v (vs. 3-component)	0.79	0.23
$\tau=100$ / 400 (def. 200)	0.77 / 0.77	–
$\kappa=0.25$ / 1.0 (def. 0.5)	1.11 / 1.02	–

Six primary sequences: three ColoRadar + three self-collected. Each row toggles one element from the default and re-runs the shared ESKF. APE_t is translational absolute pose error, Δv the per-frame body-velocity RMSE. The hard-gate variant diverges (mean $APE_t > 200$ m).

from 0.39 m for the point-cloud baselines to 0.27 m. Relative pose error is more dataset-dependent: on the short 1 m self-collected windows the point-cloud baselines remain competitive, leading RPE_t on two of the three sequences (for example, 0.10 m versus 0.16 m on sequence_01), with dense soft weighting ahead only on sequence_03. These decimetre-level differences do not overturn the APE gains; across point-cloud, learning-based, and cross-configuration comparisons the fused trajectories show consistent improvements in global translational accuracy.

Rotational errors are interpreted separately because the radar front-end is fused as a velocity measurement in a loosely coupled

ESKF. Attitude is therefore governed primarily by IMU propagation, with radar affecting rotation only indirectly through the filter state. This distinction is especially important for Radarize, where rotational APE/RPE values are computed against a consumer visual-inertial pseudo-ground truth while using the same device’s internal IMU as the inertial input. In contrast, ColoRadar and the self-collected rig use dedicated higher-grade IMUs with independent lidar-SLAM or motion-capture references. The larger rotational errors on Radarize therefore mainly reflect the inertial and pseudo-ground-truth setup rather than the dense radar weighting itself.

5.5 Comparison Against Learning-Based Odometry

We evaluate dense soft weighting on the Radarize dataset (Section 4.1) against the two learning-based baselines of Section 4.3, the Radarize Doppler-flow network and milliEgo. All methods are scored on the same 89-sequence held-out split under one protocol; the dense front-end uses no training and keeps the fixed hyperparameters used throughout.

Over the full held-out split, the dense front-end achieves 1.11 m mean translational APE, compared with 4.22 m for milliEgo and 0.81 m for Radarize (Fig. 7(h)). The Radarize network remains stronger in mean APE in its native trained setting. At the median sequence, however, the gap narrows to 0.77 m versus 0.71 m, and the dense front-end attains lower per-frame forward-velocity RMSE on 69 % of sequences. Table 2 reports the three sequences plotted in Fig. 7(e)–(g), on which dense soft weighting has the lowest translational APE. Together, these results place the training-free dense front-end on par with, and in several cases ahead of, learning-based odometry baselines, especially milliEgo, which operates from sparse radar point-cloud data. Radarize provides a strong learned dense baseline in a similar sensor and environment domain, but its performance reflects a learned mapping for the Radarize distribution and may not transfer directly when radar spectra change with sensor configuration or deployment conditions. The computational trade-off is considered separately in Section 5.6, since deployment depends on both accuracy and per-frame latency on embedded hardware.

5.6 Runtime and Embedded Feasibility

We next evaluate this deployment cost by measuring per-frame latency (Table 3) on the two compute platforms defined with the self-collected hardware in Section 4.2: a development laptop and a Jetson Orin NX embedded target. CPU figures use a single core (taskset -c 0, one BLAS thread); GPU figures use CUDA.

The cost of the proposed system front-end is governed by the range-Doppler cell count listed in Table 3: every cell undergoes the same beam selection, angle refinement, and weighting, so single-core latency is linear in the grid, at 1.1 μ s to 1.2 μ s per cell from the 3072-cell Radarize cube (3.8 ms) to the 16 384-cell ColoRadar cube (17.8 ms). For the larger cubes GPU acceleration matters most, and the algorithm supports it directly: the per-cell operations are independent, involve no detection step or data-dependent branching, and the weighted least-squares estimate reduces to an accumulation over cells, so the front-end maps onto data-parallel hardware and runs in 1.8 ms to 2.1 ms almost independently of grid size. Every

analytic front-end clears its sensor budget (10 Hz for ColoRadar and self-collected, 30 Hz for Radarize) on one CPU core, on the laptop and on Orin NX. The learned baselines have a fixed inference cost set by the input-map sizes; on the laptop GPU they run in 3.4 (Radarize) and 1.2 ms (milliEgo), but on Orin NX both meet the 30 Hz budget only on the integrated GPU.

ptcloud_onboard is excluded from Table 3 because its detection stage runs on the radar’s microcontroller rather than on the host, so no end-to-end latency from the raw ADC stream can be measured on a common compute target; its host-side step covers only the ego-velocity estimator (0.5 ms to 9 ms across platforms), and the on-chip cloud is unavailable on the self-collected rig.

5.7 Discussion

Across the three datasets, two radar chips, and three radar configurations evaluated above, a single fixed weighting rule improves both per-frame velocity and trajectory accuracy without per-dataset adjustment. This supports the representation-level claim of the present work: the improvement arises from aggregating weighted evidence across the dense spectrum, and because the comparison holds the ESKF back-end fixed, it does not depend on back-end tuning.

The density of the measurement set also motivates the analytic outlier handling that replaces RANSAC. RANSAC is well suited to sparse point clouds with a high outlier fraction, where a hard inlier/outlier partition over many randomly sampled minimal sets is required. On the dense cube, the confidence weights already attenuate clutter and sidelobe responses, and a single Cauchy reweighting suppresses the few remaining outliers without discarding any cell. This pass is deterministic and adds the cost of one additional weighted least-squares evaluation, whereas the cost of RANSAC is stochastic and depends on the hypothesis count. Because every cell is retained at a graded weight, the covariance follows in closed form from the weighted normal equations (Eq. (12)) rather than from a sandwich estimate over an inlier set. Robust losses and iterative reweighting are established in radar ego-velocity estimation [18, 19]; The proposed system applies the same principle to the dense, soft-weighted cell set in a single pass rather than to a pre-detected point cloud.

The improvement is most pronounced under lateral motion. Sparse detections concentrate near boresight, which constrains the forward velocity component but provides limited lateral geometry; the dense front-end retains off-boresight cells at reduced weight and thereby improves the conditioning of the v_y estimate. The same analysis identifies the conditions under which the benefit diminishes: when a frame contains high-SNR detections with broad angular spread, binary detection already yields a well-conditioned sparse measurement set and the two front-ends produce similar estimates. Dense soft weighting is therefore most beneficial under lateral or off-boresight motion, in low-reflectivity scenes, and in single-axis geometries where binary detection conditions the measurement set poorly.

Several limitations remain. The dominant residual error in the self-collected sequences is bias rather than random noise: under

sidelobe leakage the per-cell angle-FFT direction estimate is displaced toward boresight, so the unit vectors $\hat{u}_i$ in Eq. (8) under-represent the lateral projection and bias $\hat{v}_y$ during lateral motion. Weighted aggregation cannot remove this error because it enters through the geometry matrix U rather than the residuals; a sidelobe-aware direction-of-arrival estimator (Capon, MUSIC, or sparse Bayesian methods) is a principled extension. The covariance model likewise assumes white residuals and neglects angle-FFT sidelobe correlation across neighbouring bins, so it may under-estimate uncertainty under heavy multipath. Finally, the cross-platform evidence spans only single-chip devices at handheld and cart speeds; aerial and higher-speed ground-vehicle settings remain to be evaluated.

6 Conclusion

We presented *Dense Soft Weighting*, an analytic radar front-end for sensing ego-velocity and covariance directly from dense range-Doppler spectra. By replacing binary detector output with continuous per-cell confidence, DSW preserves weak Doppler evidence while down-weighting ambiguous cells, enabling robust weighted least-squares velocity estimation and a closed-form, measurement-derived covariance for inertial fusion. Under a shared ESKF back-end, the proposed front-end reduces mean translational APE from 2.12 m to 1.17 m on ColoRadar and from 0.39 m to 0.27 m on the self-collected 3D handheld dataset. On Radarize, it closely matches or exceeds the accuracy of learned dense odometry methods while using the same analytic parameters and requiring no dataset-specific training. These results suggest that weak Doppler evidence across the radar field of view can contribute to ego-velocity estimation when retained with low confidence rather than removed by hard thresholding. This yields a radar front-end that transfers across different single-chip radar configurations while remaining lightweight enough for embedded deployment. The implementation runs in real time on embedded hardware, suggesting that further integration within on-chip mmWave radar processing pipelines may be feasible. Future work will investigate longer-horizon inertial smoothing back-ends that exploit the reported velocity covariance beyond per-frame updates, and additional validation on aerial and higher-speed platforms under more aggressive motion.

References

- [1] Kyle Harlow, Hyesu Jang, Timothy D. Barfoot, Ayoung Kim, and Christoffer Heckman. A new wave in robotics: Survey on recent mmWave radar applications in robotics. *IEEE Transactions on Robotics*, 40:4544–4560, 2024.
- [2] Dominik Kellner, Michael Barjenbruch, Jens Klappstein, Jürgen Dickmann, and Klaus Dietmayer. Instantaneous ego-motion estimation using Doppler radar. In *IEEE International Conference on Intelligent Transportation Systems (ITSC)*, pages 869–874, Piscataway, NJ, USA, 2013. IEEE.
- [3] Christopher Doer and Gert F. Trommer. An EKF based approach to radar inertial odometry. In *IEEE International Conference on Multisensor Fusion and Integration for Intelligent Systems (MFI)*, pages 152–159, Piscataway, NJ, USA, 2020. IEEE.
- [4] Christopher Doer and Gert F. Trommer. x-RIO: Radar inertial odometry with multiple radar sensors and yaw aiding. *Gyroscopy and Navigation*, 12(4):329–339, 2021.
- [5] Changseung Kim, Geunsik Bae, Woojae Shin, Sen Wang, and Hyondong Oh. EKF-based radar-inertial odometry with online temporal calibration. *IEEE Robotics and Automation Letters*, 10(7):7230–7237, 2025. Also available as arXiv:2502.00661.
- [6] Jingqi Jiang, Shida Xu, Kaicheng Zhang, Jiyuan Wei, Jingyang Wang, and Sen Wang. Digital beamforming enhanced radar odometry. In *2025 IEEE International Conference on Robotics and Automation (ICRA)*, pages 4601–4607, Piscataway, NJ, USA, 2025. IEEE.

- [7] Akarsh Prabhakara, Tao Jin, Arnav Das, Gantavya Bhatt, Lilly Kumari, Elahe Soltanaghai, Jeff Bilmes, Swarun Kumar, and Anthony Rowe. High resolution point clouds from mmWave radar. In *IEEE International Conference on Robotics and Automation (ICRA)*, pages 4135–4142, Piscataway, NJ, USA, 2023. IEEE.
- [8] Bin Zhao and Nakul Garg. RadarSFD: Single-frame diffusion with pretrained priors for radar point clouds. In *IEEE International Conference on Robotics and Automation (ICRA)*, Piscataway, NJ, USA, 2026. IEEE. Also available as arXiv:2509.18068.
- [9] Hoang Viet Do, Bo Sung Ko, Yong Hun Kim, and Jin Woo Song. CREVE: An acceleration-based constraint approach for robust radar ego-velocity estimation. arXiv preprint arXiv:2409.16847, 2024. arXiv-only; v2 updated April 2025.
- [10] Jianguang Xiang, Xiaofeng He, Zizhuo Chen, Lilian Zhang, Xincan Luo, and Jun Mao. VGC-RIO: A tightly integrated radar-inertial odometry with spatial weighted Doppler velocity and local geometric constrained RCS histograms. *IEEE Robotics and Automation Letters*, 10(11):11642–11649, 2025.
- [11] Chris Xiaoxuan Lu, Muhamad Risqi U. Saputra, Peijun Zhao, Yasin Almalioglu, Pedro P. B. de Gusmao, Changhao Chen, Ke Sun, Niki Trigoni, and Andrew Markham. milliEgo: Single-chip mmWave radar aided egomotion estimation via deep sensor fusion. In *Proceedings of the 18th ACM Conference on Embedded Networked Sensor Systems (SenSys)*, pages 109–122, New York, NY, USA, 2020. ACM.
- [12] Emerson Sie, Zikun Liu, and Deepak Vasisht. BatMobility: Towards flying without seeing for autonomous drones. In *Proceedings of the 29th Annual International Conference on Mobile Computing and Networking (MobiCom)*, pages 1–16, New York, NY, USA, 2023. ACM.
- [13] Emerson Sie, Xinyu Wu, Heyu Guo, and Deepak Vasisht. Radarize: Enhancing radar SLAM with generalizable doppler-based odometry. In *Proceedings of the 22nd ACM International Conference on Mobile Systems, Applications and Services (MobiSys)*, pages 331–344, New York, NY, USA, 2024. ACM.
- [14] Jui-Te Huang, Timashu Huang, Anthony Rowe, and Michael Kaess. UNRIO: Uncertainty-aware velocity learning for radar-inertial odometry. arXiv preprint arXiv:2604.13584, 2026.
- [15] Cedric Le Gentil, Leonardo Brizi, Daniil Lisus, Xinyuan Qiao, Giorgio Grisetti, and Timothy D. Barfoot. DRO: Doppler-aware direct radar odometry with gyroscope. In *Robotics: Science and Systems (RSS)*, Los Angeles, CA, USA, 2025. Robotics: Science and Systems Foundation.
- [16] Christopher Doer and Gert F. Trommer. Radar inertial odometry with online calibration. In *European Navigation Conference (ENC)*, pages 1–10, Piscataway, NJ, USA, 2020. IEEE.
- [17] Christopher Doer and Gert F. Trommer. Yaw aided radar inertial odometry using Manhattan World assumptions. In *28th Saint Petersburg International Conference on Integrated Navigation Systems (ICINS)*, pages 1–9, Piscataway, NJ, USA, 2021. IEEE.
- [18] Jui-Te Huang, Ruoyang Xu, Akshay Hinduja, and Michael Kaess. Multi-radar inertial odometry for 3D state estimation using mmWave imaging radar. In *IEEE International Conference on Robotics and Automation (ICRA)*, pages 12006–12012, Yokohama, Japan, 2024. IEEE.
- [19] Dong Wang, Stefan May, and Andreas Nüchter. RIV-SLAM: Radar-inertial-velocity optimization based graph SLAM. In *IEEE 20th International Conference on Automation Science and Engineering (CASE)*, pages 774–781, Piscataway, NJ, USA, 2024. IEEE.
- [20] Prashant Kumar Rai, Natalia Strokina, and Reza Ghabcheloo. 4DEgo: Ego-velocity estimation from high-resolution radar data. *Frontiers in Signal Processing*, 3:1198205, 2023.
- [21] Shengpeng Wang, Yulong Xie, Qing Liao, and Wei Wang. S³E: Self-supervised state estimation for radar-inertial system. In *IEEE/CVF International Conference on Computer Vision (ICCV)*, pages 26686–26695, Piscataway, NJ, USA, 2025. IEEE. Also available as arXiv:2509.25984.
- [22] Vlaho-Josip Štironja, Luka Petrović, Juraj Peršić, Ivan Marković, and Ivan Petrović. Impact of temporal delay on radar-inertial odometry. arXiv preprint arXiv:2503.02509, 2025.
- [23] Jan Michalczyk, Roland Jung, and Stephan Weiss. Tightly-coupled EKF-based radar-inertial odometry. In *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 12336–12343, Piscataway, NJ, USA, 2022. IEEE.
- [24] Woosong Yang, Hyesu Jang, and Ayoung Kim. Ground-optimized 4D radar-inertial odometry via continuous velocity integration using Gaussian process. In *IEEE International Conference on Robotics and Automation (ICRA)*, pages 3815–3821, Piscataway, NJ, USA, 2025. IEEE.
- [25] Qiucan Huang, Yuchen Liang, Zhijian Qiao, Shaojie Shen, and Huan Yin. Less is more: Physical-enhanced radar-inertial odometry. In *IEEE International Conference on Robotics and Automation (ICRA)*, pages 15966–15972, Piscataway, NJ, USA, 2024. IEEE.
- [26] Joan Solà. Quaternion kinematics for the error-state Kalman filter. arXiv preprint arXiv:1711.02508, 2017. Standard ESKF reference.
- [27] Andrew Kramer, Kyle Harlow, Thomas Williams, and Christoffer Heckman. ColoRadar: The direct 3D millimeter wave radar dataset. *The International Journal of Robotics Research*, 41(4):351–360, 2022.
- [28] Michael Grupp. evo: Python package for the evaluation of odometry and SLAM. <https://github.com/MichaelGrupp/evo>, 2017.