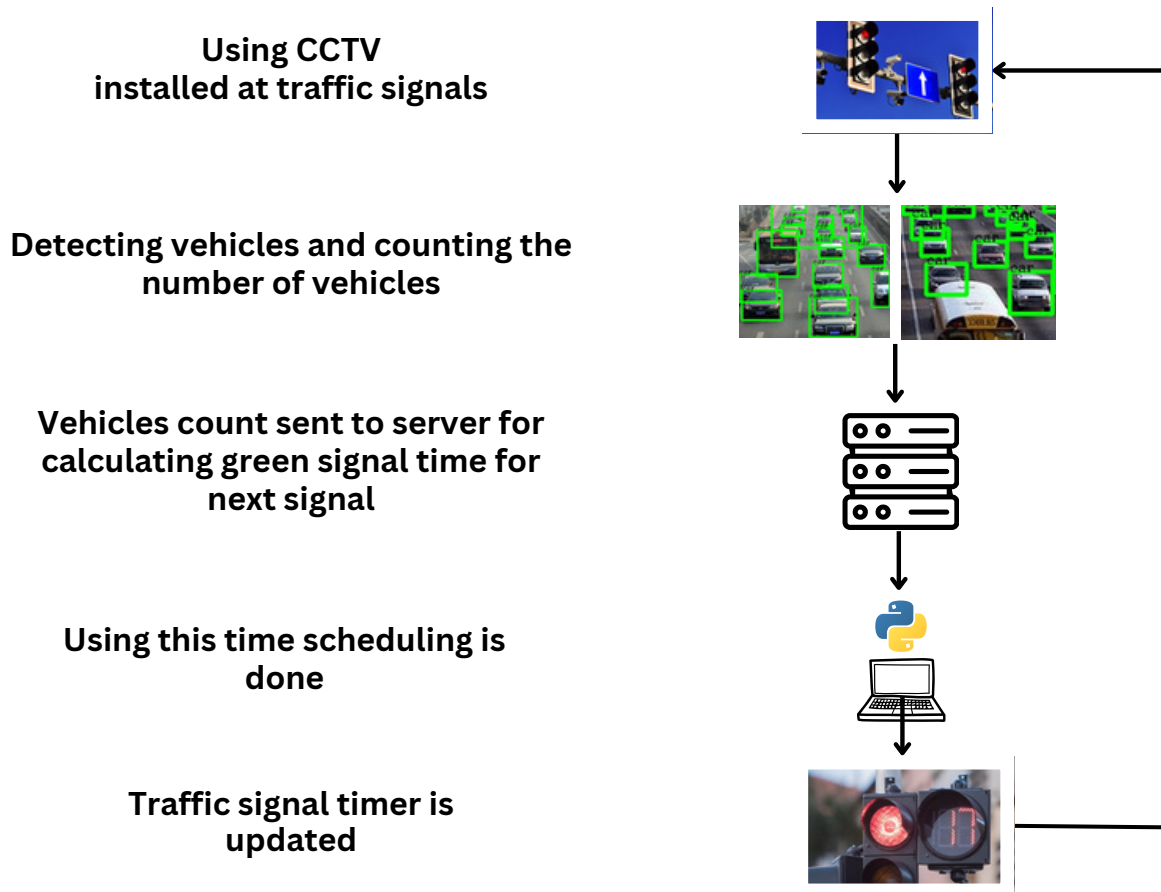# Smart System for Traffic Flow Optimization And Congestion Management

Implementation Details

Proposed System Overview

Our proposed system uses the CCTV cameras installed at traffic junctions to count the number of vehicles using vehicle detection. This system can be broken down into 3 modules : Vehicle Detection module, Signal Switching Algorithm, and Simulation module. The Signal Switching Algorithm determines green signal times for each arm by averaging the traffic density observed over previous cycles. The red signal times are updated accordingly. The green signal time is restricted to a maximum and minimum value in order to avoid starvation of a particular lane. A simulation is also developed to demonstrate the system's effectiveness and compare it with the existing static system.

Using CCTV installed at traffic signals

Detecting vehicles and counting the number of vehicles

Vehicles count sent to server for calculating green signal time for next signal

Using this time scheduling is done

Traffic signal timer is updated

Vehicle Detection Module

Our proposed system uses YOLO(You only look once) for vehicle detection, followed by vehicle tracking, where each detected vehicle is assigned a unique ID to prevent double counting. After the detection phase, our tracker monitors the movement of vehicles, ensuring accurate counting and analysis of traffic flow. A custom YOLO model was trained for vehicle detection, which can detect vehicles of different classes like cars, bikes, heavy vehicles (buses and trucks), and rickshaws.

-The dataset for training the model was prepared by scraping images from google and labelling them manually using LabelIMG, a graphical image annotation tool.

-Then the model was trained using the pre-trained weights downloaded from the YOLO website. The configuration of the .cfg file used for training was changed in accordance with the specifications of our model. The number of output neurons in the last layer was set equal to the number of classes the model is supposed to detect by changing the 'classes' variable. In our system, this was 4 viz. Car, Bike, Bus/Truck, and Rickshaw. The number of filters also needs to be changed by the formula 5*(5+number of classes), i.e., 45 in our case.

-After making these configuration changes, the model was trained until the loss was significantly less and no longer seemed to reduce. This marked the end of the training, and the weights were now updated according to our requirements.

-These weights were then imported in code and used for vehicle detection with the help of OpenCV library. A threshold is set as the minimum confidence required for successful detection. After the model is loaded and an image is fed to the model, it gives the result in a JSON format i.e., in the form of key-value pairs, in which labels are keys, and their confidence and coordinates are values. Again, OpenCV can be used to draw the bounding boxes on the images from the labels and coordinates received.

Following are some images of the output of the
Vehicle Detection Module:
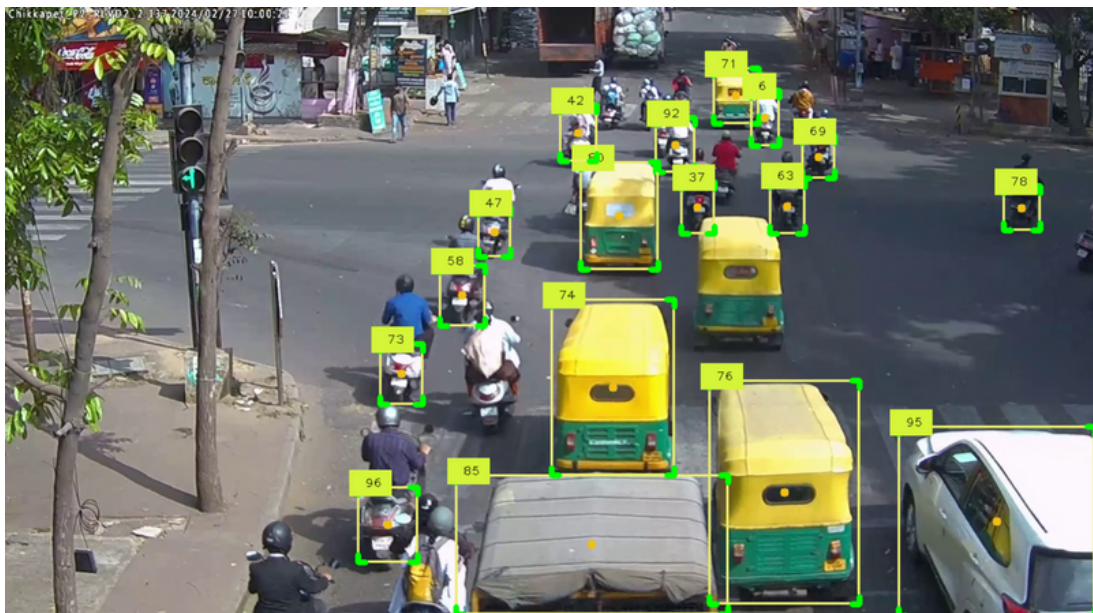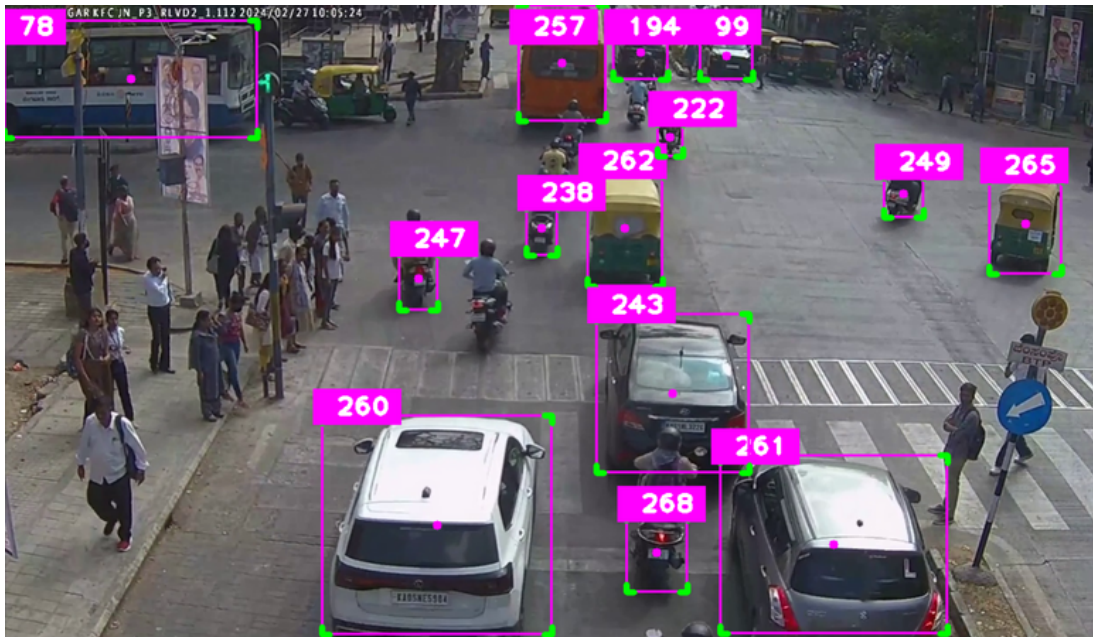
Signal Switching Algorithm

The Signal Switching Algorithm sets the green signal timer according to traffic density returned by the vehicle detection module, and updates the red signal timers of other signals accordingly. It also switches between the signals cyclically according to the timers.

The algorithm records the previous green signal time for each lane and calculates the green signal time for each lane by averaging the previous three cycles' green signal times. After this, the green signal time for the signal is calculated and assigned to it, and the red signal times of other signals are adjusted accordingly. The algorithm can be scaled up or down to any number of signals at an intersection.

The following factors were considered while developing the algorithm:
1. The processing time of the algorithm to calculate traffic density and then the green light duration.
2. Number of lanes
3. Total count of vehicles of each class like cars, trucks, motorcycles, etc.
4. Traffic density calculated using the above factors
5. Time added due to lag each vehicle suffers during start-up and the non-linear increase in lag suffered by the vehicles which are at the back [13]
6. The average speed of each class of vehicle when the green light starts i.e. the average time required to cross the signal by each class of vehicle [14]
7. The minimum and maximum time limit for the green light duration - to prevent starvation

Working of the algorithm
When the algorithm is first run, the default time is set for the first signal of the first cycle and the times for all other signals of the first cycle and all signals of the subsequent cycles are set by the algorithm. A separate unique id is started which handles the detection of vehicles for each direction and the main counter handles the timer of the current signal. When the green light timer of the current signal (or the red light timer of the next green signal) reaches 0 seconds, the system calculates the average green signal time of the last three cycles for each lane in that particular direction. Based on these calculations, the timer for the next green signal is set accordingly. All this happens in the background while the main thread is counting down the timer of the current green signal. This allows the assignment of the timer to be seamless and hence prevents any lag. Once the green timer of the current signal becomes zero, the next signal becomes green for the amount of time set by the algorithm.

The system calculates the green signal time for the next direction. This gives the system a total of 5 seconds (equal to the value of the yellow signal timer) to calculate the green signal time and accordingly set the times of this signal as well as the red signal time of the next signal. To find the optimum green signal time based on the number of vehicles of each class at a signal, the average speeds of vehicles at startup and their acceleration times were used, from which an estimate of the average time each class of vehicle takes to cross an intersection was found. The green signal time is then calculated using the formula below.

$$\textbf{Green Signal Time = Density factor} \times \textbf{Predicted taffic}_{\text{arm wise}}$$

$$\textbf{Predicted traffic} = \frac{\sum_{n=-1}^{-3} \textbf{Vehicle Count}}{3}$$

$$\textbf{Density factor} = \frac{\text{max signal time}}{\textbf{max Traffic on the lane}}$$

where:
● Green Signal Time :- it is time when vehicle can move from the signal which is calculated
.   by the formula
● Density Factor:- it gives the factor in which no vehicle can pass through the junction
● Predicted Traffic :- it a estimated traffic of the next signal which is according to the lane
● no Of Lanes:- is the number of lanes at the intersection.

The average time each class of vehicle takes to cross an intersection can be set according to the location, i.e., region-wise, city-wise, locality-wise, or even intersection-wise based on the characteristics of the intersection, to make traffic management more effective. Data from the respective transport authorities can be analyzed for this.

The signals switch in a cyclic fashion and not according to the densest direction first. This is in accordance with the current system where the signals turn green one after the other in a fixed pattern and does not need the people to alter their ways or cause any confusion. The order of signals is also the same as the current system, and the yellow signals have been accounted for as well.

Order of signals: Red → Green → Yellow → Red

Simulation Module

 A simulation was developed from scratch using Pygame to simulate real-life traffic. It assists in visualizing the system and comparing it with the existing static system. It contains a 4-way intersection with 4 traffic signals. Each signal has a timer on top of it, which shows the time remaining for the signal to switch from green to yellow, yellow to red, or red to green. Each signal also has the number of vehicles that have crossed the intersection displayed beside it. Vehicles such as cars, bikes, buses, trucks, and rickshaws come in from all directions. In order to make the simulation more realistic, some of the vehicles in the rightmost lane turn to cross the intersection. Whether a vehicle will turn or not is also set using random numbers when the vehicle is generated. It also contains a timer that displays the time elapsed since the start of the simulation. Additionally, we have added pedestrian crossing for 10 seconds after the completion of every cycle.

Key steps in development of simulation

1. Took an image of a 4-way intersection as background.
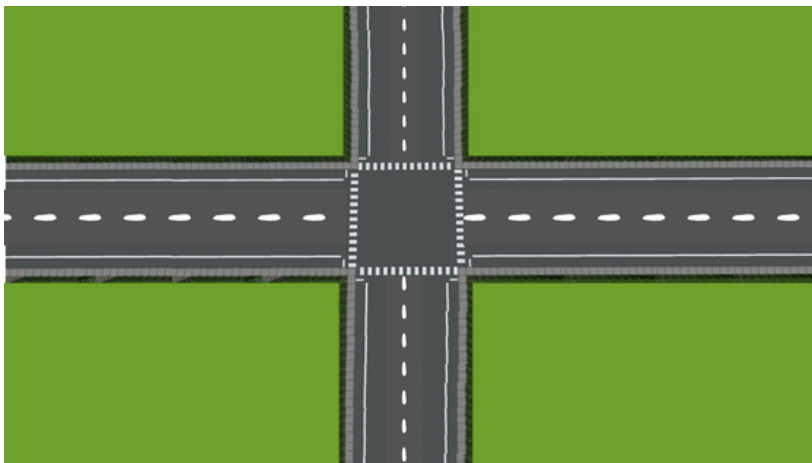
2. Gathered top-view images of car, bike, bus, truck, and rickshaw. Resized them.

3.

4. Rotated them for display along different directions.

5. Gathered images of traffic signals - red, yellow, and green.

6. Code: For rendering the appropriate image of the signal depending on whether it is red, green, or yellow.

7. Code: For displaying the current signal time i.e. the time left for a green signal to turn yellow or a red signal to turn green or a yellow signal to turn red. The green time of the signals is set according to the algorithm, by taking into consideration the number of vehicles at the signal. The red signal times of the other signals are updated accordingly.

8. Generation of vehicles according to direction, lane, vehicle class, and whether it will turn or not all set by random variables. Distribution of vehicles among the 4 directions can be controlled. A new vehicle is generated and added to the simulation after every 0.75 seconds.

9. Code: For how the vehicles move, each class of vehicle has different speed, there is a gap between 2 vehicles, if a car is following a bus, then its speed is reduced so that id does not crash into the bus.

10. Code: For how they react to traffic signals i.e. stop for yellow and red, move for green. If they have passed the stop line, then continue to move if the signal turns yellow.

11. Code: For displaying the number of vehicles that have crossed the signal.

12. Code: For displaying the time elapsed since the start of the simulation.

13. Code: For updating the time elapsed as simulation progresses and exiting when the time elapsed equals the desired simulation time, then printing the data that will be used for comparison and analysis.

14. To make the simulation closer to reality, even though there are just 2 lanes in the image, we add another lane to the left of this which has only bikes, which is generally the case in many cities.

15. Vehicles turning and crossing the intersection in the simulation to make it more realistic.

Following are some images of the demo simulation:
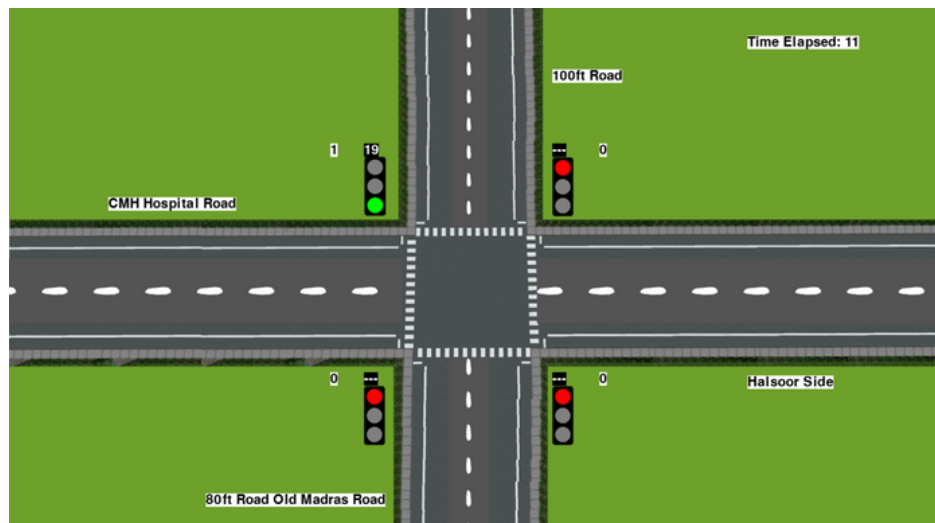
(i): Simulation just after start showing red and green lights, green signal time counting down from a default of 20 and red time of next signal blank. When the signal is red, we display a blank value till it reaches 10 seconds. The number of vehicles that have crossed can be seen beside the signal, which are all 0 initially. The time elapsed since the start of simulation can be seen on top right.
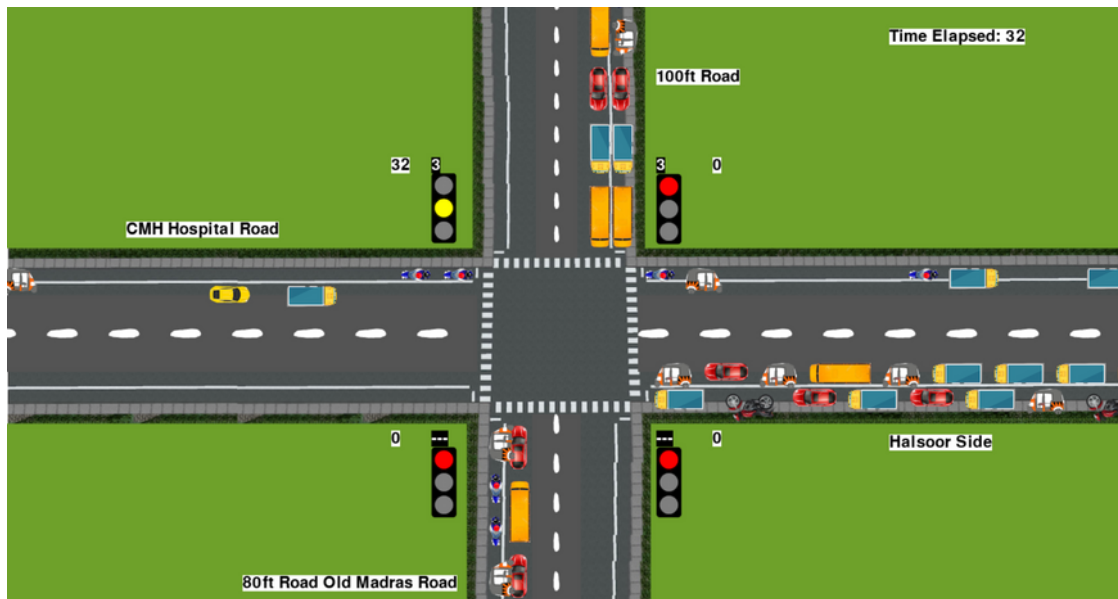

(ii): Simulation showing yellow light and red time for next signal. When red signal time is less than 10 seconds, we show the countdown timer so that vehicles can start up and be prepared to move once the signal turns green.
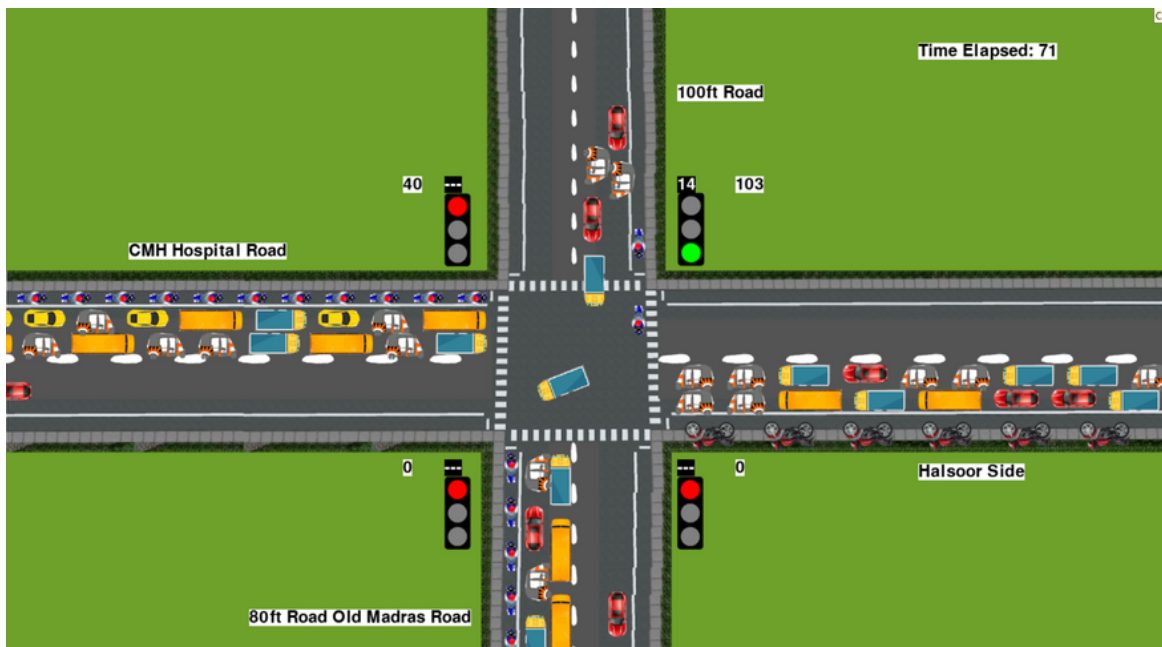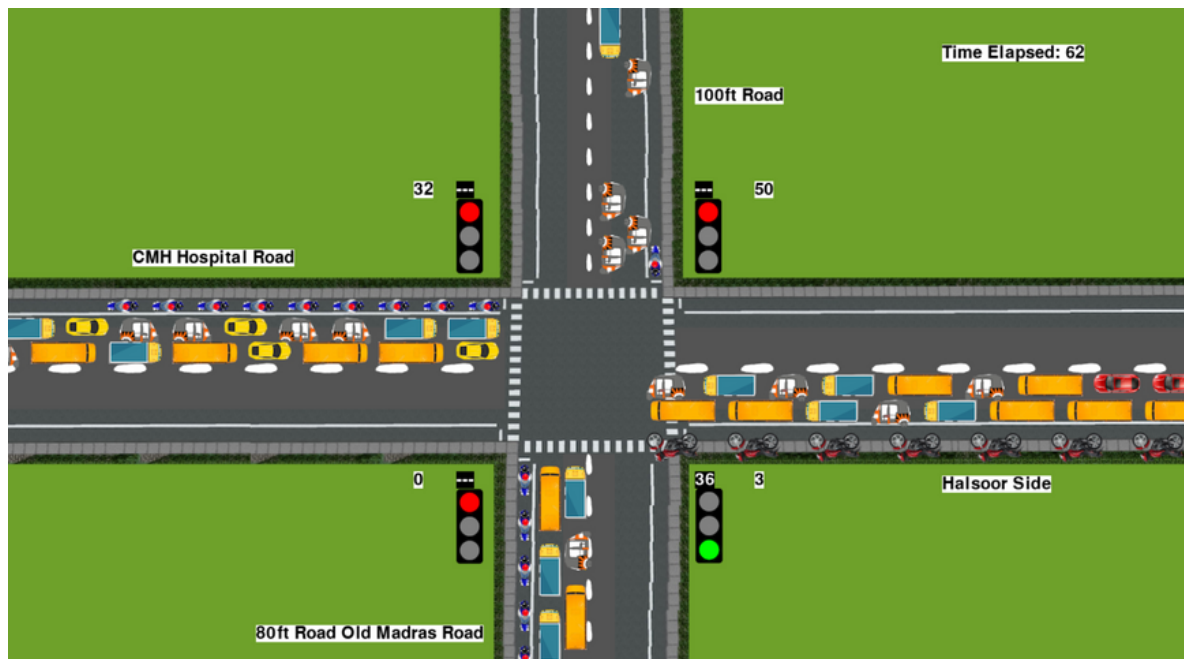
(iii): Simulation showing vehicles turning
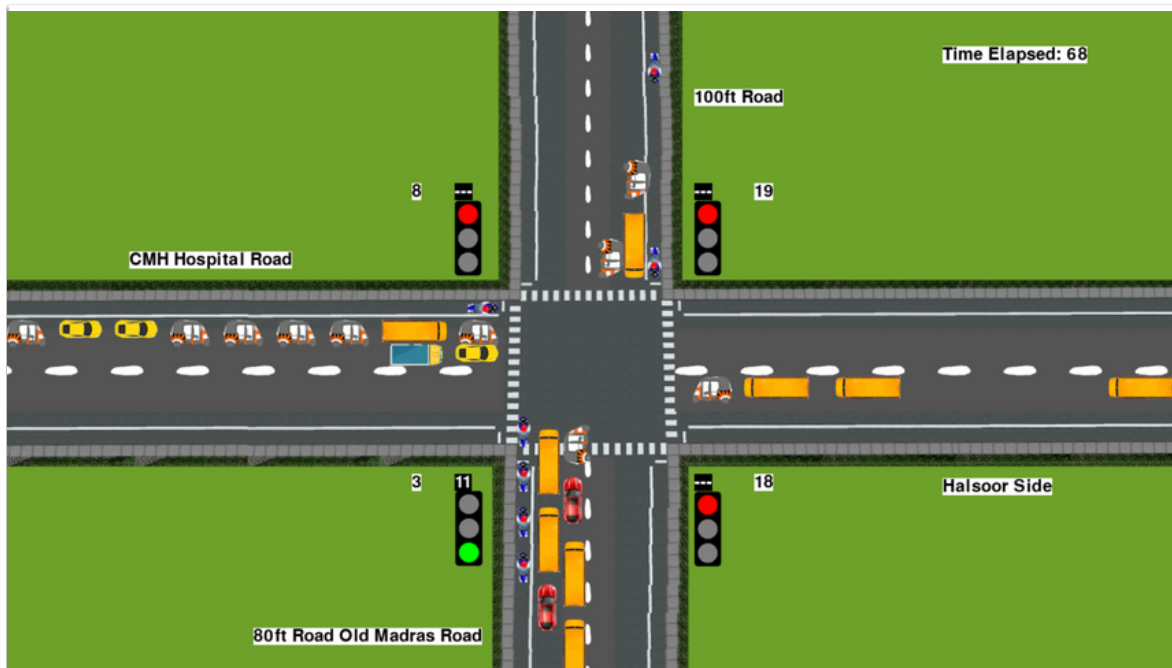
(iv): Simulation showing green time of signal for vehicles moving up set to 11 seconds according to the vehicles in that direction. As we can see, the number of vehicles is quite less here as compared to the other lanes. With the current static system, the green signal time would have been the same for all signals, like 30 seconds. But in this situation, most of this time would have been wasted. But our adaptive system detects that there are only a few vehicles, and sets the green time accordingly, which is 11 seconds in this case.
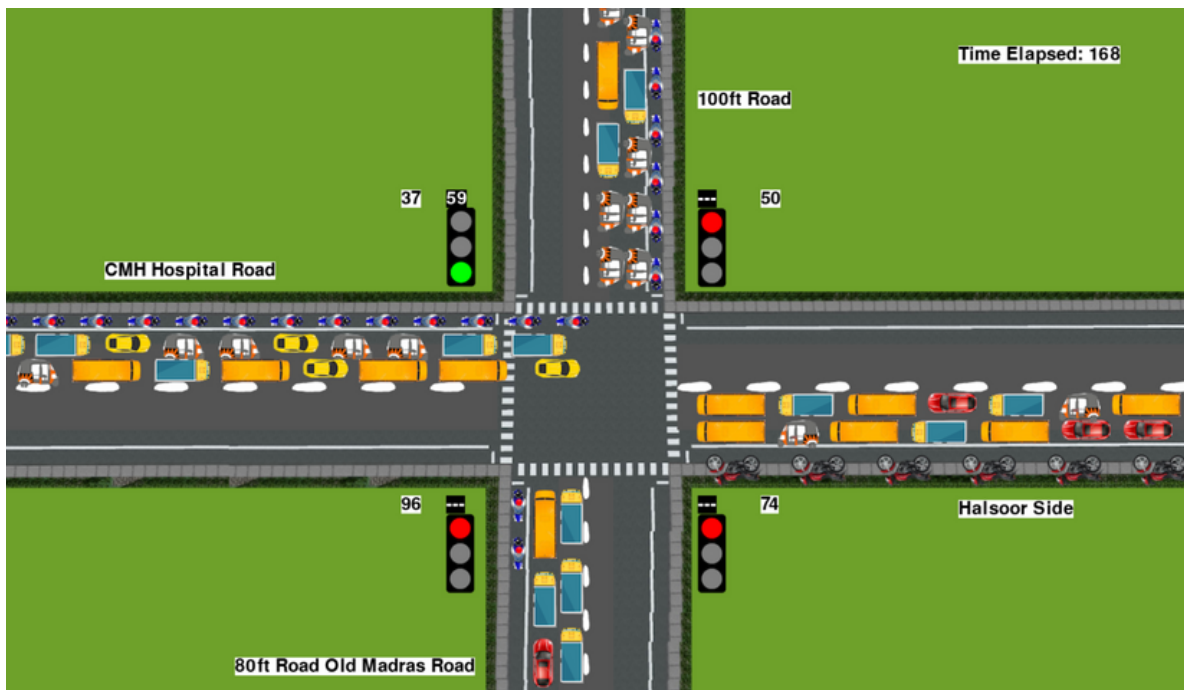
(v): Simulation showing green time of signal for vehicles moving right set to 59 seconds according to the vehicles in that direction.

(vi): Simulation showing green time of signal for vehicles moving left set to 36 seconds according to the vehicles in that direction.
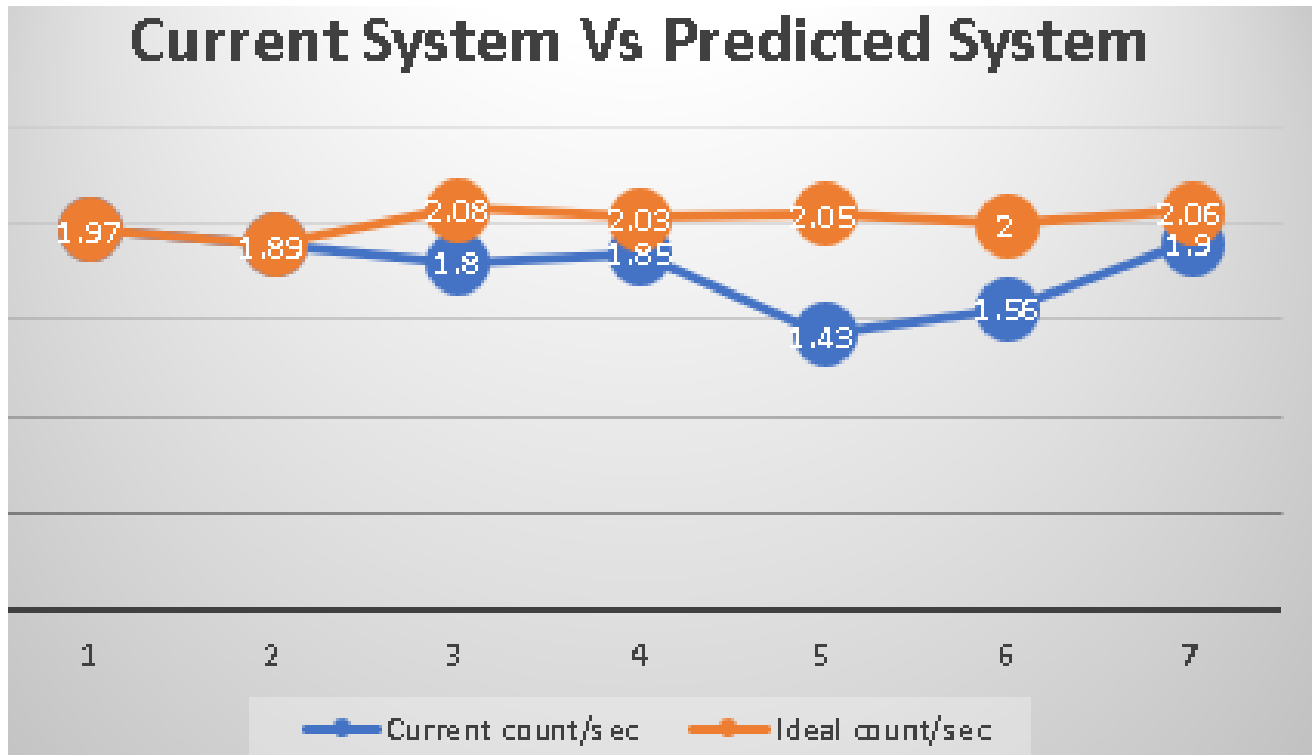
Results

We compare the vehicle count per unit time for each lane at the given road junction and present a comparison between the current system and the ideal situation with the same distribution.

The results obtained are stored in a tabulated format, where each cell represents the count per time of each lane for that particular cycle. Additionally, the total time and vehicle count for each cycle are recorded.

	Current Situation	(Indira Nagar)				
Cycle No.	Lane 1 (CMH ROAD) count/Time	Lane 2 (100ft road) count/Time	Lane 3 (OLD MADRAS count/Time	Lane 4 (HALSOOR) count/Time	Total count	Total Tim
1	65/35	84/50	70/30	87/40	306	155
2	53/35	88/50	85/30	68/40	294	155
3	62/35	92/50	62/30	72/40	288	155
4	69/35	83/50	60/30	68/40	280	155
5	51/35	73/50	40/30	59/40	223	155
6	76/35	82/50	30/30	50/40	238	155
7	67/35	98/50	63/30	65/40	293	155
					1922	1085

	Predicted System	(Indra Nagar)				
Cycle No.	Lane 1 (CMH ROAD) count/Time	Lane 2 (100ft road) count/Time	Lane 3 (OLD MADRAS ROAD)	Lane 4 (HALSOOR) count/Time	Total Count	Total Tim
1	65/35	84/50	70/30	87/40	306	155
2	53/35	88/50	85/30	68/40	294	155
3	59/36	83/46	77/27	77/35	296	142
4	61/38	88/46	72/25	73/33	295	145
5	60/37	87/48	69/25	69/30	285	139
6	60/37	82/45	54/20	66/29	263	131
7	65/35	79/44	44/15	62/27	250	121
					1989	833

Current System Vs Predicted System

Legend: Current count/sec (blue), Ideal count/sec (orange)

Data points:
- Ideal count/sec: 1.97, 1.89, 2.08, 2.03, 2.05, 2, 2.06
- Current count/sec: 1.8, 1.85, 1.43, 1.56, 1.9

As seen in the above tables, we observe that the same number of vehicles are processed in less time in the proposed system compared to the current situation. Previously, it took approximately 1055 seconds over seven cycles to process a similar volume of vehicles. However, in the ideal situation, we achieve the same throughput within 833 seconds for the same seven cycles. This implies that our proposed system is 20% more efficient compared to the current system.

Conclusion

Thus, the proposed system sets the green signal time adaptively according to the traffic density at the signal and ensures that the direction with more traffic is allotted a green signal for longer duration of time as compared to the direction with lesser traffic. This will lower the unwanted delays, and reduce congestion and waiting time which in turn will reduce the fuel consumption and pollution.

According to simulation results, the system shows about 20% improvement over the current system in terms of the number of vehicles crossing the intersection, which is a significant improvement. This system can thus be integrated with the CCTV cameras in major cities in order to facilitate better management of traffic.