Type : Lowpass
Response : Butterworth
Order : 4
Number of Stages : 2

Filter Design Report

Design : Lowpass Filter - 4th order Butterworth
Design ID: 5

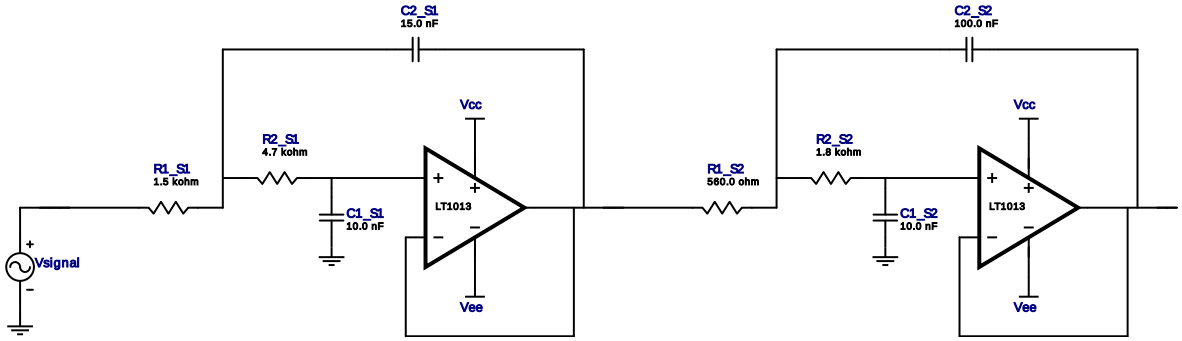

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty
1.	A1_S1	Texas Instruments Inc.	LT1013	GbwTyp= 0.7MHz VccMax= 44V VccMin= 4V	1
2.	A1_S2	Texas Instruments Inc.	LT1013	GbwTyp= 0.7MHz VccMax= 44V VccMin= 4V	1
3.	C1_S1	Generic	Ideal	Cap= 10.0 nF Tolerance= 2.0 %	1
4.	C1_S2	Generic	Ideal	Cap= 10.0 nF Tolerance= 2.0 %	1
5.	C2_S1	Generic	Ideal	Cap= 15.0 nF Tolerance= 2.0 %	1
6.	C2_S2	Generic	Ideal	Cap= 100.0 nF Tolerance= 2.0 %	1
7.	R1_S1	Generic	Ideal	Res= 1500.0ohm Tolerance= 1%	1
8.	R1_S2	Generic	Ideal	Res= 560.0ohm Tolerance= 1%	1
9.	R2_S1	Generic	Ideal	Res= 4700.0ohm Tolerance= 1%	1
10.	R2_S2	Generic	Ideal	Res= 1800.0ohm Tolerance= 1%	1

Sensitivity Analysis

#	Name	Series	Tolerance
1.	Cap	E48	2%
2.	Res	E96	1%

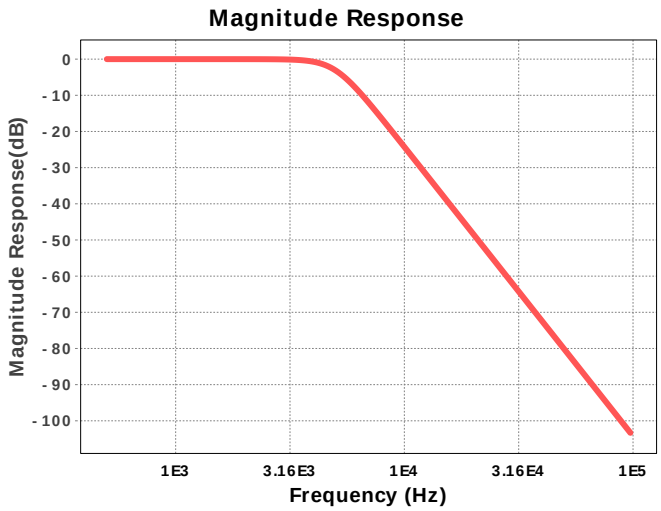

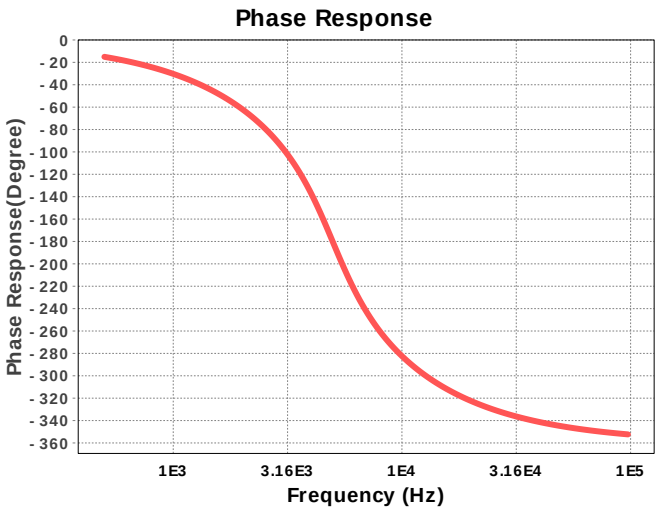

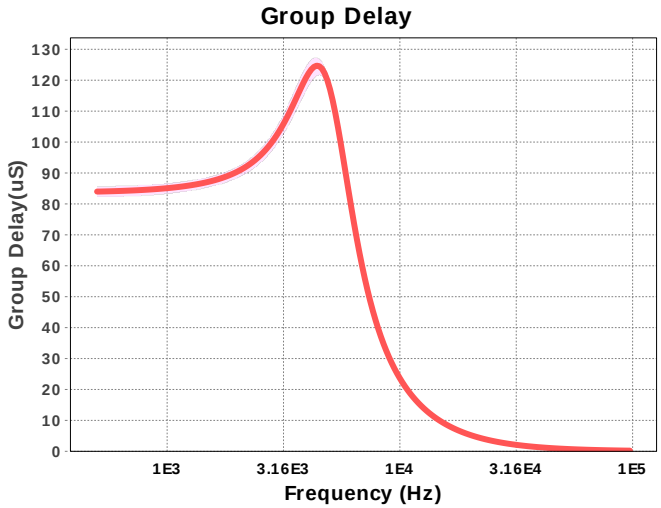

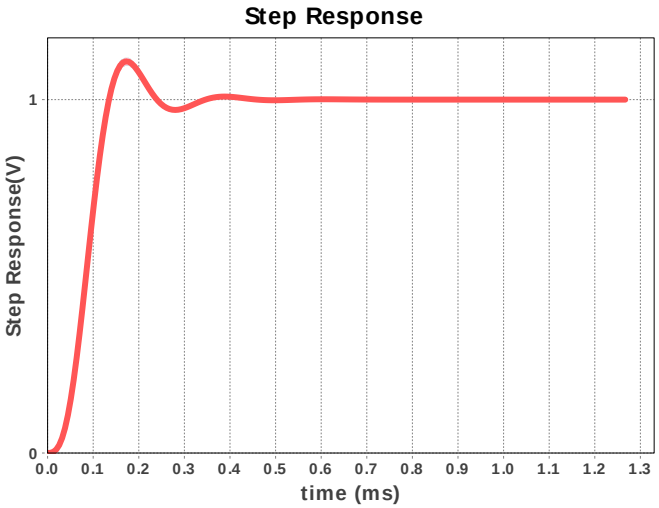

Design Inputs

#	Name	Value	Description
1.	FilterType	lowpass	
2.	FilterResponse	Butterworth	
3.	FilterOrder	4.0	
4.	FilterTopology	Sallen-Key	
5.	NumberOfStages	2.0	
6.	PassbandFrequency	5.0 k	
7.	StopbandAttenuation	-24.098	
8.	StopbandFrequency	10.0 k	
9.	Gain	1.0	
10.	DualSupply	+/-5.00 V	Power supply(s) to active chips
11.	ResistorTolerance	E96	Resistor series - 1% Passive resistor tolerance
12.	CapacitorTolerance	E48	Capacitor series - 2% Passive capacitor tolerance

Design Assistance

1. **LT1013** Product Folder : http://www.ti.com/product/LT1013 : contains the data sheet and other resources.

Filter Stage :1

Cutoff Frequency	4.894 kHz
Min GBW Reqd	270.606 kHz
Stage Gain	1.0 V/V
Stage Q	524.504 m
Stage Topology	Sallen-Key

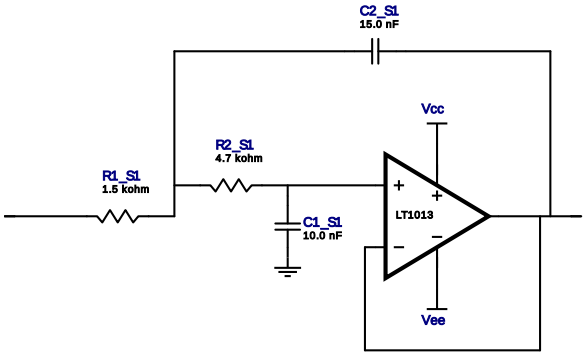

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty
1.	A1_S1	Texas Instruments Inc.	LT1013	GbwTyp= 0.7MHz VccMax= 44V VccMin= 4V	1
2.	C1_S1	Generic	Ideal	Cap= 10.0 nF Tolerance= 2.0 %	1
3.	C2_S1	Generic	Ideal	Cap= 15.0 nF Tolerance= 2.0 %	1
4.	R1_S1	Generic	Ideal	Res= 1500.0ohm Tolerance= 1%	1
5.	R2_S1	Generic	Ideal	Res= 4700.0ohm Tolerance= 1%	1

Filter Stage :2

Cutoff Frequency	5.013 kHz
Min GBW Reqd	653.286 kHz
Stage Gain	1.0 V/V
Stage Q	1.345
Stage Topology	Sallen-Key

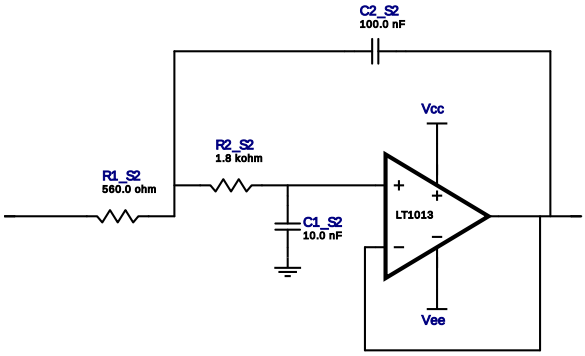

Electrical BOM

#	Name	Manufacturer	Part Number	Properties	Qty
1.	A1_S2	Texas Instruments Inc.	LT1013	GbwTyp= 0.7MHz VccMax= 44V VccMin= 4V	1
2.	C1_S2	Generic	Ideal	Cap= 10.0 nF Tolerance= 2.0 %	1
3.	C2_S2	Generic	Ideal	Cap= 100.0 nF Tolerance= 2.0 %	1
4.	R1_S2	Generic	Ideal	Res= 560.0ohm Tolerance= 1%	1
5.	R2_S2	Generic	Ideal	Res= 1800.0ohm Tolerance= 1%	1