


4 Pinout, pin description, and alternate functions


4.1 Pinout/ballout schematics

Figure 5. LQFP64 pinout

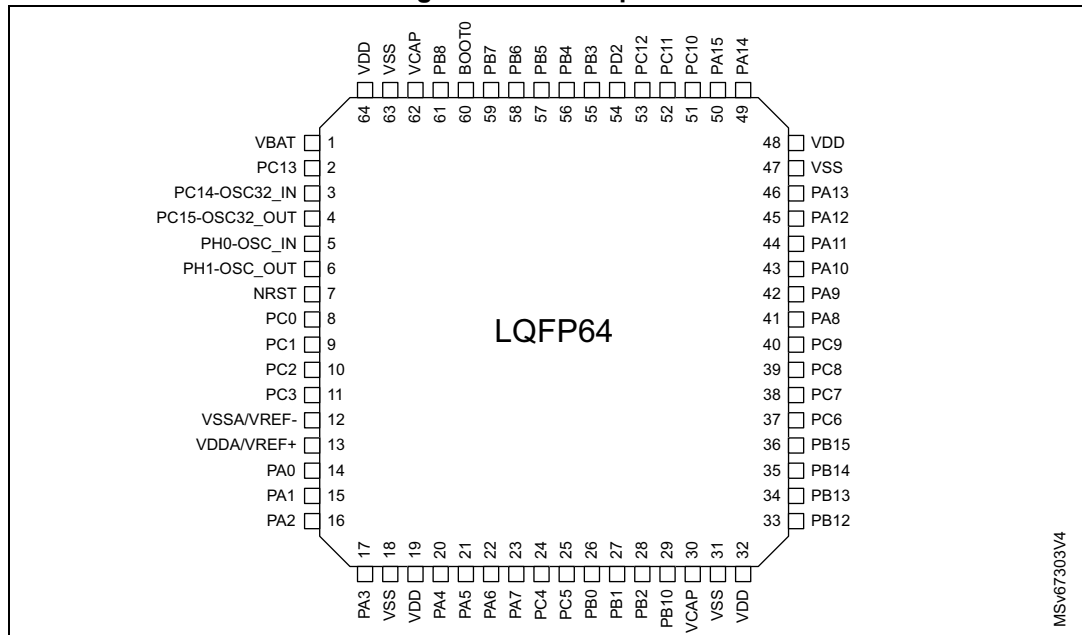


1. The above figure shows the package top view.

Figure 6. VFQFPN68 pinout

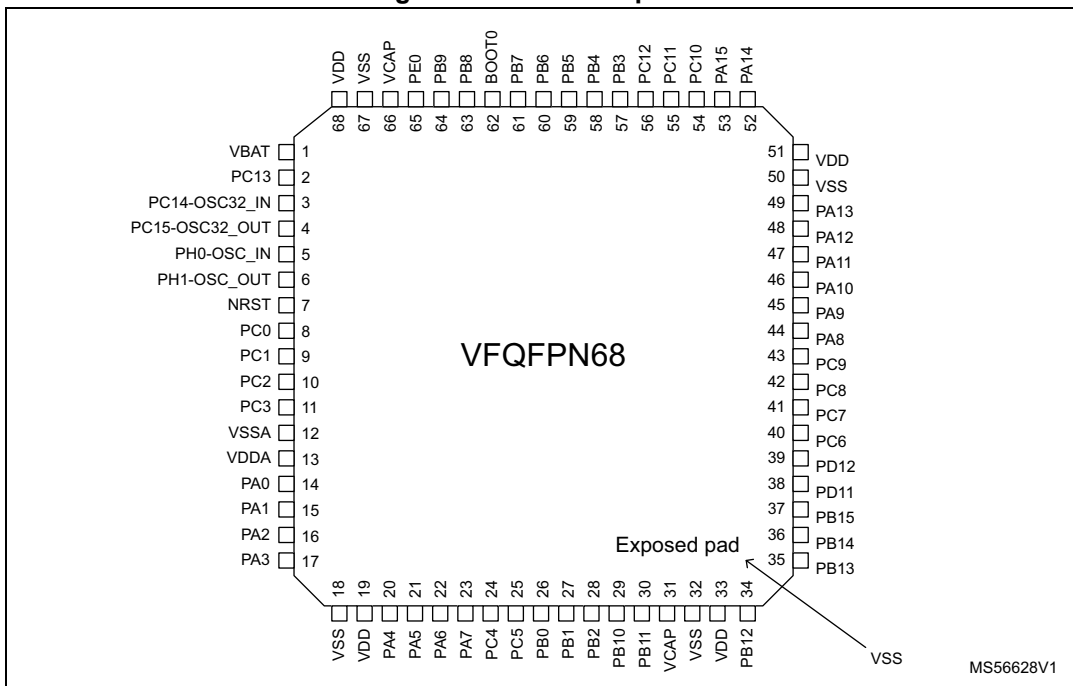


1. The above figure shows the package top view.
2. VSS pads are connected to the exposed pad.

Figure 7. WLCSP80 SMPS ballout

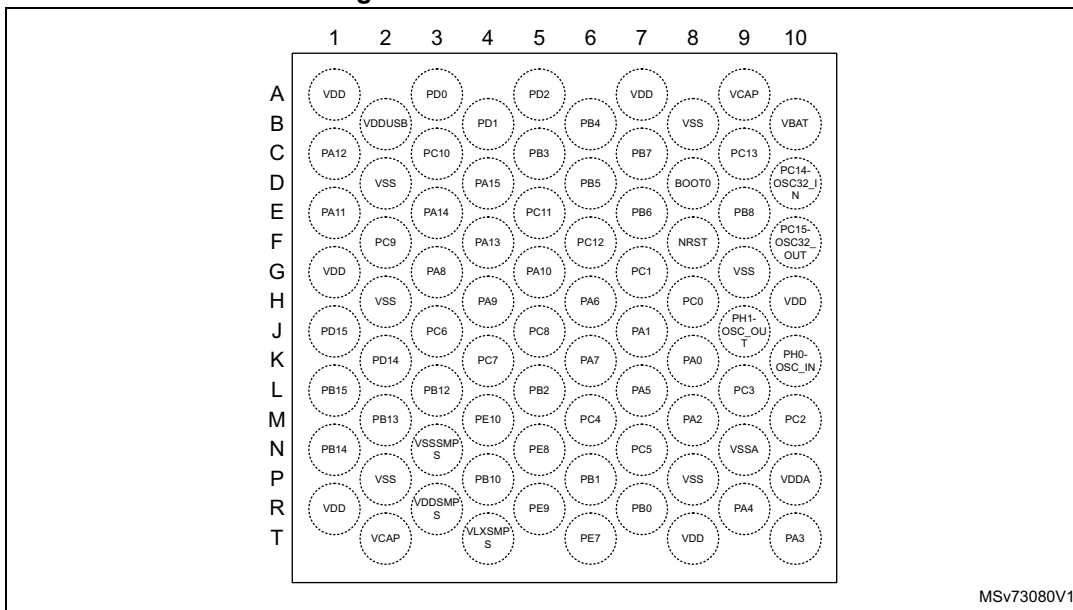


1. The above figure shows the package top view.

Figure 8. LQFP100 pinout

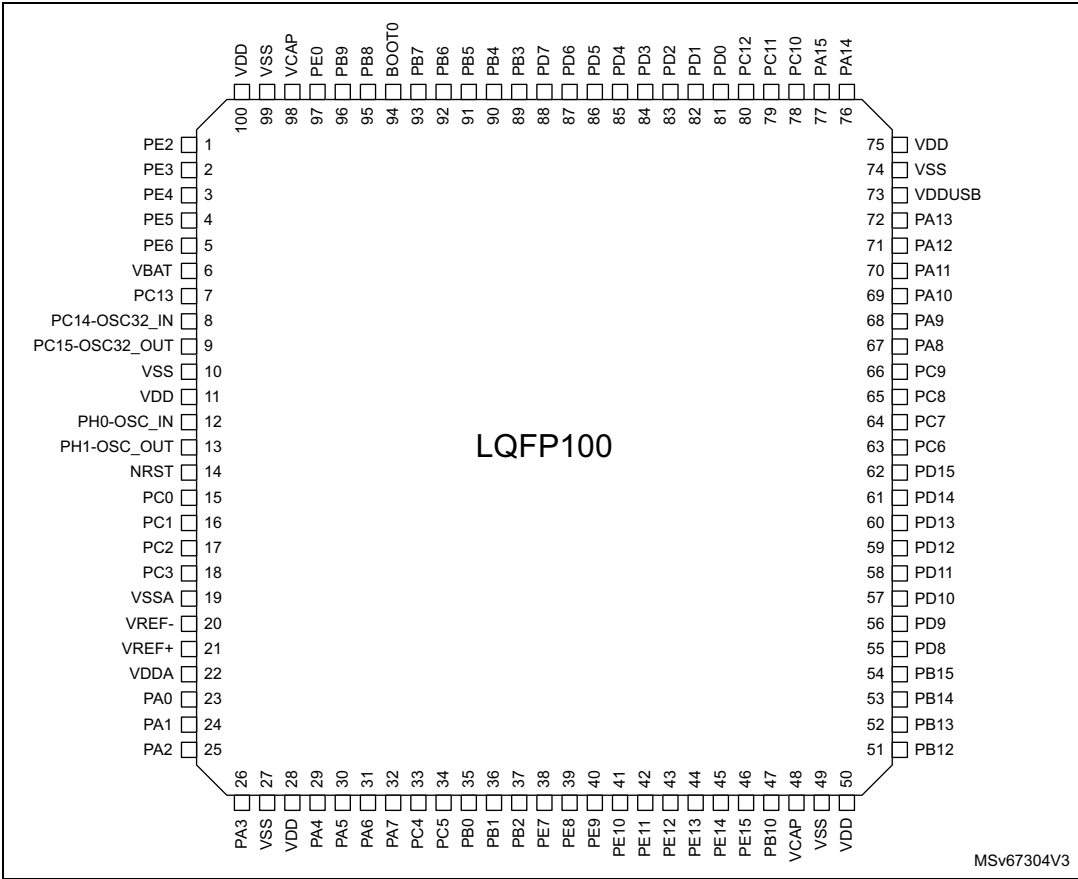

1. The above figure shows the package top view.


Figure 9. LQFP100 SMPS pinout

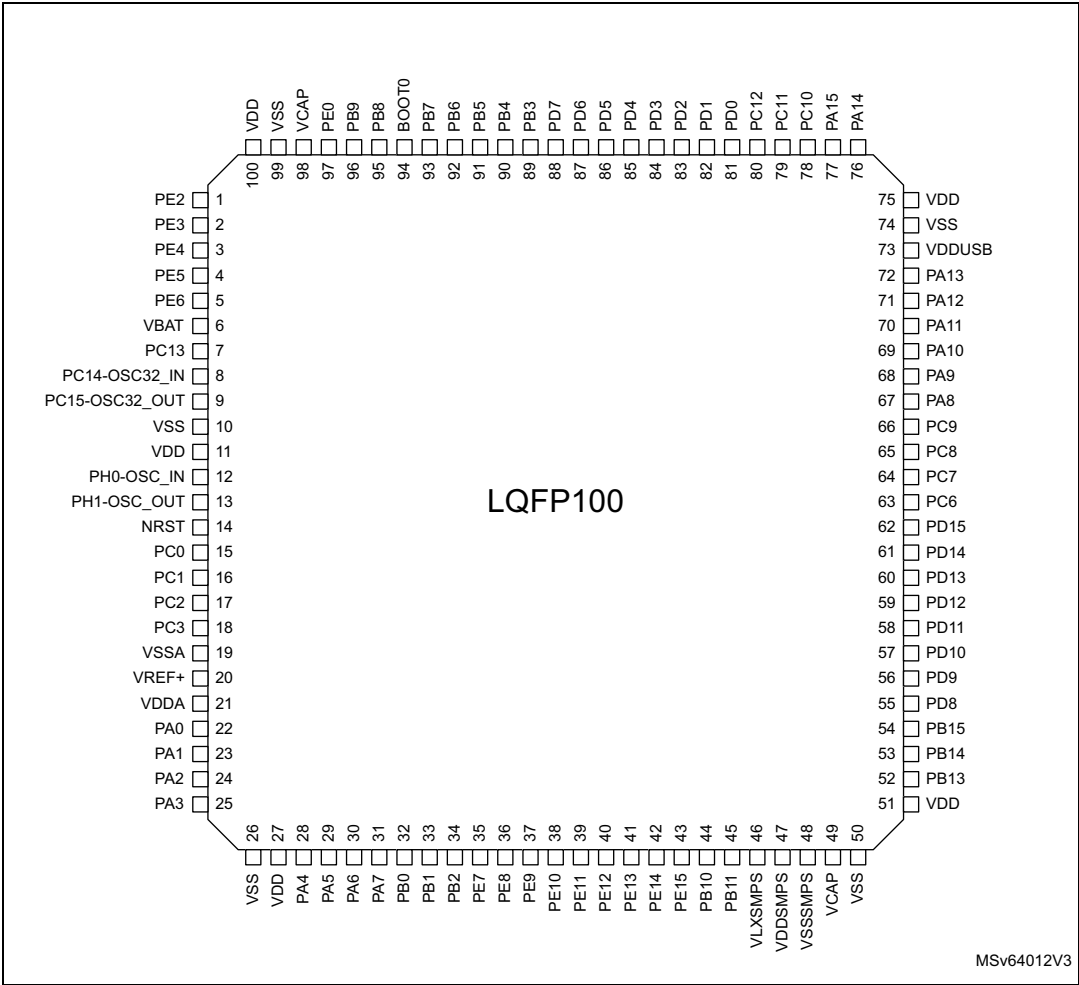

MSv64012V3


1. The above figure shows the package top view.

Figure 10. LQFP144 pinout

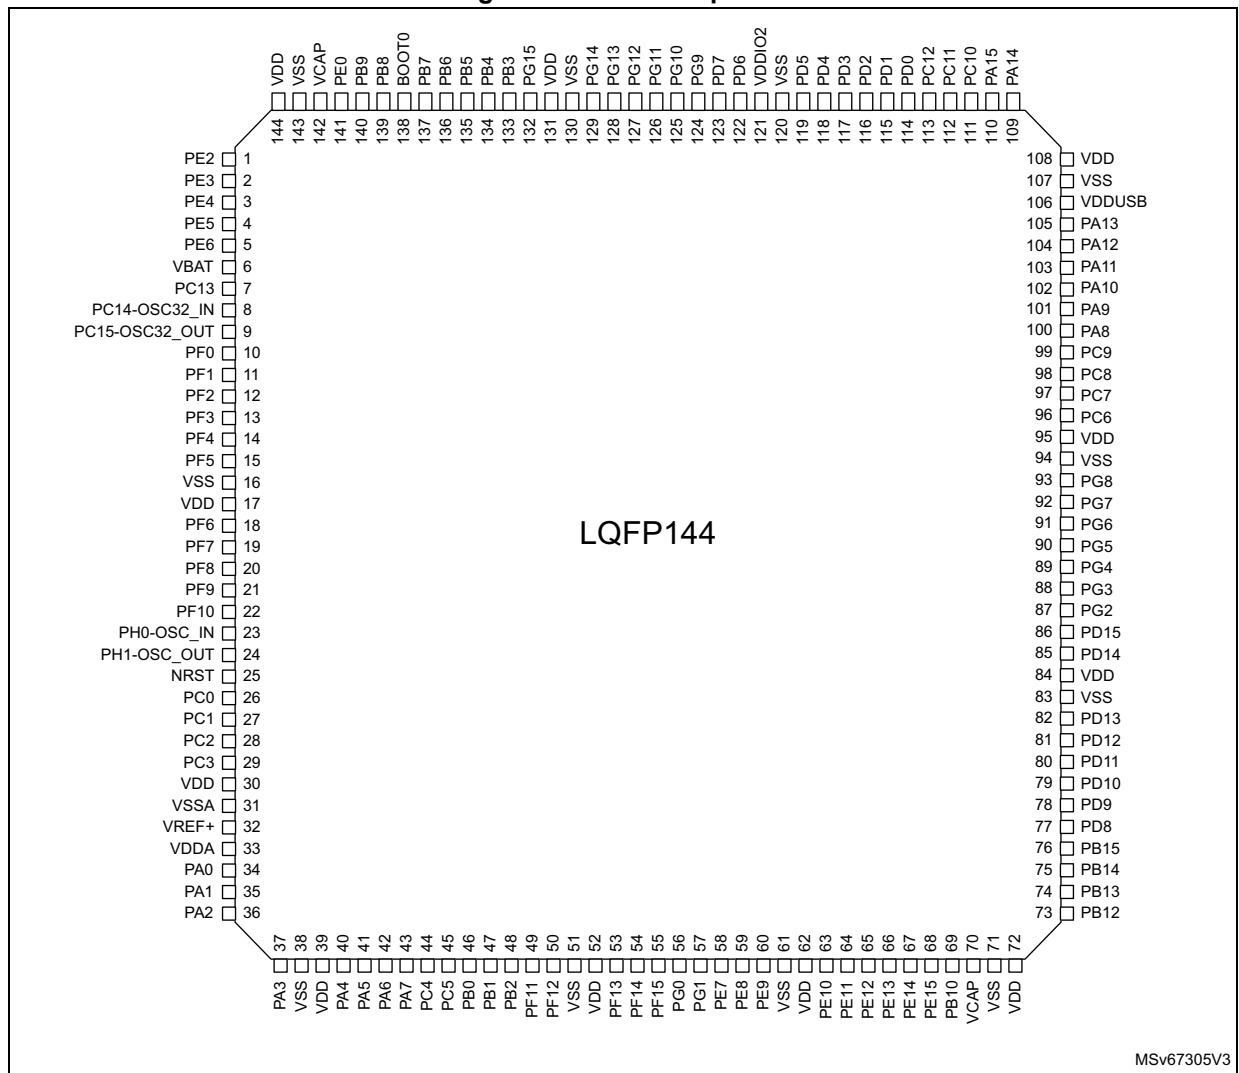


1. The above figure shows the package top view.

Figure 11. LQFP144 SMPS pinout

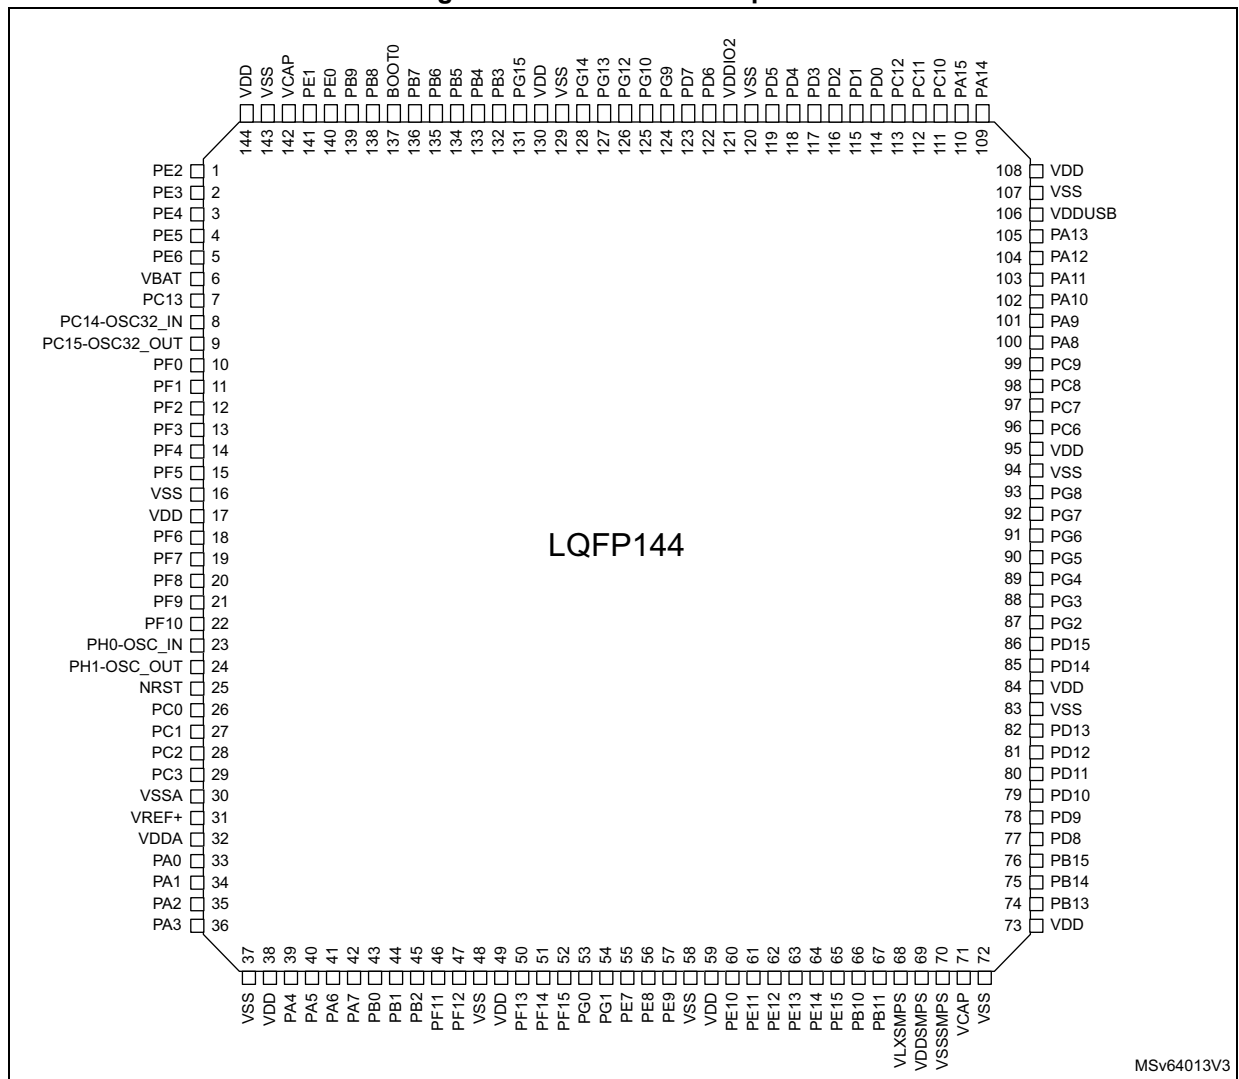


1. The above figure shows the package top view.

Figure 12. UFBGA169 ballout

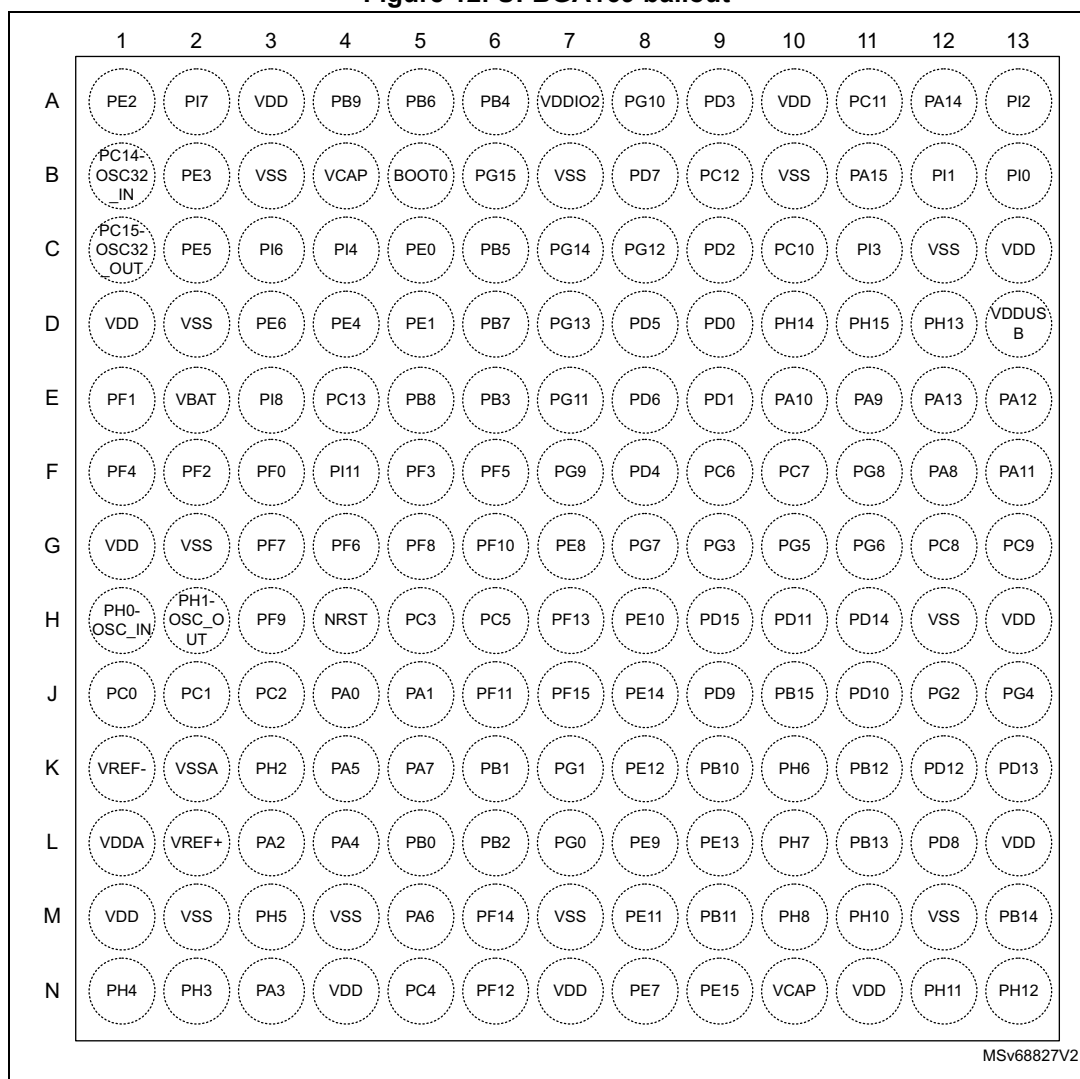

1. The above figure shows the package top view.


Figure 13. UFBGA169 SMPS ballout

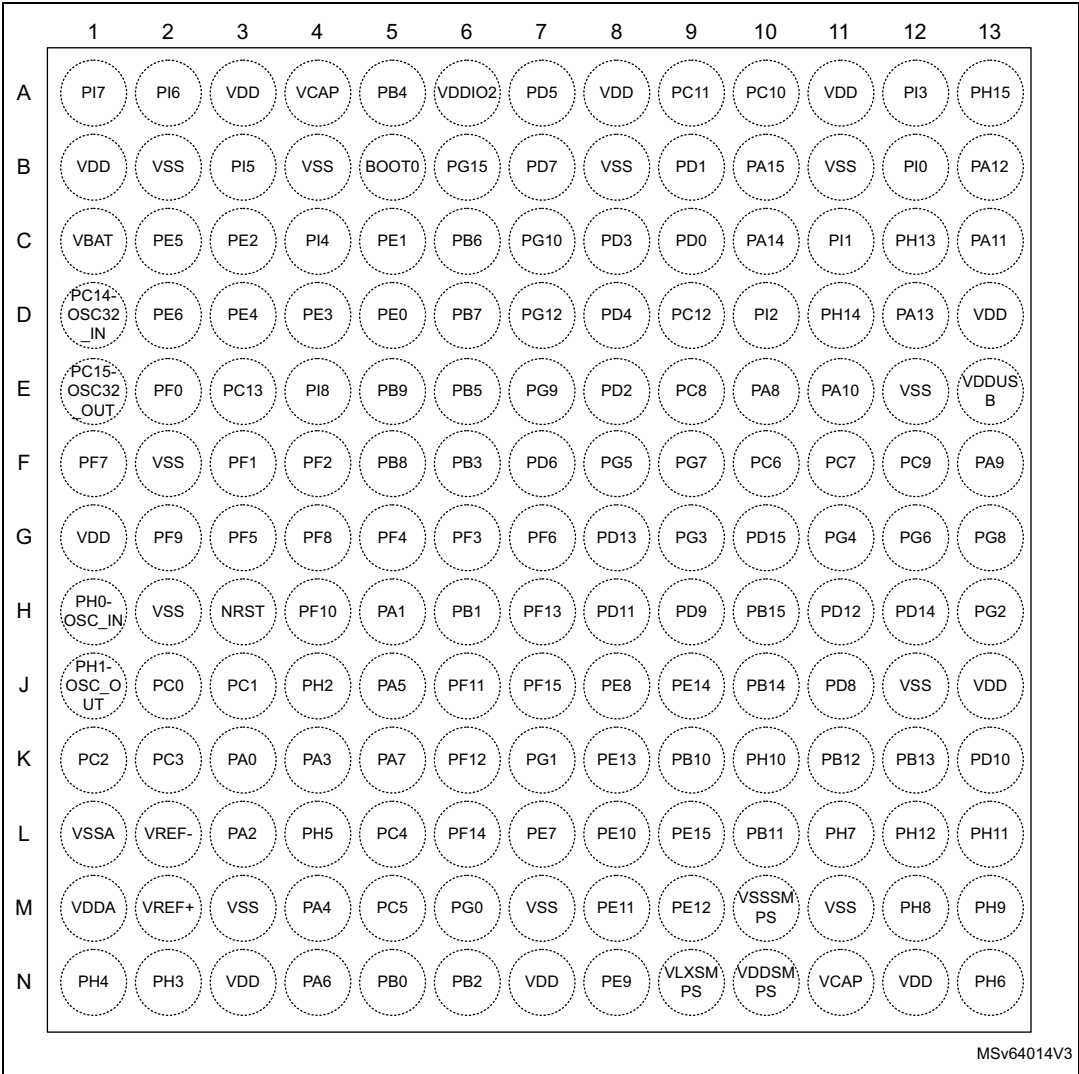

MSv64014V3


1. The above figure shows the package top view.

Figure 14. LQFP176 pinout

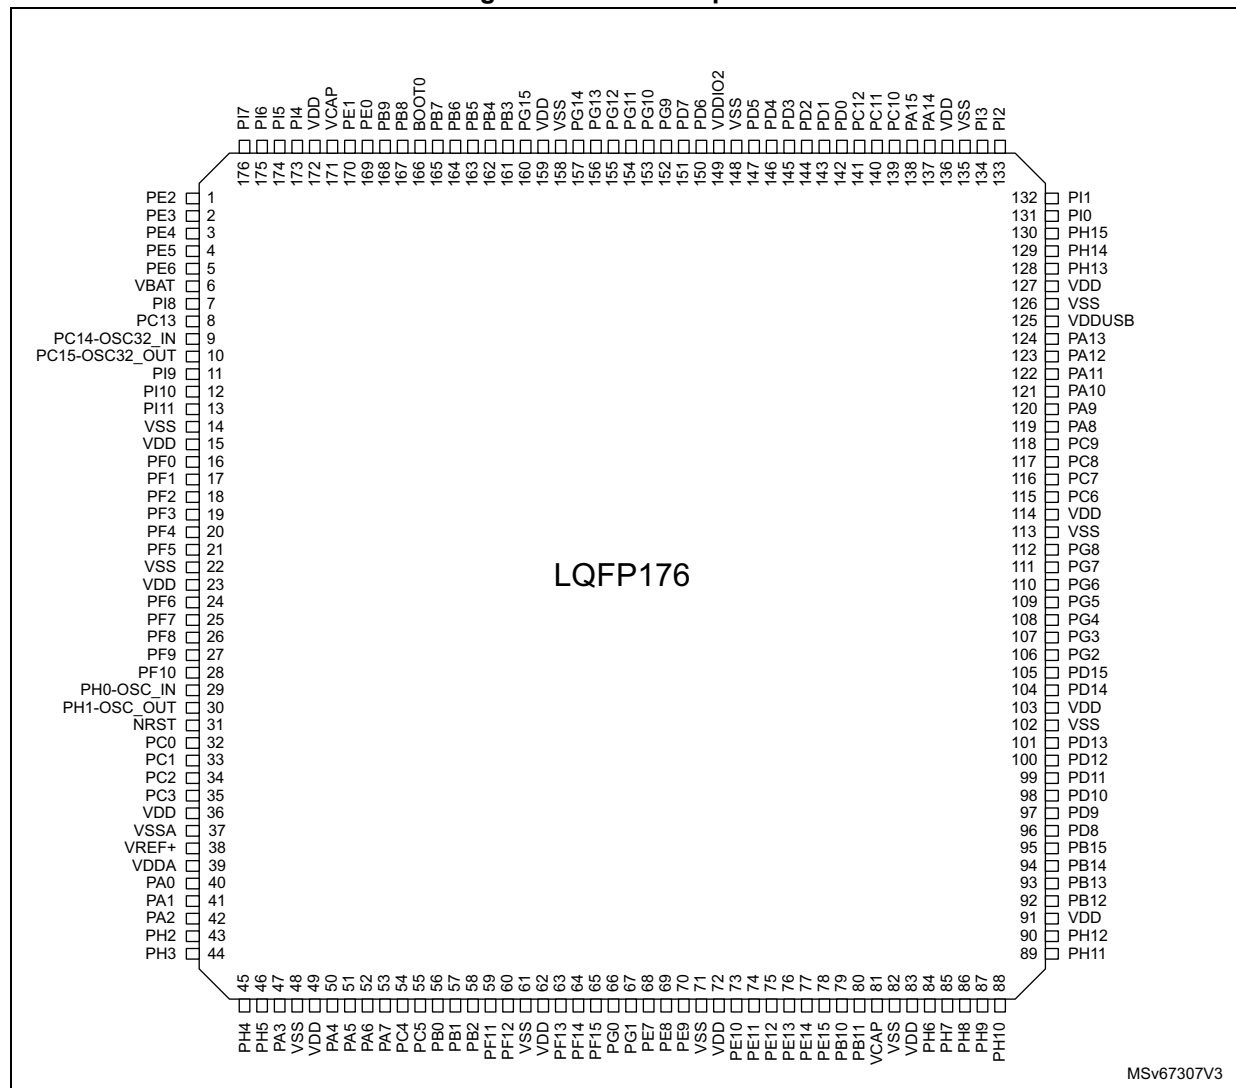


1. The above figure shows the package top view.

Figure 15. LQFP176 SMPS pinout

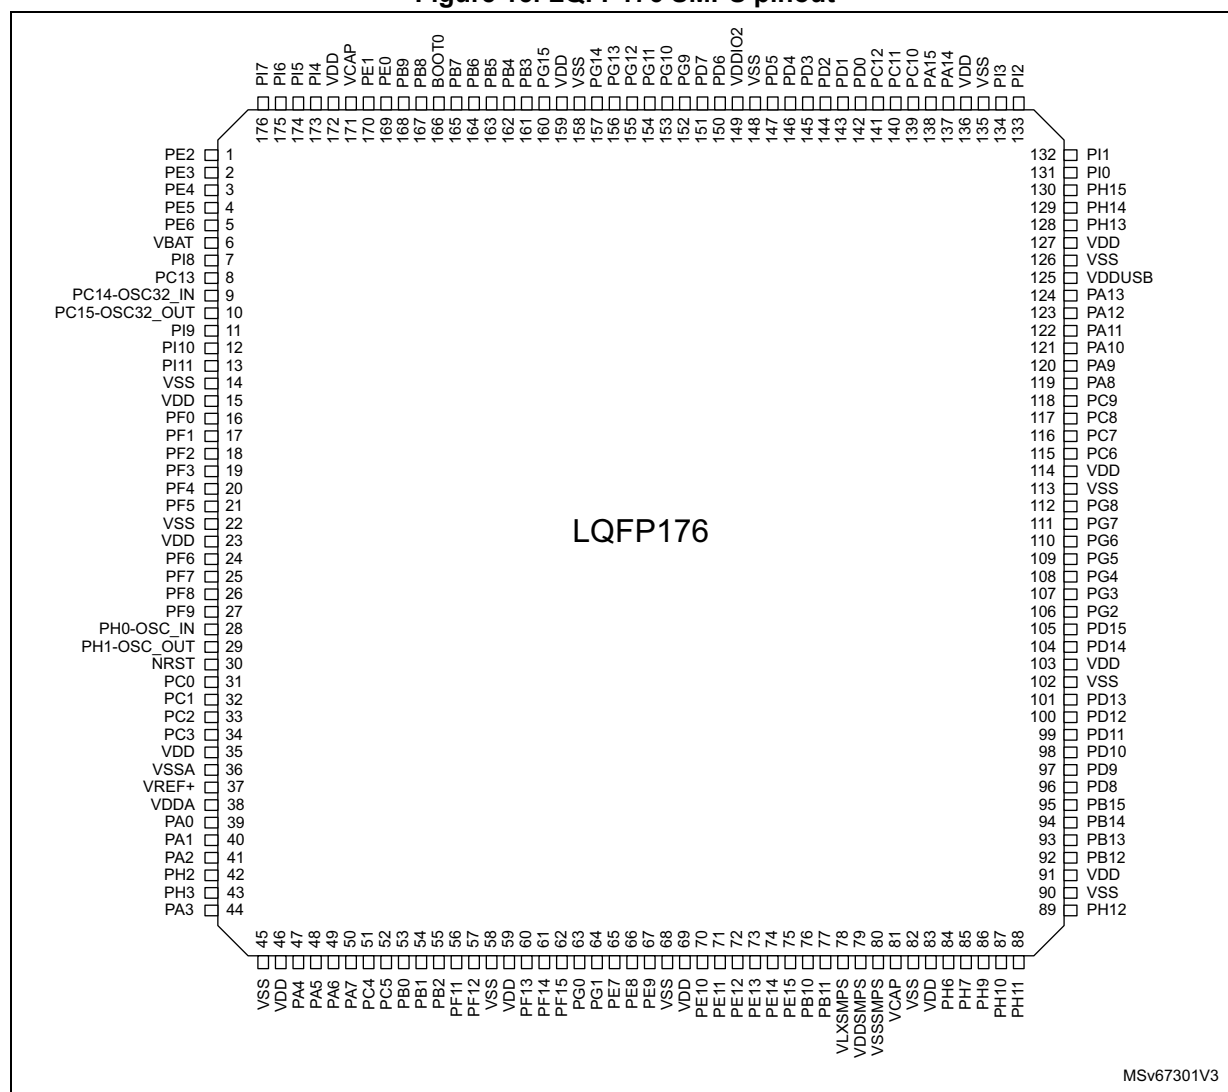


1. The above figure shows the package top view.

Figure 16. UFBGA176+25 ballout

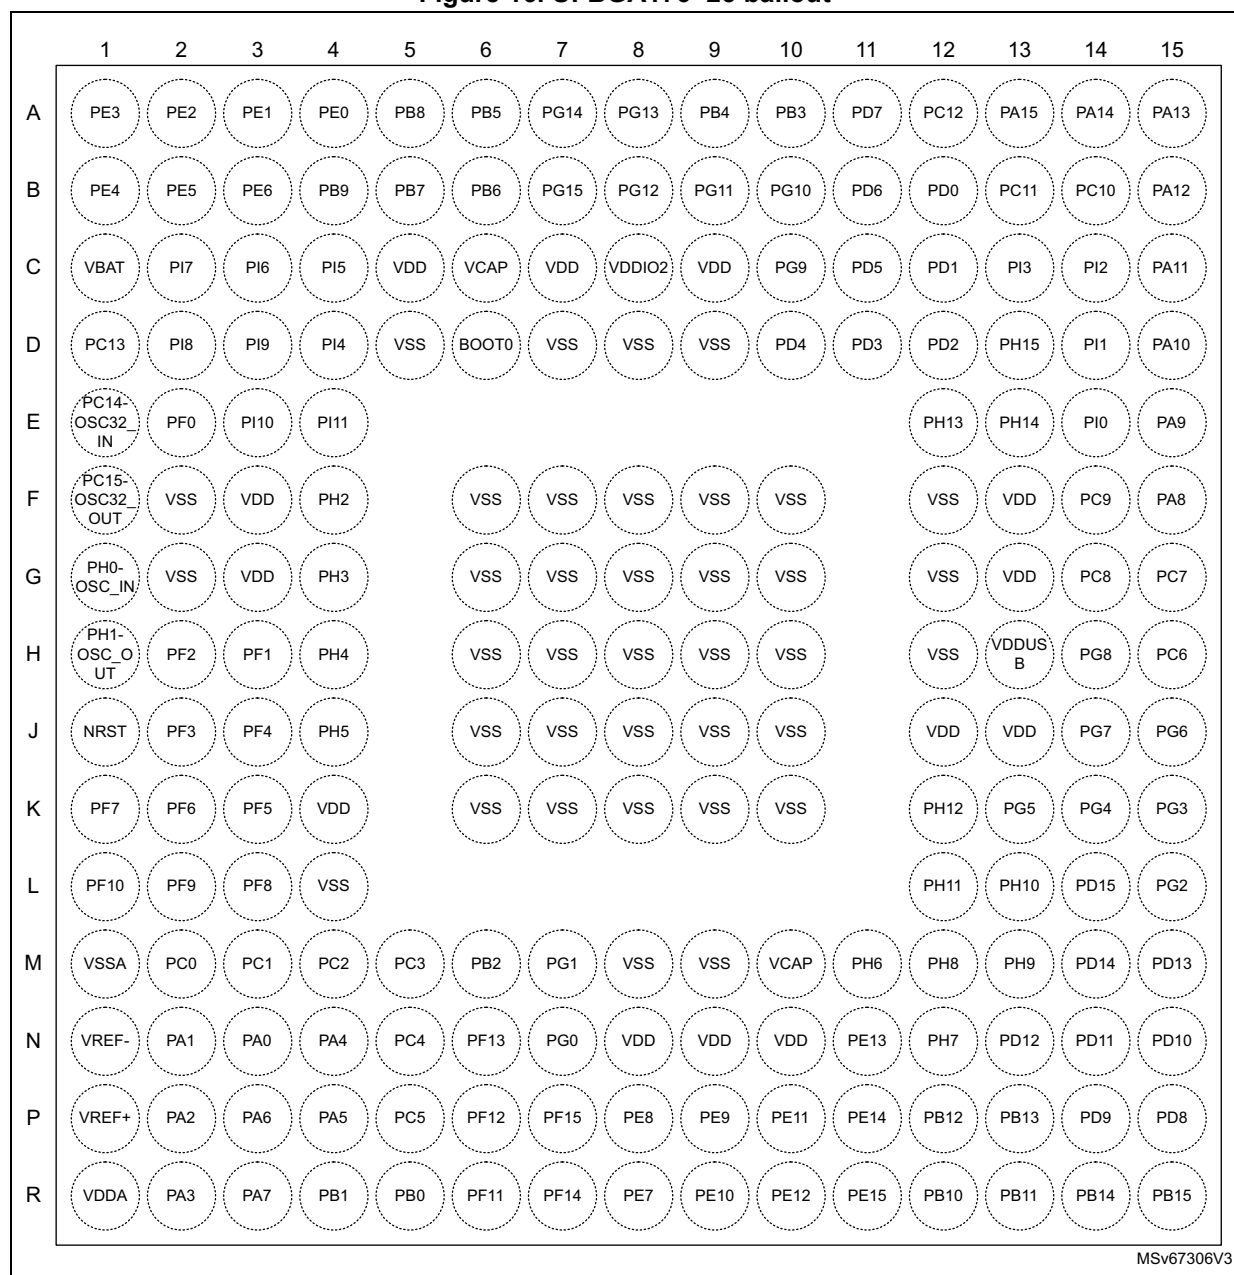

1. The above figure shows the package top view.


Figure 17. UFBGA176+25 SMPS ballout

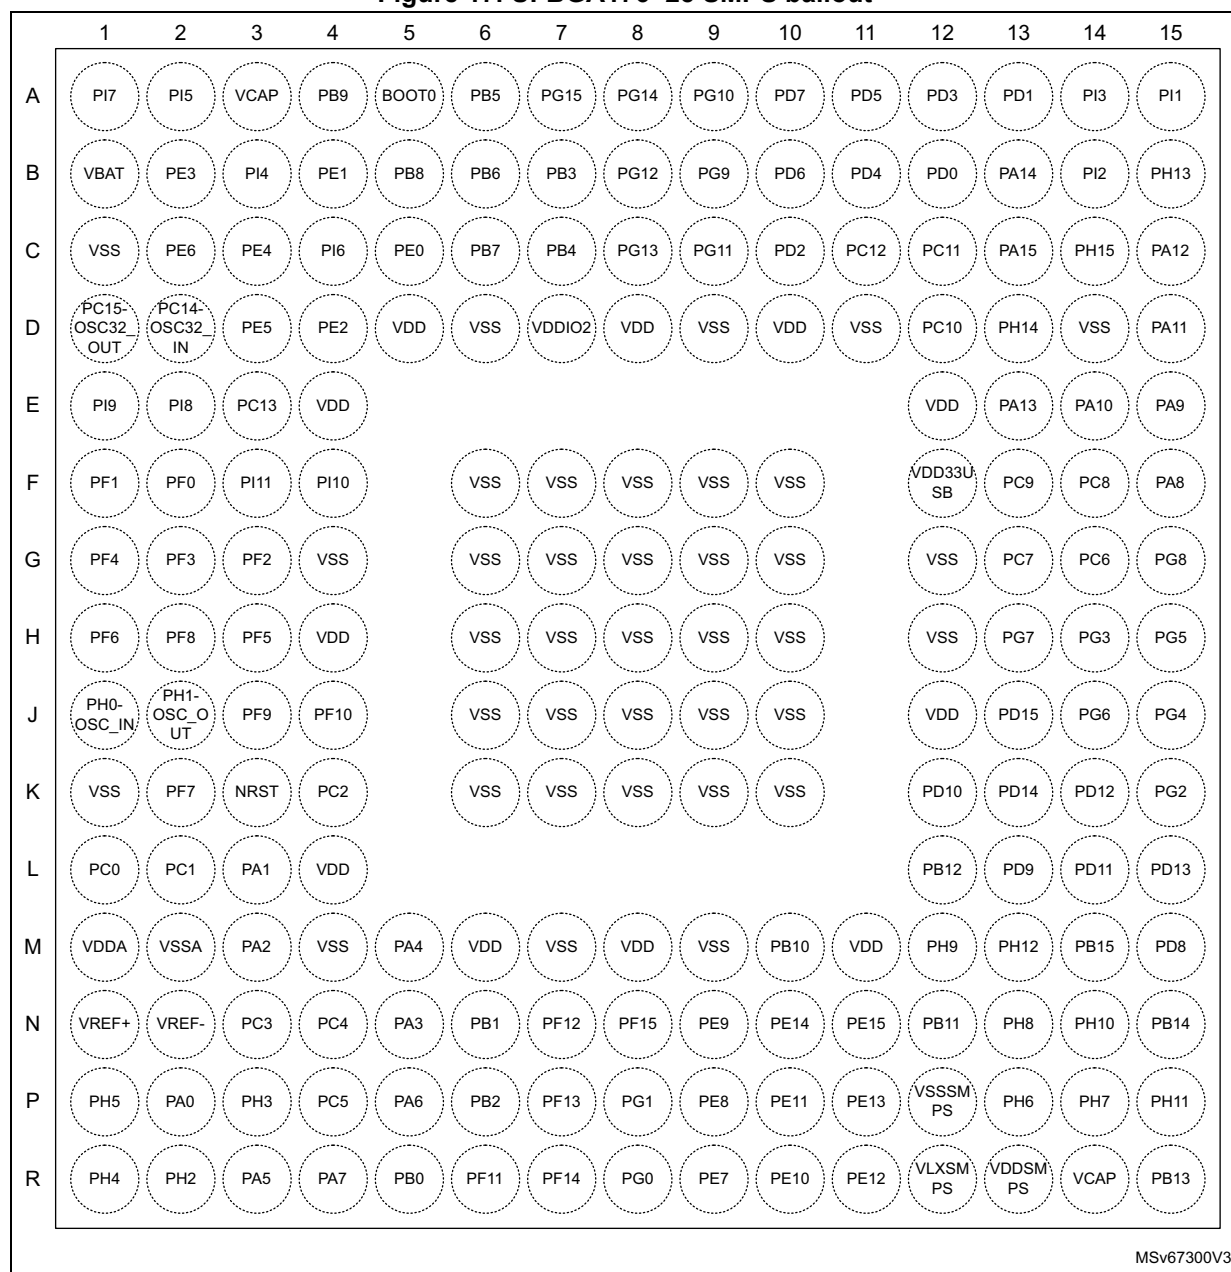

MSv67300V3

1. The above figure shows the package top view.

Figure 18. TFBGA225 ballout

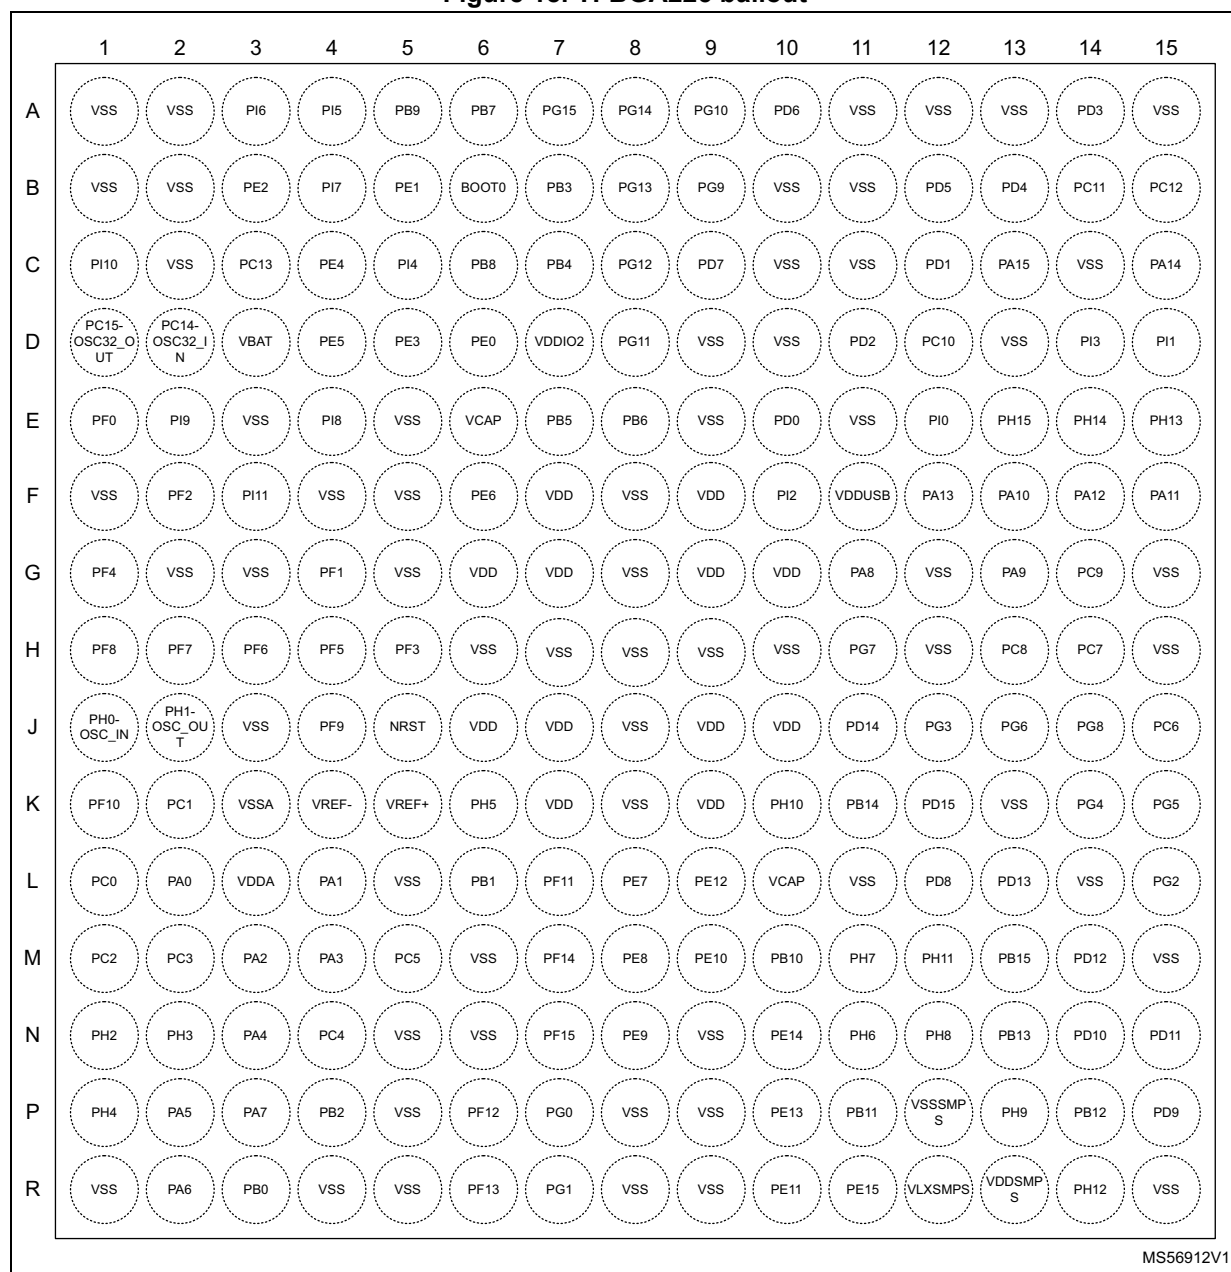

1. The above figure shows the package top view.

4.2 Pin description

Table 13. Legend/abbreviations used in the pinout table

Name		Abbreviation	Definition
Pin name		Unless otherwise specified in brackets below the pin name, the pin function during and after reset is the same as the actual pin name	
Pin type		S	Supply pin
		I	Input only pin
		I/O	Input/output pin
I/O structure		FT	5 V-tolerant I/O
		TT	3.6 V-tolerant I/O
		RST	Bidirectional reset pin with embedded weak pull-up resistor
		Option for TT or FT I/Os ⁽¹⁾	
		_a	I/O, with analog switch function supplied by V _{DDA}
		_c	I/O with USB Type-C power delivery function
		_d	I/O with USB Type-C power delivery dead battery function
		_f	I/O, Fm+ capable
		_h	I/O with high-speed low-voltage mode
		_s	I/O supplied only by V _{DDIO2}
		_t	I/O with tamper function functional in VBAT mode
		_u	I/O, with USB function supplied by V _{DDUSB}
Notes		Unless otherwise specified by a note, all I/Os are set as analog inputs during and after reset	
Pin functions	Alternate functions	Functions selected through GPIOx_AFR registers	
	Additional functions	Functions directly selected/enabled through peripheral registers	

1. The related I/O structures in the following table are a concatenation of various options. Examples: FT_hat, FT_fs, FT_u, TT_a.

Table 14. STM32H562xx and STM32H563xx pin/ball definition

Pin number ⁽¹⁾⁽²⁾														Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions	
WLCSP80 SMPs	LQFP100 SMPs	LQFP144 SMPs	UFBGA169 SMPs	LQFP176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25							
-	1	1	C3	1	D4	B3	-	-	1	1	A1	1	A2	PE2	I/O	FT_h	-	TRACECLK, LPTIM1_IN2, SAI1_CK1, SPI4_SCK, SAI1_MCLK_A, USART10_RX, UART8_TX, OCTOSPI1_IO2, ETH_MII_TXD3, FMC_A23, DCMI_D3/PSSI_D3, EVENTOUT	-	-
-	2	2	D4	2	B2	D5	-	-	2	2	B2	2	A1	PE3	I/O	FT_h	-	TRACED0, TIM15_BKIN, SAI1_SD_B, USART10_TX, FMC_A19, EVENTOUT	-	TAMP_IN6/TAMP_OUT3
-	3	3	D3	3	C3	C4	-	-	3	3	D4	3	B1	PE4	I/O	FT_h	-	TRACED1, SAI1_D2, TIM15_CH1N, SPI4_NSS, SAI1_FS_A, FMC_A20, DCMI_D4/PSSI_D4, EVENTOUT	-	TAMP_IN7/TAMP_OUT8
-	4	4	C2	4	D3	D4	-	-	4	4	C2	4	B2	PE5	I/O	FT_h	-	TRACED2, SAI1_CK2, TIM15_CH1, SPI4_MISO, SAI1_SCK_A, FMC_A21, DCMI_D6/PSSI_D6, EVENTOUT	-	TAMP_IN8/TAMP_OUT7
-	5	5	D2	5	C2	F6	-	-	5	5	D3	5	B3	PE6	I/O	FT_h	-	TRACED3, TIM1_BKIN2, SAI1_D1, TIM15_CH2, SPI4_MOSI, SAI1_SD_A, SAI2_MCLK_B, FMC_A22, DCMI_D7/PSSI_D7, EVENTOUT	-	TAMP_IN3/TAMP_OUT6
A1	-	-	-	-	-	F7	-	-	-	-	-	-	-	VDD	S	-	-		-	-
B8	-	-	-	-	-	A1	-	-	-	-	-	-	-	VSS	S	-	-		-	-
B10	6	6	C1	6	B1	D3	1	1	6	6	E2	6	C1	VBAT	S	-	-		-	-
D2	-	-	-	-	-	E3	-	-	-	-	-	-	-	VSS	S	-	-		-	-

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾													Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
WLCSP80 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	LQFP100 SMPs	-	-	-	-	TAMP_IN2/TAMP_OUT3, RTC_OUT2, WKUP3
LQFP144 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	LQFP144 SMPs	-	-	-	-	TAMP_IN1/TAMP_OUT2/ TAMP_OUT3, RTC_OUT1/ RTC_TS, WKUP4
UFBGA169 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	UFBGA169 SMPs	-	-	-	-	-
LQFP176 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	LQFP176	-	-	-	-	-
UFBGA176+25 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	UFBGA176+25	-	-	-	-	-
TFBGA225 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	TFBGA225 SMPs	-	-	-	-	-
LQFP64	-	-	-	-	-	-	-	-	-	-	-	-	LQFP64	-	-	-	-	-
VFQFPN68	-	-	-	-	-	-	-	-	-	-	-	-	VFQFPN68	-	-	-	-	-
LQFP100	-	-	-	-	-	-	-	-	-	-	-	-	LQFP100	-	-	-	-	-
LQFP144	-	-	-	-	-	-	-	-	-	-	-	-	LQFP144	-	-	-	-	-
UFBGA169	-	-	-	-	-	-	-	-	-	-	-	-	UFBGA169	-	-	-	-	-
LQFP176	-	-	-	-	-	-	-	-	-	-	-	-	LQFP176	-	-	-	-	-
UFBGA176+25	-	-	-	-	-	-	-	-	-	-	-	-	UFBGA176+25	-	-	-	-	-
D10	-	-	-	-	-	-	-	-	-	-	-	-	PC14- OSC32_IN (OSC32_IN)	I/O	FT	-	EVENTOUT	OSC32_IN
F10	-	-	-	-	-	-	-	-	-	-	-	-	PC15- OSC32_OUT (OSC32_OUT)	I/O	FT	-	EVENTOUT	OSC32_OUT
-	-	-	-	-	-	-	-	-	-	-	-	-	PI9	I/O	FT_h	-	UART4_RX, FDCAN1_RX, EVENTOUT	-
-	-	-	-	-	-	-	-	-	-	-	-	-	PI10	I/O	FT_h	-	FDCAN1_RX, ETH_MII_RX_ER, PSSI_D14, EVENTOUT	-
-	-	-	-	-	-	-	-	-	-	-	-	-	PI11	I/O	FT	-	PSSI_D15, EVENTOUT	TAMP_IN4/TAMP_OUT5
-	-	-	-	-	-	-	-	-	-	-	-	-	VSS	S	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	VDD	S	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	PF0	I/O	FT_f	-	I2C2_SDA, FMC_A0, LPTIM5_CH1, EVENTOUT	-
-	-	-	-	-	-	-	-	-	-	-	-	-	PF1	I/O	FT_f	-	I2C2_SCL, FMC_A1, LPTIM5_CH2, EVENTOUT	-

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾													Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
WLCSP80 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
LQFP100 SMPs	-	12	12	12	12	12	12	12	12	12	12	12	12	-	-	-	-	-
LQFP144 SMPs	-	12	12	12	12	12	12	12	12	12	12	12	12	-	-	-	-	-
UFBGA169 SMPs	-	12	12	12	12	12	12	12	12	12	12	12	12	-	-	-	-	-
LQFP176 SMPs	-	12	12	12	12	12	12	12	12	12	12	12	12	-	-	-	-	-
UFBGA176+25 SMPs	-	12	12	12	12	12	12	12	12	12	12	12	12	-	-	-	-	-
TFBGA225 SMPs	-	12	12	12	12	12	12	12	12	12	12	12	12	-	-	-	-	-
LQFP64	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
VQFPN68	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
LQFP100	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
LQFP144	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
UFBGA169	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
LQFP176	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
UFBGA176+25	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
													PF2	I/O	FT_h	-	LPTIM3_CH2, LPTIM3_IN2, I2C2_SMBA, UART12_TX, USART11_OK, FMC_A2, LPTIM5_IN1, EVENTOUT	-
													PF3	I/O	FT_h	-	LPTIM3_IN1, USART11_TX, FMC_A3, LPTIM5_IN2, EVENTOUT	-
													PF4	I/O	FT_h	-	LPTIM3_ETR, USART11_RX, FMC_A4, EVENTOUT	-
													PF5	I/O	FT_fh	-	LPTIM3_CH1, I2C4_SCL, I3C1_SCL, UART12_RX, USART11_CTS/USART11_NSS, FMC_A5, LPTIM3_IN1, EVENTOUT	-
													VSS	S	-	-	-	-
													VDD	S	-	-	-	-
													PF6	I/O	FT_h	-	TIM16_CH1, SPI5_NSS, SAI1_SD_B, UART7_RX, OCTOSPI1_IO3, LPTIM5_CH1, EVENTOUT	-
													PF7	I/O	FT_h	-	TIM17_CH1, SPI5_SCK, SAI1_MCLK_B, UART7_TX, OCTOSPI1_IO2, LPTIM5_CH2, EVENTOUT	-
													PF8	I/O	FT_h	-	TIM16_CH1N, SPI5_MISO, SAI1_SCK_B, UART7_RTS/UART7_DE, TIM13_CH1, OCTOSPI1_IO0, LPTIM5_IN1, EVENTOUT	-

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾		Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
Pin number ⁽¹⁾⁽²⁾	WLCSP80 SMPs	-	-	-	-	-	-
	LQFP100 SMPs	-	-	-	-	-	-
	LQFP144 SMPs	21	-	-	-	-	-
	UFBGA169 SMPs	G2	-	-	-	-	-
	LQFP176 SMPs	27	-	-	-	-	-
	UFBGA176+25 SMPs	J3	-	-	-	-	-
	TFBGA225 SMPs	J4	-	-	-	-	-
	LQFP64	-	-	-	-	-	-
	VQFPN68	-	-	-	-	-	-
	LQFP100	-	-	-	-	-	-
	LQFP144	21	-	-	-	-	-
	UFBGA169	H3	-	-	-	-	-
	LQFP176	27	-	-	-	-	-
	UFBGA176+25	L2	-	-	-	-	-
Pin number ⁽¹⁾⁽²⁾	WLCSP80 SMPs	-	-	-	-	-	-
	LQFP100 SMPs	-	-	-	-	-	-
	LQFP144 SMPs	22	-	-	-	-	-
	UFBGA169 SMPs	H4	-	-	-	-	-
	LQFP176 SMPs	-	-	-	-	-	-
	UFBGA176+25 SMPs	J4	-	-	-	-	-
	TFBGA225 SMPs	K1	-	-	-	-	-
	LQFP64	-	-	-	-	-	-
	VQFPN68	-	-	-	-	-	-
	LQFP100	-	-	-	-	-	-
	LQFP144	22	-	-	-	-	-
	UFBGA169	H4	-	-	-	-	-
	LQFP176	-	-	-	-	-	-
	UFBGA176+25	L1	-	-	-	-	-
Pin number ⁽¹⁾⁽²⁾	WLCSP80 SMPs	-	-	-	-	-	-
	LQFP100 SMPs	-	-	-	-	-	-
	LQFP144 SMPs	23	-	-	-	-	-
	UFBGA169 SMPs	H1	-	-	-	-	-
	LQFP176 SMPs	28	-	-	-	-	-
	UFBGA176+25 SMPs	J1	-	-	-	-	-
	TFBGA225 SMPs	J1	-	-	-	-	-
	LQFP64	5	-	-	-	-	-
	VQFPN68	5	-	-	-	-	-
	LQFP100	12	-	-	-	-	-
	LQFP144	23	-	-	-	-	-
	UFBGA169	H1	-	-	-	-	-
	LQFP176	29	-	-	-	-	-
	UFBGA176+25	G1	-	-	-	-	-
Pin number ⁽¹⁾⁽²⁾	WLCSP80 SMPs	-	-	-	-	-	-
	LQFP100 SMPs	-	-	-	-	-	-
	LQFP144 SMPs	24	-	-	-	-	-
	UFBGA169 SMPs	J1	-	-	-	-	-
	LQFP176 SMPs	30	-	-	-	-	-
	UFBGA176+25 SMPs	J2	-	-	-	-	-
	TFBGA225 SMPs	J2	-	-	-	-	-
	LQFP64	6	-	-	-	-	-
	VQFPN68	6	-	-	-	-	-
	LQFP100	13	-	-	-	-	-
	LQFP144	24	-	-	-	-	-
	UFBGA169	J1	-	-	-	-	-
	LQFP176	31	-	-	-	-	-
	UFBGA176+25	M2	-	-	-	-	-
Pin number ⁽¹⁾⁽²⁾	WLCSP80 SMPs	-	-	-	-	-	-
	LQFP100 SMPs	-	-	-	-	-	-
	LQFP144 SMPs	26	-	-	-	-	-
	UFBGA169 SMPs	J2	-	-	-	-	-
	LQFP176 SMPs	32	-	-	-	-	-
	UFBGA176+25 SMPs	L1	-	-	-	-	-
	TFBGA225 SMPs	L1	-	-	-	-	-
	LQFP64	8	-	-	-	-	-
	VQFPN68	8	-	-	-	-	-
	LQFP100	15	-	-	-	-	-
	LQFP144	26	-	-	-	-	-
	UFBGA169	J2	-	-	-	-	-
	LQFP176	32	-	-	-	-	-
	UFBGA176+25	M3	-	-	-	-	-
Pin number ⁽¹⁾⁽²⁾	WLCSP80 SMPs	-	-	-	-	-	-
	LQFP100 SMPs	-	-	-	-	-	-
	LQFP144 SMPs	27	-	-	-	-	-
	UFBGA169 SMPs	J3	-	-	-	-	-
	LQFP176 SMPs	33	-	-	-	-	-
	UFBGA176+25 SMPs	L2	-	-	-	-	-
	TFBGA225 SMPs	K2	-	-	-	-	-
	LQFP64	9	-	-	-	-	-
	VQFPN68	9	-	-	-	-	-
	LQFP100	16	-	-	-	-	-
	LQFP144	27	-	-	-	-	-
	UFBGA169	J3	-	-	-	-	-
	LQFP176	33	-	-	-	-	-
	UFBGA176+25	M4	-	-	-	-	-
Pin number ⁽¹⁾⁽²⁾	WLCSP80 SMPs	-	-	-	-	-	-
	LQFP100 SMPs	-	-	-	-	-	-
	LQFP144 SMPs	28	-	-	-	-	-
	UFBGA169 SMPs	K1	-	-	-	-	-
	LQFP176 SMPs	33	-	-	-	-	-
	UFBGA176+25 SMPs	K4	-	-	-	-	-
	TFBGA225 SMPs	M1	-	-	-	-	-
	LQFP64	10	-	-	-	-	-
	VQFPN68	10	-	-	-	-	-
	LQFP100	17	-	-	-	-	-
	LQFP144	28	-	-	-	-	-
	UFBGA169	K1	-	-	-	-	-
	LQFP176	34	-	-	-	-	-
	UFBGA176+25	M4	-	-	-	-	-

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾														Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
WLCSP80 SMPs	LQFP100 SMPs	LQFP144 SMPs	UFBGA169 SMPs	LQFP176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25						
L9	18	29	K2	34	N3	M2	11	11	18	29	H5	35	M5	PC3	I/O	FT_a	-	PWR_CSTOP, SAI1_D3, LPTIM3_CH1, SPI2_MOSI/I2S2_SDO, OCTOSPI1_IO6, OCTOSPI1_IO0, ETH_MII_TX_CLK, FMC_SDCKE0, EVENTOUT	ADC12_INP13, ADC12_INN12
G1	-	-	-	35	H4	G10	-	-	-	30	M1	36	G3	VDD	S	-	-	-	-
P2	-	-	H2	-	K1	H6	-	-	-	-	M2	-	G2	VSS	S	-	-	-	-
N9	19	30	L1	36	M2	K3	12	12	19	31	K2	37	M1	VSSA	S	-	-	-	-
-	-	-	L2	-	N2	K4	-	-	20	-	K1	-	N1	VREF-	S	-	-	-	-
-	20	31	M2	37	N1	K5	-	-	21	32	L2	38	P1	VREF+	S	-	-	-	-
P10	21	32	M1	38	M1	L3	13	13	22	33	L1	39	R1	VDDA	S	-	-	-	-
K8	22	33	K3	39	P2	L2	14	14	23	34	J4	40	N3	PA0	I/O	FT_at	(5)	TIM2_CH1, TIM5_CH1, TIM8_ETR, TIM15_BKIN, SPI6_NSS, SPI3_RDY, USART2_CTS/USART2_NSS, UART4_TX, SDMMC2_CMD, SAI2_SD_B, ETH_MII_CRS, TIM2_ETR, EVENTOUT	ADC12_INP0, ADC12_INN1, TAMP_IN2/TAMP_OUT1, WKUP1
J7	23	34	H5	40	L3	L4	15	15	24	35	J5	41	N2	PA1	I/O	FT_ant	(5)	TIM2_CH2, TIM5_CH2, TIM15_CH1N, LPTIM1_IN1, OCTOSPI1_DQS, USART2_RTS/USART2_DE, UART4_RX, OCTOSPI1_IO3, SAI2_MCLK_B, ETH_MII_RX_CLK/ETH_RMII_RE F_CLK, EVENTOUT	ADC12_INP1, TAMP_IN5/TAMP_OUT4

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾												Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
WLCSP80 SMPs	LQFP100 SMPs	LQFP144 SMPs	UFBGA169 SMPs	LQFP176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25				
M8	24	35	L3	41	M3	M3	16	16	25	36	L3	42	P2	I/O	(5)	TIM2_CH3, TIM5_CH3, TIM15_CH1, LPTIM1_IN2, USART2_TX, SAI2_SCK_B, ETH_MDIO, EVENTOUT	ADC12_INP14, TAMP_IN4/TAMP_OUT3, WKUP2
-	-	-	J4	42	R2	N1	-	-	-	-	K3	43	F4	I/O	-	LPTIM1_IN2, OCTOSPI1_IO4, SAI2_SCK_B, ETH_MII_CRS, FMC_SDCKE0, EVENTOUT	-
H10	-	-	-	-	L4	J6	-	-	-	-	-	-	K4	S	-	-	-
P8	-	-	-	-	M4	-	-	-	-	-	-	-	L4	S	-	-	-
-	-	-	N2	43	P3	N2	-	-	-	-	N2	44	G4	I/O	-	OCTOSPI1_IO5, SAI2_MCLK_B, ETH_MII_COL, FMC_SDNE0, EVENTOUT	-
-	-	-	N1	-	R1	P1	-	-	-	-	N1	45	H4	I/O	-	I2C2_SCL, SPI5_RDY, SPI6_RDY, PSSI_D14, EVENTOUT	-
-	-	-	L4	-	P1	K6	-	-	-	-	M3	46	J4	I/O	-	I2C2_SDA, SPI5_NSS, SPI6_RDY, FMC_SDNWE, EVENTOUT	-
T10	25	36	K4	44	N5	M4	17	17	26	37	N3	47	R2	I/O	-	TIM2_CH4, TIM5_CH4, OCTOSPI1_CLK, TIM15_CH2, SPI2_NSS/I2S2_WS, SAI1_SD_B, USART2_RX, ETH_MII_COL, EVENTOUT	ADC12_INP15
-	26	37	M3	45	M7	-	18	18	27	38	M4	48	M8	S	-	-	-
R1	27	38	N3	46	M6	-	19	19	28	39	N4	49	N8	S	-	-	-

		Pin number ⁽¹⁾⁽²⁾												Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions	
		WLCSP80 SMPs	LQFP100 SMPs	LQFP144 SMPs	UFBGA169 SMPs	LQFP176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169							LQFP176
R9	28	39	M4	47	M5	N3	20	20	20	29	40	L4	50	N4	PA4	I/O	TT_a	-	TIM5_ETR, LPTIM2_CH1, SPI1_NSS/I2S1_WS, SPI3_NSS/I2S3_WS, USART2_CK, SPI6_NSS, DCMI_HSYNC/PSSI_DE, EVENTOUT	ADC12_INP18, DAC1_OUT1
L7	29	40	J5	48	R3	P2	21	21	30	41	K4	51	P4	PA5	I/O	TT_ah	-	TIM2_CH1, TIM8_CH1N, SPI1_SCK/I2S1_CK, SPI6_SCK, ETH_MII_TX_EN/ETH_RMII_TX_ EN, PSSI_D14, TIM2_ETR, EVENTOUT	ADC12_INP19, ADC12_INN18, DAC1_OUT2	
H6	30	41	N4	49	P5	R2	22	22	31	42	M5	52	P3	PA6	I/O	FT_ah	-	TIM1_BKIN, TIM3_CH1, TIM8_BKIN, SPI1_MISO/I2S1_SDI, OCTOSPI1_IO3, USART11_TX, SPI6_MISO, TIM13_CH1, DCMI_PIXCLK/PSSI_PDCK, EVENTOUT	ADC12_INP3	
K6	31	42	K5	50	R4	P3	23	23	32	43	K5	53	R3	PA7	I/O	FT_ah	-	TIM1_CH1N, TIM3_CH2, TIM8_CH1N, SPI1_MOS/I2S1_SDO, USART11_RX, SPI6_MOSI, TIM14_CH1, OCTOSPI1_IO2, ETH_MII_RX_DV/ETH_RMII CRS _DV, FMC_SDNWE, FMC_NWE, EVENTOUT	ADC12_INP7, ADC12_INN3	
M6	-	-	L5	51	N4	N4	24	24	33	44	N5	54	N5	PC4	I/O	FT_a	-	TIM2_CH4, SAI1_CK1, LPTIM2_ETR, I2S1_MCK, USART3_RX, ETH_MII_RXD0/ETH_RMII_RXD0 , FMC_SDNE0, EVENTOUT	ADC12_INP4	

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾		Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
Pin number ⁽¹⁾⁽²⁾	WLCSP80 SMPs	N7	-	-	-	-	-
	LQFP100 SMPs	-	-	-	-	-	-
	LQFP144 SMPs	-	-	-	-	-	-
	UFBGA169 SMPs	M5	-	-	-	-	-
	LQFP176 SMPs	52	-	-	-	-	-
	UFBGA176+25 SMPs	P4	M8	-	-	-	-
	TFBGA225 SMPs	M5	-	-	-	-	-
	LQFP64	25	-	-	-	-	-
	VQFPN68	25	-	-	-	-	-
	LQFP100	34	-	-	-	-	-
	LQFP144	45	-	-	-	-	-
	UFBGA169	H6	-	-	-	-	-
	LQFP176	55	-	-	-	-	-
	UFBGA176+25	P5	-	-	-	-	-
		PC5	I/O	FT_ah	-	TIM1_CH4N, SAI1_D3, PSSI_D15, SAI1_FS_A, UART12_RTS/UART12_DE, OCTOSPI1_DQS, ETH_MII_RXD1/ETH_RMII_RXD1 , FMC_SDCKE0, EVENTOUT	ADC12_INP8, ADC12_INN4
		VDD	S	-	-	-	-
		PB0	I/O	FT_ah	-	TIM1_CH2N, TIM3_CH3, TIM8_CH2N, OCTOSPI1_IO1, USART11_CK, UART4_CTS, ETH_MII_RXD2, LPTIM3_CH1, EVENTOUT	ADC12_INP9, ADC12_INN5
		PB1	I/O	FT_ah	-	TIM1_CH3N, TIM3_CH4, TIM8_CH3N, OCTOSPI1_IO0, ETH_MII_RXD3, LPTIM3_CH2, EVENTOUT	ADC12_INP5
		PB2	I/O	FT_h	-	RTC_OUT2, SAI1_D1, TIM8_CH4N, SPI1_RDY, LPTIM1_CH1, SAI1_SD_A, SPI3_MOSI/I2S3_SDO, OCTOSPI1_CLK, OCTOSPI1_DQS, SDMMC1_CMD, LPTIM5_ETR, EVENTOUT	LSCO
		PF11	I/O	FT_ah	-	SPI5_MOSI, OCTOSPI1_NCLK, SAI2_SD_B, FMC_NRAS, DCMI_D12/PSSI_D12, LPTIM6_CH1, EVENTOUT	ADC1_INP2
		PF12	I/O	FT_ah	-	FMC_A6, LPTIM6_CH2, EVENTOUT	ADC1_INP6, ADC1_INN2

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾													Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
WLCSP80 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	VSS	S	-	-	-	-
LQFP100 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	VDD	S	-	-	-	-
LQFP144 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	PF13	I/O	FT_ah	-	I2C4_SMBA, FMC_A7, LPTIM6_IN1, EVENTOUT	ADC2_INP2
UFBGA169 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	PF14	I/O	FT_fah	-	FMC_A8, LPTIM6_IN2, EVENTOUT	ADC2_INP6, ADC2_INN2
LQFP176 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	PF15	I/O	FT_fh	-	I2C4_SDA, I3C1_SDA, FMC_A9, EVENTOUT	-
UFBGA176+25 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	PG0	I/O	FT_h	-	UART9_RX, FMC_A10, LPTIM4_IN1, EVENTOUT	-
TFBGA225 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	VDD	S	-	-	-	-
LQFP100 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	PG1	I/O	FT_h	-	SPI2_MOSI/I2S2_SDO, UART9_TX, FMC_A11, EVENTOUT	-
UFBGA169 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	PE7	I/O	FT_h	-	TIM1_ETR, UART12_RTS/UART12_DE, UART7_RX, OCTOSPI1_IO4, FMC_D4/FMC_AD4, EVENTOUT	-
LQFP144 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	PE8	I/O	FT_h	-	TIM1_CH1N, UART12_CTS/UART12_NSS, UART7_TX, OCTOSPI1_IO5, FMC_D5/FMC_AD5, EVENTOUT	-
UFBGA176+25 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	PE9	I/O	FT_h	-	TIM1_CH1, UART12_RX, UART7_RTS/UART7_DE, OCTOSPI1_IO6, FMC_D6/FMC_AD6, EVENTOUT	-
LQFP176 SMPs	-	-	-	-	-	-	-	-	-	-	-	-	VSS	S	-	-	-	-

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾		Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
Pin number ⁽¹⁾⁽²⁾	WLCSP80 SMPs	-	-	-	-	-	-
	LQFP100 SMPs	59	-	-	-	-	-
	LQFP144 SMPs	60	-	-	-	-	-
	UFBGA169 SMPs	61	-	-	-	-	-
	LQFP176 SMPs	62	-	-	-	-	-
	UFBGA176+25 SMPs	63	-	-	-	-	-
	TFBGA225 SMPs	64	-	-	-	-	-
	LQFP64	65	-	-	-	-	-
	VQFPN68	66	-	-	-	-	-
	LQFP100	67	-	-	-	-	-
	LQFP144	68	-	-	-	-	-
	UFBGA169	69	-	-	-	-	-
	LQFP176	70	-	-	-	-	-
	UFBGA176+25	71	-	-	-	-	-

Pin number ⁽¹⁾⁽²⁾													Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions	
WLCSP80 SMPs	LQFP100 SMPs	LQFP144 SMPs	UFBGA169 SMPs	LQFP176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176							UFBGA176+25
-	45	67	L10	77	N12	P11	-	30	-	-	M9	80	R13	PB11	I/O	FT_f	-	TIM2_CH4, LPTIM2_ETR, I2C2_SDA, SPI2_RDY, SPI4_RDY, USART3_RX, ETH_MII_TX_EN/ETH_RMII_TX_EN, FMC_NBL1, EVENTOUT	-
T4	46	68	N9	78	R12	R12	-	-	-	-	-	-	-	-	VLXSMPS	S	-	-	-
R3	47	69	N10	79	R13	R13	-	-	-	-	-	-	-	-	VDDSMPS	S	-	-	-
N3	48	70	M10	80	P12	P12	-	-	-	-	-	-	-	-	VSSSMPS	S	-	-	-
T2	49	71	N11	81	R14	L10	30	31	48	70	N10	81	M10	M10	VCAP	S	-	-	-
-	50	72	M11	82	M9	L5	31	32	49	71	M12	82	M9	M9	VSS	S	-	-	-
-	51	73	N12	83	M11	-	32	33	50	72	N11	83	N10	N10	VDD	S	-	-	-
-	-	-	N13	84	P13	N11	-	-	-	-	K10	84	M11	M11	PH6	I/O	FT	-	TIM1_CH3N, TIM12_CH1, TIM8_CH1, I2C2_SMBA, SPI5_SCK, ETH_MII_RXD2, FMC_SDNE1, DCMI_D8/PSSI_D8, EVENTOUT
-	-	-	L11	85	P14	M11	-	-	-	-	L10	85	N12	N12	PH7	I/O	FT_f	-	TIM1_CH3, TIM8_CH1N, I2C3_SCL, SPI5_MISO, ETH_MII_RXD3, FMC_SDCKE1, DCMI_D9/PSSI_D9, EVENTOUT
-	-	-	M12	-	N13	N12	-	-	-	-	M10	86	M12	M12	PH8	I/O	FT_fh	-	TIM1_CH2N, TIM5_ETR, TIM8_CH2, I2C3_SDA, SPI5_MOSI, DCMI_HSYNC/PSSI_DE, EVENTOUT

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾		Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
Pin number ⁽¹⁾⁽²⁾	WLCSP80 SMPs	-	-	-	-	-	-
	LQFP100 SMPs	-	-	-	-	-	-
	LQFP144 SMPs	-	-	-	-	-	-
	UFBGA169 SMPs	M13	-	-	-	-	-
	LQFP176 SMPs	86	-	-	-	-	-
	UFBGA176+25 SMPs	M12	-	-	-	-	-
	TFBGA225 SMPs	P13	-	-	-	-	-
	LQFP64	-	-	-	-	-	-
	VFQFPN68	-	-	-	-	-	-
	LQFP100	-	-	-	-	-	-
	LQFP144	-	-	-	-	-	-
	UFBGA169	-	-	-	-	-	-
	LQFP176	87	-	-	-	-	-
	UFBGA176+25	M13	-	-	-	-	-
		PH9	I/O	FT_h	-	TIM1_CH2, TIM12_CH2, TIM8_CH2N, I2C3_SMBA, SPI5_NSS, DCMI_D0/PSSI_D0, EVENTOUT	-
		PH10	I/O	FT_h	-	TIM1_CH1N, TIM5_CH1, TIM8_CH3, I2C4_SMBA, SPI5_RDY, DCMI_D1/PSSI_D1, EVENTOUT	-
		PH11	I/O	FT_fh	-	TIM1_CH1, TIM5_CH2, TIM8_CH3N, I2C4_SCL, I3C1_SCL, DCMI_D2/PSSI_D2, EVENTOUT	-
		PH12	I/O	FT_fh	-	TIM1_BKIN, TIM5_CH3, TIM8_BKIN, I2C4_SDA, I3C1_SDA, TIM8_CH4N, DCMI_D3/PSSI_D3, EVENTOUT	-
		VSS	S	-	-	-	-
		VDD	S	-	-	-	-
		PB12	I/O	FT_fh	-	TIM1_BKIN, OCTOSPI1_NCLK, I2C2_SDA, SPI2_NSS/I2S2_WS, UCPD1_FRSTX, USART3_CK, FDCAN2_RX, ETH_MII_TXD0/ETH_RMII_TXD0, UART5_RX, EVENTOUT	-

Pin number ⁽¹⁾⁽²⁾													Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions		
WLCSP80 SMPs	LQFP100 SMPs	LQFP144 SMPs	UFBGA169 SMPs	LQFP176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176							UFBGA176+25	
-	55	77	J11	96	M15	L12	-	-	55	77	L12	96	P15	PD8	I/O	FT_h	-	USART3_TX, FMC_D13/FMC_AD13, EVENTOUT	-	
-	-	-	-	-	G12	-	-	-	-	-	-	-	-	VSS	S	-	-	-		
-	56	78	H9	97	L13	P15	-	-	56	78	J9	97	P14	PD9	I/O	FT_h	-	USART3_RX, FDCAN2_RX, FMC_D14/FMC_AD14, EVENTOUT	-	

Pin number ⁽¹⁾⁽²⁾													Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions	
WLCSP80 SMPs	LQFP100 SMPs	LQFP144 SMPs	UFBGA169 SMPs	LQFP176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFOFPN68	LQFP100	LQFP144	UFBGA169	LQFP176							UFBGA176+25
-	57	79	K13	98	K12	N14	-	-	57	79	J11	98	N15	PD10	I/O	FT_h	-	LPTIM2_CH2, USART3_OK, FMC_D15/FMC_AD15, EVENTOUT	-
-	58	80	H8	99	L14	N15	-	38	58	80	H10	99	N14	PD11	I/O	FT_h	-	SAI1_CK1, LPTIM2_IN2, I2C4_SMBA, USART3_CTS/USART3_NSS, UART4_RX, OCTOSPI1_IO0, SAI2_SD_A, FMC_A16/FMC_CLE, EVENTOUT	-
-	59	81	H11	100	K14	M14	-	39	59	81	K12	100	N13	PD12	I/O	FT_fh	-	LPTIM1_IN1, TIM4_CH1, LPTIM2_IN1, I2C4_SCL, I3C1_SCL, SAI1_D1, USART3_RTS/USART3_DE, UART4_TX, OCTOSPI1_IO1, SAI2_FS_A, FMC_A17/FMC_ALE, DCMI_D12/PSSI_D12, EVENTOUT	-
-	60	82	G8	101	L15	L13	-	-	60	82	K13	101	M15	PD13	I/O	FT_fh	-	LPTIM1_CH1, TIM4_CH2, LPTIM2_CH1, I2C4_SDA, I3C1_SDA, OCTOSPI1_IO3, SAI2_SCK_A, UART9_RTS/UART9_DE, FMC_A18, DCMI_D13/PSSI_D13, LPTIM4_IN1, EVENTOUT	-
-	-	83	J12	102	-	-	-	-	-	83	H12	102	H12	VSS	S	-	-	-	-
-	-	84	J13	103	-	-	-	-	-	84	H13	103	J13	VDD	S	-	-	-	-
K2	61	85	H12	104	K13	J11	-	-	61	85	H11	104	M14	PD14	I/O	FT_h	-	TIM4_CH3, UART8_CTS, UART9_RX, FMC_D0/FMC_AD0, EVENTOUT	-

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾ (2)		Pin name (function after reset) ⁽³⁾ (4)	Pin type	I/O structure	Notes	Alternate functions	Additional functions
WLCSP80 SMPs	LQFP100 SMPs	62	-	-	-	-	-
	LQFP144 SMPs	86	-	-	-	-	-
	UFBGA169 SMPs	G10	-	-	-	-	-
	LQFP176 SMPs	105	-	-	-	-	-
	UFBGA176+25 SMPs	J13	-	-	-	-	-
	TFBGA225 SMPs	K12	-	-	-	-	-
	LQFP64	-	-	-	-	-	-
	VQFPN68	-	-	-	-	-	-
	LQFP100	62	-	-	-	-	-
	LQFP144	86	-	-	-	-	-
	UFBGA169	H9	-	-	-	-	-
	LQFP176	105	-	-	-	-	-
	UFBGA176+25	L14	-	-	-	-	-
J1						TIM4_CH4, UART8_RTS/UART8_DE, UART9_TX, FMC_D1/FMC_AD1, EVENTOUT	-
						-	-
						-	-
						-	-
						TIM8_BKIN, UART12_RX, FMC_A12, LPTIM6_ETR, EVENTOUT	-
						-	-
						TIM8_BKIN2, UART12_TX, FMC_A13, LPTIM5_ETR, EVENTOUT	-
						-	-
						TIM1_BKIN2, FMC_A14/FMC_BA0, LPTIM4_ETR, EVENTOUT	-
						-	-
						TIM1_ETR, FMC_A15/FMC_BA1, EVENTOUT	-
						-	-
						TIM17_BKIN, I3C1_SDA, I2C4_SDA, SPI1_RDY, OCTOSPI1_NCS, UCPD1_FRSTX, FMC_NE3, DCMI_D12/PSSI_D12, EVENTOUT	-
						-	-
						SAI1_CK2, I3C1_SCL, I2C4_SCL, SAI1_MCLK_A, USART6_CK, UCPD1_FRSTX, FMC_INT, DCMI_D13/PSSI_D13, EVENTOUT	-

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾		Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
WLCSP80 SMPs	UFBGA176+25	H14	I/O	FT_h	-	TIM8_ETR, SPI6_NSS, USART6_RTS/USART6_DE, ETH_PPS_OUT, FMC_SDCLK, EVENTOUT	-
	LQFP176	112	S	-	-	-	-
	UFBGA169	F11	S	-	-	-	-
	LQFP144	93	S	-	-	-	-
	LQFP100	-	-	-	-	-	-
	VQFPN68	-	-	-	-	-	-
	LQFP64	-	-	-	-	-	-
	TFBGA225 SMPs	J14	-	-	-	-	-
	UFBGA176+25 SMPs	G15	-	-	-	-	-
	LQFP176 SMPs	112	113	114	-	-	-
	UFBGA169 SMPs	G13	-	-	-	-	-
	LQFP144 SMPs	93	94	95	-	-	-
J3	LQFP100 SMPs	-	-	-	-	-	-
	LQFP144 SMPs	96	96	96	-	-	-
	LQFP100 SMPs	63	63	63	-	-	-
	LQFP144 SMPs	96	96	96	-	-	-
K4	LQFP100 SMPs	63	63	63	-	-	-
	LQFP144 SMPs	96	96	96	-	-	-
	LQFP100 SMPs	63	63	63	-	-	-
	LQFP144 SMPs	96	96	96	-	-	-
J5	LQFP100 SMPs	65	65	65	-	-	-
	LQFP144 SMPs	98	98	98	-	-	-
	LQFP100 SMPs	65	65	65	-	-	-
	LQFP144 SMPs	98	98	98	-	-	-
F2	LQFP100 SMPs	66	66	66	-	-	-
	LQFP144 SMPs	99	99	99	-	-	-
	LQFP100 SMPs	66	66	66	-	-	-
	LQFP144 SMPs	99	99	99	-	-	-

Pin number ⁽¹⁾⁽²⁾													Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions	
WLCSP80 SMPs	LQFP100 SMPs	LQFP144 SMPs	UFBGA169 SMPs	LQFP176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176							UFBGA176+25
-	-	-	-	-	-	-	-	-	-	-	-	-	G12	VSS	S	-	-	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	G13	VDD	S	-	-	-	
G3	67	100	E10	119	F15	G11	41	44	67	100	F12	119	F15	PA8	I/O	FT_fh	-	MCO1, TIM1_CH1, TIM8_BKIN2, I2C3_SCL, SPI1_RDY, USART1_CK, USB_SOF, UART7_RX, FMC_NOE, DCMI_D3/PSSI_D3, EVENTOUT	-
H4	68	101	F13	120	E15	G13	42	45	68	101	E11	120	E15	PA9	I/O	FT_d	-	TIM1_CH2, LPUART1_TX, I2C3_SMBA, SPI2_SCK/I2S2_CK, USART1_TX, ETH_MII_TX_ER, FMC_NWE, DCMI_D0/PSSI_D0, EVENTOUT	UCPD1_DB1
G5	69	102	E11	121	E14	F13	43	46	69	102	E10	121	D15	PA10	I/O	FT_h	-	TIM1_CH3, LPUART1_RX, LPTIM2_IN2, UCPD1_FRSTX, USART1_RX, FDCAN2_TX, SDMMC1_D0, DCMI_D1/PSSI_D1, EVENTOUT	-
E1	70	103	C13	122	D15	F15	44	47	70	103	F13	122	C15	PA11	I/O	FT_u	-	TIM1_CH4, LPUART1_CTS, SPI2_NSS/I2S2_WS, UART4_RX, USART1_CTS/USART1_NSS, FDCAN1_RX, USB_DM, EVENTOUT	-
C1	71	104	B13	123	C15	F14	45	48	71	104	E13	123	B15	PA12	I/O	FT_u	-	TIM1_ETR, LPUART1_RTS/LPUART1_DE, SPI2_SCK/I2S2_CK, UART4_TX, USART1_RTS/USART1_DE, SAI2_FS_B, FDCAN1_TX, USB_DP, EVENTOUT	-

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾																Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions												
WLCSP80 SMPs	LQFP100 SMPs	LQFP144 SMPs	UFBGA169 SMPs	LQFP176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	F4	72	105	D12	124	E13	F12	46	49	72	105	E12	124	A15	PA13 (JTMS/SWDIO)	I/O	FT	(7)	JTMS/SWDIO, EVENTOUT	-
														-	74	107	E12	126	D14	-	50	74	107	C12	E12	126	F12	VSS	S	-	-	-	-
														-	75	108	D13	127	E12	-	51	75	108	C13	F13	VDD	S	-	-	-	-	-	-
														B2	73	106	E13	125	F12	F11	-	73	106	D13	H13	VDDUSB	S	-	-	-	-	-	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	C12	128	B15	E15	-	-	-	-	128	E12	PH13	I/O	FT_h	-	LPTIM1_IN2, TIM8_CH1N, UART8_TX, UART4_TX, FDCAN1_TX, DCM1_D3/PSSI_D3, EVENTOUT	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	D11	129	D13	E14	-	-	-	-	129	E13	PH14	I/O	FT_h	-	TIM8_CH2N, UART4_RX, FDCAN1_RX, DCM1_D4/PSSI_D4, EVENTOUT	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	A13	130	C14	E13	-	-	-	-	130	D13	PH15	I/O	FT_h	-	TIM8_CH3N, DCM1_D11/PSSI_D11, EVENTOUT	-	
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	B12	131	-	E12	-	-	-	-	-	131	E14	PI0	I/O	FT_h	-	TIM5_CH4, SPI2_NSSI/I2S2_WS, DCM1_D13/PSSI_D13, EVENTOUT	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	C11	132	A15	D15	-	-	-	-	-	132	D14	PI1	I/O	FT_h	-	TIM8_BKIN2, SPI2_SCK/I2S2_CK, DCM1_D8/PSSI_D8, EVENTOUT	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	D10	133	B14	F10	-	-	-	-	-	133	C14	PI2	I/O	FT_h	-	TIM8_CH4, SPI2_MISO/I2S2_SDI, DCM1_D9/PSSI_D9, EVENTOUT	-
-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	A12	134	A14	D14	-	-	-	-	-	134	C13	PI3	I/O	FT_h	-	TIM8_ETR, SPI2_MOSI/I2S2_SDO, DCM1_D10/PSSI_D10, EVENTOUT	-

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾		Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
WLCSP80 SMPs	LQFP100 SMPs	-	-	-	-	-	-
	LQFP144 SMPs	-	-	-	-	-	-
	UFBGA169 SMPs	B8	-	-	-	-	-
	LQFP176 SMPs	135	-	-	-	-	-
	UFBGA176+25 SMPs	D9	-	-	-	-	-
	TFBGA225 SMPs	-	-	-	-	-	-
	LQFP64	-	-	-	-	-	-
	VQFPN68	-	-	-	-	-	-
	LQFP100	-	-	-	-	-	-
	LQFP144	-	-	-	-	-	-
	UFBGA169	B10	-	-	-	-	-
	LQFP176	135	-	-	-	-	-
UFBGA176+25	UFBGA176+25	D9	-	-	-	-	-
	LQFP176	135	-	-	-	-	-
	UFBGA169	B10	-	-	-	-	-
	LQFP144	-	-	-	-	-	-
	LQFP100	-	-	-	-	-	-
	VQFPN68	-	-	-	-	-	-
	LQFP64	-	-	-	-	-	-
	TFBGA225 SMPs	-	-	-	-	-	-
	UFBGA176+25 SMPs	D9	-	-	-	-	-
	LQFP176 SMPs	135	-	-	-	-	-
	UFBGA169 SMPs	B8	-	-	-	-	-
	LQFP144 SMPs	-	-	-	-	-	-
D4	LQFP100 SMPs	76	-	-	-	-	-
	LQFP144 SMPs	109	-	-	-	-	-
	UFBGA169 SMPs	C10	-	-	-	-	-
	LQFP176 SMPs	137	-	-	-	-	-
	UFBGA176+25 SMPs	B13	-	-	-	-	-
	TFBGA225 SMPs	C15	-	-	-	-	-
	LQFP64	49	-	-	-	-	-
	VQFPN68	52	-	-	-	-	-
	LQFP100	76	-	-	-	-	-
	LQFP144	109	-	-	-	-	-
	UFBGA169	B10	-	-	-	-	-
	LQFP176	137	-	-	-	-	-
C3	LQFP100 SMPs	77	-	-	-	-	-
	LQFP144 SMPs	110	-	-	-	-	-
	UFBGA169 SMPs	B10	-	-	-	-	-
	LQFP176 SMPs	138	-	-	-	-	-
	UFBGA176+25 SMPs	C13	-	-	-	-	-
	TFBGA225 SMPs	C13	-	-	-	-	-
	LQFP64	50	-	-	-	-	-
	VQFPN68	53	-	-	-	-	-
	LQFP100	77	-	-	-	-	-
	LQFP144	110	-	-	-	-	-
	UFBGA169	B11	-	-	-	-	-
	LQFP176	138	-	-	-	-	-
E5	LQFP100 SMPs	78	-	-	-	-	-
	LQFP144 SMPs	111	-	-	-	-	-
	UFBGA169 SMPs	A10	-	-	-	-	-
	LQFP176 SMPs	139	-	-	-	-	-
	UFBGA176+25 SMPs	D12	-	-	-	-	-
	TFBGA225 SMPs	D12	-	-	-	-	-
	LQFP64	51	-	-	-	-	-
	VQFPN68	54	-	-	-	-	-
	LQFP100	78	-	-	-	-	-
	LQFP144	111	-	-	-	-	-
	UFBGA169	C10	-	-	-	-	-
	LQFP176	139	-	-	-	-	-
F6	LQFP100 SMPs	79	-	-	-	-	-
	LQFP144 SMPs	112	-	-	-	-	-
	UFBGA169 SMPs	A9	-	-	-	-	-
	LQFP176 SMPs	140	-	-	-	-	-
	UFBGA176+25 SMPs	C12	-	-	-	-	-
	TFBGA225 SMPs	B14	-	-	-	-	-
	LQFP64	52	-	-	-	-	-
	VQFPN68	55	-	-	-	-	-
	LQFP100	79	-	-	-	-	-
	LQFP144	112	-	-	-	-	-
	UFBGA169	A11	-	-	-	-	-
	LQFP176	140	-	-	-	-	-
F6	LQFP100 SMPs	80	-	-	-	-	-
	LQFP144 SMPs	113	-	-	-	-	-
	UFBGA169 SMPs	D9	-	-	-	-	-
	LQFP176 SMPs	141	-	-	-	-	-
	UFBGA176+25 SMPs	C11	-	-	-	-	-
	TFBGA225 SMPs	B15	-	-	-	-	-
	LQFP64	53	-	-	-	-	-
	VQFPN68	56	-	-	-	-	-
	LQFP100	80	-	-	-	-	-
	LQFP144	113	-	-	-	-	-
	UFBGA169	B9	-	-	-	-	-
	LQFP176	141	-	-	-	-	-

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾													Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions	
WLCSP80 SMPs	LQFP100 SMPs	LQFP144 SMPs	UFBGA169 SMPs	LQFP176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176							UFBGA176+25
-	-	-	B11	-	D11	-	-	-	-	-	-	-	-	VSS	S	-	-	-	-
-	-	-	A11	-	D10	-	-	-	-	-	-	-	-	VDD	S	-	-	-	-
A3	81	114	C9	142	B12	E10	-	-	81	114	D9	142	B12	PD0	I/O	FT_h	-	TIM8_CH4N, UART4_RX, FDCAN1_RX, UART9_CTS, FMC_D2/FMC_AD2, EVENTOUT	-
B4	82	115	B9	143	A13	C12	-	-	82	115	E9	143	C12	PD1	I/O	FT_h	-	UART4_TX, FDCAN1_TX, FMC_D3/FMC_AD3, EVENTOUT	-
A5	83	116	E8	144	C10	D11	54	-	83	116	C9	144	D12	PD2	I/O	FT_h	-	TRACED2, TIM3_ETR, TIM15_BKIN, UART5_RX, SDMMC1_CMD, DCMI_D11/PSSI_D11, LPTIM4_ETR, EVENTOUT	WKUP7
-	84	117	C8	145	A12	A14	-	-	84	117	A9	145	D11	PD3	I/O	FT_h	-	SPI2_SCK/I2S2_CK, USART2_CTS/USART2_NSS, FMC_CLK, DCMI_D5/PSSI_D5, EVENTOUT	WKUP8
-	85	118	D8	146	B11	B13	-	-	85	118	F8	146	D10	PD4	I/O	FT_h	-	USART2_RTS/USART2_DE, OCTOSPI1_IO4, FMC_NOE, EVENTOUT	-
-	86	119	A7	147	A11	B12	-	-	86	119	D8	147	C11	PD5	I/O	FT_h	-	TIM1_CH4N, SPI2_RDY, USART2_TX, FDCAN1_TX, OCTOSPI1_IO5, FMC_NWE, EVENTOUT	-
-	-	120	-	148	-	-	-	-	-	120	B7	148	D8	VSS	S	-	-	-	-
-	-	121	A6	149	D7	D7	-	-	-	121	A7	149	C8	VDDIO2	S	-	-	-	-

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾		Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions	
-	WLCSP80 SMPs	LQFP100 SMPs	87	122	123	88	-	-
	LQFP144 SMPs	UFBGA169 SMPs	150	153	154	155	-	-
	UFBGA176 SMPs	UFBGA176+25 SMPs	150	153	154	155	-	-
	TFBGA225 SMPs	LQFP64	-	-	-	-	-	-
	VQFPN68	LQFP100	87	122	123	88	-	-
	LQFP144	UFBGA169	150	153	154	155	-	-
	LQFP176	UFBGA176+25	150	153	154	155	-	-
	PD6	PD6	I/O	FT_sh	-	SAI1_D1, SPI3_MOSI/I2S3_SDO, SAI1_SD_A, USART2_RX, OCTOSPI1_IO6, SDMMC2_CK, FMC_NWAIT, DCMI_D10/PSSI_D10, EVENTOUT	-	
	PD7	PD7	I/O	FT_sh	-	SPI1_MOSI/I2S1_SDO, USART2_CK, OCTOSPI1_IO7, SDMMC2_CMD, FMC_NE1/FMC_NCE, LPTIM4_OUT, EVENTOUT	-	
	VSS	VSS	S	-	-	-	-	
	PG9	PG9	I/O	FT_sh	-	SPI1_MISO/I2S1_SDI, USART6_RX, OCTOSPI1_IO6, SAI2_FS_B, SDMMC2_D0, FMC_NE2/FMC_NCE, DCMI_VSYNC/PSSI_RDY, EVENTOUT	-	
	PG10	PG10	I/O	FT_sh	-	SPI1_NSS/I2S1_WS, SAI2_SD_B, SDMMC2_D1, FMC_NE3, DCMI_D2/PSSI_D2, EVENTOUT	-	
	PG11	PG11	I/O	FT_sh	-	LPTIM1_IN2, SPI1_SCK/I2S1_CK, USART10_RX, USART11_RTS/USART11_DE, SDMMC2_D2, ETH_MII_TX_EN/ETH_RMII_TX_ EN, DCMI_D3/PSSI_D3, EVENTOUT	-	

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾		Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
Pin number ⁽¹⁾⁽²⁾	WLCSP80 SMPs	-	-	-	-	-	-
	LQFP100 SMPs	-	-	-	-	-	-
	LQFP144 SMPs	126	-	-	-	-	-
	UFBGA169 SMPs	D7	-	-	-	-	-
	LQFP176 SMPs	155	-	-	-	-	-
	UFBGA176+25 SMPs	B8	-	-	-	-	-
	TFBGA225 SMPs	C8	-	-	-	-	-
	LQFP64	-	-	-	-	-	-
	VQFPN68	-	-	-	-	-	-
	LQFP100	-	-	-	-	-	-
	LQFP144	127	-	-	-	-	-
	UFBGA169	C8	-	-	-	-	-
	LQFP176	155	-	-	-	-	-
	UFBGA176+25	B8	-	-	-	-	-
		PG12	I/O	FT_sh	-	LPTIM1_IN1, PSSI_D15, SPI6_MISO, USART10_TX, USART6_RTS/USART6_DE, SDMMC2_D3, ETH_MII_TXD1/ETH_RMII_TXD1, FMC_NE4, DCMI_D11/PSSI_D11, LPTIM5_CH1, EVENTOUT	-
		PG13	I/O	FT_sh	-	TRACED0, LPTIM1_CH1, SPI6_SCK, USART10_CTS/USART10_NSS, USART6_CTS/USART6_NSS, SDMMC2_D6, ETH_MII_TXD0/ETH_RMII_TXD0, FMC_A24, LPTIM5_CH2, EVENTOUT	-
		PG14	I/O	FT_sh	-	TRACED1, LPTIM1_ETR, LPTIM1_CH2, SPI6_MOSI, USART10_RTS/USART10_DE, USART6_TX, OCTOSPI1_IO7, SDMMC2_D7, ETH_MII_TXD1/ETH_RMII_TXD1, FMC_A25, LPTIM5_IN1, EVENTOUT	-
		VSS	S	-	-	-	-
		VDD	S	-	-	-	-
		PG15	I/O	FT_h	-	SPI4_RDY, USART10_CK, USART6_CTS/USART6_NSS, FMC_NCAS, DCMI_D13/PSSI_D13, EVENTOUT	-

Pin number ⁽¹⁾⁽²⁾		Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions														
C5	WLCSP80 SMPs	LQFP100 SMPs	132	F6	161	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB3(JTDO/TRACESWO)	I/O	FT_fh	-	JTDO/TRACESWO, TIM2_CH2, I2C2_SDA, SPI1_SCK/I2S1_CK, SPI3_SCK/I2S3_CK, UART12_CTS/UART12_NSS, SPI6_SCK, SDMMC2_D2, CRS_SYNC, UART7_RX, LPTIM6_ETR, EVENTOUT	-
	LQFP100 SMPs	132	F6	161	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB3(JTDO/TRACESWO)	I/O	FT_fh	-	JTDO/TRACESWO, TIM2_CH2, I2C2_SDA, SPI1_SCK/I2S1_CK, SPI3_SCK/I2S3_CK, UART12_CTS/UART12_NSS, SPI6_SCK, SDMMC2_D2, CRS_SYNC, UART7_RX, LPTIM6_ETR, EVENTOUT	-	
	LQFP144 SMPs	132	F6	161	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB3(JTDO/TRACESWO)	I/O	FT_fh	-	JTDO/TRACESWO, TIM2_CH2, I2C2_SDA, SPI1_SCK/I2S1_CK, SPI3_SCK/I2S3_CK, UART12_CTS/UART12_NSS, SPI6_SCK, SDMMC2_D2, CRS_SYNC, UART7_RX, LPTIM6_ETR, EVENTOUT	-	
	LQFP144 SMPs	132	F6	161	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB3(JTDO/TRACESWO)	I/O	FT_fh	-	JTDO/TRACESWO, TIM2_CH2, I2C2_SDA, SPI1_SCK/I2S1_CK, SPI3_SCK/I2S3_CK, UART12_CTS/UART12_NSS, SPI6_SCK, SDMMC2_D2, CRS_SYNC, UART7_RX, LPTIM6_ETR, EVENTOUT	-	
	LQFP144 SMPs	132	F6	161	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB3(JTDO/TRACESWO)	I/O	FT_fh	-	JTDO/TRACESWO, TIM2_CH2, I2C2_SDA, SPI1_SCK/I2S1_CK, SPI3_SCK/I2S3_CK, UART12_CTS/UART12_NSS, SPI6_SCK, SDMMC2_D2, CRS_SYNC, UART7_RX, LPTIM6_ETR, EVENTOUT	-	
	LQFP144 SMPs	132	F6	161	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB3(JTDO/TRACESWO)	I/O	FT_fh	-	JTDO/TRACESWO, TIM2_CH2, I2C2_SDA, SPI1_SCK/I2S1_CK, SPI3_SCK/I2S3_CK, UART12_CTS/UART12_NSS, SPI6_SCK, SDMMC2_D2, CRS_SYNC, UART7_RX, LPTIM6_ETR, EVENTOUT	-	
	LQFP144 SMPs	132	F6	161	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB3(JTDO/TRACESWO)	I/O	FT_fh	-	JTDO/TRACESWO, TIM2_CH2, I2C2_SDA, SPI1_SCK/I2S1_CK, SPI3_SCK/I2S3_CK, UART12_CTS/UART12_NSS, SPI6_SCK, SDMMC2_D2, CRS_SYNC, UART7_RX, LPTIM6_ETR, EVENTOUT	-	
	LQFP144 SMPs	132	F6	161	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB3(JTDO/TRACESWO)	I/O	FT_fh	-	JTDO/TRACESWO, TIM2_CH2, I2C2_SDA, SPI1_SCK/I2S1_CK, SPI3_SCK/I2S3_CK, UART12_CTS/UART12_NSS, SPI6_SCK, SDMMC2_D2, CRS_SYNC, UART7_RX, LPTIM6_ETR, EVENTOUT	-	
	LQFP144 SMPs	132	F6	161	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB3(JTDO/TRACESWO)	I/O	FT_fh	-	JTDO/TRACESWO, TIM2_CH2, I2C2_SDA, SPI1_SCK/I2S1_CK, SPI3_SCK/I2S3_CK, UART12_CTS/UART12_NSS, SPI6_SCK, SDMMC2_D2, CRS_SYNC, UART7_RX, LPTIM6_ETR, EVENTOUT	-	
	LQFP144 SMPs	132	F6	161	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB3(JTDO/TRACESWO)	I/O	FT_fh	-	JTDO/TRACESWO, TIM2_CH2, I2C2_SDA, SPI1_SCK/I2S1_CK, SPI3_SCK/I2S3_CK, UART12_CTS/UART12_NSS, SPI6_SCK, SDMMC2_D2, CRS_SYNC, UART7_RX, LPTIM6_ETR, EVENTOUT	-	
	LQFP144 SMPs	132	F6	161	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB3(JTDO/TRACESWO)	I/O	FT_fh	-	JTDO/TRACESWO, TIM2_CH2, I2C2_SDA, SPI1_SCK/I2S1_CK, SPI3_SCK/I2S3_CK, UART12_CTS/UART12_NSS, SPI6_SCK, SDMMC2_D2, CRS_SYNC, UART7_RX, LPTIM6_ETR, EVENTOUT	-	
	LQFP144 SMPs	132	F6	161	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB3(JTDO/TRACESWO)	I/O	FT_fh	-	JTDO/TRACESWO, TIM2_CH2, I2C2_SDA, SPI1_SCK/I2S1_CK, SPI3_SCK/I2S3_CK, UART12_CTS/UART12_NSS, SPI6_SCK, SDMMC2_D2, CRS_SYNC, UART7_RX, LPTIM6_ETR, EVENTOUT	-	
B6	WLCSP80 SMPs	LQFP100 SMPs	90	A5	162	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB4(NJTRST)	I/O	FT_h	-	NJTRST, TIM16_BKIN, TIM3_CH1, OCTOSPI1_CLK, LPTIM1_CH2, SPI1_MISO/I2S1_SDI, SPI3_MISO/I2S3_SDI, SPI2_NSS/I2S2_WS, SPI6_MISO, SDMMC2_D3, UART7_TX, DCM1_D7/PSSI_D7, EVENTOUT	-
	LQFP100 SMPs	90	A5	162	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25	PB4(NJTRST)	I/O	FT_h	-	NJTRST, TIM16_BKIN, TIM3_CH1, OCTOSPI1_CLK, LPTIM1_CH2, SPI1_MISO/I2S1_SDI, SPI3_MISO/I2S3_SDI, SPI2_NSS/I2S2_WS, SPI6_MISO, SDMMC2_D3, UART7_TX, DCM1_D7/PSSI_D7, EVENTOUT	-	
	LQFP144 SMPs	90	A5	162	UFBGA176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP6													

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾		Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																													
Pin number ⁽¹⁾⁽²⁾	WLCSP80 SMPs	C7	93	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	1011	1012	1013	1014	1015	1016	1017	1018	1019	1020	1021	1022	1023	1024	1025	1026	1027	1028	1029	1030	1031	1032	1033	1034	1035	1036	1037	1038	1039	1040	1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	1051	1052	1053	1054	1055	1056	1057	1058	1059	1060	1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	1071	1072	1073	1074	1075	1076	1077	1078	1079	1080	1081	1082	1083	1084	1085	1086	1087	1088	1089	1090	1091	1092	1093	1094	1095	1096	1097	1098	1099	1100	1101	1102	1103	1104	1105	1106	1107	1108	1109	1110	1111	1112	1113	1114	1115	1116	1117	1118	1119	1120	1121	1122	1123	1124	1125	1126	1127	1128	1129	1130	1131	1132	1133	1134	1135	1136	1137	1138	1139	1140	1141	1142	1143	1144	1145	1146	1147	1148	1149	1150	1151	1152	1153	1154	1155	1156	1157	1158	1159	1160	1161	1162	1163	1164	1165	1166	1167	1168	1169	1170	1171	1172	1173	1174	1175	1176	1177	1178	1179	1180	1181	1182	1183	1184	1185	1186	1187	1188	1189	1190	1191	1192	1193	1194	1195	1196	1197	1198	1199	1200	1201	1202	1203	1204	1205	1206	1207	1208	1209	1210	1211	1212	1213	1214	1215	1216	1217	1218	1219	1220	1221	1222	1223	1224	1225	1226	1227	1228	1229	1230	1231	1232	1233	1234	1235	1236	1237	1238	1239	1240	1241	1242	1243	1244	1245	1246	1247	1248	1249	1250	1251	1252	1253	1254	1255	1256	1257	1258	1259	1260	1261	1262	1263	1264	1265	1266	1267	1268	1269	1270	1271	1272	1273	1274	1275	1276	1277	1278	1279	1280	1281	1282	1283	1284	1285	1286	1287	1288	1289	1290	1291	1292	1293	1294	1295	1296	1297	1298	1299	1300	1301	1302	1303	1304	1305	1306	1307	1308	1309	1310	1311	1312	1313	1314	1315	1316	1317	1318	1319	1320	1321	1322	1323	1324	1325	1326	1327	1328	1329	1330	1331	1332	1333	1334	1335	1336	1337	1338	1339	1340	1341	1342	1343	1344	1345	1346	1347	1348	1349	1350	1351	1352	1353	1354	1355	1356	1357	1358	1359	1360	1361	1362	1363	1364	1365	1366	1367	1368	1369	1370	1371	1372	1373	1374	1375	1376	1377	1378	1379	1380	1381	1382	1383	1384	1385	1386	1387	1388	1389	1390	1391	1392	1393	1394	1395	1396	1397	1398	1399	1400	1401	1402	1403	1404	1405	1406	1407	1408	1409	1410	1411	1412	1413	1414	1415	1416	1417	1418	1419	1420	1421	1422	1423	1424	1425	1426	1427	1428	1429	1430	1431	1432	1433	1434	1435	1436	1437	1438	1439	1440	1441	1442	1443	1444	1445	1446	1447	1448	1449	1450	1451	1452	1453	1454	1455	1456	1457	1458	1459	1460	1461	1462	1463	1464	1465	1466	1467	1468	1469	1470	1471	1472	1473	1474	1475	1476	1477	1478	1479	1480	1481	1482	1483	1484	1485	1486	1487	1488	1489	1490	1491	1492	1493	1494	1495	1496	1497	1498	1499	1500	1501	1502	1503	1504	1505	1506	1507	1508	1509	1510	1511	1512	1513	1514	1515	1516	1517	1518	1519	1520	1521	1522	1523	1524	1525	1526	1527	1528	1529	1530	1531	1532	1533	1534	1535	1536	1537	1538	1539	1540	1541	1542	1543	1544	1545	1546	1547	1548	1549	1550	1551	1552	1553	1554	1555	1556	1557	1558	1559	1560	1561	1562	1563	1564	1565	1566	1567	1568	1569	1570	1571	1572	1573	1574	1575	

Pin number ⁽¹⁾⁽²⁾													Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions	
WLCSP80 SMPs	LQFP100 SMPs	LQFP144 SMPs	UFBGA169 SMPs	LQFP176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176							UFBGA176+25
-	-	141	C5	170	B4	B5	-	-	-	-	D5	170	A3	PE1	I/O	FT_h	-	LPTIM1_IN2, UART8_TX, FDCAN1_TX, FMC_NBL1, DCM1_D3/PSSI_D3, EVENTOUT	-
A9	-	142	A4	171	A3	E6	62	66	98	142	B4	171	C6	VCAP	S	-	-	-	-
-	99	143	-	-	-	-	63	67	99	143	B3	-	-	VSS	S	-	-	-	-
-	100	144	-	172	-	-	64	68	100	144	A3	172	-	VDD	S	-	-	-	-
-	-	-	C4	173	B3	C5	-	-	-	-	C4	173	D4	PI4	I/O	FT_h	-	TIM8_BKIN, SPI2_RDY, SAI2_MCLK_A, DCM1_D5/PSSI_D5, EVENTOUT	-
-	-	-	B3	174	A2	A4	-	-	-	-	-	-	C4	PI5	I/O	FT_h	-	TIM8_CH1, SAI2_SCK_A, DCM1_VSYNCP/PSSI_RDY, EVENTOUT	-
-	-	-	A2	175	C4	A3	-	-	-	-	C3	175	C3	PI6	I/O	FT_h	-	TIM8_CH2, SAI2_SD_A, DCM1_D6/PSSI_D6, EVENTOUT	-
-	-	-	A1	176	A1	B4	-	-	-	-	A2	176	C2	PI7	I/O	FT_h	-	TIM8_CH3, SAI2_FS_A, DCM1_D7/PSSI_D7, EVENTOUT	-
-	-	-	-	-	F6	L11	-	-	-	-	-	-	F6	VSS	S	-	-	-	-
-	-	-	-	-	F7	R1	-	-	-	-	-	-	F7	VSS	S	-	-	-	-
-	-	-	-	-	F8	A15	-	-	-	-	-	-	F8	VSS	S	-	-	-	-
-	-	-	-	-	F9	E11	-	-	-	-	-	-	F9	VSS	S	-	-	-	-
-	-	-	-	-	F10	G12	-	-	-	-	-	-	F10	VSS	S	-	-	-	-
-	-	-	-	-	G6	H10	-	-	-	-	-	-	G6	VSS	S	-	-	-	-
-	-	-	-	-	G7	G15	-	-	-	-	-	-	G7	VSS	S	-	-	-	-
-	-	-	-	-	G8	A2	-	-	-	-	-	-	G8	VSS	S	-	-	-	-

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾														Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
WLCSP80 SMPs	LQFP100 SMPs	LQFP144 SMPs	UFBGA169 SMPs	LQFP176 SMPs	UFBGA176+25 SMPs	TFBGA225 SMPs	LQFP64	VFQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25						
-	-	-	-	-	-	G9	A11	G9	A12	-	-	-	-	G9	VSS	S	-	-	-
-	-	-	-	-	-	-	-	G10	A12	-	-	-	-	G10	VSS	S	-	-	-
-	-	-	-	-	-	-	A13	H6	A13	-	-	-	-	H6	VSS	S	-	-	-
-	-	-	-	-	-	-	B1	H7	B1	-	-	-	-	H7	VSS	S	-	-	-
-	-	-	-	-	-	-	B2	H8	B2	-	-	-	-	H8	VSS	S	-	-	-
-	-	-	-	-	-	-	B10	H9	B10	-	-	-	-	H9	VSS	S	-	-	-
-	-	-	-	-	-	-	B11	H10	B11	-	-	-	-	H10	VSS	S	-	-	-
-	-	-	-	-	-	-	C2	J6	C2	-	-	-	-	J6	VSS	S	-	-	-
-	-	-	-	-	-	-	C10	J7	C10	-	-	-	-	J7	VSS	S	-	-	-
-	-	-	-	-	-	-	C11	J8	C11	-	-	-	-	J8	VSS	S	-	-	-
-	-	-	-	-	-	-	C14	J9	C14	-	-	-	-	J9	VSS	S	-	-	-
-	-	-	-	-	-	-	D9	J10	D9	-	-	-	-	J10	VSS	S	-	-	-
-	-	-	-	-	-	-	D10	K6	D10	-	-	-	-	K6	VSS	S	-	-	-
-	-	-	-	-	-	-	D13	K7	D13	-	-	-	-	K7	VSS	S	-	-	-
-	-	-	-	-	-	-	E9	K8	E9	-	-	-	-	K8	VSS	S	-	-	-
-	-	-	-	-	-	-	F1	K9	F1	-	-	-	-	K9	VSS	S	-	-	-
-	-	-	-	-	-	-	F4	K10	F4	-	-	-	-	K10	VSS	S	-	-	-
-	-	-	-	-	-	-	F5	-	-	-	-	-	-	-	VSS	S	-	-	-
-	-	-	-	-	-	-	G2	-	-	-	-	-	-	-	VSS	S	-	-	-
-	-	-	-	-	-	-	G3	-	-	-	-	-	-	-	VSS	S	-	-	-

Pin number⁽¹⁾⁽²⁾104/277

Table 14. STM32H562xx and STM32H563xx pin/ball definition (continued)

Pin number ⁽¹⁾⁽²⁾												Pin name (function after reset) ⁽³⁾⁽⁴⁾	Pin type	I/O structure	Notes	Alternate functions	Additional functions
WLCSP80 SMPS	LQFP100 SMPS	LQFP144 SMPS	UFBGA169 SMPS	LQFP176 SMPS	UFBGA176+25 SMPS	TFBGA225 SMPS	LQFP64	VQFPN68	LQFP100	LQFP144	UFBGA169	LQFP176	UFBGA176+25				
-	-	-	-	-	-	J8	-	-	-	-	-	-	-	S	-	-	-
-	-	-	-	-	-	R15	-	-	-	-	-	-	-	S	-	-	-
-	-	-	-	-	-	F9	-	-	-	-	-	-	-	S	-	-	-
-	-	-	-	-	-	G6	-	-	-	-	-	-	-	S	-	-	-
-	-	-	-	-	-	J10	-	-	-	-	-	-	-	S	-	-	-
-	-	-	-	-	-	G7	-	-	-	-	-	-	-	S	-	-	-
-	-	-	-	-	-	G9	-	-	-	-	-	-	-	S	-	-	-
-	-	-	-	-	-	J7	-	-	-	-	-	-	-	S	-	-	-
-	-	-	-	-	-	J9	-	-	-	-	-	-	-	S	-	-	-

1. The devices with SMPS correspond to commercial codes STM32H563xxQ.

2. A non-connected I/O in a given package is configured as an output tied to VSS. When VREF+ pad is not available on a package, the internal voltage reference buffer (VREFBUF) is not available and must be kept disabled.

3. PC13, PC14, and PC15 are supplied through the power switch (by VSW). This switch sinks a limited amount of current, hence the use of PC13 to PC15 GPIOs in output mode is limited: The speed must not exceed 2 MHz with a maximum load of 30 pF. These GPIOs must not be used as current sources (for example to drive a LED).

4. After a Backup domain power-up, PC13, PC14, and PC15 operate as GPIOs. Their function depends upon the content of the RTC registers that are not reset by the system reset. For details on how to manage these GPIOs, refer to the backup domain and RTC register descriptions in the product reference manual.

5. As a tamper input, only PC13, PI8, PA0, PA1, and PA2 are functional in Standby and VBAT mode. As a tamper output, only PC13, PA1, and PI8 are functional in Standby and VBAT mode.

6. For the output timing characteristics refer to [Table 67](#).

7. After reset, these pins are configured as JTAG/SW debug alternate functions. The internal pull-up on PA15, PA13, PB4 pins and the internal pull-down on PA14 pin are activated too.

4.3 Alternate functions

Table 15. Alternate functions AF0 to AF7⁽¹⁾

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7
	SYS	LPTIM1/ TIM1/2/16/17	LPTIM3/ PDM_SAI1/ TIM3/4/5/12/15	I3C1/LPTIM2/3/ LPUART1/ OCTOSPI/TIM1/8	CEC/DCMI/ I2C1/2/3/4/ LPTIM1/2/SPI1/ I2S1/TIM15/ USART1	CEC/I3C1/LPTIM1/ SPI1/I2S1/SPI2/I2S2/ SPI3/I2S3/SPI4/5/6	I2C4/OCTOSPI/ SAI1/SPI3/I2S3/ SPI4/UART4/1/2/ USART10/ USB_PD	SDMMC1/SPI2/ I2S2/SPI3/I2S3/ SPI6/UART7/8/12 /USART11/2/3/6/ 10/11
PA0	-	TIM2_CH1	TIM5_CH1	TIM8_ETR	TIM15_BKIN	SPI6_NSS	SPI3_RDY	USART2_CTS/ USART2_NSS
PA1	-	TIM2_CH2	TIM5_CH2	-	TIM15_CH1N	LPTIM1_IN1	OCTOSPI1_DQS	USART2_RTS/ USART2_DE
PA2	-	TIM2_CH3	TIM5_CH3	-	TIM15_CH1	LPTIM1_IN2	-	USART2_TX
PA3	-	TIM2_CH4	TIM5_CH4	OCTOSPI1_CLK	TIM15_CH2	SPI2_NSS/I2S2_WS	SAI1_SD_B	USART2_RX
PA4	-	-	TIM5_ETR	LPTIM2_CH1	-	SPI1_NSS/I2S1_WS	SPI3_NSS/ I2S3_WS	USART2_CK
PA5	-	TIM2_CH1	-	TIM8_CH1N	-	SPI1_SCK/I2S1_CK	-	-
PA6	-	TIM1_BKIN	TIM3_CH1	TIM8_BKIN	-	SPI1_MISO/I2S1_SDI	OCTOSPI1_IO3	USART11_TX
PA7	-	TIM1_CH1N	TIM3_CH2	TIM8_CH1N	-	SPI1_MOSI/I2S1_SDO	-	USART11_RX
PA8	MCO1	TIM1_CH1	-	TIM8_BKIN2	I2C3_SCL	SPI1_RDY	-	USART1_CK
PA9	-	TIM1_CH2	-	LPUART1_TX	I2C3_SMBA	SPI2_SCK/I2S2_CK	-	USART1_TX
PA10	-	TIM1_CH3	-	LPUART1_RX	LPTIM2_IN2	-	UCPD1_FRSTX	USART1_RX
PA11	-	TIM1_CH4	-	LPUART1_CTS	-	SPI2_NSS/I2S2_WS	UART4_RX	USART1_CTS/ USART1_NSS
PA12	-	TIM1_ETR	-	LPUART1_RTS/ LPUART1_DE	-	SPI2_SCK/I2S2_CK	UART4_TX	USART1_RTS/ USART1_DE
PA13	JTMS/SWDIO	-	-	-	-	-	-	-
PA14	JTCK/SWCLK	-	-	-	-	-	-	-
PA15	JTDI	TIM2_CH1	LPTIM3_IN2	-	HDMI_CEC	SPI1_NSS/I2S1_WS	SPI3_NSS/ I2S3_WS	SPI6_NSS

Table 15. Alternate functions AF0 to AF7⁽¹⁾ (continued)

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7
	SYS	LPTIM1/ TIM1/2/16/17	LPTIM3/ PDM_SAI1/ TIM3/4/5/12/15	I3C1/LPTIM2/3/ LPUART1/ OCTOSPI/TIM1/8	CEC/DCMI/ I2C1/2/3/4/ LPTIM1/2/SPI1/ I2S1/TIM15/ USART1	CEC/I3C1/LPTIM1/ SPI1/I2S1/SPI2/I2S2/ SPI3/I2S3/SPI4/5/6	I2C4/OCTOSPI/ SAI1/SPI3/I2S3/ SPI4/UART4/1/2/ USART10/ USB_PD	SDMMC1/SPI2/ I2S2/SPI3/I2S3/ SPI6/UART7/8/12 /USART11/2/3/6/ 10/11
PB0	-	TIM1_CH2N	TIM3_CH3	TIM8_CH2N	-	-	OCTOSPI1_IO1	USART11_CK
PB1	-	TIM1_CH3N	TIM3_CH4	TIM8_CH3N	-	-	OCTOSPI1_IO0	-
PB2	RTC_OUT2	-	SAI1_D1	TIM8_CH4N	SPI1_RDY	LPTIM1_CH1	SAI1_SD_A	SPI3_MOSI/ I2S3_SDO
PB3	JTDO/ TRACESWO	TIM2_CH2	-	-	I2C2_SDA	SPI1_SCK/I2S1_CK	SPI3_SCK/ I2S3_CK	UART12_CTS/ UART12_NSS
PB4	NJRST	TIM16_BKIN	TIM3_CH1	OCTOSPI1_CLK	LPTIM1_CH2	SPI1_MISO/I2S1_SDI	SPI3_MISO/ I2S3_SDI	SPI2_NSS/ I2S2_WS
PB5	-	TIM17_BKIN	TIM3_CH2	OCTOSPI1_NCLK	I2C1_SMBA	SPI1_MOSI/I2S1_SDO	I2C4_SMBA	SPI3_MOSI/ I2S3_SDO
PB6	-	TIM16_CH1N	TIM4_CH1	I3C1_SCL	I2C1_SCL	HDMI_CEC	I2C4_SCL	USART1_TX
PB7	-	TIM17_CH1N	TIM4_CH2	I3C1_SDA	I2C1_SDA	-	I2C4_SDA	USART1_RX
PB8	-	TIM16_CH1	TIM4_CH3	I3C1_SCL	I2C1_SCL	SPI4_RDY	I2C4_SCL	SDMMC1_CKIN
PB9	-	TIM17_CH1	TIM4_CH4	I3C1_SDA	I2C1_SDA	SPI2_NSS/I2S2_WS	I2C4_SDA	SDMMC1_CDIR
PB10	-	TIM2_CH3	LPTIM3_CH1	LPTIM2_IN1	I2C2_SCL	SPI2_SCK/I2S2_CK	-	USART3_TX
PB11	-	TIM2_CH4	-	LPTIM2_ETR	I2C2_SDA	SPI2_RDY	SPI4_RDY	USART3_RX
PB12	-	TIM1_BKIN	-	OCTOSPI1_NCLK	I2C2_SDA	SPI2_NSS/I2S2_WS	UCPD1_FRSTX	USART3_CK
PB13	-	TIM1_CH1N	LPTIM3_IN1	LPTIM2_CH1	I2C2_SMBA	SPI2_SCK/I2S2_CK	-	USART3_CTS/ USART3_NSS
PB14	-	TIM1_CH2N	TIM12_CH1	TIM8_CH2N	USART1_TX	SPI2_MISO/I2S2_SDI	-	USART3_RTS/ USART3_DE
PB15	RTC_REFIN	TIM1_CH3N	TIM12_CH2	TIM8_CH3N	USART1_RX	SPI2_MOSI/I2S2_SDO	-	USART11_CTS/ USART11_NSS

B

Table 15. Alternate functions AF0 to AF7⁽¹⁾ (continued)

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7
	SYS	LPTIM1/ TIM1/2/16/17	LPTIM3/ PDM_SAI1/ TIM3/4/5/12/15	I3C1/LPTIM2/3/ LPUART1/ OCTOSPI/TIM1/8	CEC/DCMI/ I2C1/2/3/4/ LPTIM1/2/SPI1/ I2S1/TIM15/ USART1	CEC/I3C1/LPTIM1/ SPI1/I2S1/SPI2/I2S2/ SPI3/I2S3/SPI4/5/6	I2C4/OCTOSPI/ SAI1/SPI3/I2S3/ SPI4/UART4/12/ USART10/ USB_PD	SDMMC1/SPI2/ I2S2/SPI3/I2S3/ SPI6/UART7/8/12 /USART12/3/6/ 10/11
PC0	-	TIM16_BKIN	-	-	-	-	SAI1_MCLK_A	SPI2_RDY
PC1	TRACED0	-	SAI1_D1	-	-	SPI2_MOSI/I2S2_SDO	SAI1_SD_A	USART11_RTS/ USART11_DE
PC2	PWR_CSLEEP	TIM17_CH1	TIM4_CH4	-	-	SPI2_MISO/I2S2_SDI	OCTOSPI1_IO5	-
PC3	PWR_CSTOP	-	SAI1_D3	LPTIM3_CH1	-	SPI2_MOSI/I2S2_SDO	OCTOSPI1_IO6	-
PC4	-	TIM2_CH4	SAI1_OK1	LPTIM2_ETR	-	I2S1_MCK	-	USART3_RX
PC5	-	TIM1_CH4N	SAI1_D3	-	PSSI_D15	-	SAI1_FS_A	UART12_RTS/ UART12_DE
PC6	-	-	TIM3_CH1	TIM8_CH1	-	I2S2_MCK	SAI1_SCK_A	USART6_TX
PC7	TRGIO	-	TIM3_CH2	TIM8_CH2	-	-	I2S3_MCK	USART6_RX
PC8	TRACED1	-	TIM3_CH3	TIM8_CH3	-	-	-	USART6_CK
PC9	MCO2	-	TIM3_CH4	TIM8_CH4	I2C3_SDA	AUDIOCLK	-	-
PC10	-	-	LPTIM3_ETR	-	-	-	SPI3_SCK/ I2S3_CK	USART3_TX
PC11	-	-	LPTIM3_IN1	-	-	-	SPI3_MISO/ I2S3_SDI	USART3_RX
PC12	TRACED3	-	TIM15_CH1	-	-	SPI6_SCK	SPI3_MOSI/ I2S3_SDO	USART3_CK
PC13	-	-	-	-	-	-	-	-
PC14	-	-	-	-	-	-	-	-
PC15	-	-	-	-	-	-	-	-

C

Table 15. Alternate functions AF0 to AF7⁽¹⁾ (continued)

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7
	SYS	LPTIM1/ TIM1/2/16/17	LPTIM3/ PDM_SAI1/ TIM3/4/5/12/15	I3C1/LPTIM2/3/ LPUART1/ OCTOSPI/TIM1/8	CEC/DCMI/ I2C1/2/3/4/ LPTIM1/2/SPI1/ I2S1/TIM15/ USART1	CEC/I3C1/LPTIM1/ SPI1/I2S1/SPI2/I2S2/ SPI3/I2S3/SPI4/5/6	I2C4/OCTOSPI/ SAI1/SPI3/I2S3/ SPI4/UART4/12/ USART10/ USB_PD	SDMMC1/SPI2/ I2S2/SPI3/I2S3/ SPI6/UART7/8/12 /USART11/2/3/6/ 10/11
PD0	-	-	-	TIM8_CH4N	-	-	-	-
PD1	-	-	-	-	-	-	-	-
PD2	TRACED2	-	TIM3_ETR	-	TIM15_BKIN	-	-	-
PD3	-	-	-	-	-	SPI2_SCK/I2S2_CK	-	USART2_CTS/ USART2_NSS
PD4	-	-	-	-	-	-	-	USART2_RTS/ USART2_DE
PD5	-	TIM1_CH4N	-	-	-	SPI2_RDY	-	USART2_TX
PD6	-	-	SAI1_D1	-	-	SPI3_MOSI/I2S3_SDO	SAI1_SD_A	USART2_RX
PD7	-	-	-	-	-	SPI1_MOSI/I2S1_SDO	-	USART2_CK
PD8	-	-	-	-	-	-	-	USART3_TX
PD9	-	-	-	-	-	-	-	USART3_RX
PD10	-	-	-	LPTIM2_CH2	-	-	-	USART3_CK
PD11	-	-	SAI1_CK1	LPTIM2_IN2	I2C4_SMBA	-	-	USART3_CTS/ USART3_NSS
PD12	-	LPTIM1_IN1	TIM4_CH1	LPTIM2_IN1	I2C4_SCL	I3C1_SCL	SAI1_D1	USART3_RTS/ USART3_DE
PD13	-	LPTIM1_CH1	TIM4_CH2	LPTIM2_CH1	I2C4_SDA	I3C1_SDA	-	-
PD14	-	-	TIM4_CH3	-	-	-	-	-
PD15	-	-	TIM4_CH4	-	-	-	-	-

D

Table 15. Alternate functions AF0 to AF7⁽¹⁾ (continued)

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7
	SYS	LPTIM1/ TIM1/2/16/17	LPTIM3/ PDM_SAI1/ TIM3/4/5/12/15	I3C1/LPTIM2/3/ LPUART1/ OCTOSPI/TIM1/8	CEC/DCMI/ I2C1/2/3/4/ LPTIM1/2/SPI1/ I2S1/TIM15/ USART1	CEC/I3C1/LPTIM1/ SPI1/I2S1/SPI2/I2S2/ SPI3/I2S3/SPI4/5/6	I2C4/OCTOSPI/ SAI1/SPI3/I2S3/ SPI4/UART4/12/ USART10/ USB_PD	SDMMC1/SPI2/ I2S2/SPI3/I2S3/ SPI6/UART7/8/12 /USART12/3/6/ 10/11
PE0	-	LPTIM1_ETR	TIM4_ETR	LPTIM2_CH2	LPTIM2_ETR	-	SPI3_RDY	-
PE1	-	LPTIM1_IN2	-	-	-	-	-	-
PE2	TRACECLK	LPTIM1_IN2	SAI1_CK1	-	-	SPI4_SCK	SAI1_MCLK_A	USART10_RX
PE3	TRACED0	-	-	-	TIM15_BKIN	-	SAI1_SD_B	USART10_TX
PE4	TRACED1	-	SAI1_D2	-	TIM15_CH1N	SPI4_NSS	SAI1_FS_A	-
PE5	TRACED2	-	SAI1_CK2	-	TIM15_CH1	SPI4_MISO	SAI1_SCK_A	-
PE6	TRACED3	TIM1_BKIN2	SAI1_D1	-	TIM15_CH2	SPI4_MOSI	SAI1_SD_A	-
PE7	-	TIM1_ETR	-	-	-	-	UART12_RTS/ UART12_DE	UART7_RX
PE8	-	TIM1_CH1N	-	-	-	-	UART12_CTS/ UART12_NSS	UART7_TX
PE9	-	TIM1_CH1	-	-	-	-	UART12_RX	UART7_RTS/ UART7_DE
PE10	-	TIM1_CH2N	-	-	-	-	UART12_TX	UART7_CTS
PE11	-	TIM1_CH2	-	-	SPI1_RDY	SPI4_NSS	OCTOSPI1_NCS	-
PE12	-	TIM1_CH3N	-	-	-	SPI4_SCK	-	-
PE13	-	TIM1_CH3	-	-	-	SPI4_MISO	-	-
PE14	-	TIM1_CH4	-	-	-	SPI4_MOSI	-	-
PE15	-	TIM1_BKIN	-	TIM1_CH4N	-	-	-	USART10_CK

E

Table 15. Alternate functions AF0 to AF7⁽¹⁾ (continued)

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7
	SYS	LPTIM1/ TIM1/2/16/17	LPTIM3/ PDM_SAI1/ TIM3/4/5/12/15	I3C1/LPTIM2/3/ LPUART1/ OCTOSPI/TIM1/8	CEC/DCMI/ I2C1/2/3/4/ LPTIM1/2/SPI1/ I2S1/TIM15/ USART1	CEC/I3C1/LPTIM1/ SPI1/I2S1/SPI2/I2S2/ SPI3/I2S3/SPI4/5/6	I2C4/OCTOSPI/ SAI1/SPI3/I2S3/ SPI4/UART4/12/ USART10/ USB_PD	SDMMC1/SPI2/ I2S2/SPI3/I2S3/ SPI6/UART7/8/12 /USART11/2/3/6/ 10/11
PF0	-	-	-	-	I2C2_SDA	-	-	-
PF1	-	-	-	-	I2C2_SCL	-	-	-
PF2	-	-	LPTIM3_CH2	LPTIM3_IN2	I2C2_SMBA	-	UART12_TX	USART11_CK
PF3	-	-	LPTIM3_IN1	-	-	-	-	USART11_TX
PF4	-	-	LPTIM3_ETR	-	-	-	-	USART11_RX
PF5	-	-	LPTIM3_CH1	-	I2C4_SCL	I3C1_SCL	UART12_RX	USART11_CTS/ USART11_NSS
PF6	-	TIM16_CH1	-	-	-	SPI5_NSS	SAI1_SD_B	UART7_RX
PF7	-	TIM17_CH1	-	-	-	SPI5_SCK	SAI1_MCLK_B	UART7_TX
PF8	-	TIM16_CH1N	-	-	-	SPI5_MISO	SAI1_SCK_B	UART7_RTS/ UART7_DE
PF9	-	TIM17_CH1N	-	-	-	SPI5_MOSI	SAI1_FS_B	UART7_CTS
PF10	-	TIM16_BKIN	SAI1_D3	-	PSSI_D15	-	-	-
PF11	-	-	-	-	-	SPI5_MOSI	-	-
PF12	-	-	-	-	-	-	-	-
PF13	-	-	-	-	I2C4_SMBA	-	-	-
PF14	-	-	-	-	-	-	-	-
PF15	-	-	-	-	I2C4_SDA	I3C1_SDA	-	-

F

Table 15. Alternate functions AF0 to AF7⁽¹⁾ (continued)

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7
	SYS	LPTIM1/ TIM1/2/16/17	LPTIM3/ PDM_SAI1/ TIM3/4/5/12/15	I3C1/LPTIM2/3/ LPUART1/ OCTOSPI/TIM1/8	CEC/DCMI/ I2C1/2/3/4/ LPTIM1/2/SPI1/ I2S1/TIM15/ USART1	CEC/I3C1/LPTIM1/ SPI1/I2S1/SPI2/I2S2/ SPI3/I2S3/SPI4/5/6	I2C4/OCTOSPI/ SAI1/SPI3/I2S3/ SPI4/UART4/12/ USART10/ USB_PD	SDMMC1/SPI2/ I2S2/SPI3/I2S3/ SPI6/UART7/8/12 /USART11/2/3/6/ 10/11
PG0	-	-	-	-	-	-	-	-
PG1	-	-	-	-	-	-	-	SPI2_MOSI/ I2S2_SDO
PG2	-	-	-	TIM8_BKIN	-	-	-	UART12_RX
PG3	-	-	-	TIM8_BKIN2	-	-	-	UART12_TX
PG4	-	TIM1_BKIN2	-	-	-	-	-	-
PG5	-	TIM1_ETR	-	-	-	-	-	-
PG6	-	TIM17_BKIN	-	I3C1_SDA	I2C4_SDA	SPI1_RDY	-	-
PG7	-	-	SAI1_CK2	I3C1_SCL	I2C4_SCL	-	SAI1_MCLK_A	USART6_CK
PG8	-	-	-	TIM8_ETR	-	SPI6_NSS	-	USART6_RTS/ USART6_DE
PG9	-	-	-	-	-	SPI1_MISO/I2S1_SDI	-	USART6_RX
PG10	-	-	-	-	-	SPI1_NSS/I2S1_WS	-	-
PG11	-	LPTIM1_IN2	-	-	-	SPI1_SCK/I2S1_CK	USART10_RX	USART11_RTS/ USART11_DE
PG12	-	LPTIM1_IN1	-	-	PSSI_D15	SPI6_MISO	USART10_TX	USART6_RTS/ USART6_DE
PG13	TRACED0	LPTIM1_CH1	-	-	-	SPI6_SCK	USART10_CTS/ USART10_NSS	USART6_CTS/ USART6_NSS
PG14	TRACED1	LPTIM1_ETR	-	-	LPTIM1_CH2	SPI6_MOSI	USART10_RTS/ USART10_DE	USART6_TX
PG15	-	-	-	-	-	SPI4_RDY	USART10_CK	USART6_CTS/ USART6_NSS

G

Table 15. Alternate functions AF0 to AF7⁽¹⁾ (continued)

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7
	SYS	LPTIM1/ TIM1/2/16/17	LPTIM3/ PDM_SAI1/ TIM3/4/5/12/15	I3C1/LPTIM2/3/ LPUART1/ OCTOSPI/TIM1/8	CEC/DCMI/ I2C1/2/3/4/ LPTIM1/2/SPI1/ I2S1/TIM15/ USART1	CEC/I3C1/LPTIM1/ SPI1/I2S1/SPI2/I2S2/ SPI3/I2S3/SPI4/5/6	I2C4/OCTOSPI/ SAI1/SPI3/I2S3/ SPI4/USART4/12/ USART10/ USB_PD	SDMMC1/SPI2/ I2S2/SPI3/I2S3/ SPI6/USART7/8/12 /USART1/2/3/6/ 10/11
PH0	-	-	-	-	-	-	-	-
PH1	-	-	-	-	-	-	-	-
PH2	-	LPTIM1_IN2	-	-	-	-	-	-
PH3	-	-	-	-	-	-	-	-
PH4	-	-	-	-	I2C2_SCL	SPI5_RDY	-	SPI6_RDY
PH5	-	-	-	-	I2C2_SDA	SPI5_NSS	-	SPI6_RDY
PH6	-	TIM1_CH3N	TIM12_CH1	TIM8_CH1	I2C2_SMBA	SPI5_SCK	-	-
PH7	-	TIM1_CH3	-	TIM8_CH1N	I2C3_SCL	SPI5_MISO	-	-
PH8	-	TIM1_CH2N	TIM5_ETR	TIM8_CH2	I2C3_SDA	SPI5_MOSI	-	-
PH9	-	TIM1_CH2	TIM12_CH2	TIM8_CH2N	I2C3_SMBA	SPI5_NSS	-	-
PH10	-	TIM1_CH1N	TIM5_CH1	TIM8_CH3	I2C4_SMBA	SPI5_RDY	-	-
PH11	-	TIM1_CH1	TIM5_CH2	TIM8_CH3N	I2C4_SCL	I3C1_SCL	-	-
PH12	-	TIM1_BKIN	TIM5_CH3	TIM8_BKIN	I2C4_SDA	I3C1_SDA	-	-
PH13	-	LPTIM1_IN2	-	TIM8_CH1N	-	-	-	UART8_TX
PH14	-	-	-	TIM8_CH2N	-	-	-	-
PH15	-	-	-	TIM8_CH3N	-	-	-	-

H

Table 15. Alternate functions AF0 to AF7⁽¹⁾ (continued)

Port	AF0	AF1	AF2	AF3	AF4	AF5	AF6	AF7
	SYS	LPTIM1/ TIM1/2/16/17	LPTIM3/ PDM_SAI1/ TIM3/4/5/12/15	I3C1/LPTIM2/3/ LPUART1/ OCTOSPI/TIM1/8	CEC/DCMI/ I2C1/2/3/4/ LPTIM1/2/SPI1/ I2S1/TIM15/ USART1	CEC/I3C1/LPTIM1/ SPI1/I2S1/SPI2/I2S2/ SPI3/I2S3/SPI4/5/6	I2C4/OCTOSPI/ SAI1/SPI3/I2S3/ SPI4/UART4/12/ USART10/ USB_PD	SDMMC1/SPI2/ I2S2/SPI3/I2S3/ SPI6/UART7/8/12 /USART1/2/3/6/ 10/11
PI0	-	-	TIM5_CH4	-	-	SPI2_NSS/I2S2_WS	-	-
PI1	-	-	-	TIM8_BKIN2	-	SPI2_SCK/I2S2_OK	-	-
PI2	-	-	-	TIM8_CH4	-	SPI2_MISO/I2S2_SDI	-	-
PI3	-	-	-	TIM8_ETR	-	SPI2_MOS/I2S2_SDO	-	-
PI4	-	-	-	TIM8_BKIN	-	-	-	SPI2_RDY
PI5	-	-	-	TIM8_CH1	-	-	-	-
PI6	-	-	-	TIM8_CH2	-	-	-	-
PI7	-	-	-	TIM8_CH3	-	-	-	-
PI8	-	-	-	-	-	-	-	-
PI9	-	-	-	-	-	-	-	-
PI10	-	-	-	-	-	-	-	-
PI11	-	-	-	-	-	-	-	-

1. Refer to the next table for AF8 to AF15.

Table 16. Alternate functions AF8 to AF15⁽¹⁾

Port	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
A	LPUART1/SAI2 /SDMMC1/SPI6 /UART4/5/8	FDCAN12/FMC [NAND16]/FMC [NORmux]/FMC [NOR_RAM] /OCTOSPI/ SDMMC2/TIM13/14	CRS/FMC[NAND 16]/OCTOSPI/S AI2/SDMMC2/ TIM8/USB_PD	ETH[MII/RMII]/ FMC[NAND16]/ OCTOSPI/ SDMMC2/ UART7/9/USB_PD	FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ FMC[SDRAM_16bit] /SDMMC1	DCMI/FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ LPTIM5	LPTIM3/4/5/6/ TIM2/UART5	SYS
	PA0	UART4_TX	SDMMC2_CMD	SAI2_SD_B	ETH_MII CRS	-	TIM2_ETR	EVENTOUT
	PA1	UART4_RX	OCTOSPI1_IO3	SAI2_MCLK_B	ETH_MII_RX_CLK/E TH_RMII_REF_CLK	-	-	EVENTOUT
	PA2	SAI2_SCK_B	-	-	ETH_MDIO	-	-	EVENTOUT
	PA3	-	-	-	ETH_MII_COL	-	-	EVENTOUT
	PA4	SPI6_NSS	-	-	-	DCMI_HSYNC/ PSSI_DE	-	EVENTOUT
	PA5	SPI6_SCK	-	-	ETH_MII_TX_EN/ ETH_RMII_TX_EN	PSSI_D14	TIM2_ETR	EVENTOUT
	PA6	SPI6_MISO	TIM13_CH1	-	-	DCMI_PIXCLK/ PSSI_PDCK	-	EVENTOUT
	PA7	SPI6_MOSI	TIM14_CH1	OCTOSPI1_IO2	ETH_MII_RX_DV/ ETH_RMII CRS_DV	FMC_NWE	-	EVENTOUT
	PA8	-	-	USB_SOF	UART7_RX	DCMI_D3/PSSI_D3	-	EVENTOUT
	PA9	-	-	-	ETH_MII_TX_ER	DCMI_D0/PSSI_D0	-	EVENTOUT
	PA10	-	FDCAN2_TX	-	-	DCMI_D1/PSSI_D1	-	EVENTOUT
	PA11	-	FDCAN1_RX	USB_DM	-	-	-	EVENTOUT
	PA12	SAI2_FS_B	FDCAN1_TX	USB_DP	-	-	-	EVENTOUT
	PA13	-	-	-	-	-	-	EVENTOUT
	PA14	-	-	-	-	-	-	EVENTOUT
PA15	UART4_RTS/ UART4_DE	-	-	UART7_TX	FMC_NBL1	DCMI_D11/PSSI_D11	TIM2_ETR	EVENTOUT

Table 16. Alternate functions AF8 to AF15⁽¹⁾ (continued)

Port	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
	LPUART1/SAI2 /SDMMC1/SPI6 /UART4/5/8	FDCAN1/2/FMC [NAND16]/FMC [NORmux]/FMC [NOR_RAM]/ OCTOSPI/ SDMMC2/TIM13/14	CRS/FMC[NAND 16]/OCTOSPI/S AI2/SDMMC2/ TIM8/USB_PD	ETH[MII/RMII]/ FMC[NAND16]/ OCTOSPI/ SDMMC2/ UART7/9/USB_PD	FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ FMC[SDRAM_16bit] /SDMMC1	DCMI/FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ LPTIM5	LPTIM3/4/5/6/ TIM2/UART5	SYS
PB0	UART4_CTS	-	-	ETH_MII_RXD2	-	-	LPTIM3_CH1	EVENTOUT
PB1	-	-	-	ETH_MII_RXD3	-	-	LPTIM3_CH2	EVENTOUT
PB2	-	OCTOSPI1_CLK	OCTOSPI1_DQS	-	SDMMC1_CMD	LPTIM5_ETR	-	EVENTOUT
PB3	SPI6_SCK	SDMMC2_D2	CRS_SYNC	UART7_RX	-	-	LPTIM6_ETR	EVENTOUT
PB4	SPI6_MISO	SDMMC2_D3	-	UART7_TX	-	DCMI_D7/PSSI_D7	-	EVENTOUT
PB5	SPI6_MOSI	FDCAN2_RX	-	ETH_PPS_OUT	FMC_SDCKE1	DCMI_D10/PSSI_D10	UART5_RX	EVENTOUT
PB6	LPUART1_TX	FDCAN2_TX	OCTOSPI1_NCS	-	FMC_SDNE1	DCMI_D5/PSSI_D5	UART5_TX	EVENTOUT
PB7	LPUART1_RX	FDCAN1_TX	SDMMC2_D5	SDMMC2_CKIN	FMC_NL	DCMI_VSYNC/ PSSI_RDY	-	EVENTOUT
PB8	UART4_RX	FDCAN1_RX	SDMMC2_D4	ETH_MII_TXD3	SDMMC1_D4	DCMI_D6/PSSI_D6	-	EVENTOUT
PB9	UART4_TX	FDCAN1_TX	SDMMC2_D5	SDMMC2_CKIN	SDMMC1_D5	DCMI_D7/PSSI_D7	-	EVENTOUT
PB10	-	OCTOSPI1_NCS	-	ETH_MII_RX_ER	-	-	-	EVENTOUT
PB11	-	-	-	ETH_MII_TX_EN/ET H_RMII_TX_EN	FMC_NBL1	-	-	EVENTOUT
PB12	-	FDCAN2_RX	-	ETH_MII_TXD0/ ETH_RMII_TXD0	-	-	UART5_RX	EVENTOUT
PB13	-	FDCAN2_TX	-	-	SDMMC1_D0	-	UART5_TX	EVENTOUT
PB14	UART4_RTS/ UART4_DE	SDMMC2_D0	-	-	-	-	LPTIM3_ETR	EVENTOUT
PB15	UART4_CTS	SDMMC2_D1	OCTOSPI1_CLK	ETH_MII_TXD1/ ETH_RMII_TXD1	-	DCMI_D2/PSSI_D2	UART5_RX	EVENTOUT

B

Table 16. Alternate functions AF8 to AF15⁽¹⁾ (continued)

Port	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
	LPUART1/SAI2 /SDMMC1/SPI6 /UART4/5/8	FDCAN1/2/FMC [NAND16]/FMC [NORmux]/FMC [NOR_RAM]/ OCTOSPI/ SDMMC2/TIM13/14	CRS/FMC[NAND 16]/OCTOSPI/S AI2/SDMMC2/ TIM8/USB_PD	ETH[MII/RMII]/ FMC[NAND16]/ OCTOSPI/ SDMMC2/ UART7/9/USB_PD	FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ FMC[SDRAM_16bit] /SDMMC1	DCMI/FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ LPTIM5	LPTIM3/4/5/6/ TIM2/UART5	SYS
PC0	SAI2_FS_B	FMC_A25	OCTOSPI1_IO7	-	FMC_SDNWE	-	-	EVENTOUT
PC1	SAI2_SD_A	SDMMC2_CK	OCTOSPI1_IO4	ETH_MDC	-	-	-	EVENTOUT
PC2	-	OCTOSPI1_IO2	-	ETH_MII_TXD2	FMC_SDNE0	-	-	EVENTOUT
PC3	-	OCTOSPI1_IO0	-	ETH_MII_TX_CLK	FMC_SDCKE0	-	-	EVENTOUT
PC4	-	-	-	ETH_MII_RXD0/ ETH_RMII_RXD0	FMC_SDNE0	-	-	EVENTOUT
PC5	-	-	OCTOSPI1_DQS	ETH_MII_RXD1/ ETH_RMII_RXD1	FMC_SDCKE0	-	-	EVENTOUT
PC6	SDMMC1_D0D IR	FMC_NWAIT	SDMMC2_D6	OCTOSPI1_IO5	SDMMC1_D6	DCMI_D0/PSSI_D0	-	EVENTOUT
PC7	SDMMC1_D12 3DIR	FMC_NE1	SDMMC2_D7	OCTOSPI1_IO6	SDMMC1_D7	DCMI_D1/PSSI_D1	-	EVENTOUT
PC8	UART5_RTS/ UART5_DE	FMC_NE2/ FMC_NCE	FMC_INT	FMC_ALE	SDMMC1_D0	DCMI_D2/PSSI_D2	-	EVENTOUT
PC9	UART5_CTS	OCTOSPI1_IO0	-	FMC_CLE	SDMMC1_D1	DCMI_D3/PSSI_D3	-	EVENTOUT
PC10	UART4_TX	OCTOSPI1_IO1	-	ETH_MII_TXD0/ ETH_RMII_TXD0	SDMMC1_D2	DCMI_D8/PSSI_D8	-	EVENTOUT
PC11	UART4_RX	OCTOSPI1_NCS	-	-	SDMMC1_D3	DCMI_D4/PSSI_D4	-	EVENTOUT
PC12	UART5_TX	-	-	-	SDMMC1_CK	DCMI_D9/PSSI_D9	-	EVENTOUT
PC13	-	-	-	-	-	-	-	EVENTOUT
PC14	-	-	-	-	-	-	-	EVENTOUT
PC15	-	-	-	-	-	-	-	EVENTOUT

C

Table 16. Alternate functions AF8 to AF15⁽¹⁾ (continued)

Port	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
	LPUART1/SAI2/ SDMMC1/SPI6/ UART4/5/8	FDCAN1/2/FMC [NAND16]/FMC [NORmux]/FMC [NOR_RAM]/ OCTOSPI/ SDMMC2/TIM13/14	CRS/FMC[NAND 16]/OCTOSPI/S AI2/SDMMC2/ TIM8/USB_PD	ETH[MI/II/RMII]/ FMC[NAND16]/ OCTOSPI/ SDMMC2/ UART7/9/USB_PD	FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ FMC[SDRAM_16bit] /SDMMC1	DCMI/FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ LPTIM5	LPTIM3/4/5/6/ TIM2/UART5	SYS
PD0	UART4_RX	FDCAN1_RX	-	UART9_CTS	FMC_D2/FMC_AD2	-	-	EVENTOUT
PD1	UART4_TX	FDCAN1_TX	-	-	FMC_D3/FMC_AD3	-	-	EVENTOUT
PD2	UART5_RX	-	-	-	SDMMC1_CMD	DCMI_D11/PSSI_D11	LPTIM4_ETR	EVENTOUT
PD3	-	-	-	-	FMC_CLK	DCMI_D5/PSSI_D5	-	EVENTOUT
PD4	-	-	OCTOSPI1_IO4	-	FMC_NOE	-	-	EVENTOUT
PD5	-	FDCAN1_TX	OCTOSPI1_IO5	-	FMC_NWE	-	-	EVENTOUT
PD6	-	-	OCTOSPI1_IO6	SDMMC2_CK	FMC_NWAIT	DCMI_D10/PSSI_D10	-	EVENTOUT
PD7	-	-	OCTOSPI1_IO7	SDMMC2_CMD	FMC_NE1/ FMC_NCE	-	LPTIM4_OUT	EVENTOUT
PD8	-	-	-	-	FMC_D13/ FMC_AD13	-	-	EVENTOUT
PD9	-	FDCAN2_RX	-	-	FMC_D14/ FMC_AD14	-	-	EVENTOUT
PD10	-	-	-	-	FMC_D15/ FMC_AD15	-	-	EVENTOUT
PD11	UART4_RX	OCTOSPI1_IO0	SAI2_SD_A	-	FMC_A16/FMC_CLE	-	-	EVENTOUT
PD12	UART4_TX	OCTOSPI1_IO1	SAI2_FS_A	-	FMC_A17/FMC_ALE	DCMI_D12/PSSI_D12	-	EVENTOUT
PD13	-	OCTOSPI1_IO3	SAI2_SCK_A	UART9_RTS/ UART9_DE	FMC_A18	DCMI_D13/PSSI_D13	LPTIM4_IN1	EVENTOUT
PD14	UART8_CTS	-	-	UART9_RX	FMC_D0/FMC_AD0	-	-	EVENTOUT
PD15	UART8_RTS/ UART8_DE	-	-	UART9_TX	FMC_D1/FMC_AD1	-	-	EVENTOUT

D

Table 16. Alternate functions AF8 to AF15⁽¹⁾ (continued)

Port	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
	LPUART1/SAI2 /SDMMC1/SPI6 /UART4/5/8	FDCAN1/2/FMC [NAND16]/FMC [NORmux]/FMC [NOR_RAM]/ OCTOSPI/ SDMMC2/TIM13/14	CRS/FMC[NAND 16]/OCTOSPI/S AI2SDMMC2/ TIM8/USB_PD	ETH[MII/RMII]/ FMC[NAND16]/ OCTOSPI/ SDMMC2/ UART7/9/USB_PD	FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ FMC[SDRAM_16bit] /SDMMC1	DCMI/FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ LPTIM5	LPTIM3/4/5/6/ TIM2/UART5	SYS
PE0	UART8_RX	FDCAN1_RX	SAI2_MCLK_A	-	FMC_NBL0	DCMI_D2/PSSI_D2	-	EVENTOUT
PE1	UART8_TX	FDCAN1_TX	-	-	FMC_NBL1	DCMI_D3/PSSI_D3	-	EVENTOUT
PE2	UART8_TX	OCTOSPI1_IO2	-	ETH_MII_TXD3	FMC_A23	DCMI_D3/PSSI_D3	-	EVENTOUT
PE3	-	-	-	-	FMC_A19	-	-	EVENTOUT
PE4	-	-	-	-	FMC_A20	DCMI_D4/PSSI_D4	-	EVENTOUT
PE5	-	-	-	-	FMC_A21	DCMI_D6/PSSI_D6	-	EVENTOUT
PE6	-	-	SAI2_MCLK_B	-	FMC_A22	DCMI_D7/PSSI_D7	-	EVENTOUT
PE7	-	-	OCTOSPI1_IO4	-	FMC_D4/FMC_AD4	-	-	EVENTOUT
PE8	-	-	OCTOSPI1_IO5	-	FMC_D5/FMC_AD5	-	-	EVENTOUT
PE9	-	-	OCTOSPI1_IO6	-	FMC_D6/FMC_AD6	-	-	EVENTOUT
PE10	-	-	OCTOSPI1_IO7	-	FMC_D7/FMC_AD7	-	-	EVENTOUT
PE11	-	-	SAI2_SD_B	-	FMC_D8/FMC_AD8	-	-	EVENTOUT
PE12	-	-	SAI2_SCK_B	-	FMC_D9/FMC_AD9	-	-	EVENTOUT
PE13	-	-	SAI2_FS_B	-	FMC_D10/ FMC_AD10	-	-	EVENTOUT
PE14	-	-	SAI2_MCLK_B	-	FMC_D11/ FMC_AD11	-	-	EVENTOUT
PE15	-	-	-	-	FMC_D12/ FMC_AD12	-	-	EVENTOUT

E

Table 16. Alternate functions AF8 to AF15⁽¹⁾ (continued)

Port	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
	LPUART1/SAI2 /SDMMC1/SPI6 /UART4/5/8	FDCAN1/2/FMC [NAND16]/FMC [NORmux]/FMC [NOR_RAM]/ OCTOSPI/ SDMMC2/TIM13/14	CRS/FMC[NAND 16]/OCTOSPI/S AI2/SDMMC2/ TIM8/USB_PD	ETH[MI/II/RMII]/ FMC[NAND16]/ OCTOSPI/ SDMMC2/ UART7/9/USB_PD	FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ FMC[SDRAM_16bit] /SDMMC1	DCMI/FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ LPTIM5	LPTIM3/4/5/6/ TIM2/UART5	SYS
PF0	-	-	-	-	FMC_A0	LPTIM5_CH1	-	EVENTOUT
PF1	-	-	-	-	FMC_A1	LPTIM5_CH2	-	EVENTOUT
PF2	-	-	-	-	FMC_A2	LPTIM5_IN1	-	EVENTOUT
PF3	-	-	-	-	FMC_A3	LPTIM5_IN2	-	EVENTOUT
PF4	-	-	-	-	FMC_A4	-	-	EVENTOUT
PF5	-	-	-	-	FMC_A5	-	LPTIM3_IN1	EVENTOUT
PF6	-	-	OCTOSPI1_IO3	-	-	LPTIM5_CH1	-	EVENTOUT
PF7	-	-	OCTOSPI1_IO2	-	-	LPTIM5_CH2	-	EVENTOUT
PF8	-	TIM13_CH1	OCTOSPI1_IO0	-	-	LPTIM5_IN1	-	EVENTOUT
PF9	-	TIM14_CH1	OCTOSPI1_IO1	-	-	LPTIM5_IN2	-	EVENTOUT
PF10	-	OCTOSPI1_CLK	-	-	-	DCMI_D11/PSSI_D11	-	EVENTOUT
PF11	-	OCTOSPI1_NCLK	SAI2_SD_B	-	FMC_NRAS	DCMI_D12/PSSI_D12	LPTIM6_CH1	EVENTOUT
PF12	-	-	-	-	FMC_A6	-	LPTIM6_CH2	EVENTOUT
PF13	-	-	-	-	FMC_A7	-	LPTIM6_IN1	EVENTOUT
PF14	-	-	-	-	FMC_A8	-	LPTIM6_IN2	EVENTOUT
PF15	-	-	-	-	FMC_A9	-	-	EVENTOUT

F

Table 16. Alternate functions AF8 to AF15⁽¹⁾ (continued)

Port	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
	LPUART1/SAI2 /SDMMC1/SPi6 /UART4/5/8	FDCAN1/2/FMC [NAND16]/FMC [NORmux]/FMC [NOR_RAM]/ OCTOSPI/ SDMMC2/TIM13/14	CRS/FMC[NAND 16]/OCTOSPI/S AI2/SDMMC2/ TIM8/USB_PD	ETH[MII/RMII]/ FMC[NAND16]/ OCTOSPI/ SDMMC2/ UART7/9/USB_PD	FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ FMC[SDRAM_16bit] /SDMMC1	DCMI/FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ LPTIM5	LPTIM3/4/5/6/ TIM2/UART5	SYS
PG0	-	-	-	UART9_RX	FMC_A10	-	LPTIM4_IN1	EVENTOUT
PG1	-	-	-	UART9_TX	FMC_A11	-	-	EVENTOUT
PG2	-	-	-	-	FMC_A12	-	LPTIM6_ETR	EVENTOUT
PG3	-	-	-	-	FMC_A13	LPTIM5_ETR	-	EVENTOUT
PG4	-	-	-	-	FMC_A14/FMC_BA0	-	LPTIM4_ETR	EVENTOUT
PG5	-	-	-	-	FMC_A15/FMC_BA1	-	-	EVENTOUT
PG6	-	-	OCTOSPI1_NCS	UCPD1_FRSTX	FMC_NE3	DCMI_D12/PSSI_D12	-	EVENTOUT
PG7	-	-	-	UCPD1_FRSTX	FMC_INT	DCMI_D13/PSSI_D13	-	EVENTOUT
PG8	-	-	-	ETH_PPS_OUT	FMC_SDCCLK	-	-	EVENTOUT
PG9	-	OCTOSPI1_IO6	SAI2_FS_B	SDMMC2_D0	FMC_NE2/ FMC_NCE	DCMI_VSYNC/ PSSI_RDY	-	EVENTOUT
PG10	-	-	SAI2_SD_B	SDMMC2_D1	FMC_NE3	DCMI_D2/PSSI_D2	-	EVENTOUT
PG11	-	-	SDMMC2_D2	ETH_MII_TX_EN/ET H_RMII_TX_EN	-	DCMI_D3/PSSI_D3	-	EVENTOUT
PG12	-	-	SDMMC2_D3	ETH_MII_TXD1/ ETH_RMII_TXD1	FMC_NE4	DCMI_D11/PSSI_D11	LPTIM5_CH1	EVENTOUT
PG13	-	-	SDMMC2_D6	ETH_MII_TXD0/ ETH_RMII_TXD0	FMC_A24	LPTIM5_CH2	-	EVENTOUT
PG14	-	OCTOSPI1_IO7	SDMMC2_D7	ETH_MII_TXD1/ ETH_RMII_TXD1	FMC_A25	LPTIM5_IN1	-	EVENTOUT
PG15	-	-	-	-	FMC_NCAS	DCMI_D13/PSSI_D13	-	EVENTOUT

G

Table 16. Alternate functions AF8 to AF15⁽¹⁾ (continued)

Port	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
	LPUART1/SAI2 /SDMMC1/SPI6 /UART4/5/8	FDCAN1/2/FMC [NAND16]/FMC [NORmux]/FMC [NOR_RAM]/ OCTOSPI/ SDMMC2/TIM13/14	CRS/FMC[NAND 16]/OCTOSPI/S AI2/SDMMC2/ TIM8/USB_PD	ETH[MII/RMII]/ FMC[NAND16]/ OCTOSPI/ SDMMC2/ UART7/9/USB_PD	FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ FMC[SDRAM_16bit] /SDMMC1	DCMI/FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ LPTIM5	LPTIM3/4/5/6/ TIM2/UART5	SYS
PH0	-	-	-	-	-	-	-	EVENTOUT
PH1	-	-	-	-	-	-	-	EVENTOUT
PH2	-	OCTOSPI1_IO4	SAI2_SCK_B	ETH_MII_CRS	FMC_SDCKE0	-	-	EVENTOUT
PH3	-	OCTOSPI1_IO5	SAI2_MCLK_B	ETH_MII_COL	FMC_SDNE0	-	-	EVENTOUT
PH4	-	-	-	-	-	PSSI_D14	-	EVENTOUT
PH5	-	-	-	-	FMC_SDNWE	-	-	EVENTOUT
PH6	-	-	-	ETH_MII_RXD2	FMC_SDNE1	DCMI_D8/PSSI_D8	-	EVENTOUT
PH7	-	-	-	ETH_MII_RXD3	FMC_SDCKE1	DCMI_D9/PSSI_D9	-	EVENTOUT
PH8	-	-	-	-	-	DCMI_HSYNC/ PSSI_DE	-	EVENTOUT
PH9	-	-	-	-	-	DCMI_D0/PSSI_D0	-	EVENTOUT
PH10	-	-	-	-	-	DCMI_D1/PSSI_D1	-	EVENTOUT
PH11	-	-	-	-	-	DCMI_D2/PSSI_D2	-	EVENTOUT
PH12	-	-	TIM8_CH4N	-	-	DCMI_D3/PSSI_D3	-	EVENTOUT
PH13	UART4_TX	FDCAN1_TX	-	-	-	DCMI_D3/PSSI_D3	-	EVENTOUT
PH14	UART4_RX	FDCAN1_RX	-	-	-	DCMI_D4/PSSI_D4	-	EVENTOUT
PH15	-	-	-	-	-	DCMI_D11/PSSI_D11	-	EVENTOUT

H

Table 16. Alternate functions AF8 to AF15⁽¹⁾ (continued)

Port	AF8	AF9	AF10	AF11	AF12	AF13	AF14	AF15
	LPUART1/SAI2 /SDMMC1/SPI6 /UART4/5/8	FDCAN1/2/FMC [NAND16]/FMC [NORmux]/FMC [NOR_RAM]/ OCTOSPI/ SDMMC2/TIM13/14	CRS/FMC[NAND 16]/OCTOSPI/S AI2/SDMMC2/ TIM8/USB_PD	ETH[MII/RMII]/ FMC[NAND16]/ OCTOSPI/ SDMMC2/ UART7/9/USB_PD	FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ FMC[SDRAM_16bit] /SDMMC1	DCMI/FMC[NAND16]/ FMC[NORmux]/ FMC[NOR_RAM]/ LPTIM5	LPTIM3/4/5/6/ TIM2/UART5	SYS
PI0	-	-	-	-	-	DCMI_D13/PSSI_D13	-	EVENTOUT
PI1	-	-	-	-	-	DCMI_D8/PSSI_D8	-	EVENTOUT
PI2	-	-	-	-	-	DCMI_D9/PSSI_D9	-	EVENTOUT
PI3	-	-	-	-	-	DCMI_D10/PSSI_D10	-	EVENTOUT
PI4	-	-	SAI2_MCLK_A	-	-	DCMI_D5/PSSI_D5	-	EVENTOUT
PI5	-	-	SAI2_SCK_A	-	-	DCMI_VSYNC/ PSSI_RDY	-	EVENTOUT
PI6	-	-	SAI2_SD_A	-	-	DCMI_D6/PSSI_D6	-	EVENTOUT
PI7	-	-	SAI2_FS_A	-	-	DCMI_D7/PSSI_D7	-	EVENTOUT
PI8	-	-	-	-	-	-	-	EVENTOUT
PI9	UART4_RX	FDCAN1_RX	-	-	-	-	-	EVENTOUT
PI10	-	FDCAN1_RX	-	ETH_MII_RX_ER	-	PSSI_D14	-	EVENTOUT
PI11	-	-	-	-	-	PSSI_D15	-	EVENTOUT

1. Refer to the previous table for AF0 to AF7.