



User Manual

FG6485A High precision
Temperature and Humidity Transmitter



Certified ACC ISO 9001:2015

Product overview

The sensor adopts high-quality digital sensor and reliable digital processing circuit, so as to convert the temperature and humidity in the environment into standard Modbus signals, which can be monitored and monitored in a centralized manner with the upper computer system reliably. Good long - term stability, low hysteresis, strong chemical resistance, excellent repeatability. Widely used in building automation, climate and hvAC systems, museums, climate stations and other systems control.

Technical data

Temperature range: -40~120°C

Humidity range: 0~99.9%RH

Accuracy: $\pm 0.3^{\circ}\text{C}$; $\pm 3\%\text{RH}$

Sensitivity attenuation value: $< 0.1^{\circ}\text{C}/\text{Years}$;
 $< 0.5\%\text{RH}/\text{rs}$

Precautions for Use

To ensure the accuracy and stability of this product, please do not install this product in the following environment:

- Close to heat source, cold source or direct sunlight
- In the neat, water mist, and other condensing devices for a long time

Installation

1. The transmitter shall be installed at a location that is typical of the temperature and humidity to be measured in the environment.
2. Make sure there is enough space around the transmitter to allow air to circulate.
3. do not install directly on the heating and cooling equipment, and steam.
4. Keep away from power lines during installation.

Error sources

1. Place for too short a time/change the position frequently.
2. Too close to the cold source/heat source.
3. It is directly exposed to dust or other environmental pollution without maintenance.

Disclaimer

Do not use this product in a protective device or emergency stop device, or in any application that may result in personal injury due to the failure of the modified product, unless there is a special purpose or authorization for use. Please follow the instructions of the product before using and installing. In case of any personal injury accident or property loss caused by non-compliance with this recommendation, the Company will not be liable for any liability and claim, and will not be liable for any claim arising from such accident to the company's managers, employees, agents and distributors.

Quality assurance

We guarantee the quality of our products to direct buyers for 12 months (from the date of delivery). The company shall publish the technical specifications of the data manual of the product. If the product is proved to be defective within the warranty period, the company will provide free repair and replacement. The user shall satisfy the following conditions:

1. Notify the company in writing within 14 days after finding the defect.
 2. Send it back to the company at the buyer's own expense
 3. Product is within the warranty period
- The company is only responsible for the defects caused by the application of the products in accordance with the technical conditions of the products. No guarantees are made for specific application scenarios.

License Agreement

1. Without the written permission of the Company, the contents in the Instructions shall not be copied and disseminated in any form, nor shall the contents be disclosed to any third party.
2. The ownership of the Company and the third party Yonyou software can only be used by users after signing a contract or obtaining a software license.
3. The contents of the manual are subject to change without prior notice.

Resolution: 0.1

Sampling period: 3s


Power supply: 12~36V (DC)

Output: Modbus RTU


N.W: 39.0g

Wiring instructions

Pin	Name	Describe
1	A+	RS485 A
2	VDD	Power in
3	GND	Power out
4	B-	RS485 B




Modbus address



Calculation method:

The Numbers 1-8 correspond to 1, 2, 4, 8, 16, 32, 64, 128: Add all the corresponding values of 1-8 address code to NO part, and the result is the address value.

Error curve:

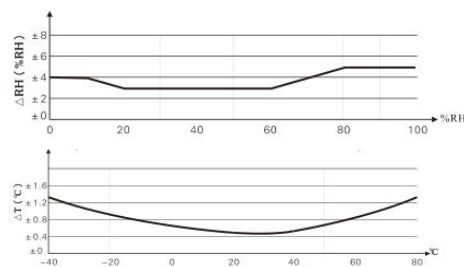

Certificate of approval

Product Name: Product Model:
Factory No. : Inspector:
Date of manufacture:

Warranty card

User contact:	
Model:	
Purchase date:	
Warranty:	

- * If the content crisis, then the warranty card is invalid, because the user is required to record the content when purchasing.
- * The warranty items in the warranty card are breathtaking and the free items bound in the warranty card are maintained.
- * During the warranty period, in case of any failure of the product, users are requested to issue a real warranty card to the dealer, purchase an invoice and propose maintenance requirements.