

► Cylinder Inductive Proximity Switch Series




Dimension				Φ4(LJ4)	M5(LJ5)	Φ6(LJ6)		Φ8(LJ8)		M10(LJ10)
Mounting way				Screen shield type	Screen shield type	Screen shield type	Non-screen shield type	Screen shield type	Non-screen shield type	Non-screen shield type
Type	DC type	NPN	NO	LJ4A3-1-Z/BX	LJ5A3-1-Z/BX	LJ6A3-1-Z/BX	LJ6A3-2-Z/BX	LJ8A3-1-Z/BX	LJ8A3-2-Z/BX	LJ10A3-2-Z/BX
			NC	LJ4A3-1-Z/AX	LJ5A3-1-Z/AX	LJ6A3-1-Z/AX	LJ6A3-2-Z/AX	LJ8A3-1-Z/AX	LJ8A3-2-Z/AX	LJ10A3-2-Z/AX
			NO+NC							
		PNP	NO	LJ4A3-1-Z/BY	LJ5A3-1-Z/BY	LJ6A3-1-Z/BY	LJ6A3-2-Z/BY	LJ8A3-1-Z/BY	LJ8A3-2-Z/BY	LJ10A3-2-Z/BY
			NC	LJ4A3-1-Z/AY	LJ5A3-1-Z/AY	LJ6A3-1-Z/AY	LJ6A3-2-Z/AY	LJ8A3-1-Z/AY	LJ8A3-2-Z/AY	LJ10A3-2-Z/AY
			NO+NC							
	AC type	Two-wire	NO			LJ6A3-1-Z/EX	LJ6A3-2-Z/EX	LJ8A3-1-Z/EX	LJ8A3-2-Z/EX	LJ10A3-2-Z/EX
			NC			LJ6A3-1-Z/DX	LJ6A3-2-Z/DX	LJ8A3-1-Z/DX	LJ8A3-2-Z/DX	LJ10A3-2-Z/DX
		Three-wire	NO			LJ6A3-1-J/EZ	LJ6A3-2-J/EZ	LJ8A3-1-J/EZ	LJ8A3-2-J/EZ	LJ10A3-2-J/EZ
			NC			LJ6A3-1-J/DZ	LJ6A3-2-J/DZ	LJ8A3-1-J/DZ	LJ8A3-2-J/DZ	LJ10A3-2-J/DZ
Detection range				1mm±10%	1mm±10%	1.5mm±10%	2mm±10%	1.5mm±10%	2mm±10%	2mm±10%
Set distance				0~0.7mm	0~0.7mm	0~1.2mm	0~1.6mm	0~1.2mm	0~1.6mm	0~1.6mm
Standard detection object				Iron 5×5×1mm	Iron 5×5×1mm	Iron 8×8×1mm	Iron 12×12×1mm	Iron 8×8×1mm	Iron 12×12×1mm	Iron 8×8×1mm
Response frequency				DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz
illustration				Chart 33	Chart 34	Chart 35		Chart 36	Chart 37	Chart 38

Dimension				M14(LJ14)		M16(LJ16)		M20(LJ20)		M22(LJ22)	
Mounting way				Screen shield type	Non-screen shield type	Screen shield type	Non-screen shield type	Screen shield type	Non-screen shield type	Screen shield type	Non-screen shield type
Type	DC type	NPN	NO	LJ12A3-2-Z/BX	LJ12A3-4-Z/BX	LJ18A3-5-Z/BX	LJ18A3-8-Z/BX	LJ24A3-8-Z/BX	LJ24A3-10-Z/BX	LJ30A3-10-Z/BX	LJ30A3-15-Z/BX
			NC	LJ12A3-2-Z/AX	LJ12A3-4-Z/AX	LJ18A3-5-Z/AX	LJ18A3-8-Z/AX	LJ24A3-8-Z/AX	LJ24A3-10-Z/AX	LJ30A3-10-Z/AX	LJ30A3-15-Z/AX
			NO+NC	LJ12A3-2-Z/CX	LJ12A3-4-Z/CX	LJ18A3-5-Z/CX	LJ18A3-8-Z/CX	LJ24A3-8-Z/CX	LJ24A3-10-Z/CX	LJ30A3-10-Z/CX	LJ30A3-15-Z/CX
		PNP	NO	LJ12A3-2-Z/BY	LJ12A3-4-Z/BY	LJ18A3-5-Z/BY	LJ18A3-8-Z/BY	LJ24A3-8-Z/BY	LJ24A3-10-Z/BY	LJ30A3-10-Z/BY	LJ30A3-15-Z/BY
			NC	LJ12A3-2-Z/AY	LJ12A3-4-Z/AY	LJ18A3-5-Z/AY	LJ18A3-8-Z/AY	LJ24A3-8-Z/AY	LJ24A3-10-Z/AY	LJ30A3-10-Z/AY	LJ30A3-15-Z/AY
			NO+NC	LJ12A3-2-Z/CY	LJ12A3-4-Z/CY	LJ18A3-5-Z/CY	LJ18A3-8-Z/CY	LJ24A3-8-Z/CY	LJ24A3-10-Z/CY	LJ30A3-10-Z/CY	LJ30A3-15-Z/CY
	AC type	Two-wire	NO	LJ12A3-2-Z/EX	LJ12A3-4-Z/EX	LJ18A3-5-Z/EX	LJ18A3-8-Z/EX	LJ24A3-8-Z/EX	LJ24A3-10-Z/EX	LJ30A3-10-Z/EX	LJ30A3-15-Z/EX
			NC	LJ12A3-2-Z/DX	LJ12A3-4-Z/DX	LJ18A3-5-Z/DX	LJ18A3-8-Z/DX	LJ24A3-8-Z/DX	LJ24A3-10-Z/DX	LJ30A3-10-Z/DX	LJ30A3-15-Z/DX
		Three-wire	NO	LJ12A3-2-J/EZ	LJ12A3-4-J/EZ	LJ18A3-5-J/EZ	LJ18A3-8-J/EZ	LJ24A3-8-J/EZ	LJ24A3-10-J/EZ	LJ30A3-10-J/EZ	LJ30A3-15-J/EZ
			NC	LJ12A3-2-J/DZ	LJ12A3-4-J/DZ	LJ18A3-5-J/DZ	LJ18A3-8-J/DZ	LJ24A3-8-J/DZ	LJ24A3-10-J/DZ	LJ30A3-10-J/DZ	LJ30A3-15-J/DZ
		NO+NC				LJ18A3-5-J/EDZ	LJ18A3-8-J/EDZ	LJ24A3-8-J/EDZ	LJ24A3-10-J/EDZ	LJ30A3-10-J/EDZ	LJ30A3-15-J/EDZ
Detection range				2mm±10%	4mm±10%	5mm±10%	8mm±10%	8mm±10%	10mm±10%	10mm±10%	15mm±10%
Set distance				0~1.6mm	0~3.6mm	0~4mm	0~7mm	0~7mm	0~8mm	0~7mm	0~8mm
Standard detection object				Iron 12×12×1mm	Iron 15×15×1mm	Iron 18×18×1mm	Iron 30×30×1mm	Iron 24×24×1mm	Iron 30×30×1mm	Iron 30×30×1mm	Iron 54×54×1mm
Responce frequency				DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz	DC:0.5Hz AC:25Hz
illustration				Chart 39	Chart 40	Chart 41	Chart 42	Chart 43	Chart 44	Chart 45	Chart 46

► Cylinder Inductive Proximity Switch Series

Chart 33


LJ4A3-1-□

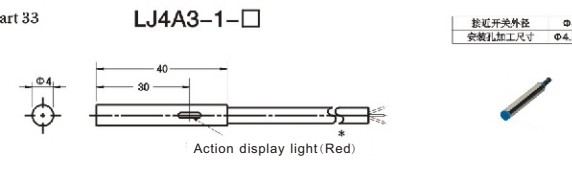

按近开关外径 Φ4
安装孔加工尺寸 Φ4.5^{±0.05}

Chart 34


LJ5A3-1-□

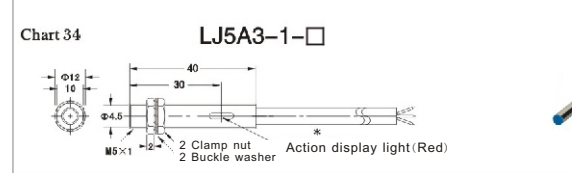

Φ4.5
M5×1
2 Clamp nut
2 Buckle washer
Action display light (Red)

Chart 35


LJ6A3-1-□

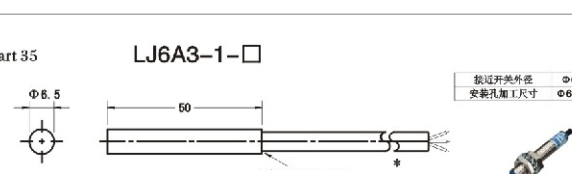

按近开关外径 Φ6.5
安装孔加工尺寸 Φ6.7^{±0.05}

Chart 36


LJ8A3-1-□

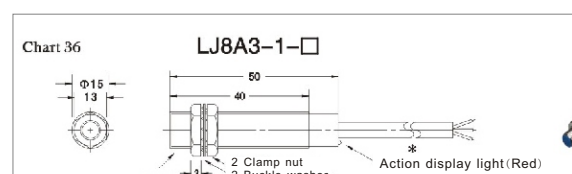

Φ8
M8×1
2 Clamp nut
2 Buckle washer
Action display light (Red)

Chart 37


LJ8A3-2-□

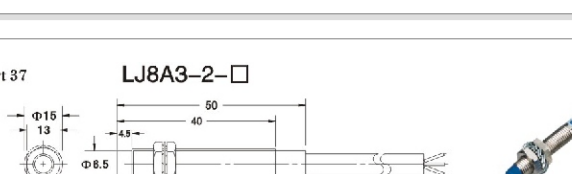

Φ8
M8×1
2 Clamp nut
2 Buckle washer
Action display light (Red)

Chart 38


LJ10A3-2-□

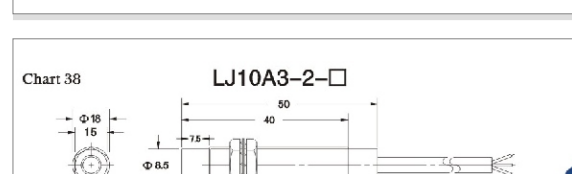

Φ10
M10×1
2 Clamp nut
2 Buckle washer
Action display light (Red)

Chart 39


LJ12A3-2-□

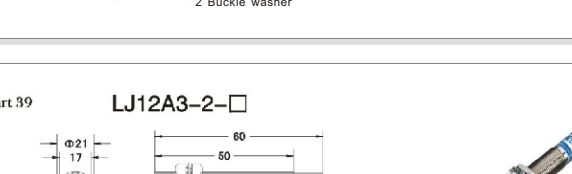

Φ12
M12×1
2 Clamp nut
2 Buckle washer
Action display light (Red)

Chart 40


LJ12A3-4-□

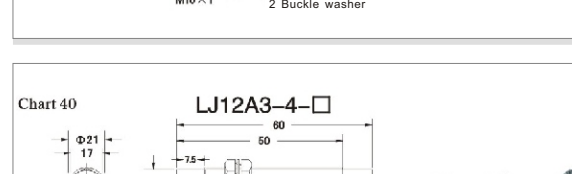

Φ12
M12×1
2 Clamp nut
2 Buckle washer
Action display light (Red)

Chart 41


LJ18A3-5-□

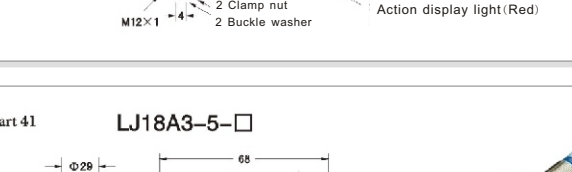

Φ18
M18×1
2 Clamp nut
2 Buckle washer
Action display light (Red)

Chart 42


LJ18A3-8-□

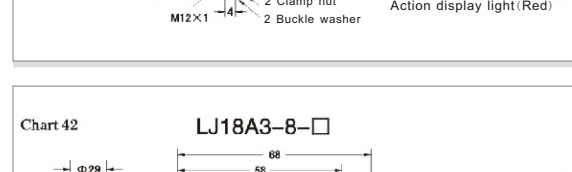

Φ18
M18×1
2 Clamp nut
2 Buckle washer
Action display light (Red)

Chart 43


LJ24A3-8-□

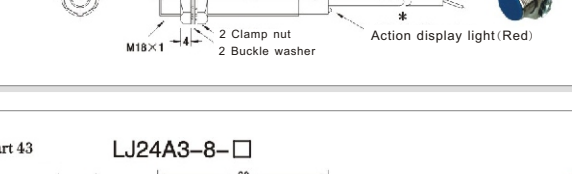

Φ24
M24×1.5
2 Clamp nut
2 Buckle washer
Action display light (Red)

Chart 44


LJ24A3-10-□

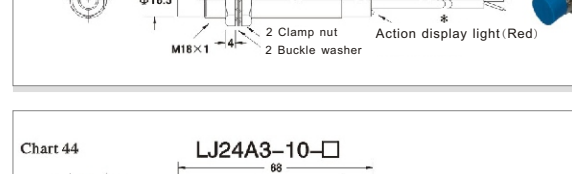

Φ24
M24×1.5
2 Clamp nut
2 Buckle washer
Action display light (Red)

Chart 45


LJ30A3-10-□

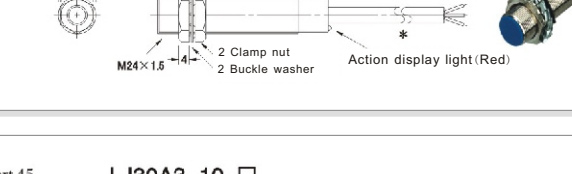

Φ30
M30×1.5
2 Clamp nut
2 Buckle washer
Action display light (Red)

Chart 46

LJ30A3-15-□

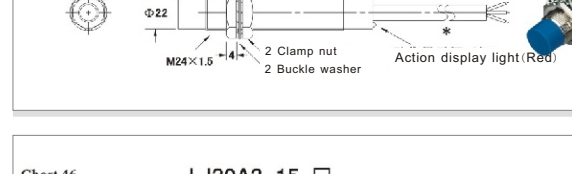

Φ30
M30×1.5
2 Clamp nut
2 Buckle washer
Action display light (Red)