



Online PCB Quote


[Re-Upload](#) [Gerber Viewer](#)



Detected 2 layer board of 61.32×61.37mm(2.41×2.42 inches).

Base Material

?



Layers

?

1

2

4

High Precision PCB

6

8

10

12

14

16

More

Dimensions

?

61.37

*

61.32

mm

PCB Qty

?

5

Product Type

?

Industrial/Consumer electronics

Aerospace

Medical

"4-Wire Kelvin Test" and "FR4 Tg155" options are automatically selected to ensure the board quality for aerospace and medical products.

PCB Specifications

^

Different Design

?

1

2

3

4

Delivery Format

?

Single PCB

Panel by Customer

Panel by JLCPCB

PCB Thickness

?

0.4mm

0.6mm

0.8mm

1.0mm

1.2mm

1.6mm

2.0mm

PCB Color

?

Green

Purple

Red

Yellow

Blue

White

Black

Silkscreen

?

White

Material Type

?

FR4 TG135

FR4 TG155

Nan Ya NP-140F

KB6164 - TG135

Nan Ya NP-155F

KB-6165 - TG155

S1141 TG140

S1000H TG155

Surface Finish

?

HASL(with lead)

LeadFree HASL

ENIG

High-spec Options

^

Outer Copper Weight

?

1 oz

2 oz

Inner Copper Weight

?

0.5 oz

1 oz

2 oz

Specify Layer Sequence

?

No

Yes

Specify Stackup

?

No

Yes

[Impedance calculator >](#)

Via Covering	?	Plugged	Untented	Epoxy Filled & Capped	Copper paste Filled & Capped	Tented
Via Plating Method	?	Not Specified	Conductive Adhesive	Horizontal Electroless Copper Plating		
Min via hole size/diameter	?	0.3mm/(0.4/0.45mm)	0.25mm/(0.35/0.4mm)	0.2mm/(0.3/0.35mm)	0.15mm/(0.25/0.3mm)	
Board Outline Tolerance	?	±0.2mm(Regular)	±0.1mm(Precision)			
Confirm Production file	?	No	Yes			
Mark on PCB	?	Remove Mark	2D barcode (Serial Number)			
Electrical Test	?	Flying Probe Fully Test				
Gold Fingers	?	No	Yes			
Castellated Holes	?	No	Yes			
Press-Fit Hole	?	No	Yes (Tolerance +/-0.05mm)			
Edge Plating	?	No	Yes			
Blind Slots	?	No	Yes			
UL Marking	?	No	Yes (Any Position)	Yes (Specify Position)		
Backdrill	?	No	Yes			
Humidity Indicator Card	?	No	Yes			

Advanced Options

4-Wire Kelvin Test	?	No	Yes		
Paper between PCBs	?	No	Yes		
Appearance Quality	?	IPC Class 2 Standard	Superb Quality		
Silkscreen Technology	?	Ink-jet Printing Silkscreen	High-precision Printing Silkscreen	EasyEDA multi-color silkscreen	
		High-definition Exposure Silkscreen			
Package Box	?	With JLCPCB logo	Blank box		
Inspection Report	?	No	Final Inspection Report	Electrical Test Report	ROHS Test Report

PCB Remark 




PCB Assembly




Assembly cost starting from \$0 with coupon>



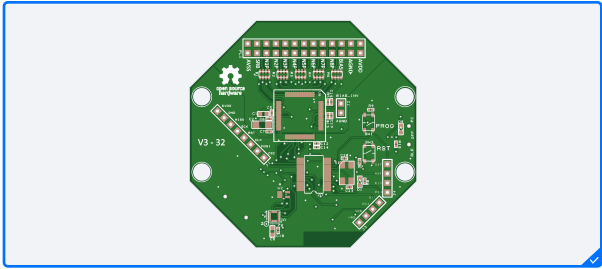

☒ Assemble top side

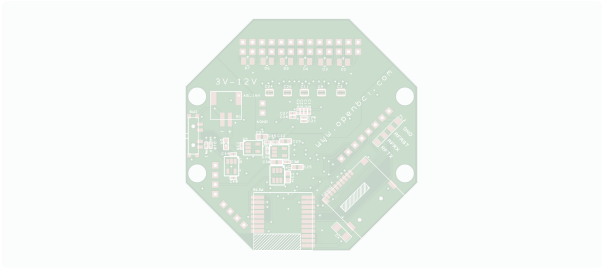

☐ Assemble bottom side

PCBA Type [What's the difference?](#)

Assembly Side

PCBA Qty

Tooling holes

Confirm Parts Placement

Stencil Storage

Fixture Storage

Parts Selection

Advanced Options ^

Bake Components	No	Photo Confirmation	No
Board Cleaning	No	Conformal Coating (cleaning included)	No
Special stencil	No	Packaging	Antistatic bubble fil
Depanel boards & edge rail before delivery	No	Solder Paste	High temp.
Flying Probe Test	No	Nitrogen reflow soldering	Yes (for Economic)
Function test	No	PCBA remark	No

☒ I agree to [the Terms and Conditions of JLCPCB assembly Service](#).



Stencil

Order together with PCB ☐ Stencil Order Guide>

Charge Detail

Special Offer
Via Covering
Surface Finish
Material Type
4-Wire Kelvin

Economic PC

Components

SMT Assembly
Hand-soldering
Manual Assembly

PCB Build Time

☐ 3-4 days
☒ 3 days
☐ 2-3 days

Calculated
Additional charges

