

Nebula Camera Installation Firmware Upgrade

Step One

Download the firmware upgrade software and decompress it

(https://www.creality.com/pages/download-creality-nebula-smart-kit?spm=..page_1934481.products_display_1.1&spm_prev=..index.header_1.1)



NEBULA_ota_img_V1.1.0.29.img

Dec 10, 2025

[Download](#)

Release Notes

+

Older Versions

+

Step Two


Connect the Nebula camera to your computer

Step Three


Open the "USBDownloadTool_debug.exe" file and click "FW Version". The system automatically identifies the latest firmware



名称	修改日期	类型	大小
AitUVCExtApi.dll	2018/2/2 16:54	应用程序扩展	18K
appfs.jffs2	2023/11/17 17:20	JFFS2 文件	1,024
auto_update.txt	2023/7/13 19:37	文本文档	-
iboot.bin	2023/9/8 15:47	BIN 文件	25
msvcp140d.dll	2016/6/9 22:46	应用程序扩展	73K
ucamera-t31	2023/11/17 10:01	文件	86K
ucrtbased.dll	2016/7/28 8:00	应用程序扩展	1,49K
ulmage	2023/11/17 17:20	文件	3,54K
UsbCamLib.dll	2022/2/22 11:13	应用程序扩展	16K
USBDownloadTool_debug.exe	2023/11/20 19:29	应用程序	8,69K
UserManual.docx	2023/11/18 12:06	DOCX 文档	8K
vcruntime140d.dll	2016/6/9 22:46	应用程序扩展	11K

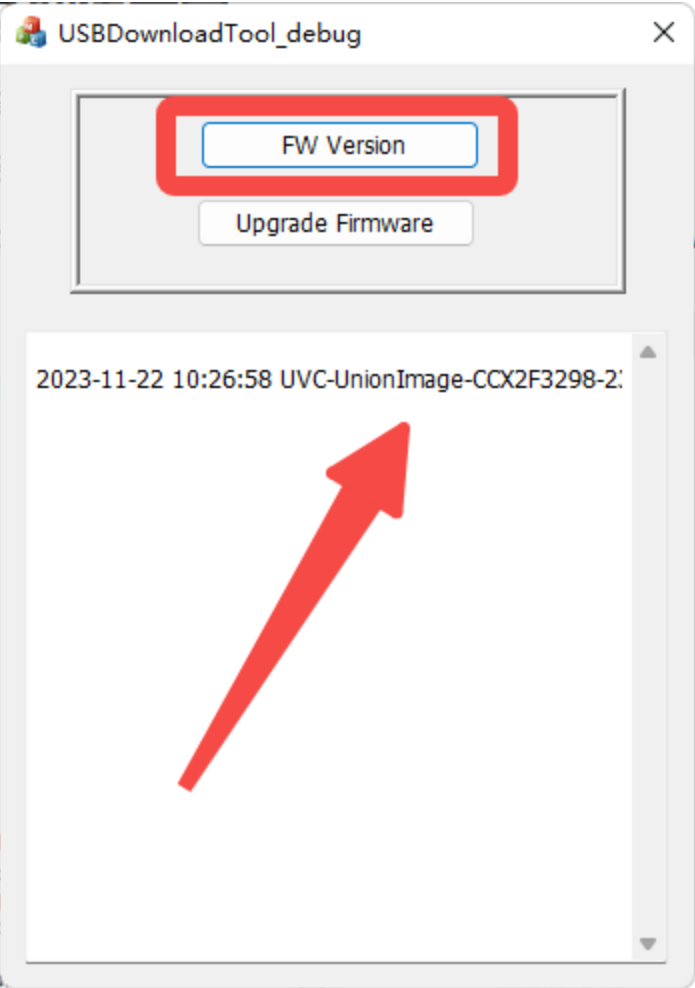


If the computer does not recognize the camera, the following will display "烫烫烫 (hot hot hot)" . Please try to reinsert or replace another USB port, if it is still not recognized, check the computer driver or replace the computer

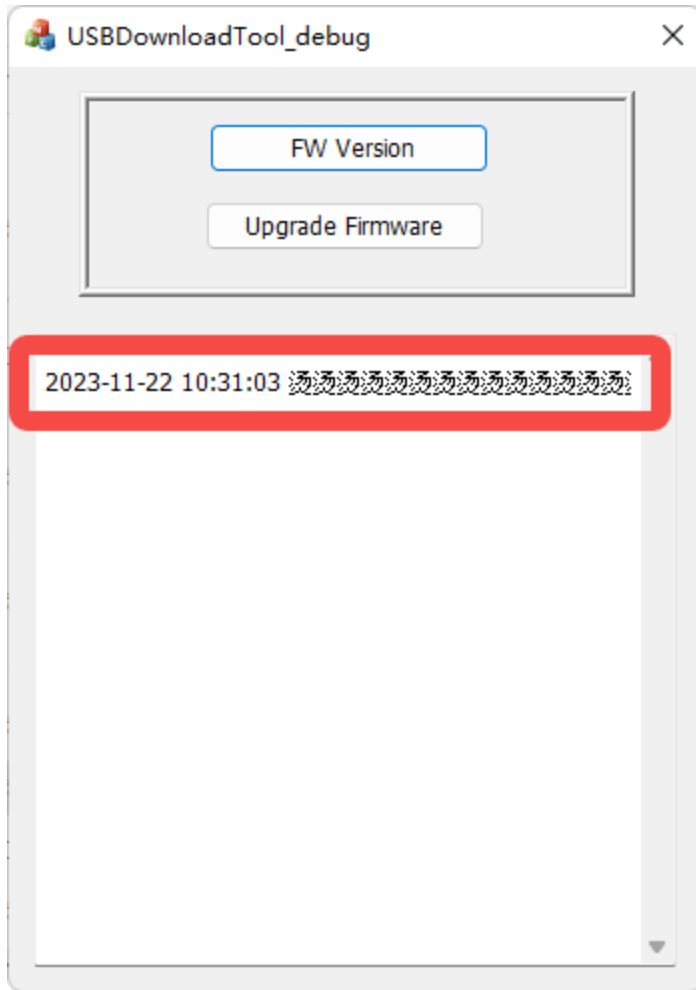


Step Four

Left click "Upgrade Firmware" and wait until "UVC-UnionImage" is displayed in the lower part of the window

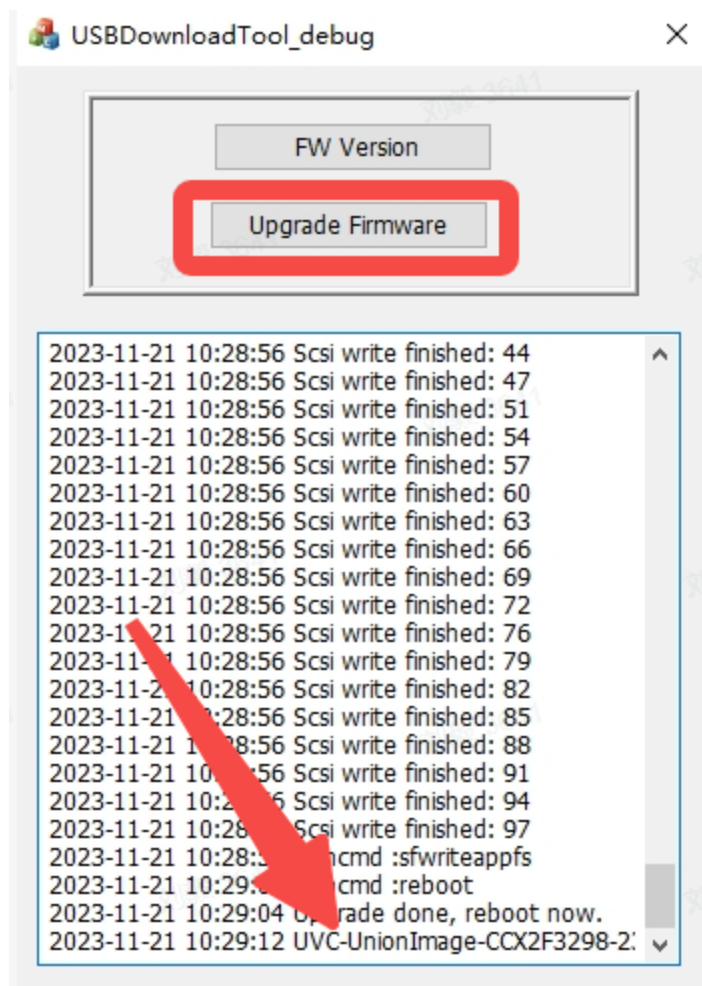

If the message "Can't find SCSI device" is displayed below, the current PC does not have the permission to export files. Set or replace the PC

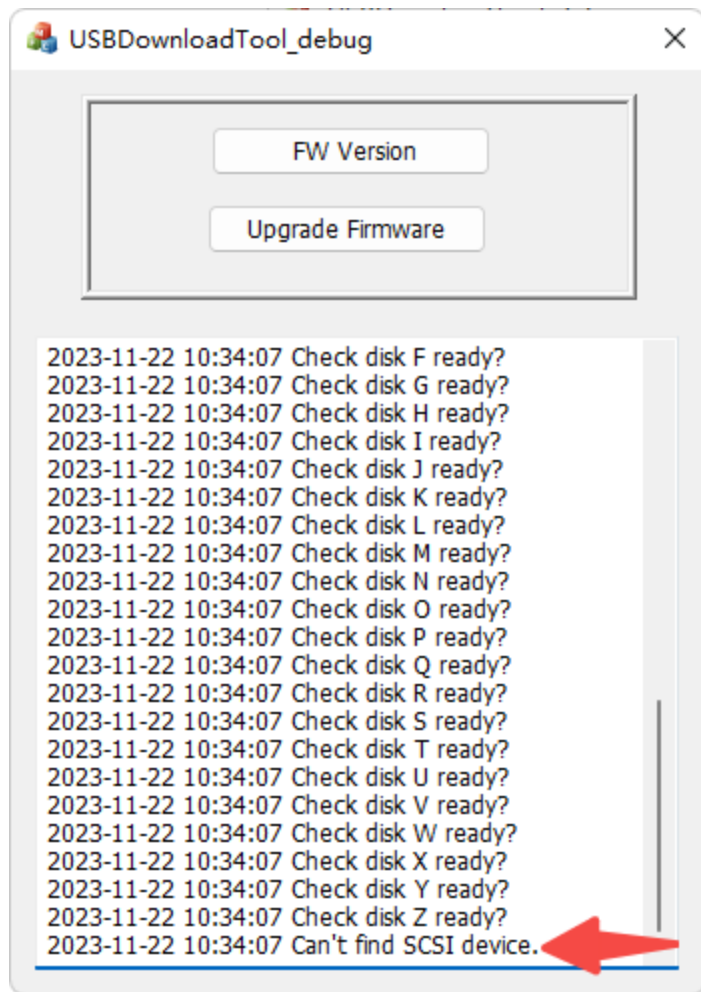

Step Five

Finish