AERO SELFIE

AERO SELFIE · REV A · 2026-05-29

30A

4-IN-1 ESC · 8-BIT
SPECIFICATION SHEET

01 / PRODUCT OVERVIEW

The **AERO SELFIE 30A** is a compact four-in-one brushless ESC driven by an **8-bit** high-speed MCU, delivering **30 A** continuous and **40 A** burst (30 s) on each of its four channels across a **6-18 V** (2S-4S) input range. High-frequency PWM with hardware synchronous rectification and regenerative braking gives excellent throttle linearity, faster deceleration, and higher battery energy-recovery efficiency. **PWM**, **DShot**, and **OneShot** drive protocols, a current-sense output, and onboard stall protection round out a power stage sized for sub-300 mm multirotors. The integrated **28 × 30 × 5.4 mm** board mounts on a **20 × 20 mm** M3 pattern, weighs roughly **5.6 g**, and cools by natural convection.

02 / SPECIFICATIONS

Model	4in1-ESC-30A
Type	4-in-1 Brushless ESC
Input Voltage	6-18 V (2S-4S)
Continuous Current	30 A × 4
Burst Current	40 A × 4 (30 s)
Drive Protocol	PWM · DShot · OneShot
MCU	8-bit
BEC Output	None
Stall Protection	Yes
Cooling	Natural convection
Dimensions	28 × 30 × 5.4 mm
Mounting	M3 × 4 · 20 × 20 mm
Weight	≈ 5.6 g
Operating Temp.	-10°C - 55°C
HW / SW Version	1.0 / 1.0

03 / BOARD LAYOUT

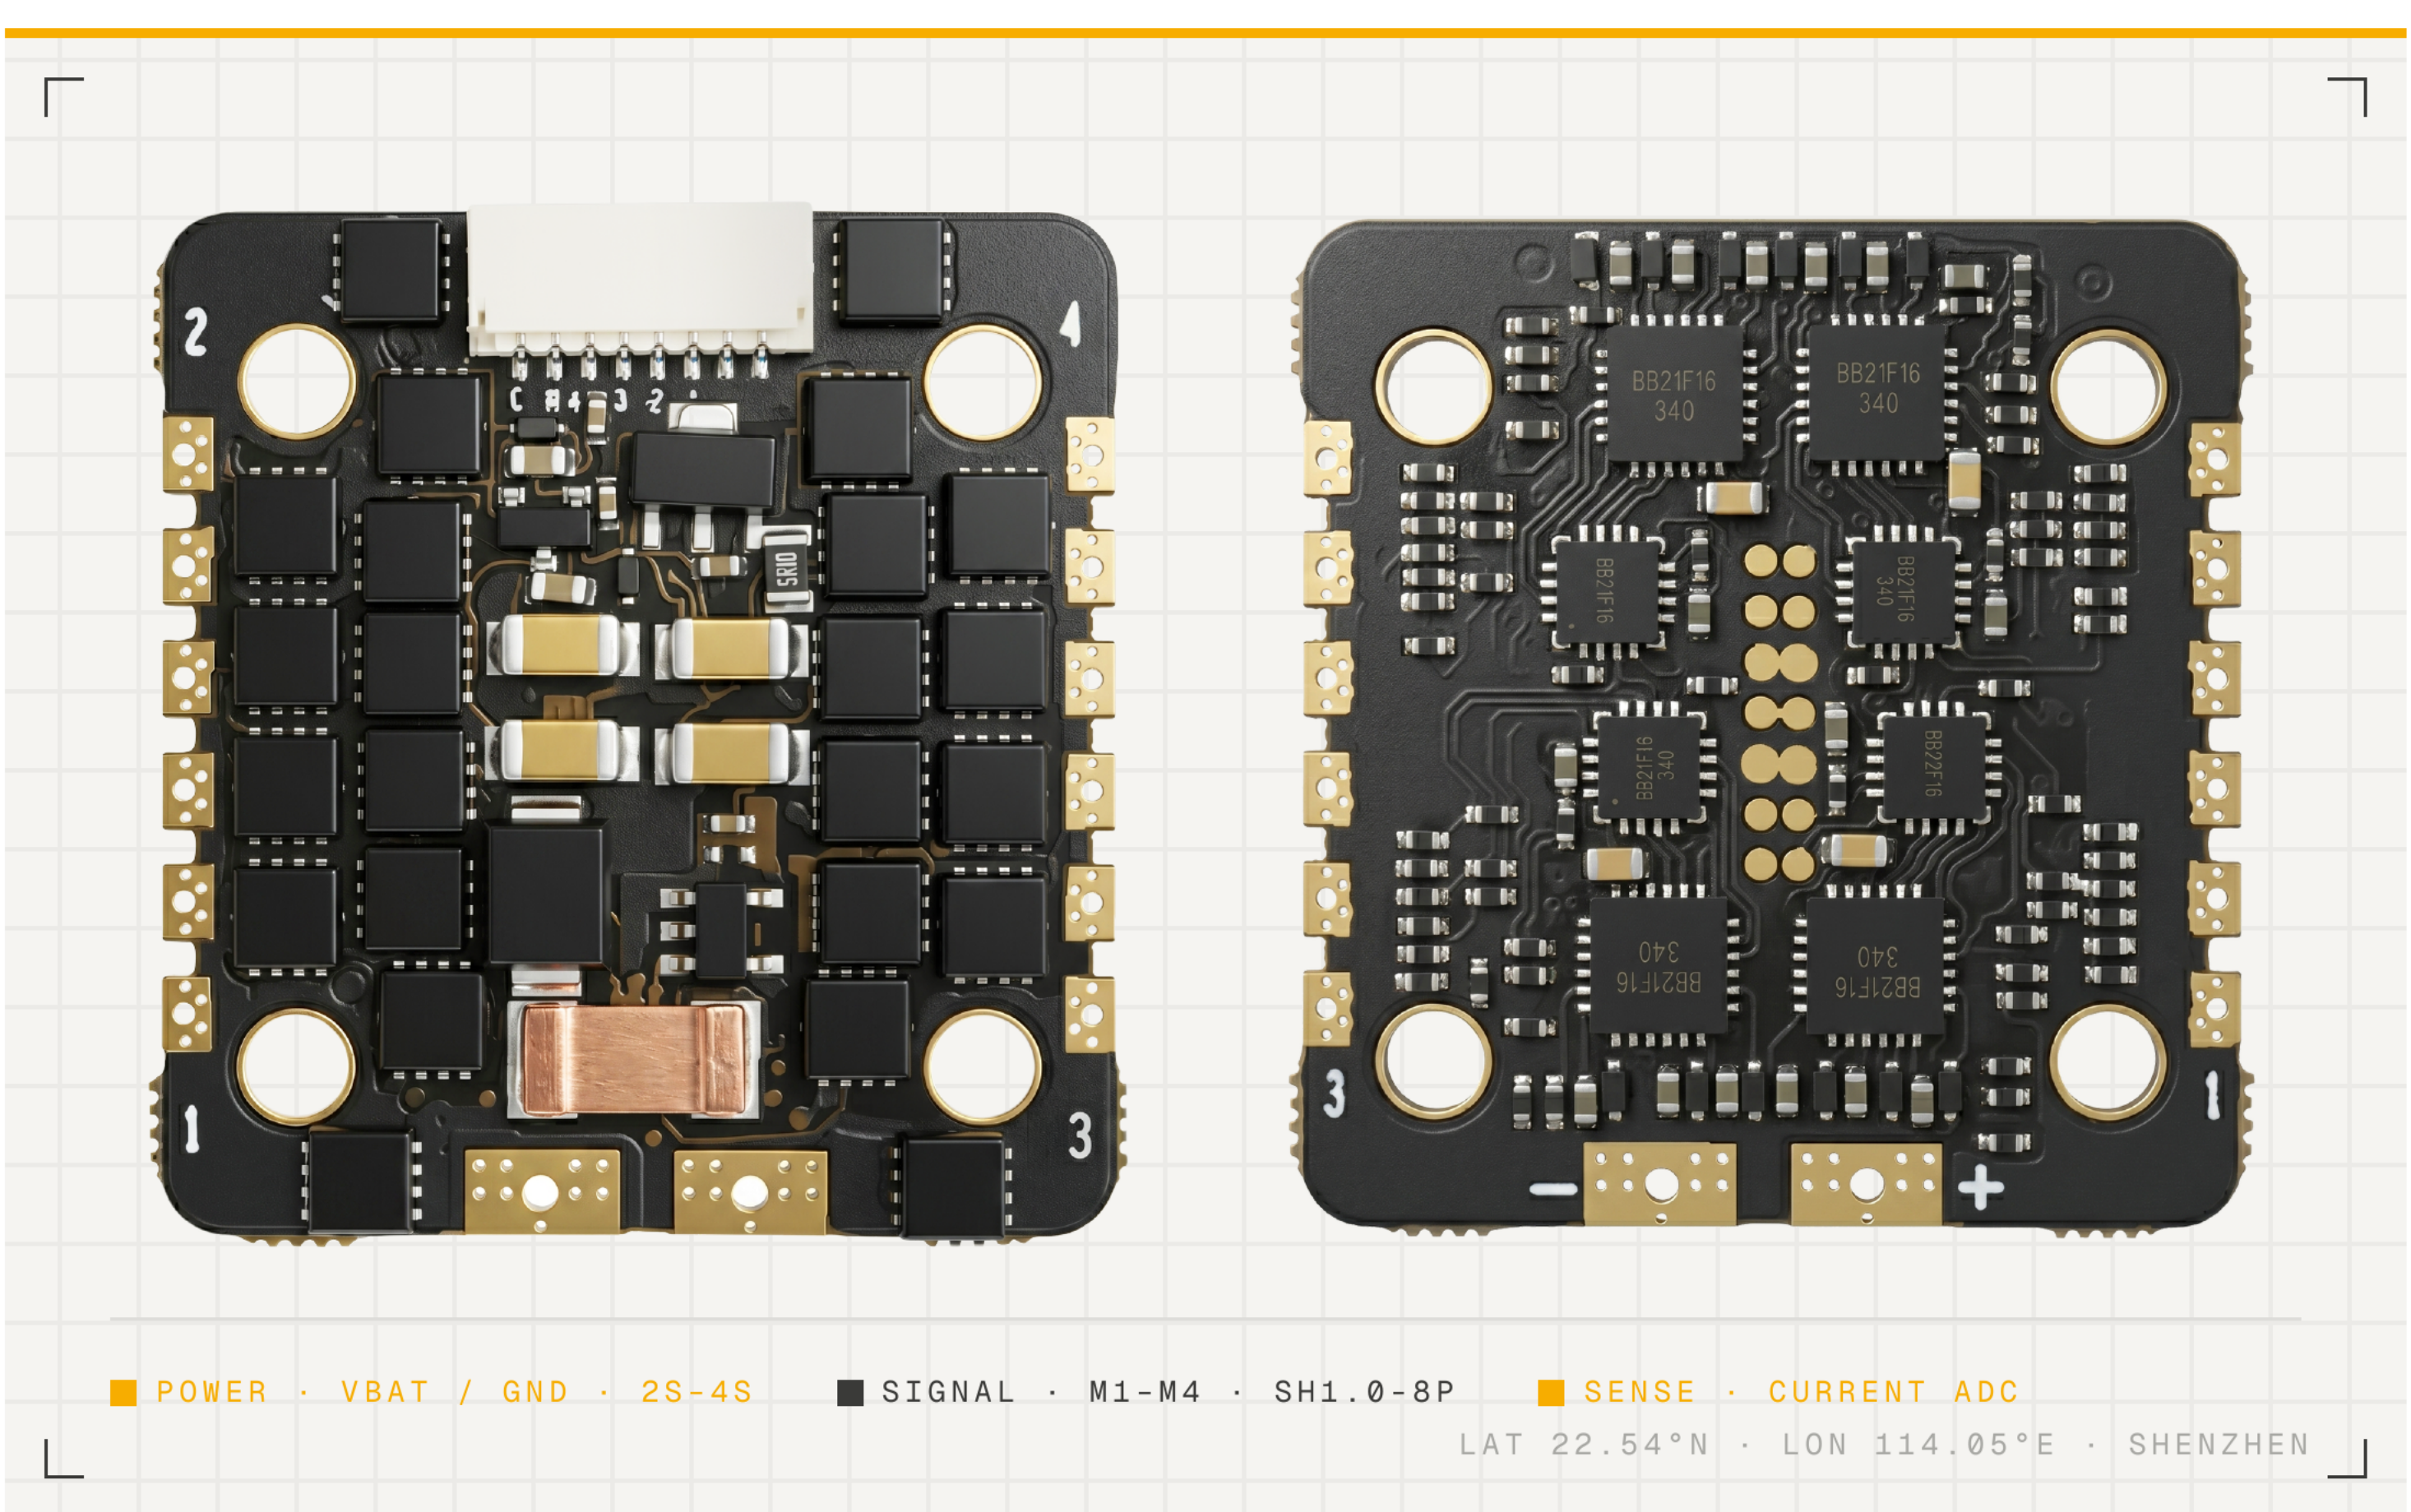
2
4
1
3
C N 4 3 2
BB21F16 340
−
+
■ POWER · VBAT / GND · 2S-4S
■ SIGNAL · M1-M4 · SH1.0-8P
■ SENSE · CURRENT ADC
LAT 22.54°N · LON 114.05°E · SHENZHEN

04 / USAGE INSTRUCTIONS

Throttle signal: (PWM as example)
- Initialization signal range 800-1050 us
- Start signal range 1050-2000 us

Motor tones:
- Initialization complete: beep - beep - beep, low - medium - high, three tones
- No throttle signal input: one beep every three seconds
- Stall-protection reset: beep - beep, medium - low, two tones

05 / MECHANICAL DIMENSIONS

Outline dimensions: L × W × H = 28 × 30 × 5.4 mm (excluding electrolytic capacitor), tolerance ±0.5 mm, see figure below.

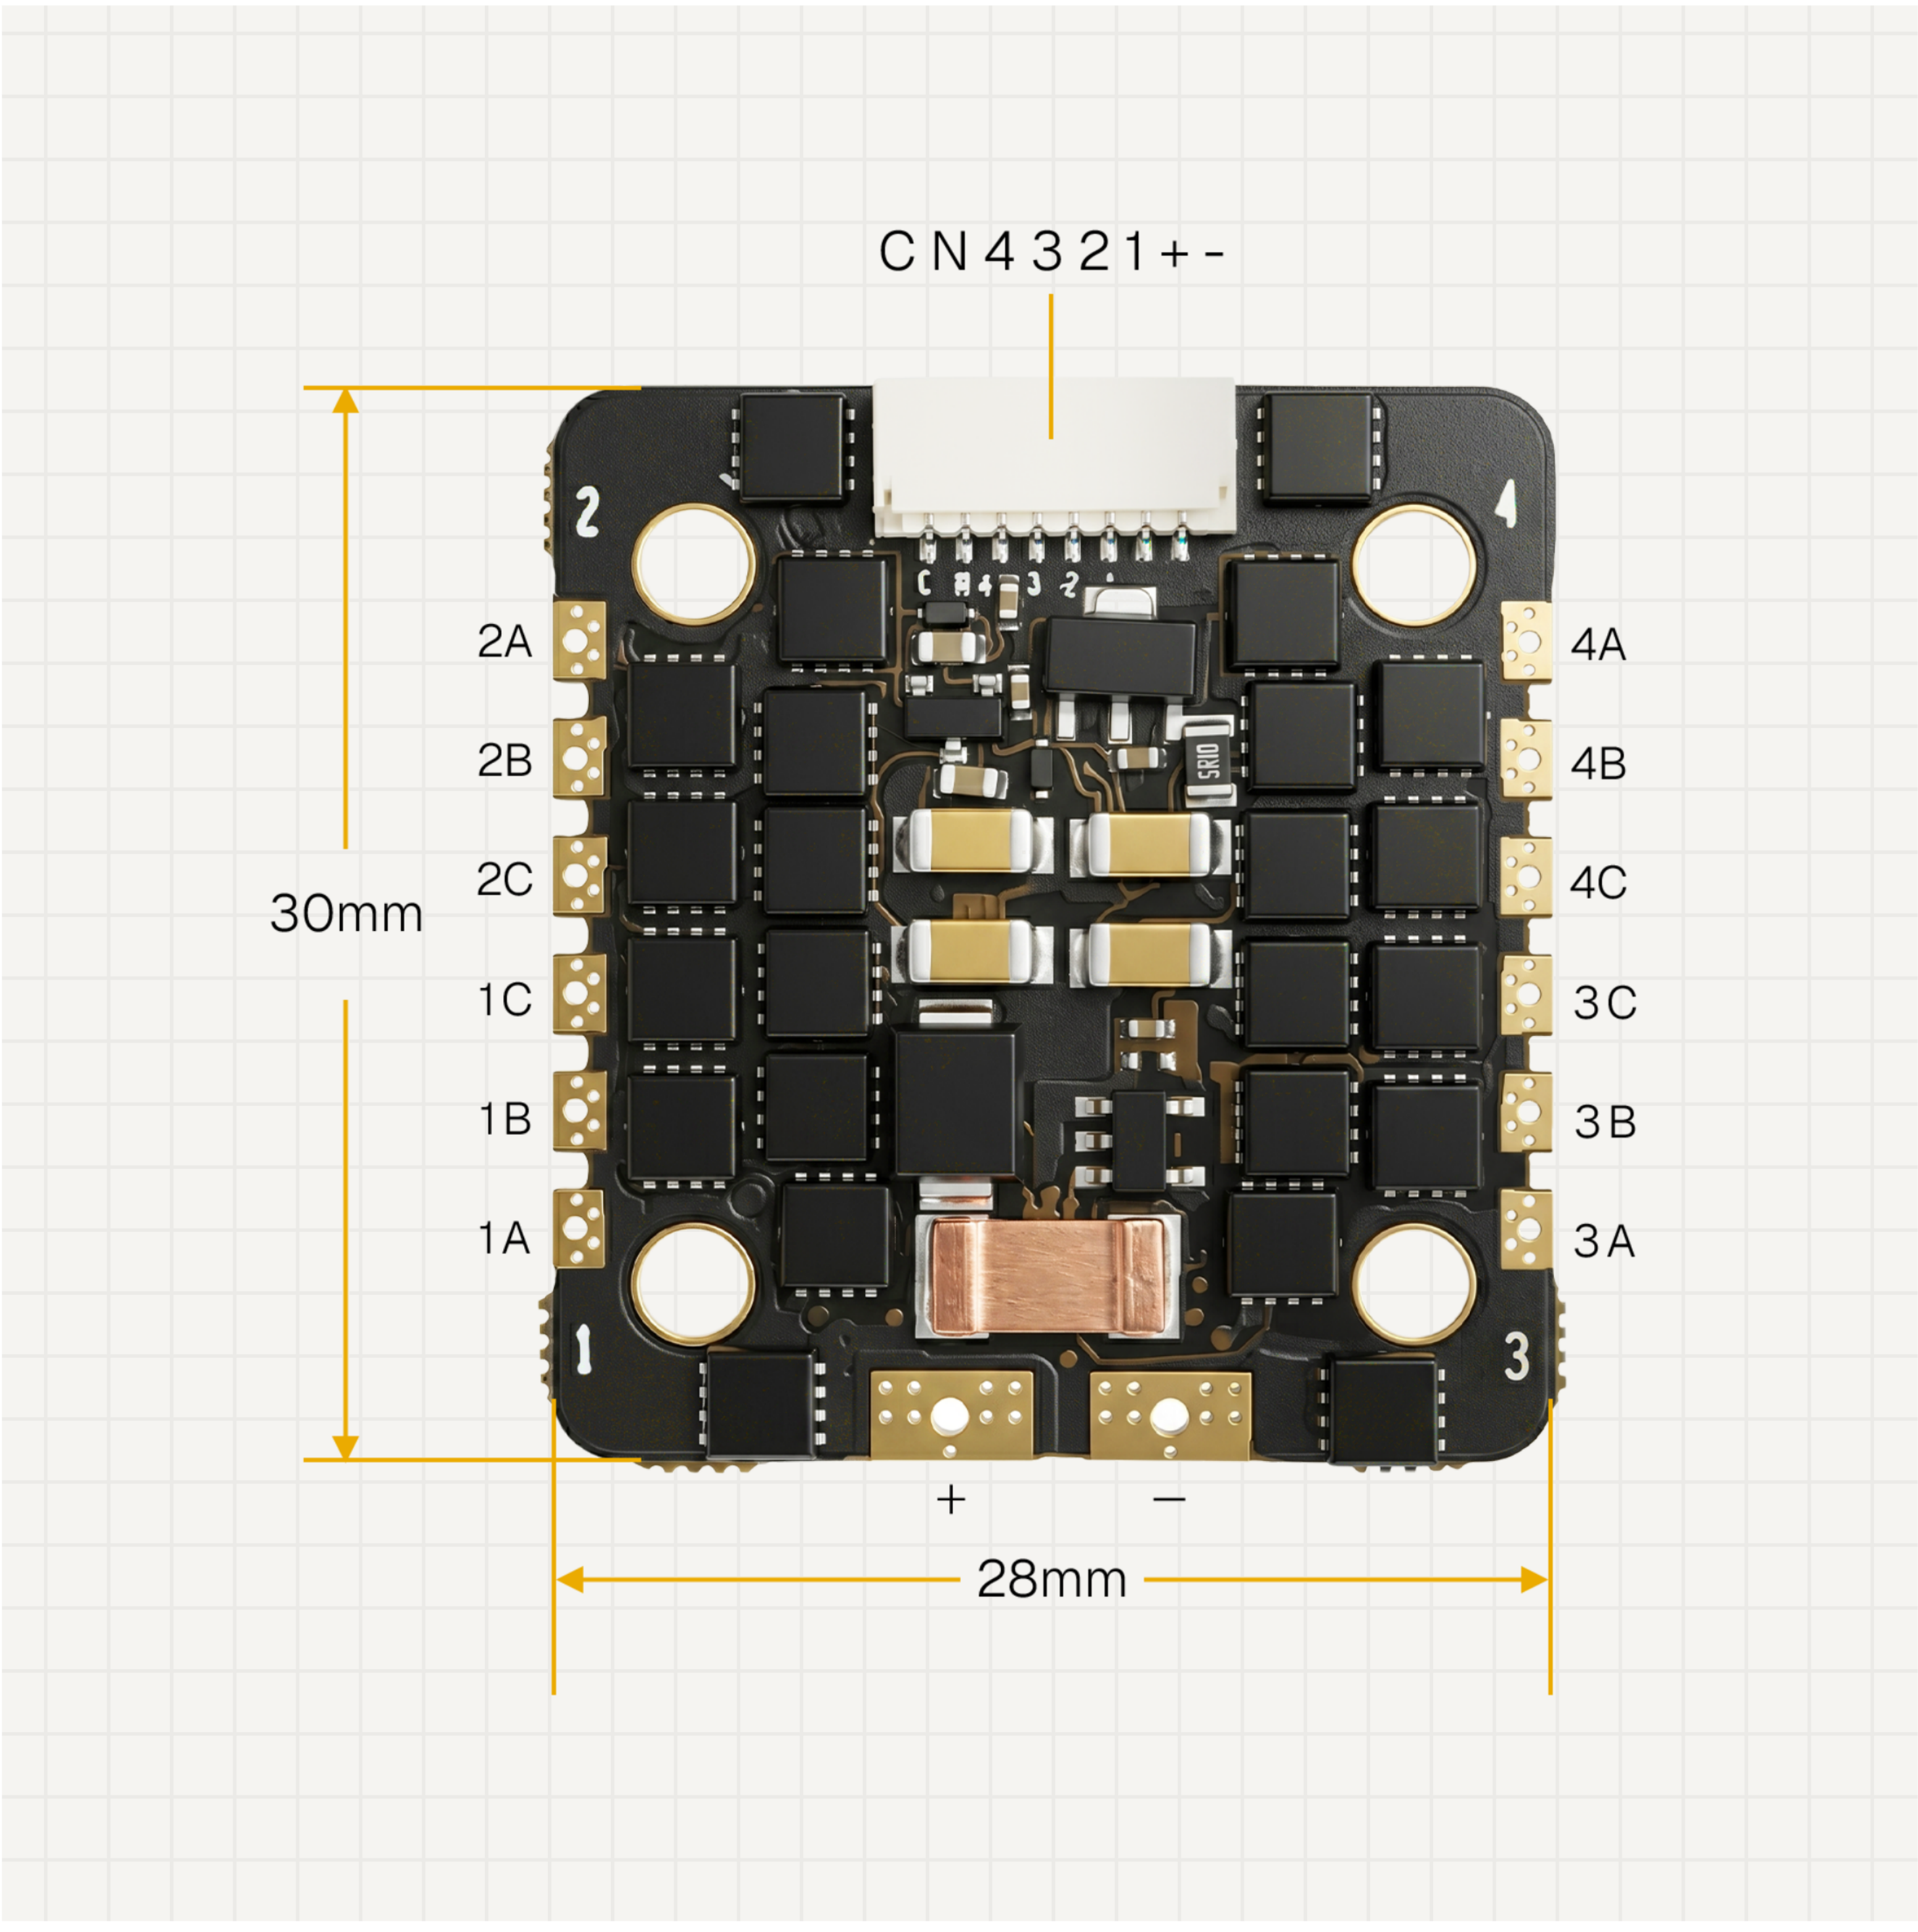

Front View (MOS side up)

06 / PIN ASSIGNMENT

pin	Name	Function
+	Battery voltage positive	Power input
-	Battery voltage negative	Power input
1A	OUT A	Motor 1 output A
1B	OUT B	Motor 1 output B
1C	OUT C	Motor 1 output C
2A	OUT A	Motor 2 output A
2B	OUT B	Motor 2 output B
2C	OUT C	Motor 2 output C
3A	OUT A	Motor 3 output A
3B	OUT B	Motor 3 output B
3C	OUT C	Motor 3 output C
4A	OUT A	Motor 4 output A
4B	OUT B	Motor 4 output B
4C	OUT C	Motor 4 output C
-	Battery voltage negative	Power output
+	Battery voltage positive	Power output
1	Signal	ESC 1 throttle control signal
2	Signal	ESC 2 throttle control signal
3	Signal	ESC 3 throttle control signal
4	Signal	ESC 4 throttle control signal
N	NC	No output
C	Current	Current signal ADC

⚠ 07 / SAFETY NOTICE

Thank you for choosing AERO SELFIE product. Please read this disclaimer carefully — by using this product, you acknowledge and agree to the following: brushless power systems can be dangerous, and improper use may result in personal injury or equipment damage. Follow the installation and operation instructions carefully. Because we cannot control how this product is used, installed, or maintained, we accept no liability for any loss or damage arising from its use. Any unauthorized modifications are at your own risk.

Read this manual to understand all power configuration and flight parameters before powering the system. Installation requires soldering and wiring. Make sure all wires are properly insulated before connection to avoid short circuits. Use a soldering iron with adequate power to ensure solid joints — poor connections can cause loss of control or damage to your equipment.

AERO SELFIE

30A

EMAIL aeroselfie-support@corvon.tech
WEB https://aeroselfie.myshopify.com/

4-IN-1 ESC

BUILD 2026-05-29.0001