

MCU – ESP32-S3-WROOM-1 N16R8

Dual-core LX7 @ 240MHz, 16MB Flash, 8MB PSRAM

GPIO ASSIGNMENT TABLE

Display (8080 parallel):
GPIO4-11 = D0-D7 (8-bit data bus)
GPIO12=CS GPIO13=RST GPIO14=DC
GPIO46=WR (RD/BL tied +3V3 on FPC)


Audio (I2S):
GPIO15=BCLK GPIO16=LRCK GPIO17=DOUT

SD Card (SPI):
GPIO44=MOSI GPIO43=MISO GPIO38=CLK GPIO39=CS

Controls (active low, 10k pull-up):
D-pad: GPIO40=UP 41=DOWN 42=LEFT 1=RIGHT
Face: GPIO2=A 48=B 47=X 21=Y
Sys: GPIO18=START 0=SELECT 45=L 3=R

USB (native, firmware flash + debug):
GPIO19=D- GPIO20=D+

Reserved (do not use, module-internal):
GPIO26-32 = Octal Flash (N16)
GPIO33-37 = Octal PSRAM (R8)

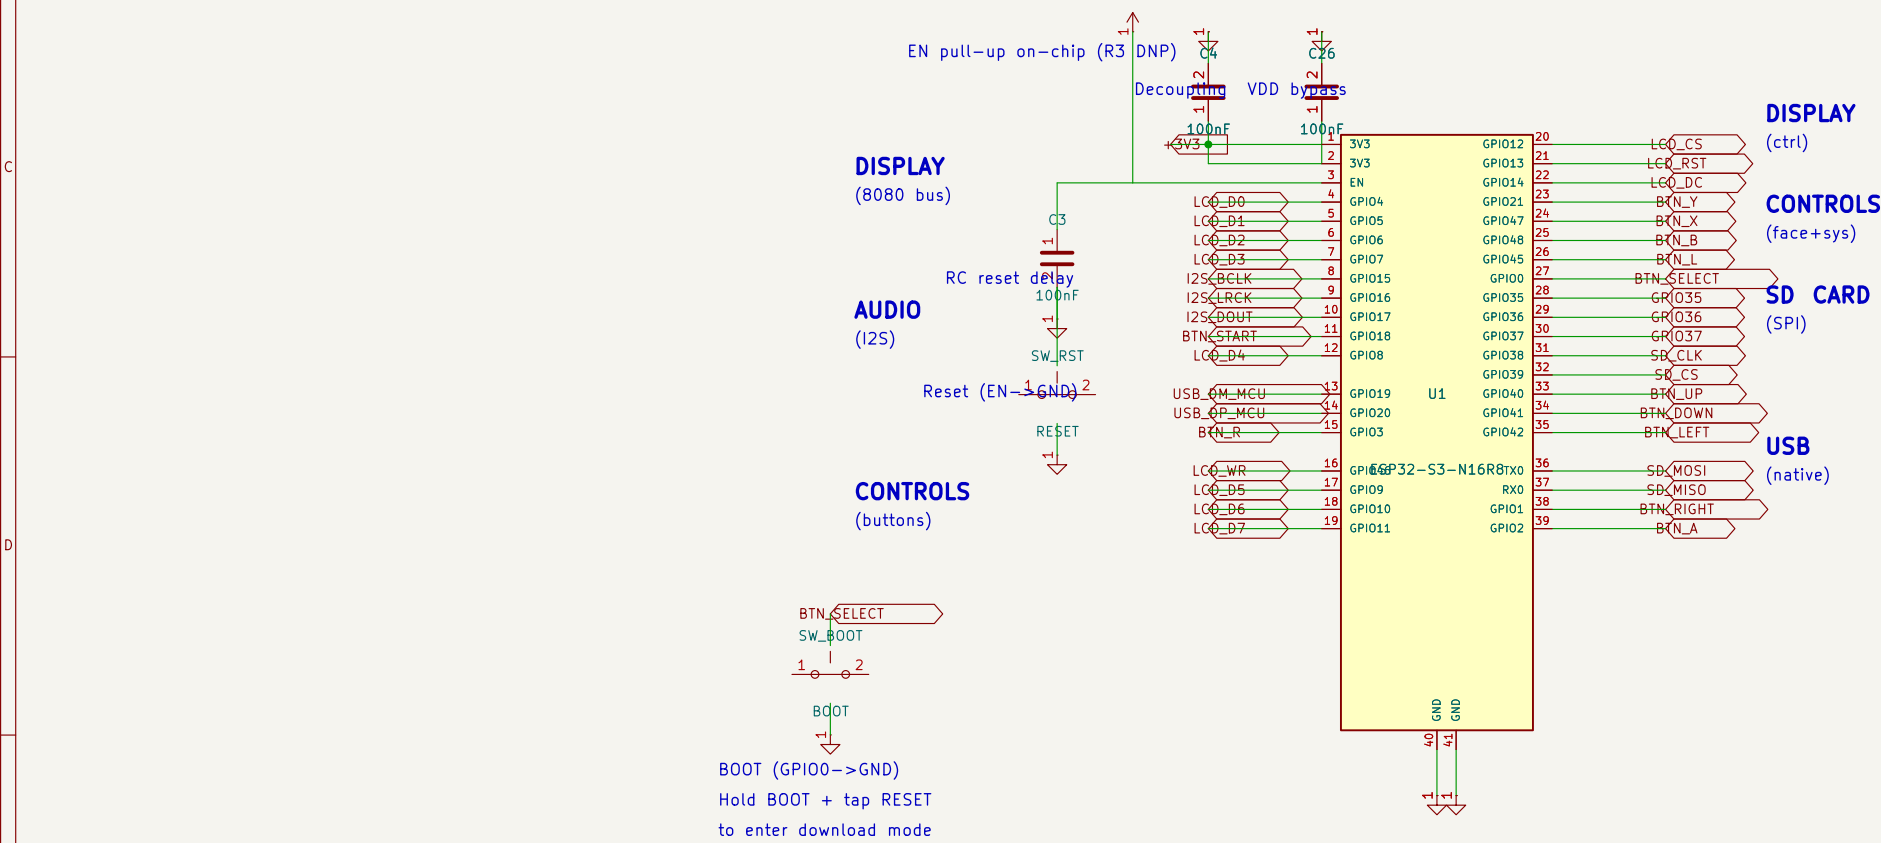

Generated by scripts/generate_schematics
ESP32 Emu Turbo – Handheld Retro Console

Sheet: /
File: 02-mcu.kicad_sch

Title: MCU – ESP32-S3-WROOM-1 N16R8

Size: A3	Date:	Rev:
KiCad E.D.A. 10.0.0-rc1.1-513-g294bfe097a		Id: 2/1