



WHAT'S NEW? → [How Brushless Motor and ESC Work \(https://howtomechatronics.com/how-it-works/how-brushless-motor-and-esc-work/\)](https://howtomechatronics.com/how-it-works/how-brushless-motor-and-esc-work/)



<https://www.youtube.com/user/DejanNedelkovski>

G+ <https://plus.google.com/+Howtomechatronics>

f <https://www.facebook.com/howtomechatronics/>

Follow me on: ()



[Home \(https://howtomechatronics.com\)](https://howtomechatronics.com) > [Tutorials \(https://howtomechatronics.com/category/tutorials/\)](https://howtomechatronics.com/category/tutorials/) > [Arduino Tutorials \(https://howtomechatronics.com/category/tutorials/arduino/\)](https://howtomechatronics.com/category/tutorials/arduino/)

Arduino Color Sensing Tutorial – TCS230 TCS3200 Color Sensor

by [Dejan \(https://howtomechatronics.com/author/howtom12_wp/\)](https://howtomechatronics.com/author/howtom12_wp/) in [Arduino Tutorials \(https://howtomechatronics.com/category/tutorials/arduino/\)](https://howtomechatronics.com/category/tutorials/arduino/)

38 <https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comments>



In this Arduino Tutorial we will learn how to detect colors using Arduino and the TCS230 / TCS3200 Color Sensor. You can watch the following video or read the written tutorial below for more details.

Arduino Color Sensing Tutorial - TCS230 TCS3200 Color Sensor

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

[Read more \(https://howtomechatronics.com/privacy-policy-page/\)](https://howtomechatronics.com/privacy-policy-page/)



SPONSORED SEARCHES



Circuit Board



Programming Code




Circuit Diagram



Software Code

**How TCS230 Color Sensor Works**


The TCS230 senses color light with the help of an 8 x 8 array of photodiodes. Then using a Current-to-Frequency Converter the readings from the photodiodes are converted into a square wave with a frequency directly proportional to the light intensity. Finally, using the Arduino Board we can read the square wave output and get the results for the color.

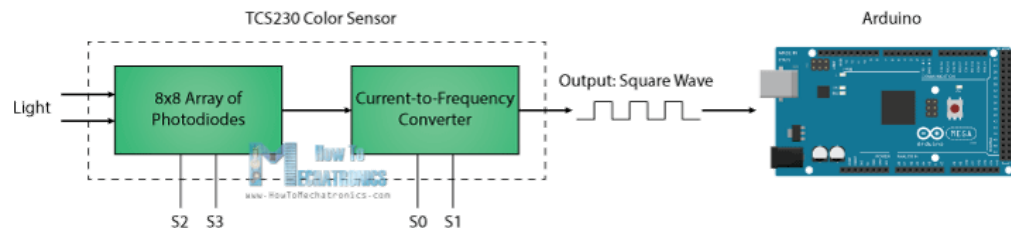

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

https://howtomechatronics.com/privacy-policy-page/)"/>

If we take a closer look at the sensor we can see how it detects various colors. The photodiodes have three different color filters. Sixteen of them have red filters, another 16 have green filters, another 16 have blue filters and the other 16 photodiodes are clear with no filters.

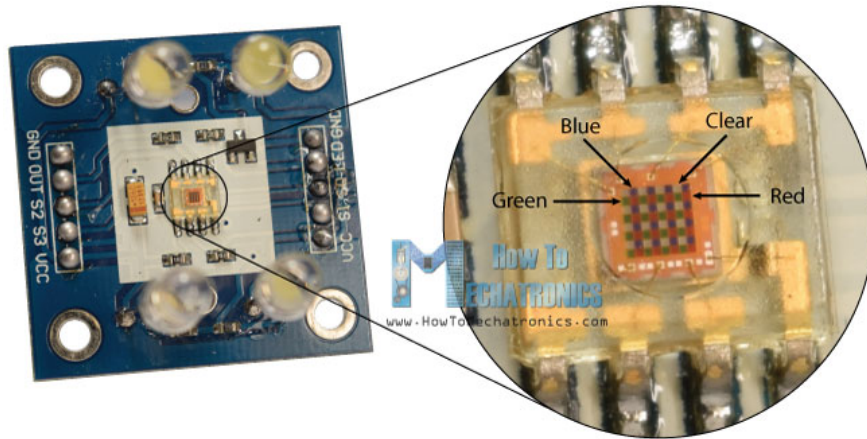

Each 16 photodiodes are connected in parallel, so using the two control pins S2 and S3 we can select which of them will be read. So for example, if we want to detect red color, we can just use the 16 red filtered photodiodes by setting the two pins to low logic level according to the table.

S0	S1	Output Frequency Scaling
L	L	Power down
L	H	2%
H	L	20%
H	H	100%

S2	S3	Photodiode Type
L	L	Red
L	H	Blue
H	L	Clear (no filter)
H	H	Green

The sensor has two more control pins, S0 and S1 which are used for scaling the output frequency. The frequency can be scaled to three different preset values of 100 %, 20 % or 2%. This frequency-scaling function allows the output of the sensor to be optimized for various frequency counters or microcontrollers.

Plc programm


automation

visit our website

gpai.eu

OP

Now we are ready to move on and connect the TCS230 sensor to the Arduino board. Here's the circuit schematics.

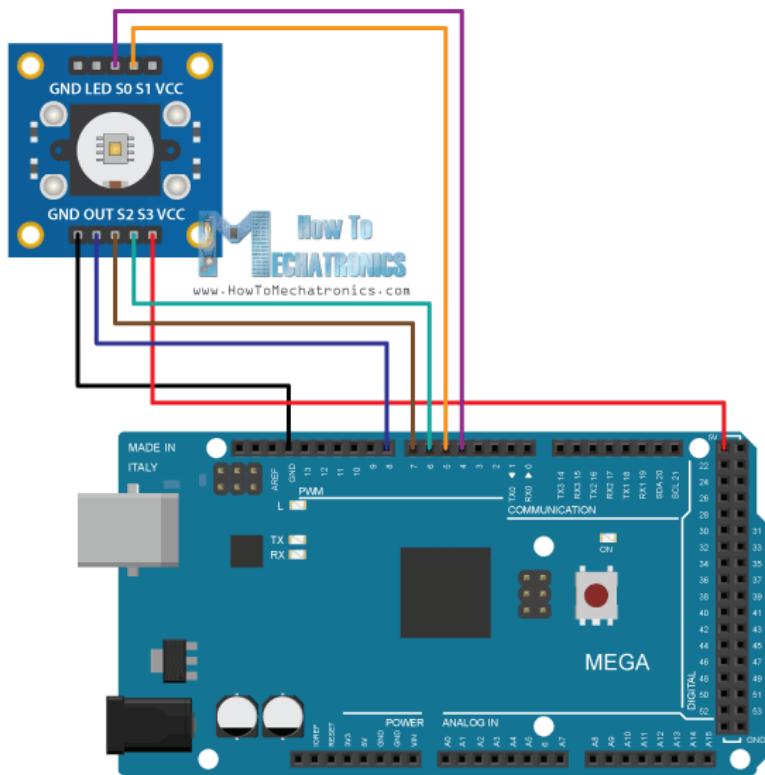

You can get the components needed for this Arduino tutorial from the links below:

- TCS230 TCS3200 Color Sensor..... [Amazon \(https://amzn.to/2MkH4sG\)](https://amzn.to/2MkH4sG) / [Banggood \(https://howtomechatronics.com/recommends/tcs230-tcs3200-color-sensor-banggood-2/\)](https://howtomechatronics.com/recommends/tcs230-tcs3200-color-sensor-banggood-2/)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

- Arduino Board [Amazon \(https://amzn.to/2Cds5K6\)](https://amzn.to/2Cds5K6) / [Banggood \(https://howtomechatronics.com/recommends/arduino-mega-board-bg/\)](https://howtomechatronics.com/recommends/arduino-mega-board-bg/)

- Breadboard and Jump Wires [Amazon \(https://amzn.to/2LYGILy\)](https://amzn.to/2LYGILy) / [Banggood \(https://howtomechatronics.com/recommends/breadboard-and-jump-wires-banggood/\)](https://howtomechatronics.com/recommends/breadboard-and-jump-wires-banggood/)
-

**Please note: These are affiliate links. I may make a commission if you buy the components through these links. I would appreciate your support in this way!*

TCS230 Color Sensor Source Code

Description: First we need to define the pins to which the sensor is connected and define a variable for reading the frequency. In the setup section we need to define the four control pins as outputs and the sensor output as an Arduino input. Here we also need to set the frequency-scaling, for this example I will set it to 20%, and start the serial communication for displaying the results in the Serial Monitor.

In the loop section, we will start with reading the red filtered photodiodes. For that purpose we will set the two control pins S2 and S3 to low logic level. Then using the “pulseIn()” function we will read the output frequency and put it into the variable “frequency”. Using the Serial.print() function we will print the result on the serial monitor. The same procedure goes for the two other colors, we just need to adjust the control pins for the appropriate color.

```

1.  /*      Arduino Color Sensing Tutorial
2.  *
3.  *   by Dejan Nedelkovski, www.HowToMechatronics.com
4.  *
5.  */
6.
7.  #define S0 4
8.  #define S1 5
9.  #define S2 6
10. #define S3 7
11. #define sensorOut 8
12.
13. int frequency = 0;
14.
15. void setup() {
16.   pinMode(S0, OUTPUT);
17.   pinMode(S1, OUTPUT);
18.   pinMode(S2, OUTPUT);
19.   pinMode(S3, OUTPUT);
20.   pinMode(sensorOut, INPUT);
21.
22.   // Setting frequency-scaling to 20%
23.   digitalWrite(S0,HIGH);
24.   digitalWrite(S1,LOW);
25.
26.   Serial.begin(9600);
27. }
28.
29. void loop() {
30.   // Setting red filtered photodiodes to be read
31.   digitalWrite(S2,LOW);
32.   digitalWrite(S3,LOW);
33.   // Reading the output frequency
34.   frequency = pulseIn(sensorOut, LOW);
35.   // Printing the value on the serial monitor

```

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok



Read more (<https://howtomechatronics.com/privacy-policy-page/>)

```

36. Serial.print("R= "); //printing name
37. Serial.print(frequency); //printing RED color frequency
38. Serial.print(" ");
39. delay(100);
40.
41. // Setting Green filtered photodiodes to be read
42. digitalWrite(S2,HIGH);
43. digitalWrite(S3,HIGH);
44. // Reading the output frequency
45. frequency = pulseIn(sensorOut, LOW);
46. // Printing the value on the serial monitor
47. Serial.print("G= "); //printing name
48. Serial.print(frequency); //printing RED color frequency
49. Serial.print(" ");
50. delay(100);
51.
52. // Setting Blue filtered photodiodes to be read
53. digitalWrite(S2,LOW);
54. digitalWrite(S3,HIGH);
55. // Reading the output frequency
56. frequency = pulseIn(sensorOut, LOW);
57. // Printing the value on the serial monitor
58. Serial.print("B= "); //printing name
59. Serial.print(frequency); //printing RED color frequency
60. Serial.println(" ");
61. delay(100);
62. }


```

Now if we run the Serial Monitor we will start getting some values. These values depend on the selected frequency-scaling, as well as from the surrounding lighting.

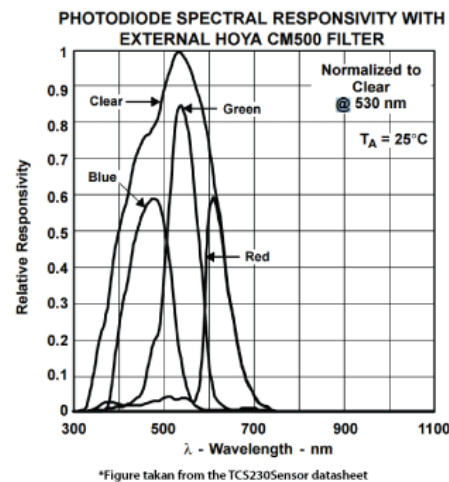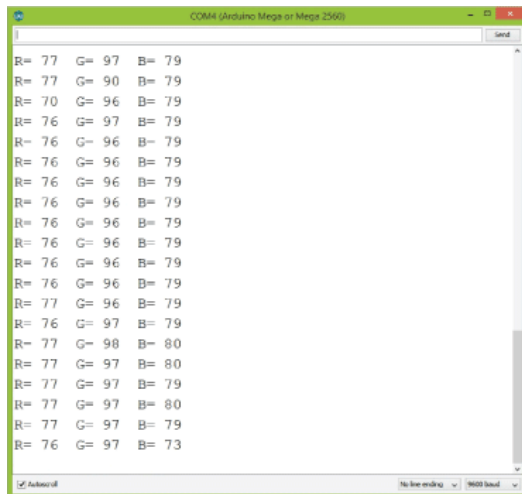

Note here that three values differ due to the different sensitivity of each photodiode type, as seen from the photodiode spectral response diagram from the datasheet of the sensor.

Nevertheless, now let's see how the values react when we will bring different colors in front of the sensor. So for example, if we bring red color, the initial value will drop down, in my case from around 70 to around 25.

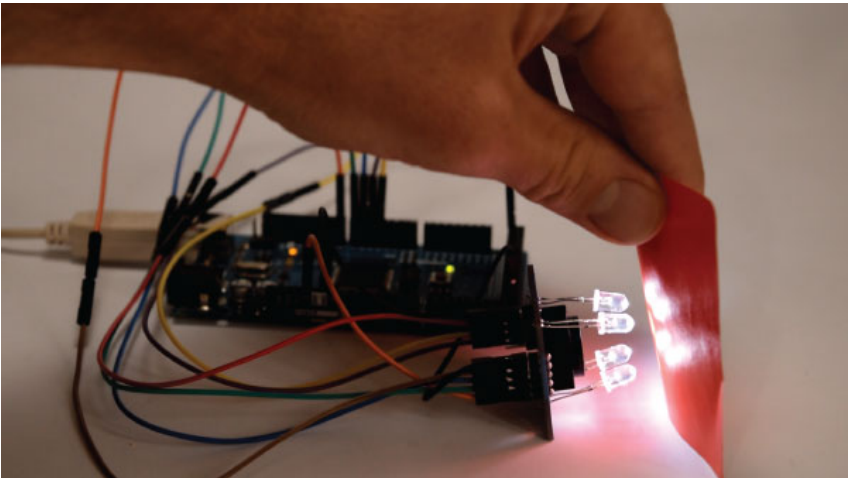

So now if we want to represent the detected colors with the RGB Model which has values from 0 to 255, we will use the `map()` function to map or convert the readings to the values from 0 to 255.

```
1. //Remaping the value of the frequency to the RGB Model of 0 to 255
2. frequency = map(frequency, 25,70,255,0);
```

The value of 70 will be mapped to 0, and the value of 25 to 255. The same procedure goes for the two other colors.



Robotics

Vision

Tailor made machine

gpai.eu

OPE

Here's the final source code for this example:

```
1. /* Arduino Color Sensing Tutorial
2. *
```

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

```
3.  * by Dejan Nedelkovski, www.HowToMechatronics.com
4.  *
5.  */
6.
7.  #define S0 4
8.  #define S1 5
9.  #define S2 6
10. #define S3 7
11. #define sensorOut 8
12.
13. int frequency = 0;
14.
15. void setup() {
16.     pinMode(S0, OUTPUT);
17.     pinMode(S1, OUTPUT);
18.     pinMode(S2, OUTPUT);
19.     pinMode(S3, OUTPUT);
20.     pinMode(sensorOut, INPUT);
21.
22.     // Setting frequency-scaling to 20%
23.     digitalWrite(S0,HIGH);
24.     digitalWrite(S1,LOW);
25.
26.     Serial.begin(9600);
27. }
28.
29. void loop() {
30.     // Setting red filtered photodiodes to be read
31.     digitalWrite(S2,LOW);
32.     digitalWrite(S3,LOW);
33.     // Reading the output frequency
34.     frequency = pulseIn(sensorOut, LOW);
35.     //Remaping the value of the frequency to the RGB Model of 0 to 255
36.     frequency = map(frequency, 25,72,255,0);
37.     // Printing the value on the serial monitor
38.     Serial.print("R= "); //printing name
39.     Serial.print(frequency); //printing RED color frequency
40.     Serial.print(" ");
41.     delay(100);
42.
43.     // Setting Green filtered photodiodes to be read
44.     digitalWrite(S2,HIGH);
45.     digitalWrite(S3,HIGH);
46.     // Reading the output frequency
47.     frequency = pulseIn(sensorOut, LOW);
48.     //Remaping the value of the frequency to the RGB Model of 0 to 255
49.     frequency = map(frequency, 30,90,255,0);
50.     // Printing the value on the serial monitor
51.     Serial.print("G= "); //printing name
52.     Serial.print(frequency); //printing RED color frequency
53.     Serial.print(" ");
54.     delay(100);
55.
56.     // Setting Blue filtered photodiodes to be read
57.     digitalWrite(S2,LOW);
58.     digitalWrite(S3,HIGH);
59.     // Reading the output frequency
60.     frequency = pulseIn(sensorOut, LOW);
```

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)


```

61. //Remaping the value of the frequency to the RGB Model of 0 to 255
62. frequency = map(frequency, 25,70,255,0);
63. // Printing the value on the serial monitor
64. Serial.print("B= "); //printing name
65. Serial.print(frequency); //printing RED color frequency
66. Serial.println(" ");
67. delay(100);
68. }

```

Note that the colors aren't that much accurate but they are still good enough for simple projects. As another example of the TCS230 color sensor in my next video we will learn how to make an Arduino Automatic Color Sorting Machine.



<https://howtomechatronics.com/projects/arduino-color-sorter-project/>

Feel free to ask any question in the comments section below and don't forget to [check out my collection of Arduino Projects](https://howtomechatronics.com/arduino-projects/) (<https://howtomechatronics.com/arduino-projects/>).

JLPCB – Prototype 10 PCBs for \$2 (For Any Color) (<https://jlcpcb.com/quote>)

China's Largest PCB Prototype Enterprise, 600,000+ Customers & 10,000+ Online Orders Daily (<https://jlcpcb.com>)

([http://savefrom.net/?](http://savefrom.net/?url=https%3A%2F%2Fwww.youtube.com%2Mw&utm_source=userjs-)

[url=https%3A%2F%2Fwww.youtube.com%2Mw&utm_source=userjs-](http://savefrom.net/?url=https%3A%2F%2Fwww.youtube.com%2Mw&utm_source=userjs-)

See Why JLPCB Is So Popular: <https://jlcpcb.com> (https://www.youtube.com/watch?v=_XCznQFV-Mw) chrome&utm_medium=extensions&utm_c

[Arduino](https://howtomechatronics.com/tag/arduino/) (<https://howtomechatronics.com/tag/arduino/>).

[Arduino Color Sensing](https://howtomechatronics.com/tag/arduino-color-sensing/) (<https://howtomechatronics.com/tag/arduino-color-sensing/>).

[Color Sensor](https://howtomechatronics.com/tag/color-sensor/) (<https://howtomechatronics.com/tag/color-sensor/>).

[TCS230](https://howtomechatronics.com/tag/tcs230/) (<https://howtomechatronics.com/tag/tcs230/>).

[TCS3200](https://howtomechatronics.com/tag/tcs3200/) (<https://howtomechatronics.com/tag/tcs3200/>).

[Tutorial](https://howtomechatronics.com/tag/tutorial/) (<https://howtomechatronics.com/tag/tutorial/>).

SHARE ON:

Share 110

Like 110

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok


[Read more \(https://howtomechatronics.com/privacy-policy-page/\)](https://howtomechatronics.com/privacy-policy-page/)

Save (<https://uk.pinterest.com/pin/create/button/?guid=DY9o1nMe1W8o-1&url=https%3A%2F%2Fhowtomechatronics.com%2Ftutorials%2Farduino%2Farduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor%2F&media=https%3A%2F%2Fhowtomechatronics.com%2Fwp-content%2Fuploads%2F2016%2F05%2FArduino-Color-Sensing-Tutorial-TCS230-Color-Sensor.jpg&description=Arduino%2BColor%2BSensing%2BTutorial%2B%26%238211%3B%2BTCS230%2BTCS3200%2BColor%2BSensor>)

sensor%2F&media=https%3A%2F%2Fhowtomechatronics.com%2Fwp-content%2Fuploads%2F2016%2F05%2FArduino-Color-Sensing-Tutorial-TCS230-Color-Sensor.jpg&description=Arduino%2BColor%2BSensing%2BTutorial%2B%26%238211%3B%2BTCS230%2BTCS3200%2BColor%2BSensor)

Tweet

RELATED POSTS



This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.


Ok Read more (<https://howtomechatronics.com/privacy-policy-page/>)

Arduino Robot Car Wireless Con

HC-05 Bluetooth

NRF24L01

HC-12

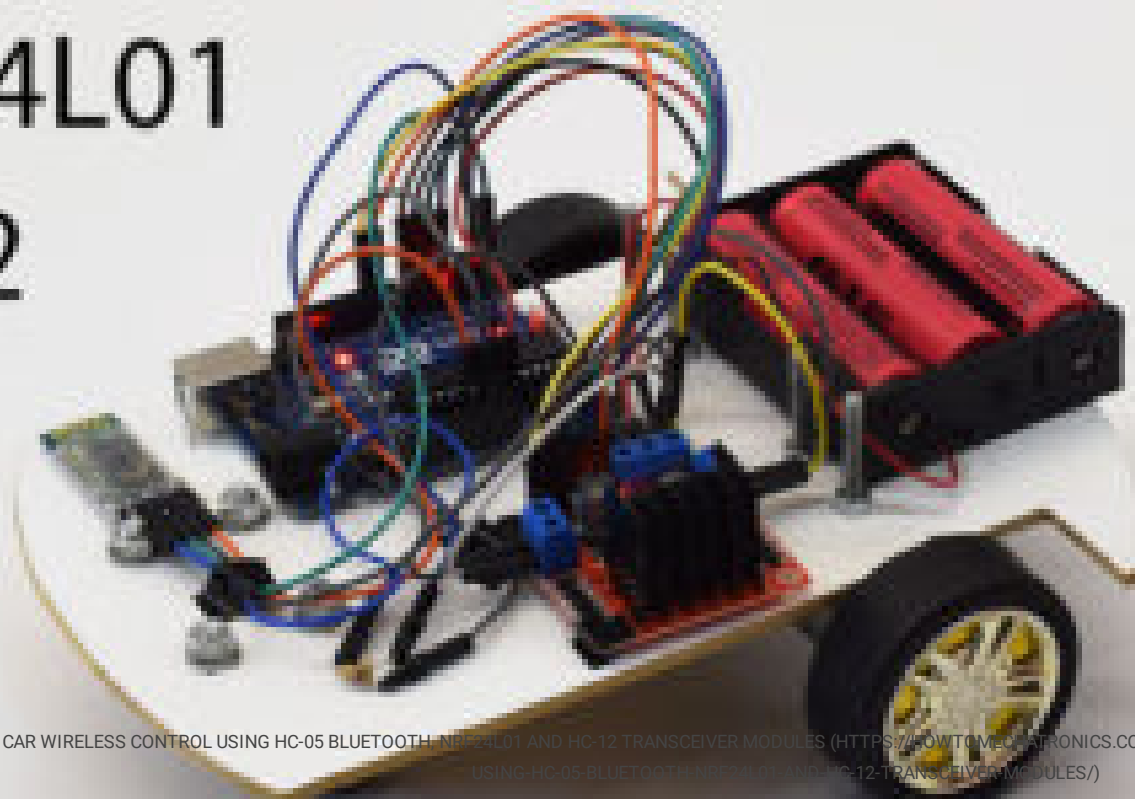

ARDUINO ROBOT CAR WIRELESS CONTROL USING HC-05 BLUETOOTH, NRF24L01 AND HC-12 TRANSCEIVER MODULES ([HTTPS://HOWTOMECHATRONICS.COM/TUTORIALS/ARDUINO/ARDUINO-ROBOT-CAR-WIRELESS-CONTROL-USING-HC-05-BLUETOOTH-NRF24L01-AND-HC-12-TRANSCEIVER-MODULES/](https://howtomechatronics.com/tutorials/arduino/arduino-robot-car-wireless-control-using-hc-05-bluetooth-nrf24l01-and-hc-12-transceiver-modules/))

Dejan (https://howtomechatronics.com/author/howtom12_wp/).

30 (<https://howtomechatronics.com/tutorials/arduino/arduino-robot-car-wireless-control-using-hc-05-bluetooth-nrf24l01-and-hc-12-transceiver-modules/#comments>), (<https://howtomechatronics.com/tutorials/arduino/arduino-robot-car-wireless-control-using-hc-05-bluetooth-nrf24l01-and-hc-12-transceiver-modules/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

ARDUINO TUTORIAL #03



ANALOG INPUTS

ARDUINO TUTORIAL ON ANALOG INPUTS ([HTTPS://HOWTOMECHATRONICS.COM/TUTORIALS/ARDUINO/ANALOG-INPUTS/](https://howtomechatronics.com/tutorials/arduino/analog-inputs/))

By Leo (<https://howtomechatronics.com/author/leowin12-wang/>) & 8 (<https://howtomechatronics.com/tutorials/arduino/analog-inputs/#comments>).
(<https://howtomechatronics.com/tutorials/arduino/analog-inputs/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

DIY Arduino Robot Arm



DIY ARDUINO ROBOT ARM WITH SMARTPHONE CONTROL (<https://howtomechatronics.com/tutorials/arduino/diy-arduino-robot-arm-with-smartphone-control/>)

Dejan (https://howtomechatronics.com/author/howtom12_wp/), 53 (<https://howtomechatronics.com/tutorials/arduino/diy-arduino-robot-arm-with-smartphone-control/#comments>), (<https://howtomechatronics.com/tutorials/arduino/diy-arduino-robot-arm-with-smartphone-control/>)


This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

Stepper Motor Control

A4988 Driver

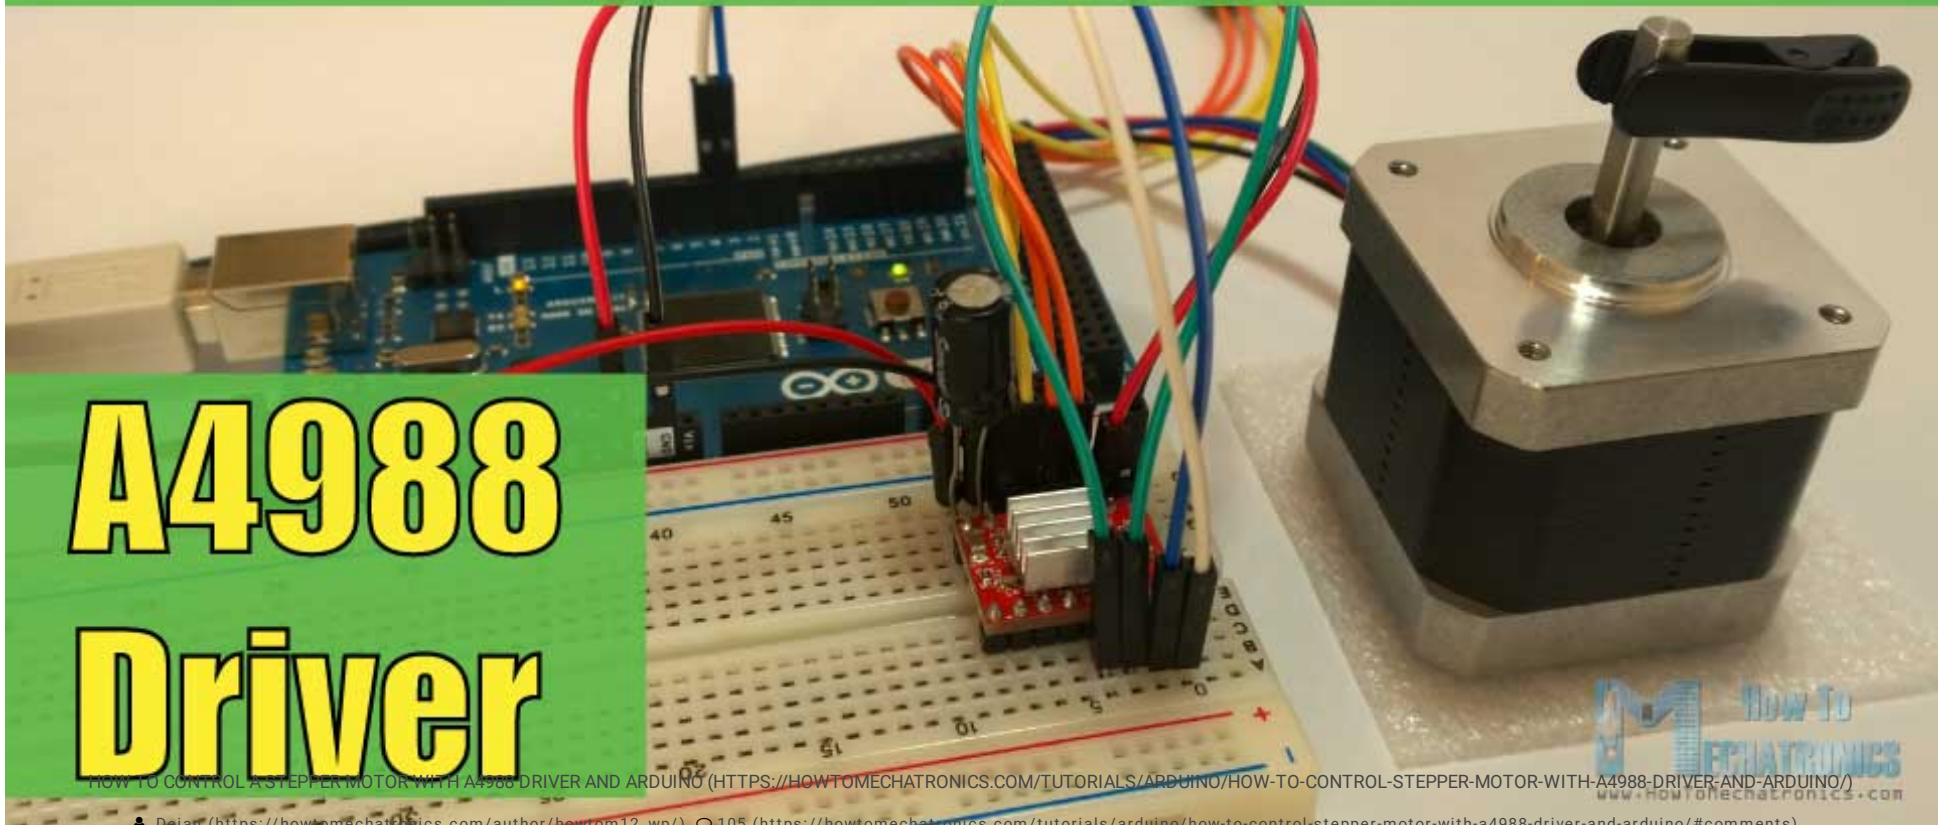

HOW TO CONTROL A STEPPER MOTOR WITH A4988 DRIVER AND ARDUINO (<https://howtomechatronics.com/tutorials/arduino/how-to-control-stepper-motor-with-a4988-driver-and-arduino/>)

Dejan (<https://howtomechatronics.com/author/howtom12-wp/>), 105 (<https://howtomechatronics.com/tutorials/arduino/how-to-control-stepper-motor-with-a4988-driver-and-arduino/#comments>), (<https://howtomechatronics.com/tutorials/arduino/how-to-control-stepper-motor-with-a4988-driver-and-arduino/>)

38 RESPONSES

Shashi August 6, 2016 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1119>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

Nice video,

I have a TCS3200, and where does the LED pin go ? Your video shows that the LED is lit, but you have not connected the LED output to anything in the picture uploaded in this web page ?

How did the LED on the TCS 230 light up ? In my case, the LED does not light up as it is NOT connected. Appreciate a reply.

REPLY

Dejan Nedelkovski (<https://howtomechatronics.com>). August 14, 2016 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1137>).

Thanks. Well in my case the LEDs light up by just connecting power to the VCC pin. Did you try connecting 5V to the LED pin of the module, did you get your LEDs light up?

REPLY

sahan kalhara October 16, 2016 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1306>).

Hi Dear Mr.Dejan Nedelkovski

I tested this example it's work,but i couldn't understand how to map color value,

Red 25~37 to map 0 ~ 255

Green 30~90 to map 0 ~ 255

Blue 25~70 to map 0 ~ 255

How to gate those (25~37,30~90,25~70) value

please help me to understand how to change those value

Thank you

BR

Sahan kalhara

REPLY

Dejan Nedelkovski (<https://howtomechatronics.com>) *October 18, 2016* (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1315>).

Hi there. Did you try using the following function for mapping values: `map(variable, fromLow, fromHigh, toLow, toHigh)?`

REPLY

xwarrior *April 15, 2017* (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1892>).

The formula is `(variable, fromLow, fromHigh, toLow, toHigh)` or `(variable, fromLow, fromHigh, toHigh, toLow)` because in coding is write `frequency = map(frequency, 25,70,255,0);`

Dejan Nedelkovski (<https://howtomechatronics.com>) *April 15, 2017* (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1893>).

That's a good note. The formula is more like `(variable, fromValue1, fromValue2, toValue1, toValue2)` and the reason the code line is `frequency = map(frequency, 25,70,255,0)` is because we want to reverse the values.

FerNava *October 23, 2016* (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1341>).

Hello.

Am I right to assume those are just regular white LEDs? I have a TCS3200 that came with the leds already soldered, but they are too short and I need it to have a smaller field of view. Can I just remove those leds and solder new ones?

Thank you, very useful website!!

REPLY

Dejan Nedelkovski (<https://howtomechatronics.com>) *October 23, 2016* (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1344>).

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

Yes, they are regular LEDs and you should be able to replace them.

REPLY

David Jordan [October 30, 2016 \(https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1376\)](https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1376)

Good job Dejan. Thanks.

I'm really enjoying getting to know the sensors for the Arduino. The generosity of guys like you, posting helpful material like this makes it so much quicker to learn.

I wish now that I hadn't bought the TCS3200 board before I read your guide or I would definitely have clicked through to Amazon from here.

All the best, David

REPLY

Dejan Nedelkovski (<https://howtomechatronics.com>) November 9, 2016 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1405>)

Thank you!

REPLY

Schurke [December 1, 2016 \(https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1442\)](https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1442)

With your code I get values like:

"R= 245 G= 382 B= 170

R= -292 G= 382 B= 182

R= -292 G= 382 B= 187

R= -292 G= 382 B= 182

R= -292 G= 382 B= 170

R= -292 G= -875 B= 193

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

R= -282 G= 382 B= 204
R= -271 G= 217 B= 210
R= -271 G= 221 B= 216
R= -184 G= 382 B= -640
R= -43 G= -2579 B= -11951
R= -1101 G= -3162 B= -11622
R= 55 G= -2915 B= -11401
"

I Dont know whats happening there. I have a smaller arduino and connected all to Analog pins. The LED's are on.

REPLY

Dejan Nedelkovski (<https://howtomechatronics.com/>) December 17, 2016 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1470>).

You should connect it to digital pins.

REPLY

Le Tuan Anh January 7, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1532>).

Hi Dear Mr.Dejan Nedelkovski

Thanks for your post. But i dont understand about S0, S1 and the output frequency scaling. What does it show? and in the 1st code, why you setting frequency scaling to 20%?

Thanks,

REPLY

Dejan Nedelkovski (<https://howtomechatronics.com/>) January 11, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1537>).

The frequency can be scaled to three different preset values of 100 %, 20 % or 2%. This frequency-scaling function allows the output of the sensor to be optimized for various frequency counters or microcontrollers. In other words depending on the selected value it will produce different output signal.

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

[REPLY](#)

Nguyen Khang January 16, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1548>).

Dear Mr. Dejan.

Thanks for your post. But I have some problems because our TCS has different Relative Responsivity. So my result don't fall into 0 – 255 as I like.

Could you explain to me how do you get the interval of each color like you did, such as R (25;70) please. I can't figure out how to get that. Thank you.

I'm looking forward to your reply.

[REPLY](#)

Dejan Nedelkovski (<https://howtomechatronics.com>) January 17, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1550>).

The following line is used for converting the range from 25-70 to 0-255.

```
//Remaping the value of the frequency to the RGB Model of 0 to 255
```

```
frequency = map(frequency, 25,70,255,0);
```

[REPLY](#)

Nguyen Khang January 25, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1582>).

I mean how can we know the range of the sensor is between 25-70 ? Because my sensor gave me the totally different data.

Anas Masood Quddusi February 18, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1642>).

Hi,

Can you please tell me how to make an LED illuminate the same color as the color recognized by the sensor?

and also, what ever the value is read, lets say R=255, G = 108, B = 20, put it in another function where a ratio is calculated?

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy/page/>)

Thank you.

REPLY

Dejan Nedelkovski (<https://howtomechatronics.com>) February 20, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1655>).

Well you just need and RGB led and using the digital.Write() function send those values to each R, G and B pin. Check my Arduino RGB tutorial for more details how to use an RGB LED with Arduino.

REPLY

SANATH March 22, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1785>).

HOW to make tcs3200 only to detect green color, ignoring red and blue? So that, if it detects green color green we have to run a motor.

REPLY

Dejan Nedelkovski (<https://howtomechatronics.com>) March 27, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1812>).

Well just take into consideration the values from the sensor when reading the green color and use them to set the motor running.

REPLY

wanix April 20, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1909>).

hello sir, your circuit connection is different with the codes. just concern it might confused other user.

REPLY

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

Dejan Nedelkovski (<https://howtomechatronics.com>), May 11, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-1987>).

Thanks for the remark, you are right. S0 should go to pin number 4, S1 to pin number 5.

REPLY

Dylan Petkus June 13, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-2117>).

Hello,

I'm having the same difficulty as Nguyen Khang above. My sensor hovers around the following for each sensor

R: 200

G: 350

B: 450

Granted we are in a room with bright office lighting. How would you recommend mapping these values? Just use a bigger range than yours (25-70)?

We're using an arduino Uno by the way.

REPLY

Dejan Nedelkovski (<https://howtomechatronics.com>), June 17, 2017 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-2130>).

Well yes, you should adjust the ranges according your the values you are getting. This have to be done by manually testing each color you want to scan, and do that multiply times for getting more accurate or average values.

REPLY

uday January 15, 2018 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-2939>).

hi sir ,
we are stuck in calibration .how long we have to calibrate. sensor are not detecting the colour properly .so can you suggest how to rectify the problem .

REPLY

Dejan Nedelkovski (<https://howtomechatronics.com>) January 17, 2018 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-2953>).

Well yeah, the calibration is a problem, because the sensor often gives various readings for the same color. Try changing the environment lightning, add some more light around so it might work better, or maybe reduce the light.

REPLY

Noah January 26, 2018 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-3000>).

Hi,

When connecting the TCS3200 can you use just regular digital pins or do it need to be connected to the PWM ports of the ARDUINO

REPLY

Dejan Nedelkovski (<https://howtomechatronics.com>) January 29, 2018 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-3008>).

Yes, you can use the regular digital pins.

REPLY

kamlesh [March 11, 2018 \(https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-3255\)](https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-3255)

hi can you please explain how to calibrate the color sensor ?

Dejan Nedelkovski (<https://howtomechatronics.com>), [March 18, 2018 \(https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-3277\)](https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-3277)

It's kind a hard to calibrate because it's a low quality sensor.

Rajesh [December 25, 2018 \(https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-5015\)](https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-5015)

Hi,

Thanks for the tutorial. Does this sensor detects color under sunlight?

REPLY

Dejan (<https://howtomechatronics.com>), [December 25, 2018 \(https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-5027\)](https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-5027)

Well I guess yes, it should be able to detect color under sunlight.

REPLY

Colonel [January 2, 2019 \(https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-5104\)](https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-5104)

In the code that has been written, the `pulseIn(sensorOut,LOW)` method returns the time for which pin 8 is low. It does not return the output frequency. But this example is however as it gives a good method of using TCS3200.

[https://www.arduino.cc/en/Reference.PulseIn](https://www.arduino.cc/en/Reference/PulseIn) (<https://www.arduino.cc/en/Reference.PulseIn>)

REPLY

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

[Read more \(https://howtomechatronics.com/privacy-policy-page/\)](https://howtomechatronics.com/privacy-policy-page/)

Tofiq January 11, 2019 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-5205>)

Hi,

How far can this sensor measure?
maximum range ?

REPLY

Dejan (<https://howtomechatronics.com>) January 12, 2019 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-5219>)

The range is pretty small, around 1cm – 3cm.

REPLY

Maris February 5, 2019 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-5496>)

Hello, i am a not student in engineering and we need to pick a colour sensor solution for a robot we are making.

The main issue as for now is that we don't know from how far we can sense colours with this kind of sensors, we only need to sense green.

We are on a budget so we can't really afford high quality sensors, do you have any ideas of the max distance/field of view for arduino compatible sensors ?

Thank you for the guides !

REPLY

Dejan (<https://howtomechatronics.com>) February 5, 2019 (<https://howtomechatronics.com/tutorials/arduino/arduino-color-sensing-tutorial-tcs230-tcs3200-color-sensor/#comment-5505>)

Hey, the sensor range is relatively small, around 1cm to 3cm.

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

[REPLY](#)

LEAVE A REPLY

Your email address will not be published.

Comment

Name*

Email*



Website

[SUBMIT](#)


LATEST

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

[Ok](#)[Read more \(https://howtomechatronics.com/privacy-policy-page/\)](https://howtomechatronics.com/privacy-policy-page/)

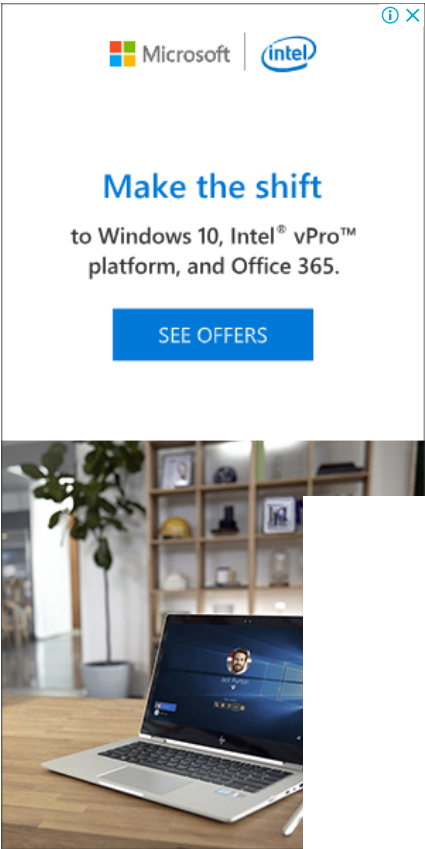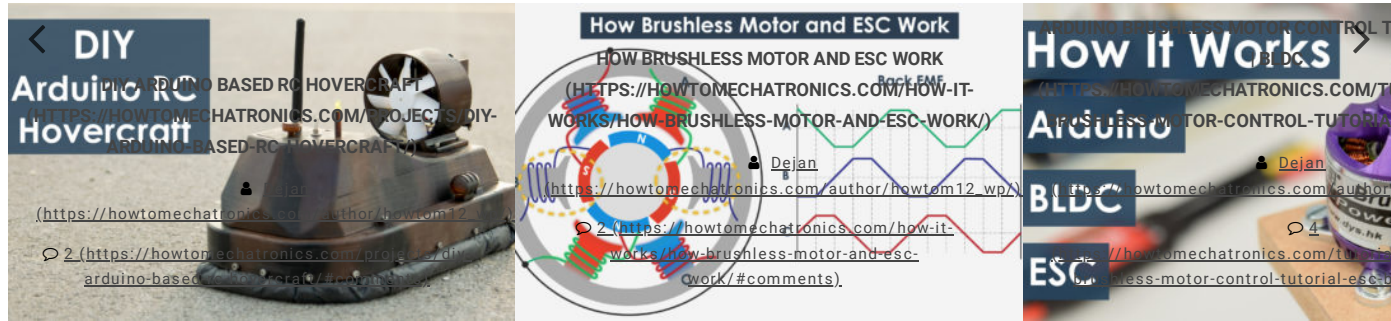

POPULAR

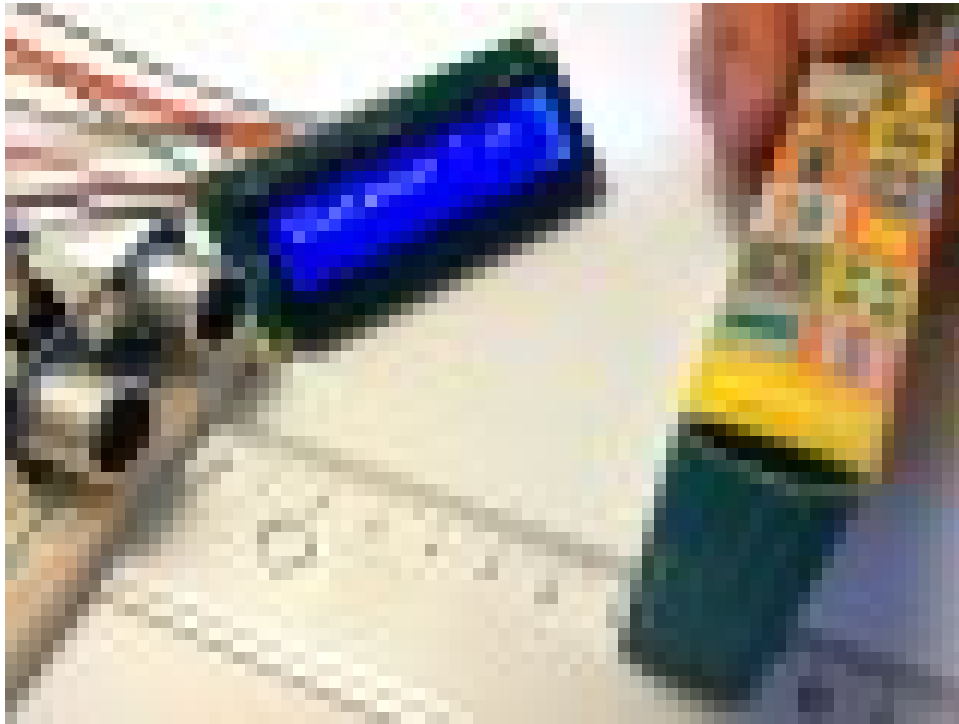

Ultrasonic Sensor HC-SR04 and Arduino Tutorial

(<https://howtomechatronics.com/tutorials/arduino/sensor-hc-sr04/>)


by Dejan

(<https://howtomechatronics.com/author/howtomechatronics/>)

92

(<https://howtomechatronics.com/tutorials/sensor-hc-sr04/#comments>)

(<https://howtomechatronics.com/tutorials/arduino/ultrasonic-sensor-hc-sr04/>)

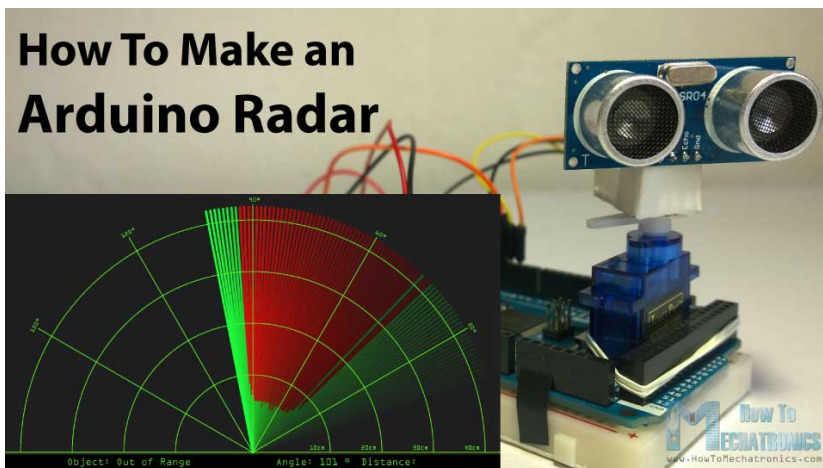

Arduino Radar Project

(<https://howtomechatronics.com/projects/arduino-radar-project/>)

by Dejan

(https://howtomechatronics.com/author/howtom12_wp/)

347 (<https://howtomechatronics.com/projects/arduino-radar-project/#comments>)

(<https://howtomechatronics.com/projects/arduino-radar-project/>)

How To Control a Stepper Motor with A4988 Driver and Arduino (<https://howtomechatronics.com/tutorials/arduino/how-to-control-stepper-motor-with-a4988-driver-and-arduino/>)

by Dejan (https://howtomechatronics.com/author/howtom12_wp/)


105 (<https://howtomechatronics.com/tutorials/arduino/how-to-control-stepper-motor-with-a4988-driver-and-arduino/#comments>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

Stepper Motor Control

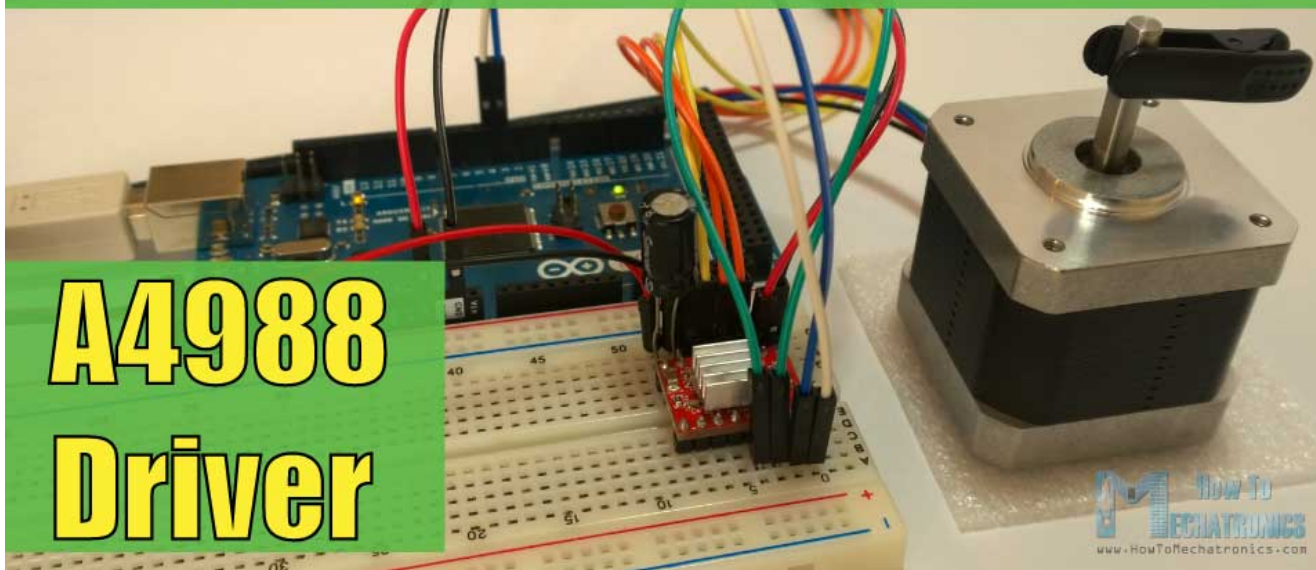

(<https://howtomechatronics.com/tutorials/arduino/how-to-control-stepper-motor-with-a4988-driver-and-arduino/>).

Arduino and HC-05 Bluetooth Module Tutorial (<https://howtomechatronics.com/tutorials/arduino/arduino-and-hc-05-bluetooth-module-tutorial/>)

Dejan (https://howtomechatronics.com/author/howtom12_wp/).

33 (<https://howtomechatronics.com/tutorials/arduino/arduino-and-hc-05-bluetooth-module-tutorial/#comments>).

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)



(<https://howtomechatronics.com/tutorials/arduino/arduino-and-hc-05-bluetooth-module-tutorial/>)

Arduino TFT LCD Touch Screen Tutorial (<https://howtomechatronics.com/tutorials/arduino/arduino-tft-lcd-touch-screen-tutorial/>)

👤 Dejan (https://howtomechatronics.com/author/howtom12_wp/).

🗨️ 160 (<https://howtomechatronics.com/tutorials/arduino/arduino-tft-lcd-touch-screen-tutorial/#comments>).

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)




(<https://howtomechatronics.com/tutorials/arduino/arduino-tft-lcd-touch-screen-tutorial/>).

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

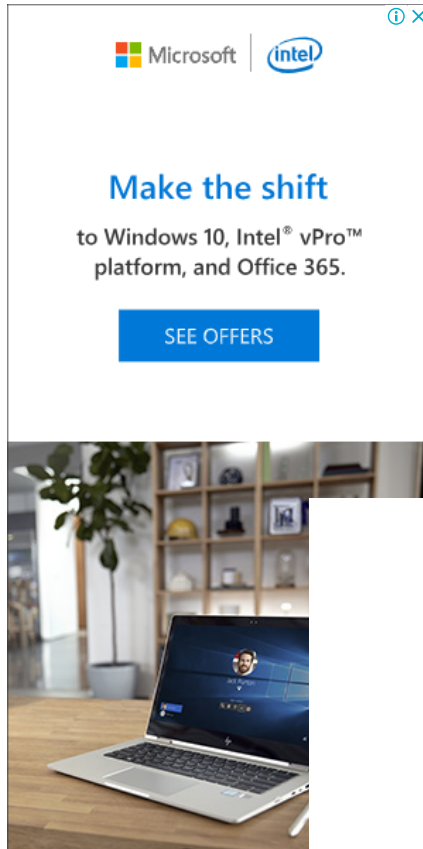

FOLLOW ME!

Join My Newsletter!

Get notified when I publish new projects and tutorials straight to your inbox.

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

https://howtomechatronics.com/privacy-policy-page/)"/>



How To Mechatronics
23,024 likes

Like Page

Send Message

CREATIVITY HERO PROJECT



[i](#) [x](#)

Robotics

Vision

Tailor made machine

gpai.eu

OPE


This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

20 Arduino Projects

From Getting Started to Advanced

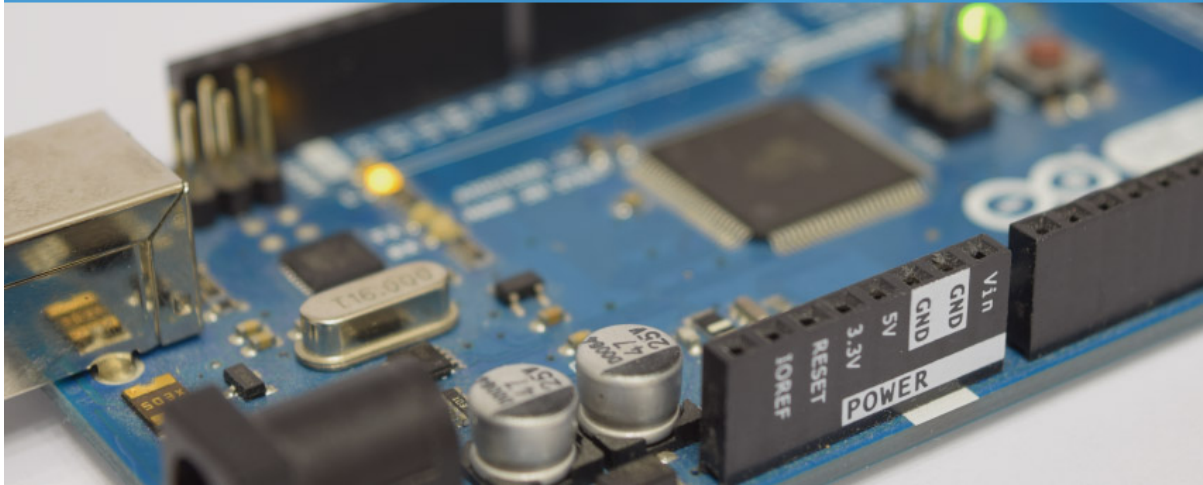

(<https://howtomechatronics.com/arduino-projects/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

HOW TO MECHATRONICS

HowToMechatronics is an education website in the area of Mechanical, Electrical and Computer Engineering. Tutorials, Tips, Tricks, How It Works, Projects, Examples, Source Codes, Download files and much more can be found here.

FOLLOW HOWTOMECHATRONICS ON SOCIAL MEDIA

(<https://www.facebook.com/howtomechatronics>) (<https://www.youtube.com/channel/UCjNedekovski>)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)

DISCLOSURE

HowToMechatronics is a participant in the Amazon Services LLC Associates Program, an affiliate advertising program designed to provide a means for sites to earn advertising fees by advertising and linking to Amazon.com

Copyright © 2019 HowToMechatronics.com. All rights reserved. [Terms and Conditions \(https://howtomechatronics.com/disclaimer/\)](https://howtomechatronics.com/disclaimer/) | [Privacy Policy \(https://howtomechatronics.com/privacy-policy-page/\)](https://howtomechatronics.com/privacy-policy-page/)

This website uses cookies to improve user experience. By using our website, you agree to our use of cookies.

Ok

Read more (<https://howtomechatronics.com/privacy-policy-page/>)