
Κλειδαριά — ESP32 wiring

board esp32dev · pins from esp32/config.h · rev 2026-11-04

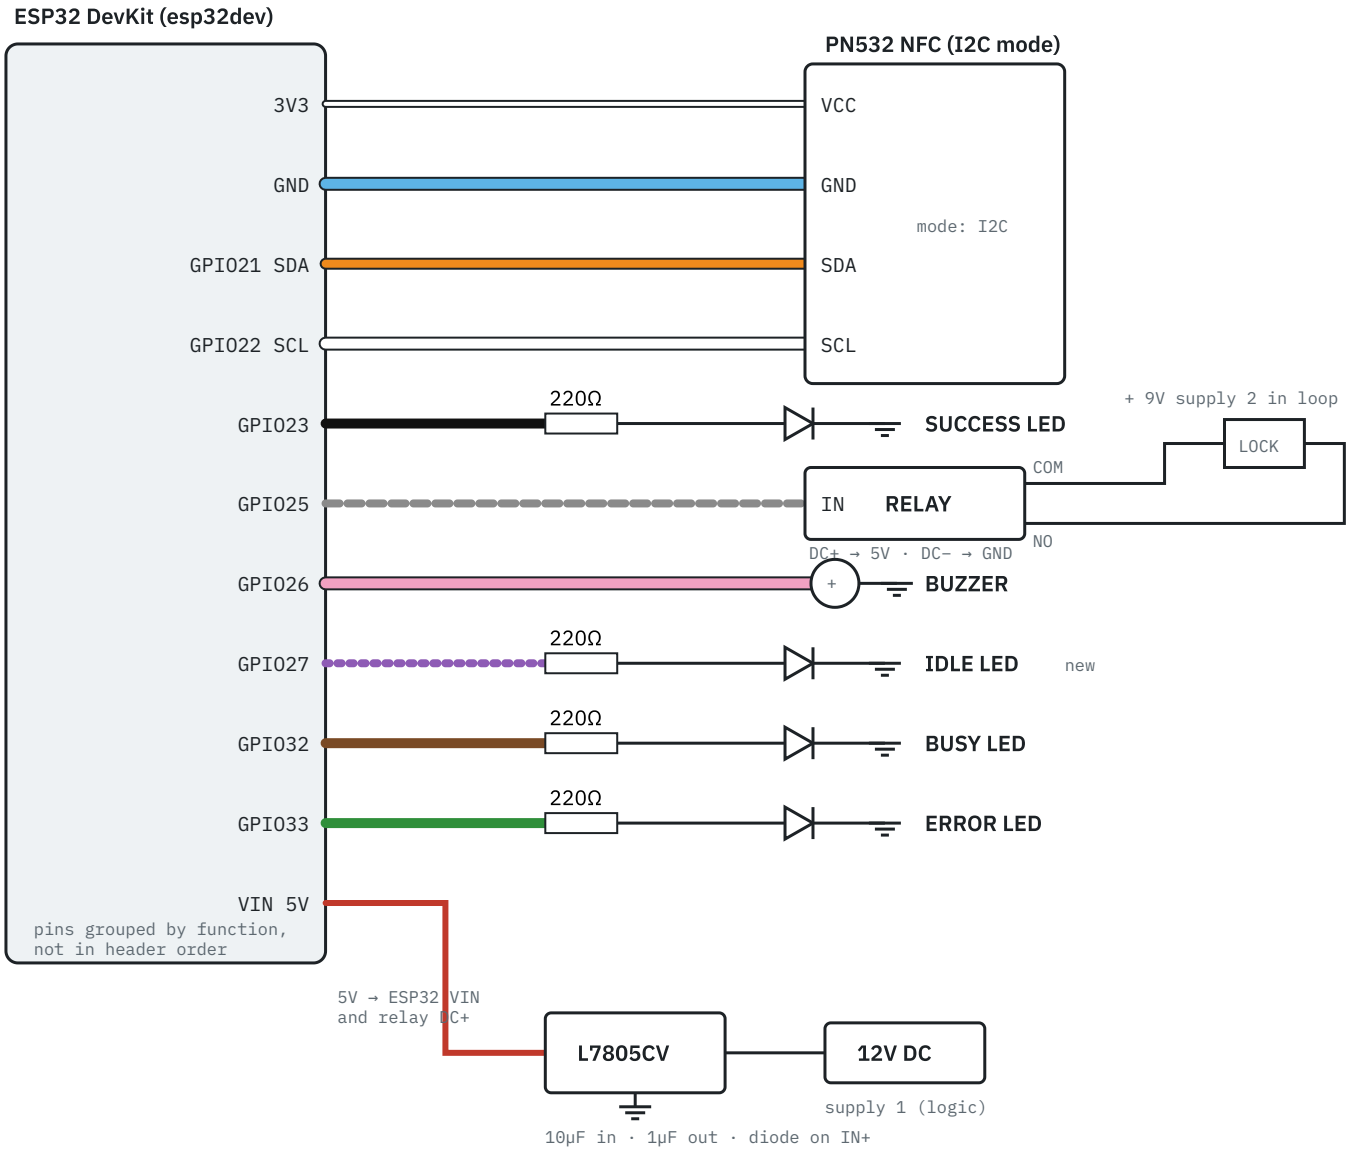

WIRE MAP

WIRE	LEGACY PIN	ESP32 PIN	GOES TO	CODE
white, thick	D1	GPIO22	PN532 SCL	NFC_SCL
orange	D2	GPIO21	PN532 SDA	NFC_SDA
white, thin	3V	3V3	PN532 VCC	—
light blue, thick	G	GND	PN532 GND, common ground	—
pink, thick	D4	GPIO26	Buzzer +	SPEAKER
not recorded	D5 (was D0)	GPIO25	Relay IN (HIGH = open)	DOOR_PIN
brown	D6	GPIO32	Busy LED	BUSY_LED
green	D7	GPIO33	Error LED	ERROR_LED
black	D8	GPIO23	Success LED	SUCCESS_LED
new wire	—	GPIO27	Idle LED add	IDLE_LED
5V	VIN	VIN	L7805 out, relay DC+	—

NOTES

Colours. Each colour keeps the job it had on the legacy sheet. Only the pin at the board end changes: move it to the GPIO in the table.

Relay on GPIO25. D0 moved to D5 because it went HIGH at boot and

Idle LED is back. The legacy sheet merged Idle into Busy. The firmware drives a separate Idle LED on GPIO27 (on when online, blinking when offline). Pick any free colour and write it here: _____

GND wire. The legacy legend has the light blue G line crossed out. Check

opened the lock. GPIO25 is not a strapping pin, so the lock stays shut on boot. Never use GPIO 0, 2, 5, 12 or 15 for the relay.

Exit switch. The legacy sheet ties the push switch into the relay input line. ESP32 GPIOs are 3.3V only: pressing the switch must never put 5V onto GPIO25.

which wire carries ground before re-soldering. All grounds (ESP32, PN532, relay DC–, LEDs, buzzer, L7805) must be common.

PN532. Runs in I2C mode on 3V3. Change the pins with NFC_SDA / NFC_SCL in config.h.