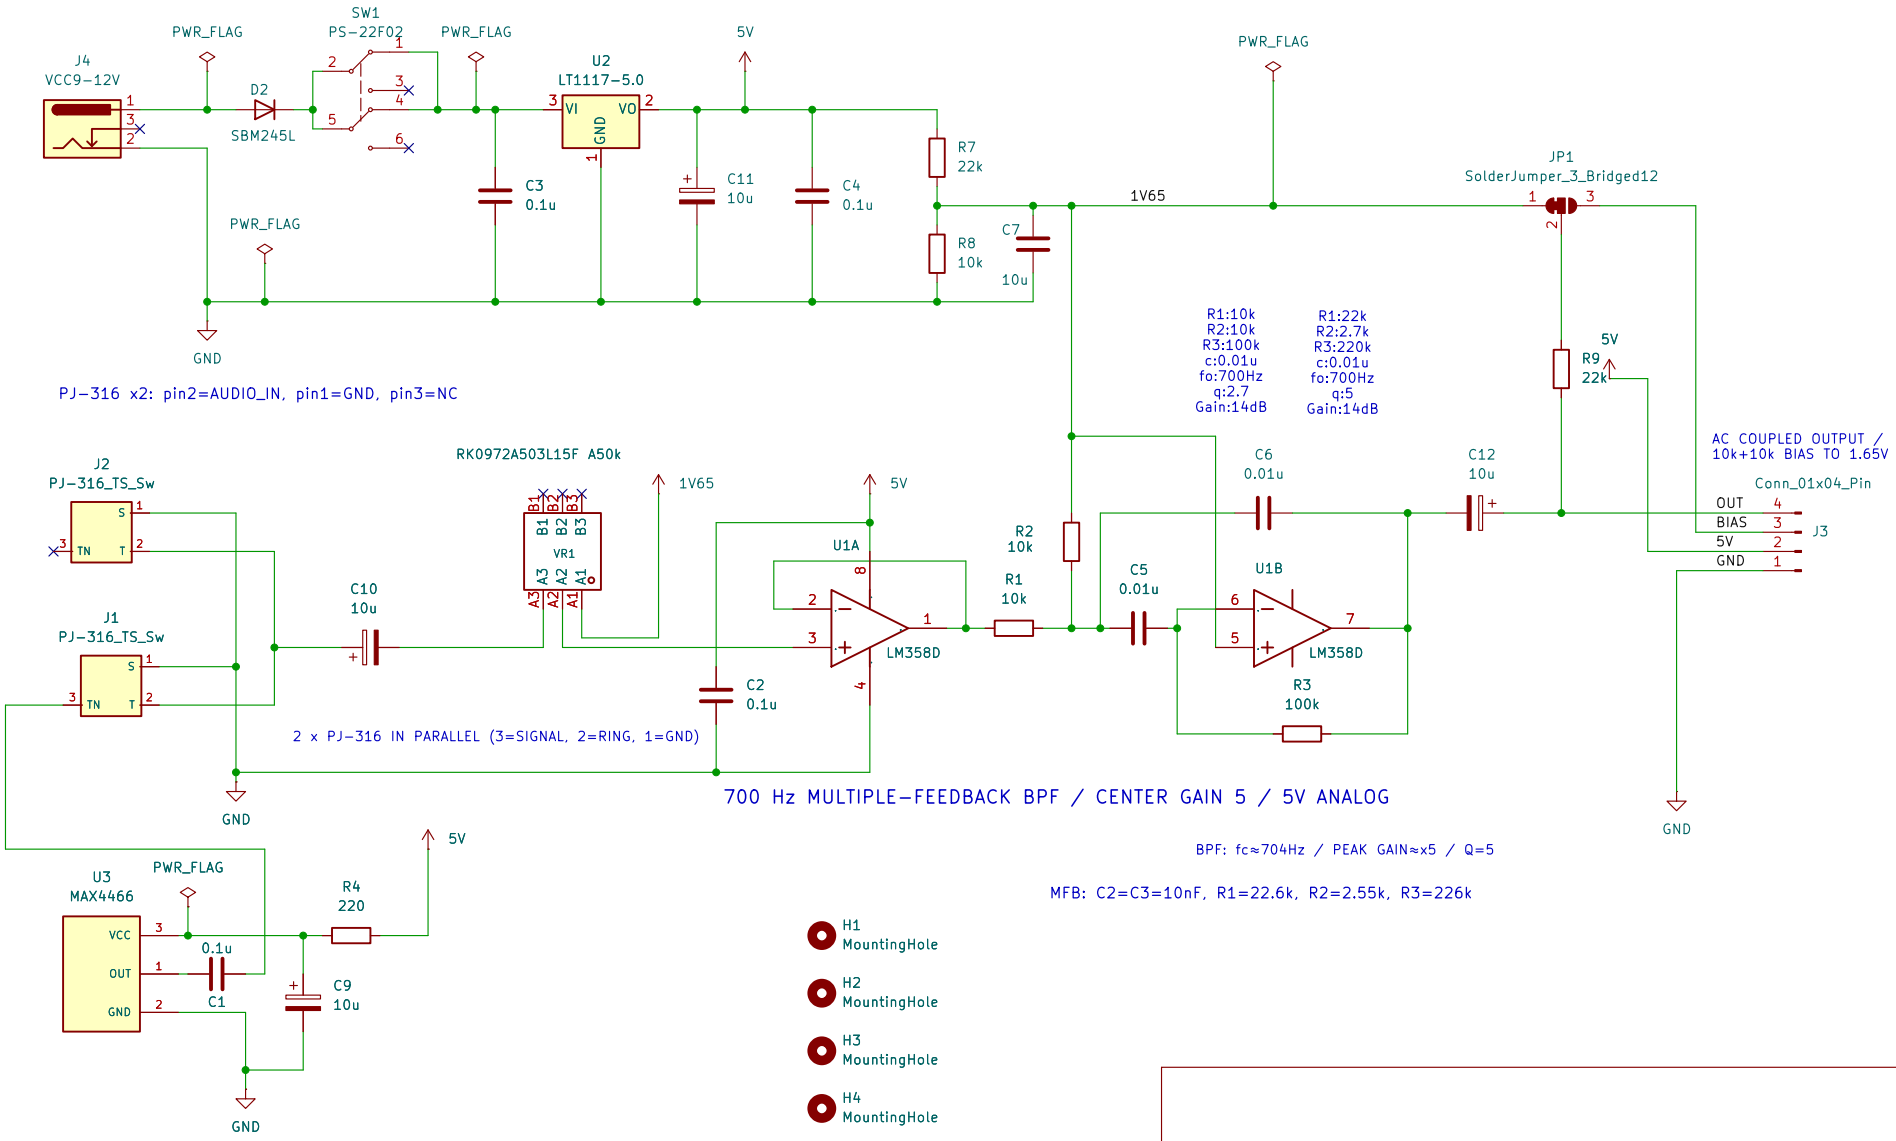

J4
VCC9–12V
PWR_FLAG
D2
SBM245L
SW1
PS–22F02
PWR_FLAG
U2
LT1117–5.0
VI
VO
GND
5V
C3
0.1u
C11
10u
C4
0.1u
R7
22k
R8
10k
C7
10u
PWR_FLAG
1V65
PWR_FLAG
JP1
SolderJumper_3_Bridged12
GND
PJ–316 x2: pin2=AUDIO_IN, pin1=GND, pin3=NC
R1:10k
R2:10k
R3:100k
c:0.01u
fo:700Hz
q:2.7
Gain:14dB
R1:22k
R2:2.7k
R3:220k
c:0.01u
fo:700Hz
q:5
Gain:14dB
5V
R9
22k
AC COUPLED OUTPUT /
10k+10k BIAS TO 1.65V
Conn_01x04_Pin
OUT
BIAS
5V
GND
J3
J2
PJ–316_TS_Sw
J1
PJ–316_TS_Sw
RK0972A503L15F A50k
VR1
1V65
5V
C10
10u
U1A
LM358D
R2
10k
R1
10k
C6
0.01u
C5
0.01u
C12
10u
U1B
LM358D
R3
100k
C2
0.1u
2 x PJ–316 IN PARALLEL (3=SIGNAL, 2=RING, 1=GND)
GND
700 Hz MULTIPLE–FEEDBACK BPF / CENTER GAIN 5 / 5V ANALOG
BPF: fc≈704Hz / PEAK GAIN≈x5 / Q=5
MFB: C2=C3=10nF, R1=22.6k, R2=2.55k, R3=226k
U3
MAX4466
VCC
OUT
GND
PWR_FLAG
0.1u
C1
R4
220
C9
10u
5V
GND
H1
MountingHole
H2
MountingHole
H3
MountingHole
H4
MountingHole
700 Hz MULTIPLE–FEEDBACK BPF / CENTER GAIN 5 / 3.3V ANALOG
Ohe Mfg.
Sheet: /
File: CWDV4_R1.kicad_sch
Title: CW Decoder 4 Analog Board
Size: A4
Date: 2026–09–22
Rev: 1.0
KiCad E.D.A. 10.0.1
Id: 1/1