BATTERY & PROTECTION & OR

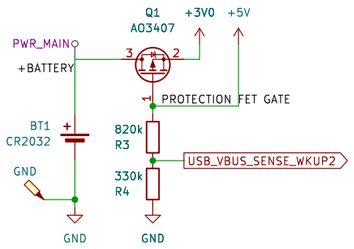

Q1 works as a reverse polarity protection,
closes on 5V presence from USB (Ugate > Usource)

CR2032 will have ~200mA till 2V5 discharge

Energizer CR2032

LDO: 5V -> 3V3



LDO, Udrop = 250mV

LOW-PASS FILTER & MCU CAPS

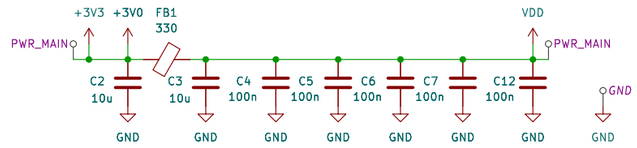

USB-C: POWER & MSD

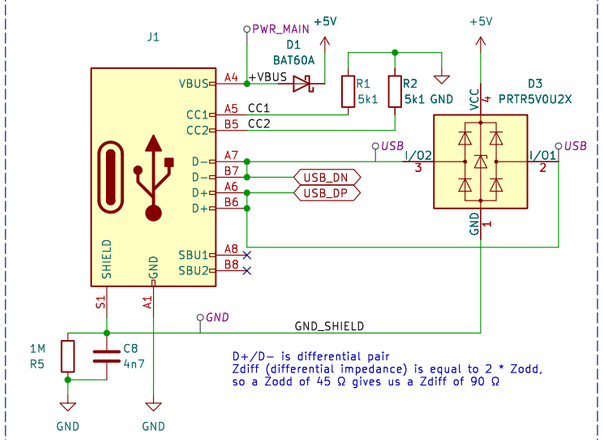

D+/D- is differential pair
Zdiff (differential impedance) is equal to 2 * Zodd,
so a Zodd of 45 Ω gives us a Zdiff of 90 Ω

NFC

I2C: system 0x57 (0xAE/0xAF), user 0x54 (0xA6/0xA7)

ST25DV ultra-low power: AN5733
Antenna design: AN2972
Antenna design double-layer : AN5605
FTM Data exchange: AN4910

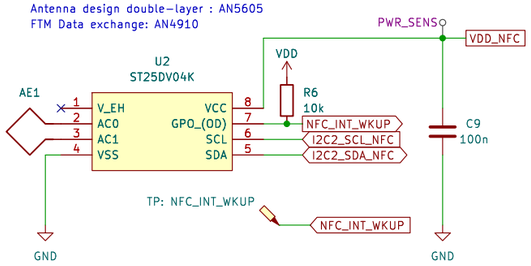

C=28.5pF
equivalent L=4.9uH

AMBIENT LIGHT SENSOR

I2C 0x45 (0x8A/0x8B), ADDR=VDD

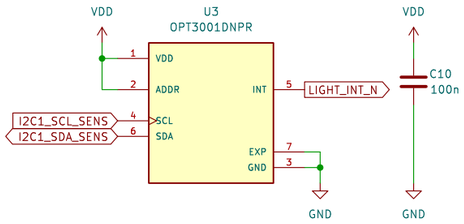

TEMPERATURE & HUMIDITY SENSOR

I2C 0x44 (0x88/0x89), ADDR=GND

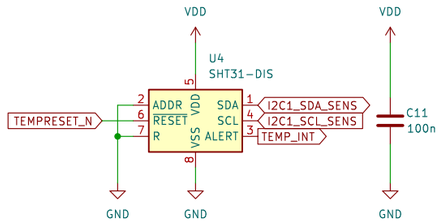

SHT3x-DIS

3-AXIS ACCELEROMETER

I2C 0x19 (0x32/0x33), ADDR(SA0)=VDD (internal pull-up)

Orientation: Can detect logger tilt
Shock and vibration monitoring: Shipping and warranty usage logging
Freefall: Logger fall detection

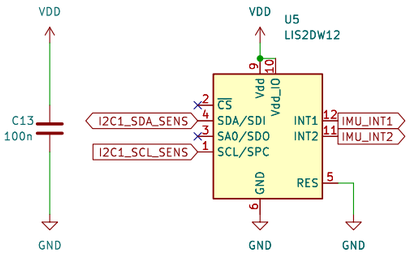

QSPI NOR FLASH 2MB

2.5V - 3.6V: allows to drain battery effeciently

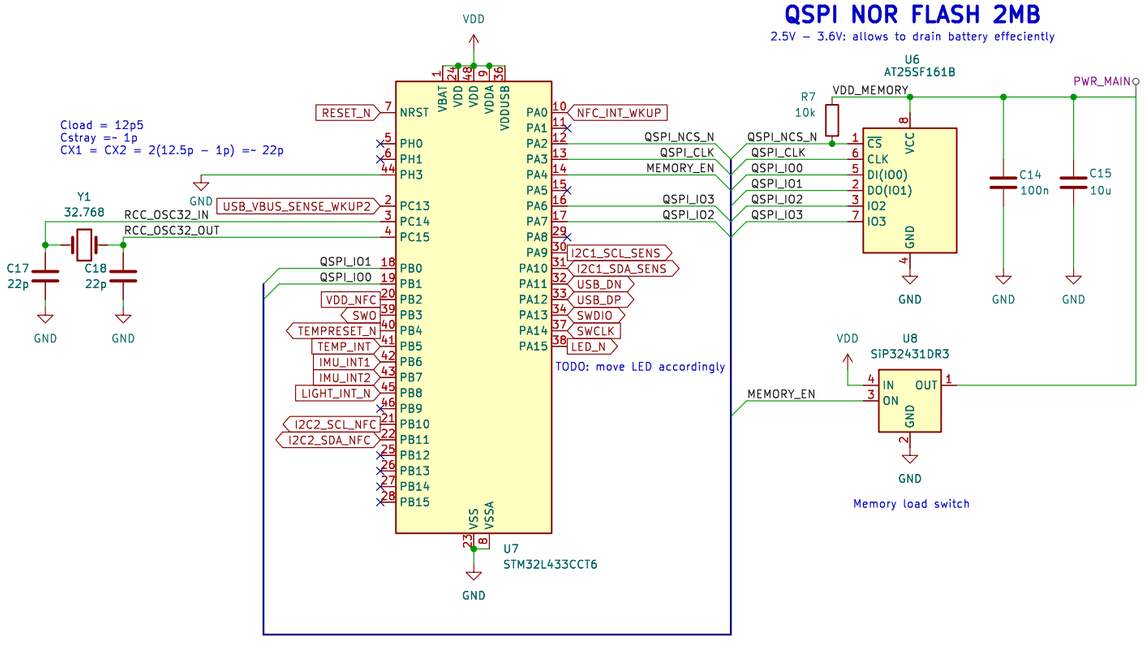

I2C PULL-UPS

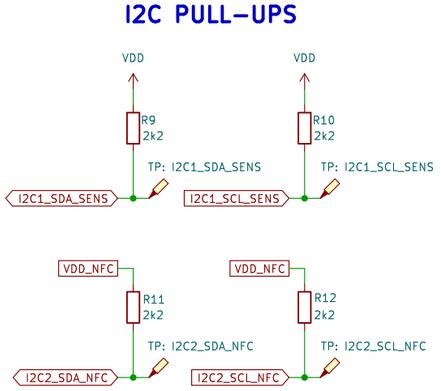

LED



I = 0.45mA

ARM SWD

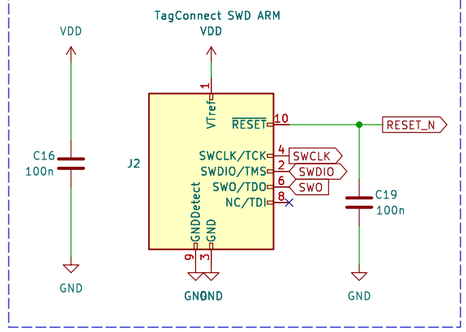

Sheet: /		
File: iot-risk-logger-stm32l4.kicad_sch		
Title: IoT Risk data logger		
Size: A3	Date: 2025-11-06	**Rev: 2.0.0**
KiCad E.D.A. 9.0.4		Id: 1/1