

Ping pong ball catcher

Anders Jensen¹, Jorge Rodriguez Marin², and Kim Lindberg
Schwaner³

University of Southern Denmark
Faculty of Engineering
EMB1

December 14, 2014

¹`anje111@student.sdu.dk`

²`jorod14@student.sdu.dk`

³`kschw10@student.sdu.dk`

Abstract

In the following pages the design and implementation process of a ping pong ball catcher is described. The machine consists of a squared base sensed with four piezo sensors in the corners so it is able to calculate the position of a hit in the base. When a ping pong ball hits the base, a robotic arm will move in to catch the ball after the first rebound. The system is equipped with an FPGA that calculates the position of the hit and move the arm, whereas a computer program shows the hits into an interface and save a history of the balls.

Contents

1	Introduction	2
1.1	Overall description	2
1.2	Report structure	2
2	Methodology and Equipment	4
2.1	Methodology	4
2.1.1	PCB Design and manufacturing	4
2.1.2	Design and manufacturing of mechanical part	4
2.1.3	Low-level programming	5
2.1.4	High-level programming	5
2.2	Equipment	5
3	Detecting xy-position of ball impact	6
3.1	TDOA positioning in a plane	6
3.2	Piezo electric elements	8
3.3	Construction of impact plane	9
3.3.1	Precise timing for TDOA	9
3.3.2	Precise timing in VHDL	9
3.4	Test of positioning	9
4	Two joint arm as ball catcher	11
4.1	Physical construction	11
4.2	Inverse kinematics and control	11
4.2.1	Servo control	11
4.3	Inverse kinematics and control	12
5	PC Program	13
5.1	Communication and Logic	13
5.2	Interface	13
6	Conclusions	14

Chapter 1

Introduction

1.1 Overall description

The goal of this project is catching a ping pong ball released above a platform, on which four piezoelectric elements are placed in a rectangular pattern as shown in Figure 1.1. Once the ball has hit the platform once, each of the piezo elements will generate a signal and permit triangulation of the impact point. When the impact point has been found, a net will catch the ball when it returns toward the platform after the first bounce.

Overall the different tasks of the project are thus:

- Calculating the xy-coordinate of the impact point
- Moving an arm – holding a net – to catch the ball after it has bounced once

1.2 Report structure

The report is structured as follows. To start the theoritical...

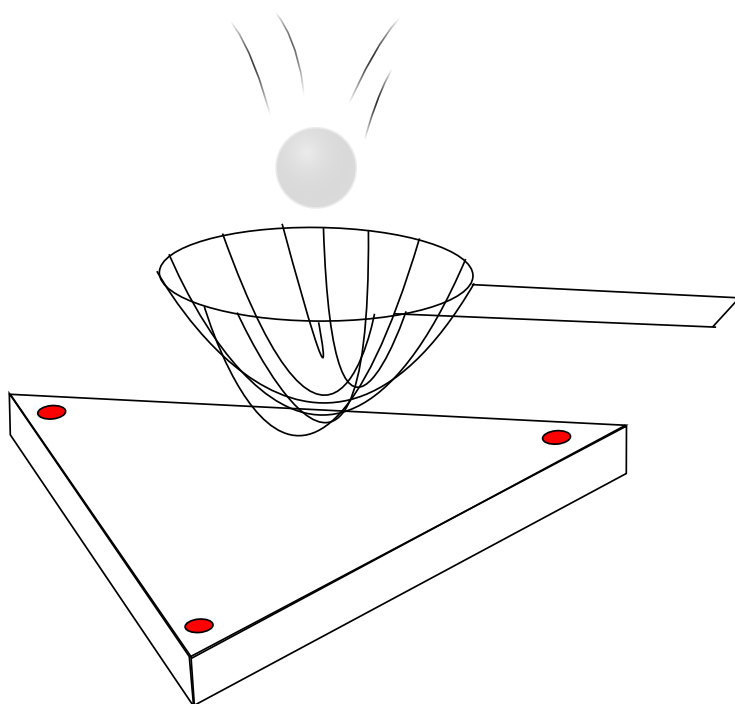


Figure 1.1: Side view of the platform surface area and the net. The red markings are piezoelectric sensors. TODO:change to picture of setup

Chapter 2

Methodology and Equipment

In order to complete the project a number of methods and materials were used.

2.1 Methodology

The workload in this project can be divided in four parts that will be treat separately, being this: mechanics, electronics, and high- and low-level programming. Since the workload is large in the low-level programming all multiple people were working on it. Whereas the workload for the other parts were mainly distributed to individuals, to maximize resource utility.

2.1.1 PCB Design and manufacturing

The design for PCB with the piezo electric elements were conducted by first doing some research on the working principles of the piezo. Since it turn out to be rather hard to theoretically design the PCB a more pragmatic approach were conducted. The sensor characteristics were analyzed by mounting it with a big potentiometer in parallel and measuring the generated voltage when hitting the base plate with a ping pong ball. Based on this analysis a prototype were put together and tested on a breadboard. Then the design from the breadboard are drawn as a schematics and a board in eagle. After verifying the schematics and board one of the four identical PCB's are manufactured and tested before producing the others. Other simpler electrical connections are manufactured on stripboards to minimize time spend on producing PCB's.

2.1.2 Design and manufacturing of mechanical part

In the mechanics part the schedule was:

- Design of the structure

- Manufacturing of the laser cutter machine parts
- Manufacturing of the 3D printed parts
- Structure assembly
- Add sensors and electronics to the whole structure

2.1.3 Low-level programming

Whereas in the programming part:

- **Blabla**

2.1.4 High-level programming

To finish, the computer program was divided in:

- UI conceptualization
- Serial research and first test
- Develop of the whole program
- Testing

2.2 Equipment

To develop and test the designed solution the following equipments were used.

- Oscilloscope
- Multimeter
- Soldering iron
- Nexys 2 board
- Eagle 7.1 Light
- Breadboard
- PCB development instruments
- Printer
- DC servo motor
- Murata piezo sensor 7BB-20-6L0
- 3D printer
- Laser cutter machine

Chapter 3

Detecting xy-position of ball impact

This chapter describes the implementation of a solution that enables detection of point of impact for a ping pong ball using an FPGA and piezo electric elements.

3.1 TDOA positioning in a plane

In this section the relationship between differences in time measurements from multiple sensors and the xy-position of the emitter are derived. The problem can be modeled as in figure 3.1 where the following parameters are known from the setup and measurements:

- Time of arrival of sound at sensors a, b, c and d.
- Speed of sound in chosen material.
- Position of sensors.

The system is setup with four sensors since the possibility of resulting in multiple solutions when using only three [**tdoa_book**]. The solution will be represented as a system of linear equations to enable fast and relatively simple implementation in VHDL. The derivation will be conducted for two of the sensors giving one row in the equation system. The other two rows are determined in a similar manner.

By assuming a constant speed of sound through the impact plane, equation 3.1 describes the relationship between time difference between measurement and impact ($t_a - t$) and the distance the impact point is from sensor a.

$$l_a = v(t_a - t) \Leftrightarrow l_a^2 = v^2(t_a - t)^2 \quad (3.1)$$

Equation 3.2 describes the same relationship with respect to sensor b.

$$l_b = v(t_b - t) \Leftrightarrow l_b^2 = v^2(t_b - t)^2 \quad (3.2)$$

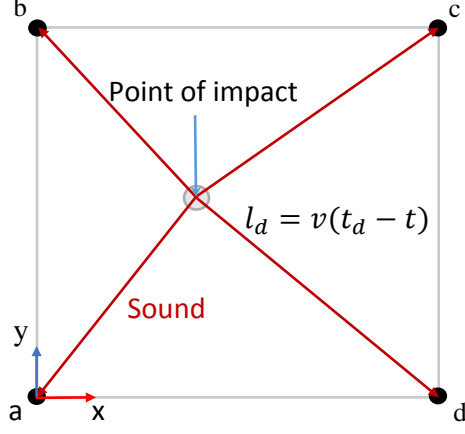


Figure 3.1: Side view of the platform surface area and the net. The red markings are piezoelectric sensors.

By differencing equation 3.1 and 3.2 equation 3.3 can be derived using the difference of squares formula. It is a linear relation with respect to time of impact t .

$$l_a^2 - l_b^2 = v^2(t_a^2 - t_b^2) - 2v^2(t_a - t_b)t \quad (3.3)$$

By using Pythagoras theorem the difference in squared distances from the impact point are also related according to equation 3.4. It can be seen that it is a linear equation in x and y with constants given from the setup.

$$\begin{aligned} l_a^2 - l_b^2 &= (x_a - x_b)^2 + (y_a - y)^2 - ((x_b - x) + (-y_b - y))^2 \\ &= -2((x_a - x_b)x + (y_a - y_b)y) + x_a^2 + y_a^2 - (x_b^2 + y_b^2) \end{aligned} \quad (3.4)$$

By setting equation 3.3 and 3.4 equal and isolating the constants known from time measurements and setup equation 3.5 is derived.

$$(x_a - x_b)x + (y_a - y_b)y - v^2(t_a - t_b)t = (x_a^2 + y_a^2 - (x_b^2 + y_b^2) - v^2(t_a^2 - t_b^2))/2 \equiv k_{ab} \quad (3.5)$$

Using similar relations for the other four sensors results in the system of linear equations 3.6 which solution uniquely defines the xy -position of the impact [toa_notes].

$$\begin{bmatrix} x_a - x_b & y_a - y_b & -v^2(t_a - t_b) \\ x_b - x_c & y_b - y_c & -v^2(t_b - t_c) \\ x_c - x_d & y_c - y_d & -v^2(t_c - t_d) \end{bmatrix} \begin{bmatrix} x \\ y \\ t \end{bmatrix} = \begin{bmatrix} k_{ab} \\ k_{bc} \\ k_{cd} \end{bmatrix} \quad (3.6)$$

3.2 Piezo electric elements

This section describes the construction of a number of sensor circuits using piezo electric elements to measure the time of arrival of bending waves. There is a circuit like the one on figure 3.2 for each sensor. It is chosen to make one print for each circuit in order to keep the wires conducting the analog sensor values as small as possible. The very small current that the piezo electric element

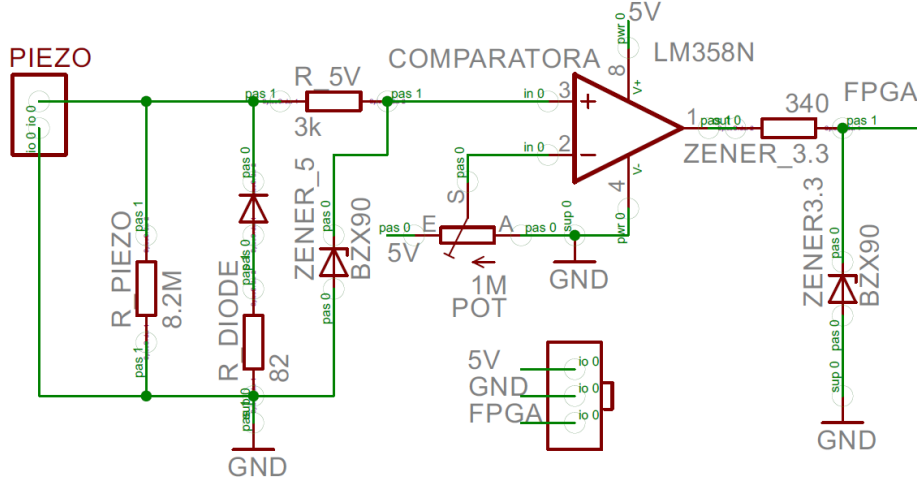


Figure 3.2: Schematics of circuit for digitalizing the output from a piezo electric elements.

generates are amplified with a resistor on $8.5M\Omega$. This value is chosen since test showed that it was possible to detect ball bounce from as low a height as 30cm. Diodes are used to account for the large positive and negative voltage spikes that the sensor in combination with the large resistor can output in case of a powerful input to the sensor. Since the negative voltage are not used it is removed up to $0.7V$ with a diode which conducts current for ground when the voltage from the piezo becomes less than $0.7V$. The resistor is calculated according to equation 3.4.

$$20 - 0.7V = R_{diode} \cdot 300mA \Leftrightarrow R_{diode} = 64.3\Omega \quad (3.7)$$

Since this resistance was not in stock a resistor of 82Ω is chosen. Where the $20V$ is taken as a guess on the absolute maximum based on the fact that tests has not shown voltages above $15V$ when throwing the ball against the plate. Hence the system are robust against misuse. Since the op-amp can not compare values that are larger than the supply of $5V$, the positive voltage is limited to $5.1V$ with a zener diode [zener]. The resistor R_{5V} is calculated by assuming infinite input resistance in the op amp according to equation

$$20 - 5V = R_{5V} \cdot 5mA \Leftrightarrow R_{5V} = 3k\Omega \quad (3.8)$$

A zener diode [zener] is used to convert the 5V on the data output from the operational amplifier to 3.3V, which is appropriate voltage for the FPGA. The solution with a zener diode is chosen over another using a voltage divider since the voltage is kept at 3.3V for all op-amp of the type LM358 even in case of changes in production. According to the datasheet for LM358 the saturated output voltages varies from the supply voltages down to 1.5V below [lm358]. The resistor placed on the output of the operational amplifier is calculated using the current used for testing conditions in the datasheet for the diode, as can be seen in equation 3.9 [zener].

$$5 - 3.3V = R_z I_{test} \Leftrightarrow R_z = 1.7V/5mA = 340\Omega \quad (3.9)$$

A potentiometer is connected to the inverting pin of the Op-amp in order to ease the tuning process. It's value is set to 1M Ω to minimize the power consumption.

3.3 Construction of impact plane

The physical platform area will be a flat area of approximately 40 \times 40 cm.

3.3.1 Precise timing for TDOA

This section describes how the precise timing of time differences between signal arrivals on the different piezo elements. These timings enable determination of impact point by solving the TDOA problem.

3.3.2 Precise timing in VHDL

3.4 Test of positioning

In order to test whether the positioning system calculates the correct position two test are conducted. In each test a ball is dropped on to the same position of the base plate multiple times.

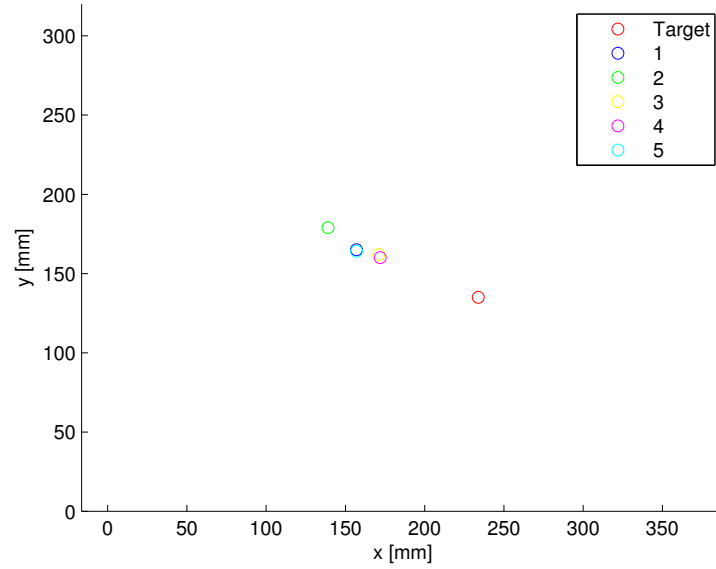


Figure 3.3: Estimated impact positions based as a result of dropping a ball on to the same target multiple times.

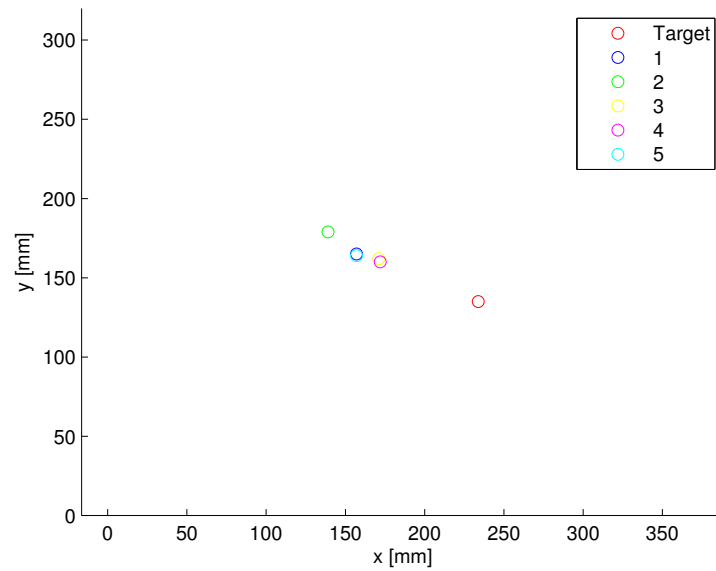


Figure 3.4: Estimated impact positions based as a result of dropping a ball on to the same target multiple times.

Chapter 4

Two joint arm as ball catcher

A arm will be mounted on a stick besides the platform so that the net does not hit the ground. The arm consist of two

4.1 Physical construction

How the arm is constructed to be robust and fast while being able to reach the specified area for impact.

«««< HEAD

4.2 Inverse kinematics and control

The inverse kinematics for the one joint arm can be calculated very simple using the x and y position calculated from the TDOA information using equation 4.1.

$$angle = atan(y/x) \quad (4.1)$$

This calculation are easily implemented in c code on microblaze MCS.

4.2.1 Servo control

The servo are controlled to move the arm to the calculated angle. By testing it is found that the servo copes with the standard for servos by going to zero degree when a 1ms high is applied. When the PPM signal is high for 2ms it moves to a 90° angle. In between there are a linear relationship between the time with high signal and the amount of degrees it moves to. Todo: finish this, maybe change implementation in VHDL The amount of time the servo is high are controlled with the generic PWM module designed in project one which recessives the number of

=====

4.3 Inverse kinematics and control

Due to the construction of this prototype with just one servo, the position of the servo is defined by:

$$\theta = \arctan \frac{y}{x}$$

»»»> origin/master

Chapter 5

PC Program

A PC program will show the position of the hit point and the height the ball will bounce back to.

5.1 Communication and Logic


Regarding the communication, the PC program and the FPGA are connected by a USB wire and this protocol is handled by the Qt serial libraries given. This lets the communication in the hands of a code that has been already tested.


5.2 Interface


Chapter 6

Conclusions

Sum up of results.

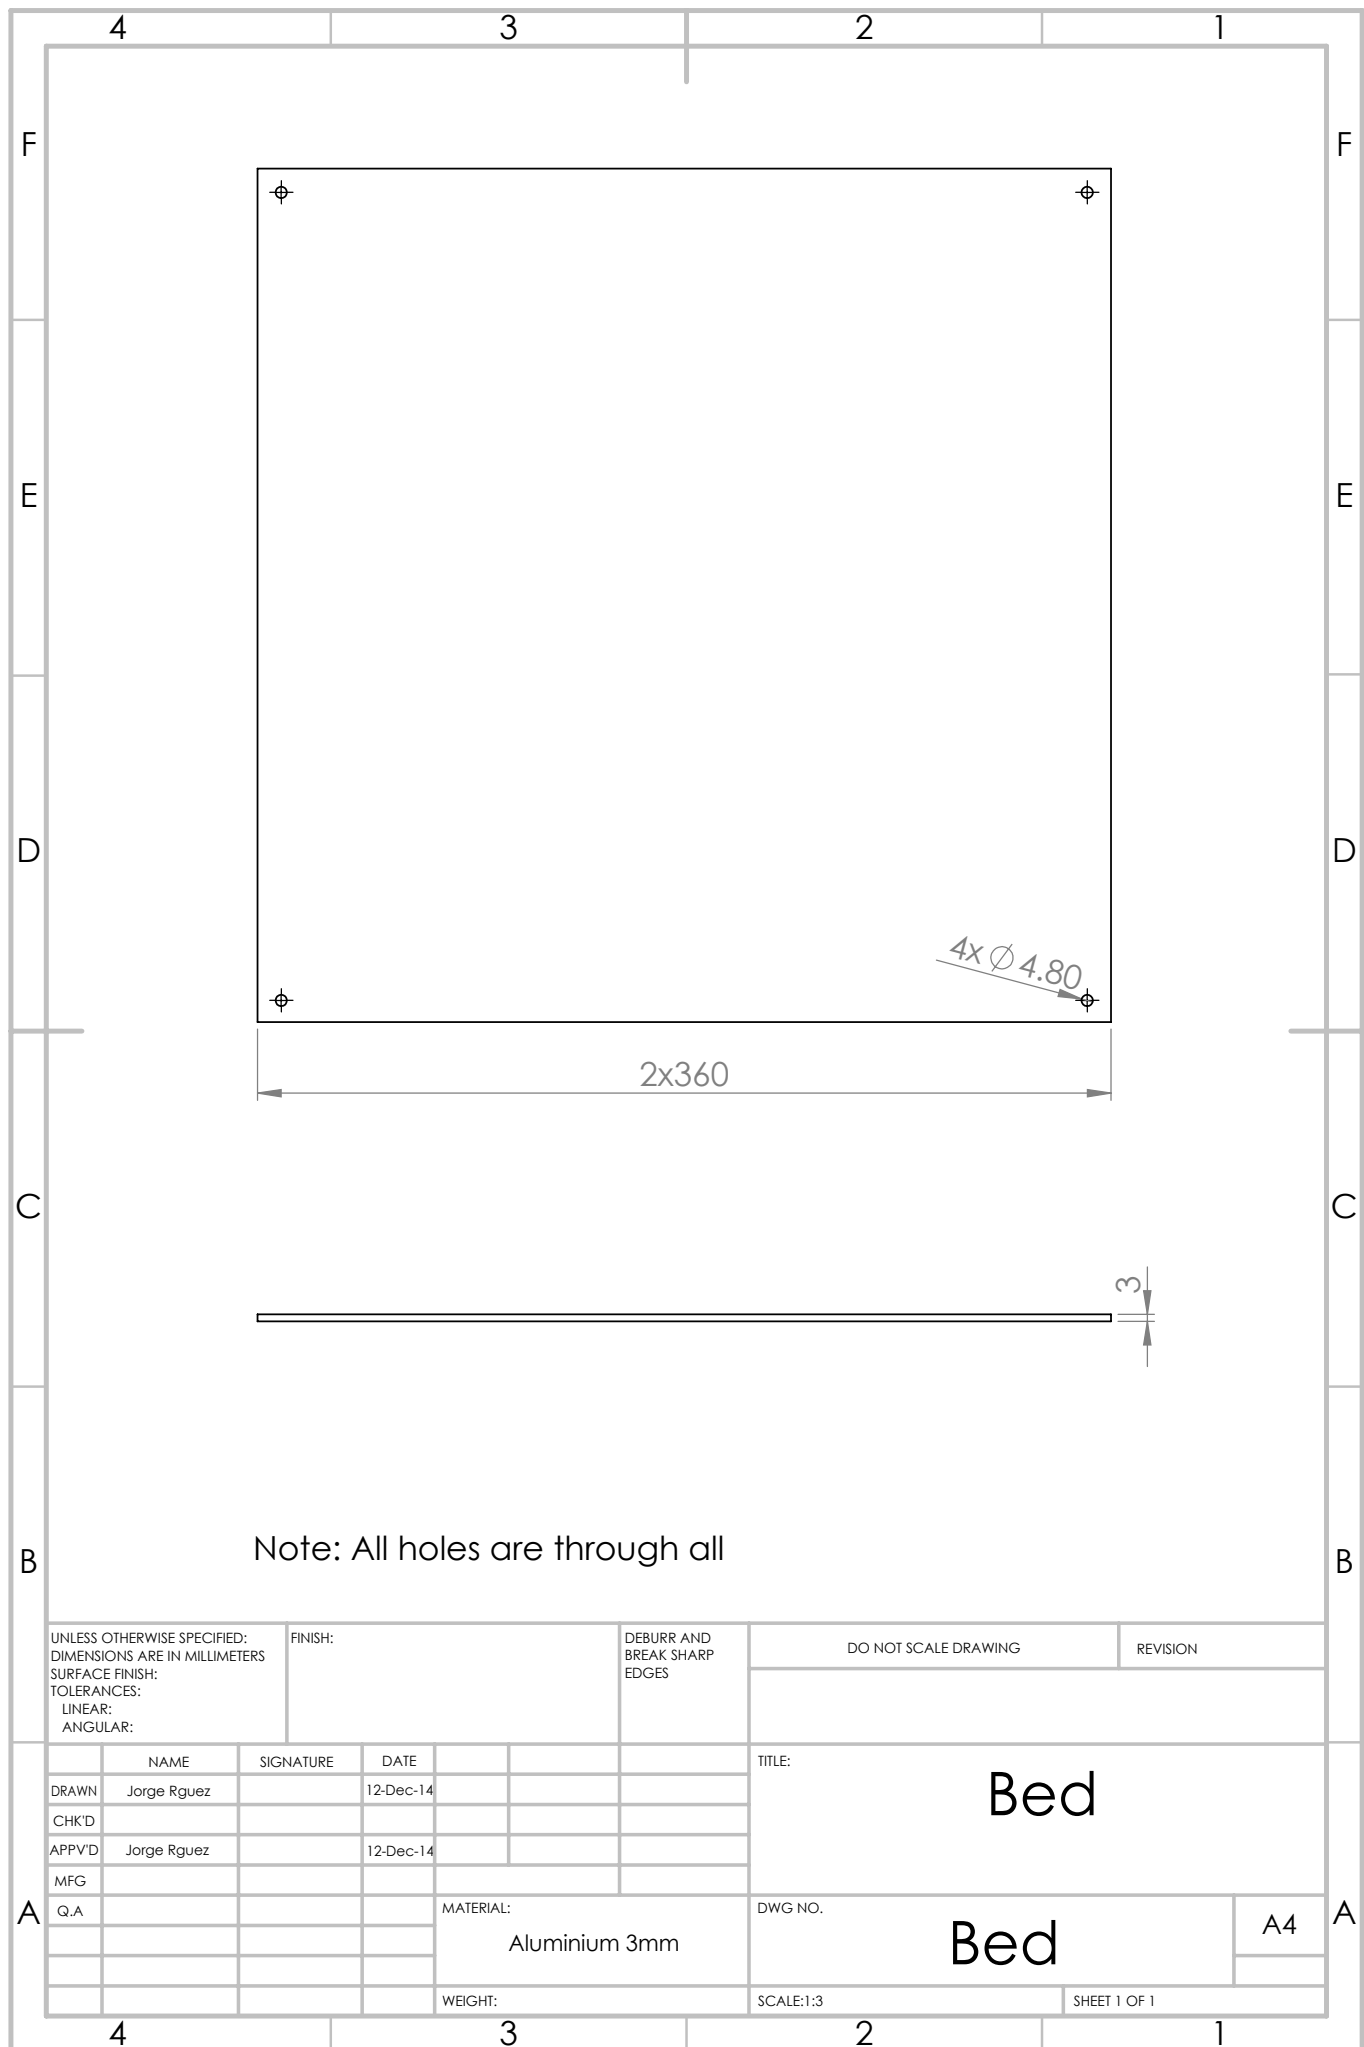


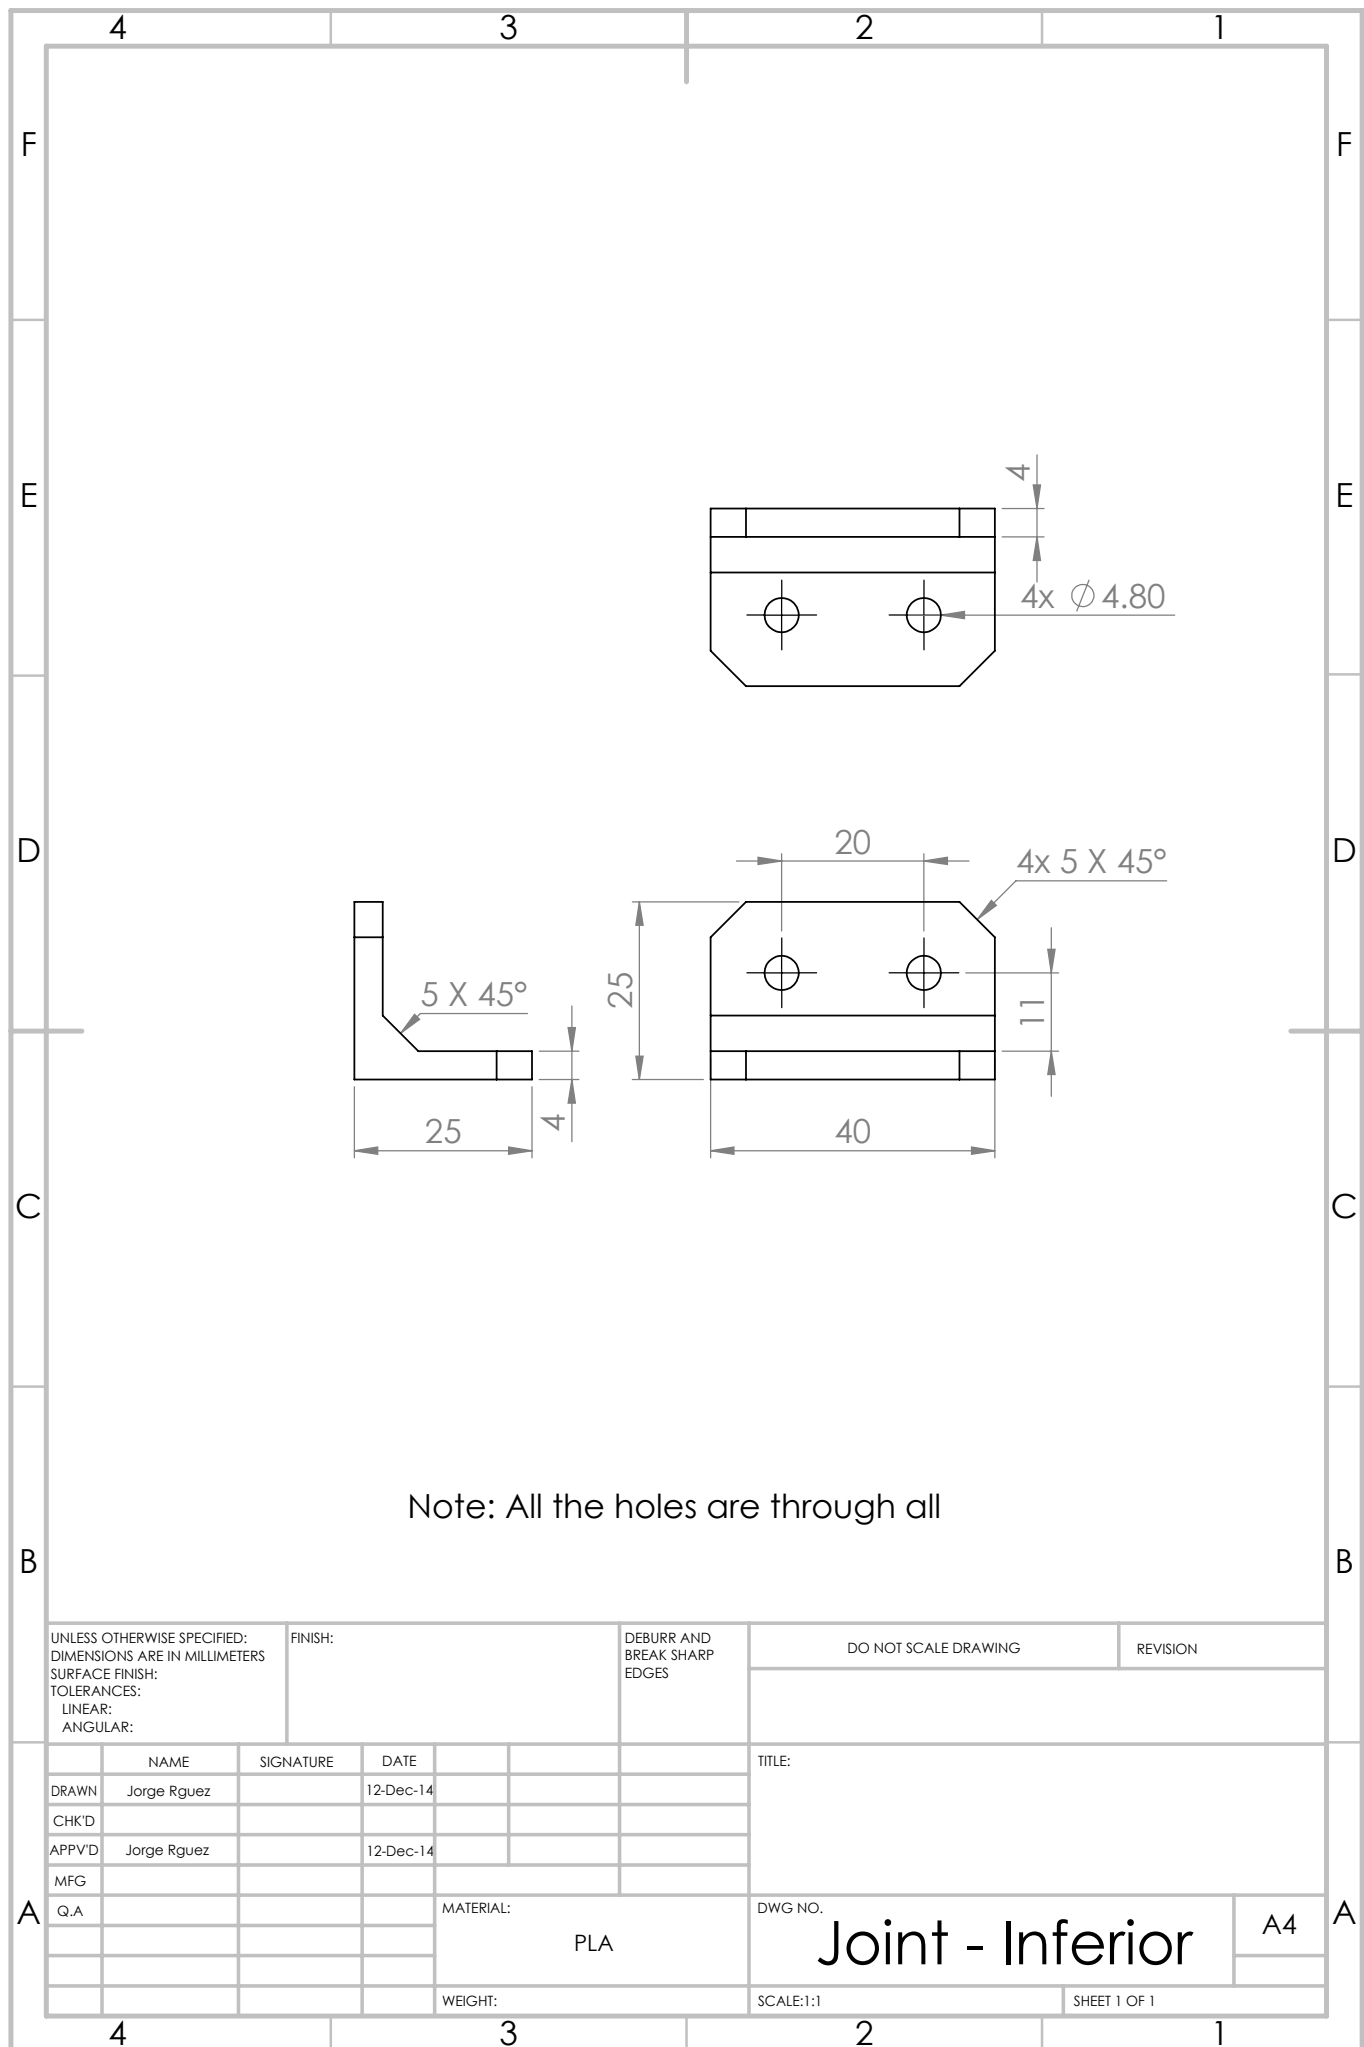

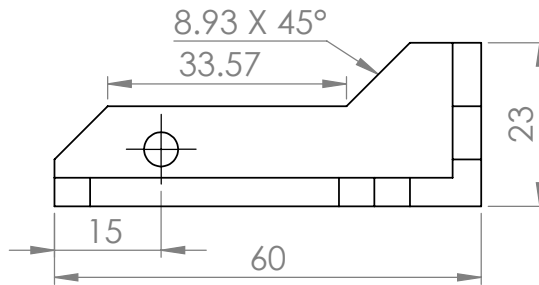

All the holes are through all

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS SURFACE FINISH: TOLERANCES: LINEAR: ANGULAR:						FINISH:		DEBURR AND BREAK SHARP EDGES		DO NOT SCALE DRAWING		REVISION	
	NAME		SIGNATURE	DATE				TITLE:					
DRAWN	Jorge Rguez			12-Dec-14									
CHK'D													
APPV'D	Jorge Rguez			12-Dec-14									
MFG													
Q.A.					MATERIAL: PLA				DWG NO.		Joint - Superior		A4
								WEIGHT:		SCALE:1:1		SHEET 1 OF 1	

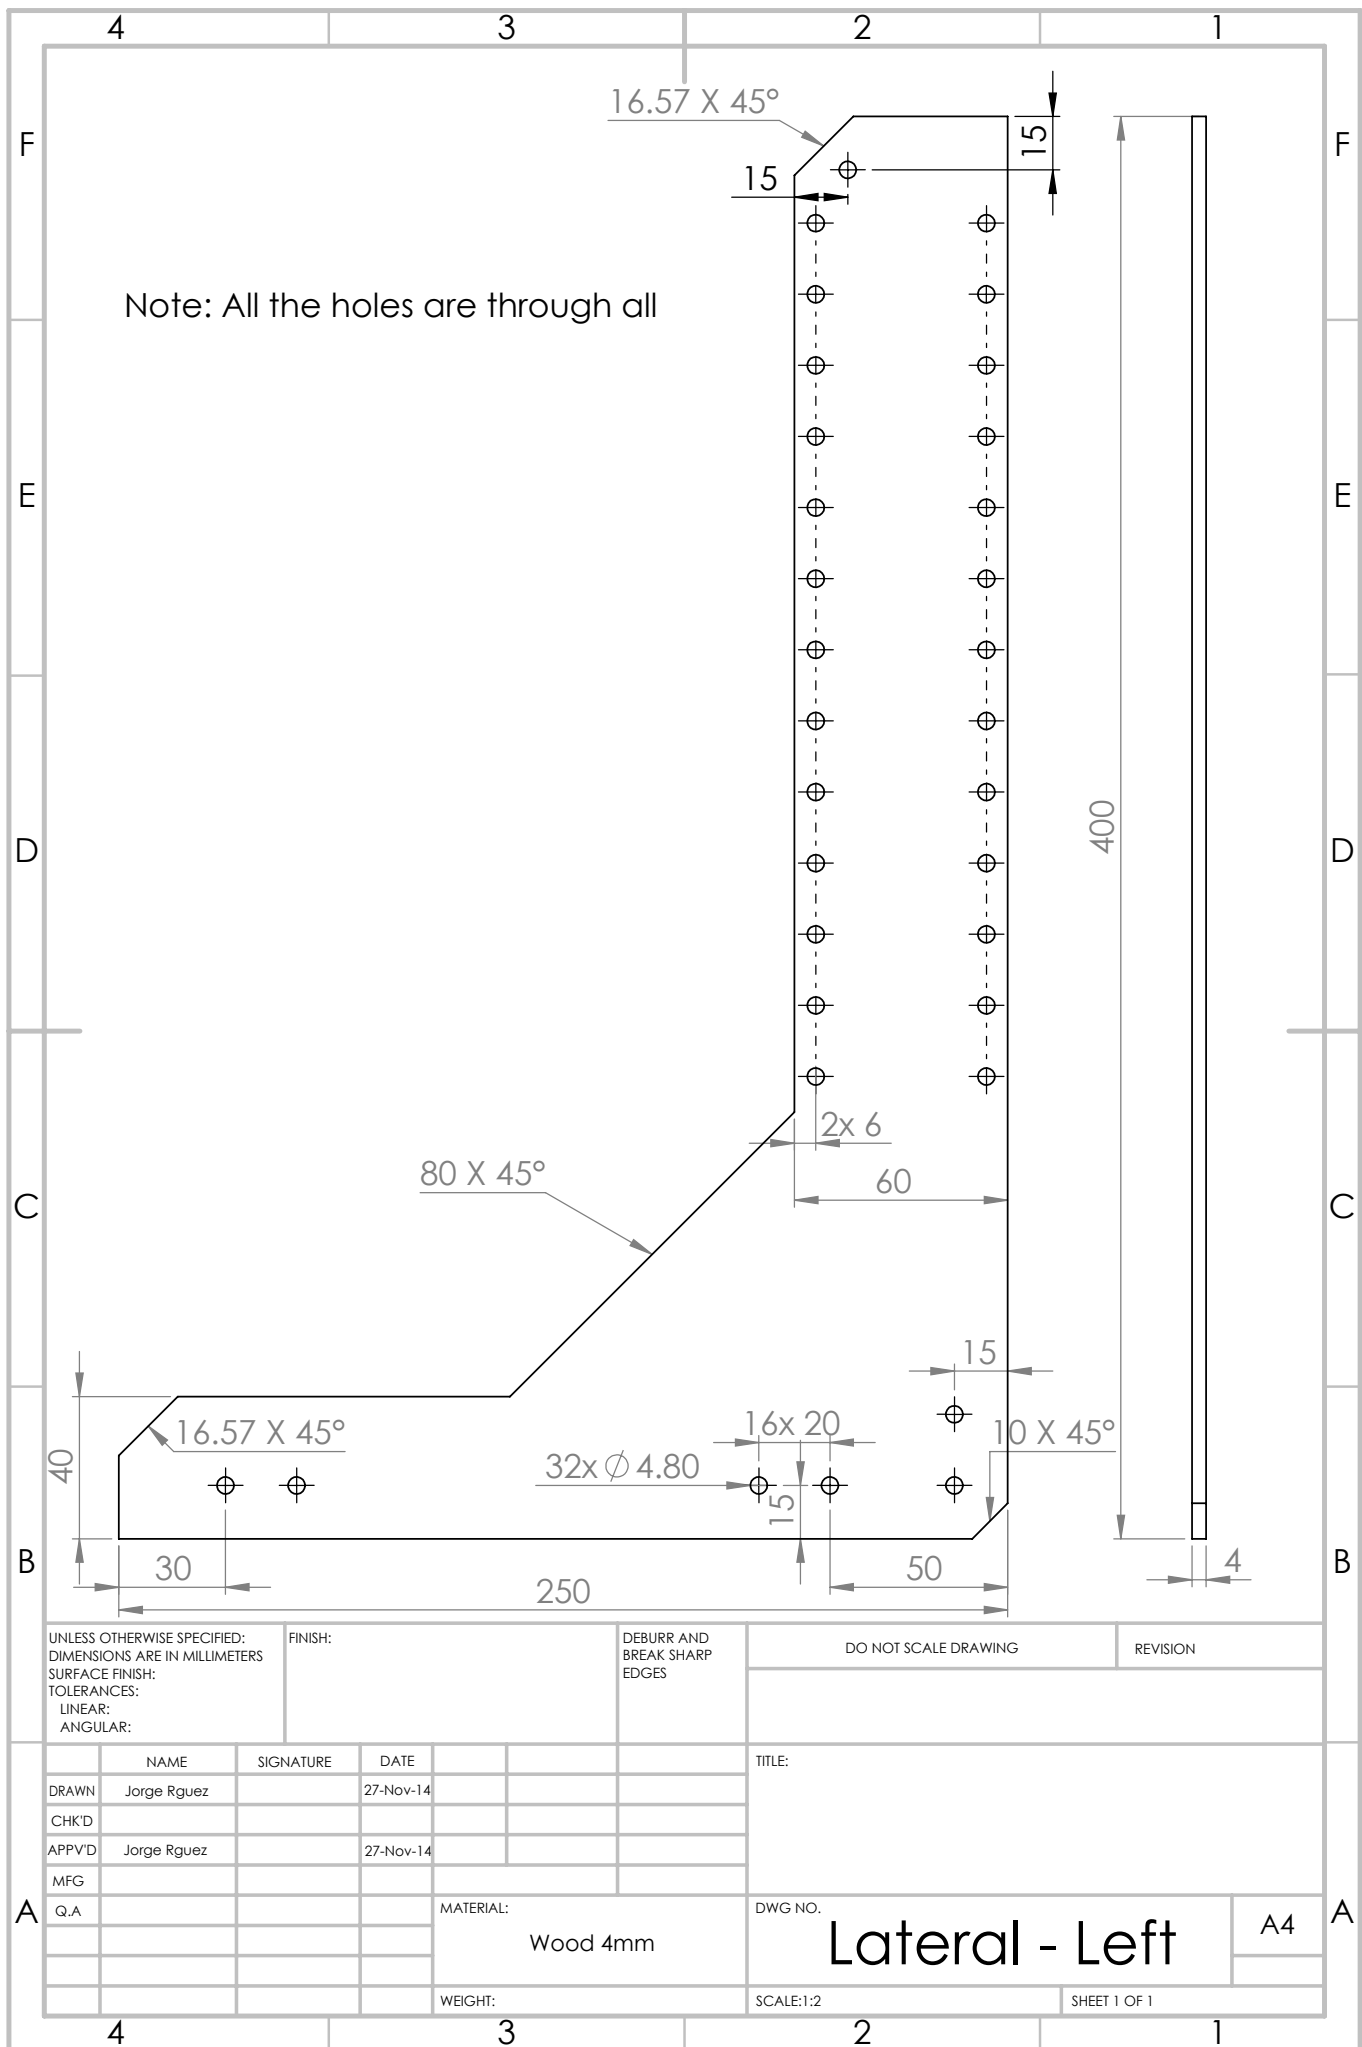

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBURR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

	NAME	SIGNATURE	DATE			
DRAWN	Jorge Rguez		27-Nov-14			
CHK'D						
APPV'D	Jorge Rguez		27-Nov-14			
MFG						
Q.A						

MATERIAL:
Wood 4mm

WEIGHT:

TITLE:


DWG NO.

Lateral - Left

A4

SCALE:1:2

SHEET 1 OF 1

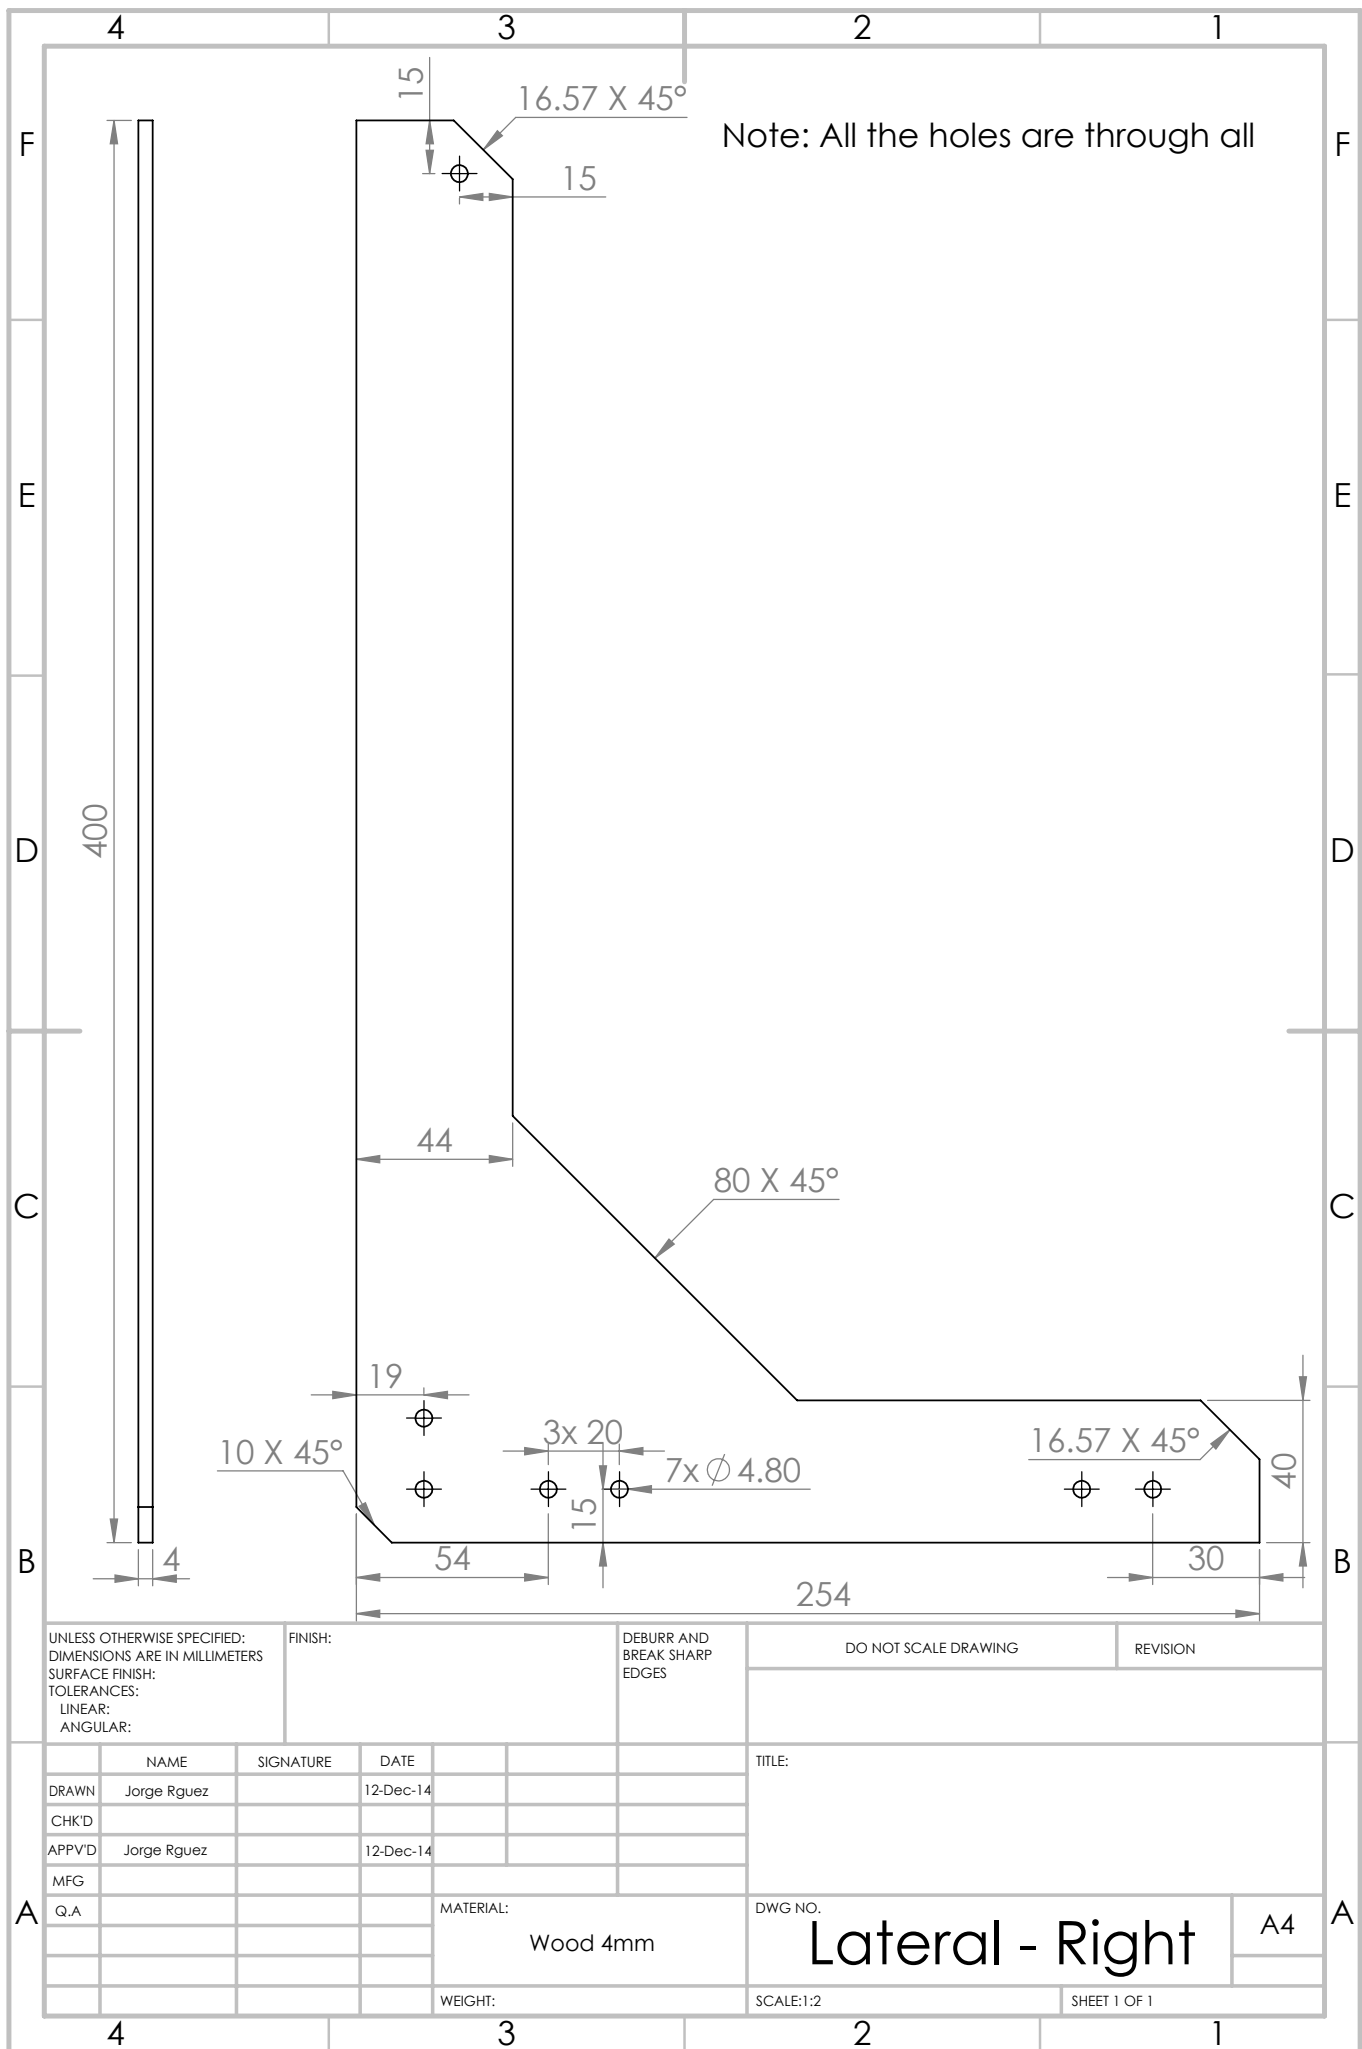

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN MILLIMETERS
SURFACE FINISH:
TOLERANCES:
LINEAR:
ANGULAR:

FINISH:

DEBURR AND
BREAK SHARP
EDGES

DO NOT SCALE DRAWING

REVISION

	NAME	SIGNATURE	DATE			
DRAWN	Jorge Rguez		12-Dec-14			
CHK'D						
APPV'D	Jorge Rguez		12-Dec-14			
MFG						
Q.A						

MATERIAL:
Wood 4mm

TITLE:

DWG NO.

Lateral - Right

A4

WEIGHT:

SCALE:1:2

SHEET 1 OF 1

