

Ping pong ball catcher

Anders Jensen¹, Jorge Rodriguez Marin², and Kim Lindberg
Schwaner³

University of Southern Denmark
Faculty of Engineering
EMB1

December 14, 2014

¹`anje111@student.sdu.dk`

²`jorod14@student.sdu.dk`

³`kschw10@student.sdu.dk`

Abstract

In the following pages the design and implementation process of a ping pong ball catcher is described. The machine consists of a squared base sensed with four piezo sensors in the corners so it is able to calculate the position of a hit in the base. When a ping pong ball hits the base, a robotic arm will move in to catch the ball after the first rebound. The system is equipped with an FPGA that calculates the position of the hit and move the arm, whereas a computer program shows the hits into an interface and save a history of the balls.

Contents

1	Introduction	2
1.1	Overall description	2
1.2	Report structure	2
2	Methodology and Equipment	4
2.1	Methodology	4
2.2	Equipment	5
3	Detecting xy-position of ball impact	6
3.1	TDOA positioning in a plane	6
3.2	Piezo electric elements	7
3.3	Construction of impact plane	9
3.4	Solving the TDOA using VHDL	9
3.4.1	Precise timing	9
3.4.2	Solving system of linear equations	9
4	Height of ball bounce back	10
4.1	Determining energy in impact using ADC	10
4.2	Bounce back height from measured energy	10
5	Two joint arm as ball catcher	11
5.1	Physical construction	11
5.2	Inverse kinematics and control	11
6	PC Program	12
6.1	Communication and Logic	12
6.2	Interface	12
7	Conclusions	13
	Bibliography	14

Chapter 1

Introduction

1.1 Overall description

The goal of this project is catching a ping pong ball released above a platform, on which four piezoelectric elements are placed in a rectangular pattern as shown in Figure 1.1. Once the ball has hit the platform once, each of the piezo elements will generate a signal and permit triangulation of the impact point. When the impact point has been found, a net will catch the ball when it returns toward the platform after the first bounce.

Overall the different tasks of the project are thus:

- Calculating the xy-coordinate of the impact point
- Moving an arm – holding a net – to catch the ball after it has bounced once

1.2 Report structure

The report is structured as follows. To start the theoritical...

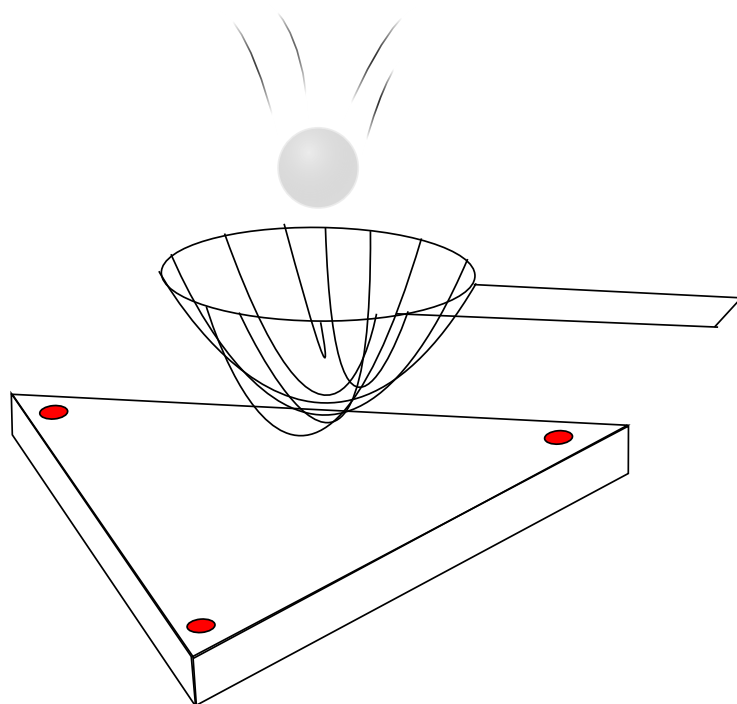


Figure 1.1: Side view of the platform surface area and the net. The red markings are piezoelectric sensors. TODO:change to picture of setup

Chapter 2

Methodology and Equipment

In order to complete the project a number of methods and materials were used.

2.1 Methodology

The whole project can be divided in four parts that will be treat separately, being this: *mechanics*, *electronics*, *programming* and *computerprogram*. At the same time this tasks were organized so:

In the mechanics part the schedule was:

- Design of the structure
- Manufacturing of the laser cutter machine parts
- Manufacturing of the 3D printed parts
- Structure assembly
- Add sensors and electronics to the whole structure

In turn, the electronics part:

- Circuit design
- First prototype test in breadboard
- Manufacturing of the PCB boards
- Testing

Whereas in the programming part:

- Blabla

To finish, the computer program was divided in:

- UI conceptualization
- Serial research and first test
- Develop of the whole program
- Testing

2.2 Equipment

To develop and test the designed solution the following equipments were used.

- Oscilloscope
- Multimeter
- Soldering iron
- **FPGA Spartan 3??**
- Eagle 7.1 Light
- Breadboard
- PCB development instruments
- Printer
- DC servo motor
- Murata piezo sensor 7BB-20-6L0
- 3D printer
- Laser cutter machine

Chapter 3

Detecting xy-position of ball impact

This chapter describes the implementation of a solution that enables detection of point of impact for a ping pong ball using an FPGA and piezo electric elements.

3.1 TDOA positioning in a plane

In this section the relationship between differences in time measurements from multiple sensors and the xy-position of the emitter are derived. The problem can be modeled as in figure 3.1 where the following parameters are known from the setup and measurements:

- Time of arrival of sound at sensors a, b, c and d.
- Speed of sound in chosen material.
- Position of sensors.

The system is setup with four sensors since the possibility of resulting in multiple solutions when using only three [1] The solution will be represented as a system of linear equations to enable fast and relatively simple implementation in VHDL. The derivation will be conducted for two of the sensors giving one row in the equation system. The other two rows are determined in a similar manner.

By assuming a constant speed of sound through the impact plane, equation 3.1 describes the relationship between time difference between measurement and impact ($t_a - t$) and the distance the impact point is from sensor a.

$$l_a = v(t_a - t) \Leftrightarrow l_a^2 = v^2(t_a - t)^2 \quad (3.1)$$

Equation 3.2 describes the same relationship with respect to sensor b.

$$l_b = v(t_b - t) \Leftrightarrow l_b^2 = v^2(t_b - t)^2 \quad (3.2)$$

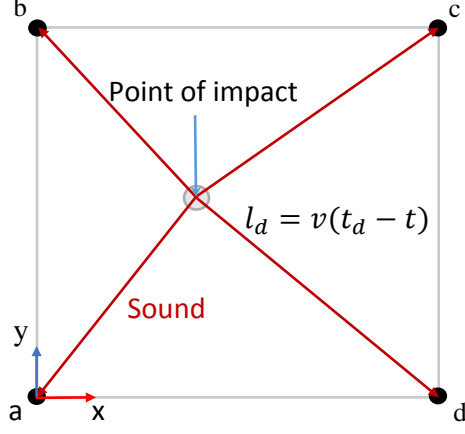


Figure 3.1: Side view of the platform surface area and the net. The red markings are piezoelectric sensors.

By differencing equation 3.1 and 3.2 equation 3.3 can be derived using the difference of squares formula. It is a linear relation with respect to time of impact t .

$$l_a^2 - l_b^2 = v^2(t_a^2 - t_b^2) - 2v^2(t_a - t_b)t \quad (3.3)$$

By using Pythagoras theorem the difference in squared distances from the impact point are also related according to equation 3.4. It can be seen that it is a linear equation in x and y with constants given from the setup.

$$\begin{aligned} l_a^2 - l_b^2 &= (x_a - x_b)^2 + (y_a - y)^2 - ((x_b - x) + (-y_b - y))^2 \\ &= -2((x_a - x_b)x + (y_a - y_b)y) + x_a^2 + y_a^2 - (x_b^2 + y_b^2) \end{aligned} \quad (3.4)$$

By setting equation 3.3 and 3.4 equal and isolating the constants known from time measurements and setup equation 3.5 is derived.

$$(x_a - x_b)x + (y_a - y_b)y - v^2(t_a - t_b)t = (x_a^2 + y_a^2 - (x_b^2 + y_b^2) - v^2(t_a^2 - t_b^2))/2 \equiv k_{ab} \quad (3.5)$$

Using similar relations for the other four sensors results in the system of linear equations 3.6 which solution uniquely defines the xy -position of the impact [7].

$$\begin{bmatrix} x_a - x_b & y_a - y_b & -v^2(t_a - t_b) \\ x_b - x_c & y_b - y_c & -v^2(t_b - t_c) \\ x_c - x_d & y_c - y_d & -v^2(t_c - t_d) \end{bmatrix} \begin{bmatrix} x \\ y \\ t \end{bmatrix} = \begin{bmatrix} k_{ab} \\ k_{bc} \\ k_{cd} \end{bmatrix} \quad (3.6)$$

3.2 Piezo electric elements

This section describes the construction of a number of sensor circuits using piezo electric elements to measure the time of arrival of bending waves. There is a

circuit like the one on figure 3.2 for each sensor. It is chosen to make one print for each circuit in order to keep the wires conducting the analog sensor values as small as possible. The very small current that the piezo electric element

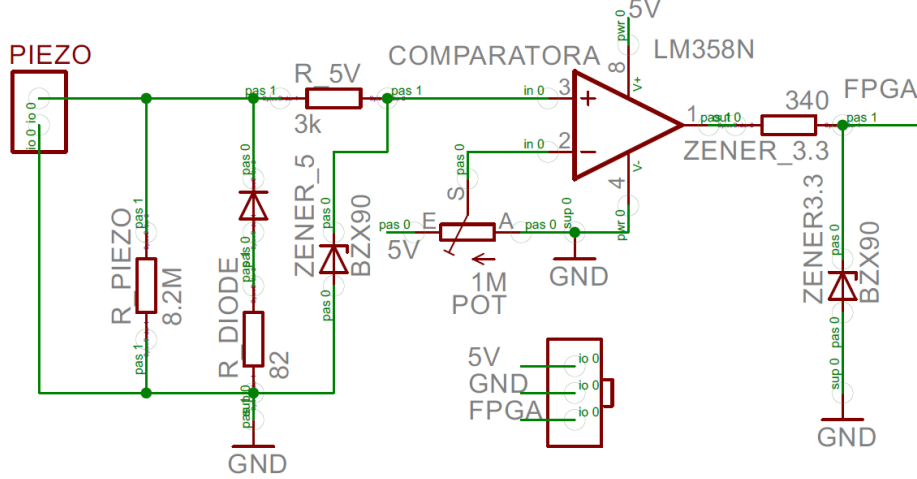


Figure 3.2: Schematics of circuit for digitalizing the output from a piezo electric elements.

generates are amplified with a resistor on $8.5M\Omega$. This value is chosen since test showed that it was possible to detect ball bounce from as low a height as 30cm. Diodes are used to account for the large positive and negative voltage spikes that the sensor in combination with the large resistor can output in case of a powerful input to the sensor. Since the negative voltage are not use it is removed up to $0.7V$ with a diode which conducts current for ground when the voltage from the piezo becomes less then $0.7V$. The resistor is calculated according to equation 3.4.

$$20 - 0.7V = R_{diode} \cdot 300mA \Leftrightarrow R_{diode} = 64.3\Omega \quad (3.7)$$

Since this resistance was not in stock a resistor of 82Ω is chosen. Where the $20V$ is taken as a guess on the absolute maximum based on the fact that tests has not shown voltages above $15V$ when throwing the ball against the plate. Hence the system are robust against misuse. Since the op-amp can not compare values that are larger than the supply of $5V$, the positive voltage is limited to $5.1V$ with a zener diode [3]. The resistor R_{5V} is calculated by assuming infinite input resistance in the op amp according to equation

$$20 - 5V = R_{5V} \cdot 5mA \Leftrightarrow R_{diode} = 3k\Omega \quad (3.8)$$

A zener diode [3] is used to convert the $5V$ on the data output from the operational amplifier to $3.3V$, which is appropriate voltage for the FPGA. The solution with a zener diode is chosen over a another using a voltage divider

since the voltage is kept at $3.3V$ for all op-amp of the type LM358 even in case of changes in production. According to the datasheet for LM358 the saturated output voltages varies from the supply voltages down to $1.5V$ below [8]. The resistor placed on the output of the operational amplifier is calculated using the current used for testing conditions in the datasheet for the diode, as can be seen in equation 3.9 [3].

$$5 - 3.3V = R_z I_{test} \Leftrightarrow R_z = 1.7V/5mA = 340\Omega \quad (3.9)$$

A potentiometer is connected to the inverting pin of the Op-amp in order to ease the tuning process. It's value is set to $1M\Omega$ to minimize the power consumption.

3.3 Construction of impact plane

The physical platform area will be a flat area of approximately 40×40 cm.

3.4 Solving the TDOA using VHDL

This section describes how the solution for TDOA positioning are implemented in VHDL on a FPGA.

3.4.1 Precise timing

3.4.2 Solving system of linear equations

Chapter 4

Height of ball bounce back

4.1 Determerning energy in impact using ADC

4.2 Bounce back height from measured energy

Derive the kinematics for the ball bouncing back.

Chapter 5

Two joint arm as ball catcher

A arm will be mounted on a stick besides the platform so that the net does not hit the ground. The arm consist of two

5.1 Physical construction

How the arm is constructed to be robust and fast while being able to reach the specified area for impact.

5.2 Inverse kinematics and control

Due to the construction of this prototype with just one servo, the position of the servo is defined by:

$$\theta = \arctan \frac{y}{x}$$

Chapter 6

PC Program

A PC program will show the position of the hit point and the height the ball will bounce back to.

6.1 Communication and Logic

Regarding the communication, the PC program and the FPGA are connected by a USB wire and this protocol is handled by the Qt serial libraries given. This lets the communication in the hands of a code that has been already tested.

6.2 Interface

Chapter 7

Conclusions

Sum up of results.

Bibliography

- [1] R. Michael Buehrer. “Fundamentals of Time-of-Arrival-Based Position Locations”. In: (2011), pp. 175–180. URL: http://www.ee.nmt.edu/~rison/ee389_spr08/toa.pdf.
- [2] Texas Instruments. “10-bit analog-to-digital converters with serial control”. In: (Mar. 1, 1995). URL: <http://docs-europe.electrocomponents.com/webdocs/0026/0900766b800269de.pdf>.
- [3] Texas Instruments. “BZX79 series voltage regulator diodes”. In: (Feb. 27, 2002). URL: http://www.nxp.com/documents/data_sheet/BZX79.pdf.
- [4] David L. Jones. “PCB Design Tutorial”. In: 26 (June 29, 2014).
- [5] M. Jones and N. Smirnoff. “10-bit analog-to-digital converters with serial control”. In: 57 (Sept. 27, 2012).
- [6] Jørgen Christian Larsen. “Project 1 - Robot Electronics (EMB1)”. In: (2014).
- [7] B. Rison. “TIME OF ARRIVAL LOCATION TECHNIQUE”. In: (Feb. 2008). URL: http://www.ee.nmt.edu/~rison/ee389_spr08/toa.pdf.
- [8] National semiconductor. “Low Power Dual Operational Amplifiers”. In: (Jan. 1, 2000).
- [9] Opto semiconductors. “Silicon pin Photodiode with very shot switching time”. In: (Apr. 27, 2005).
- [10] Avago Technologies. “New 5mm Blue and Green LED Lamps (Green and blue)”. In: (Mar. 7, 2012). URL: <http://docs-europe.electrocomponents.com/webdocs/116c/0900766b8116c0d4.pdf>.
- [11] Avago Technologies. “T-13/4 (5 mm) Precision Optical Performance Alln-GaP LED Lamps (red)”. In: (Sept. 2, 2008). URL: http://www.nxp.com/documents/data_sheet/BZX79.pdf.
- [12] www.ti.com. “LM2675 SIMPLE SWITCHER Power Converter High Efficiency 1A Step-Down Voltage Regulator”. In: (2005), pp. 1335–1346. URL: <http://www.ti.com/lit/ds/symlink/lm2675.pdf>.
- [13] Xilinx. “Spartan-3A FPGA Family: Data Sheet”. In: (Mar. 7, 2012).