DMA (8257)

DMA stands for Direct Memory Access. It is designed by Intel to transfer data at the fastest rate. It allows the device to transfer the data directly to/from memory without any interference of the CPU.

Using a DMA controller, the device requests the CPU to hold its data, address and control bus, so the device is free to transfer data directly to/from the memory. The DMA data transfer is initiated only after receiving HLDA signal from the CPU.

How DMA Operations are Performed?

Following is the sequence of operations performed by a DMA −

- Initially, when any device has to send data between the device and the memory, the device has to send DMA request (DRQ) to DMA controller.
- The DMA controller sends Hold request (HRQ) to the CPU and waits for the CPU to assert the HLDA.
- Then the microprocessor tri-states all the data bus, address bus, and control bus. The CPU leaves the control over bus and acknowledges the HOLD request through HLDA signal.
- Now the CPU is in HOLD state and the DMA controller has to manage the operations over buses between the CPU, memory, and I/O devices.

Features of 8257

Here is a list of some of the prominent features of 8257 −

- It has four channels which can be used over four I/O devices.
- Each channel has 16-bit address.
- Each channel can transfer data up to 64kb.
- Each channel can be programmed independently.
- Each channel can perform read transfer, write transfer and verify transfer operations.
- It generates MARK signal to the peripheral device that 128 bytes have been transferred.
- It operates in 2 modes, i.e., **Master mode** and **Slave mode**.

8257 Architecture

The following image shows the architecture of 8257 −

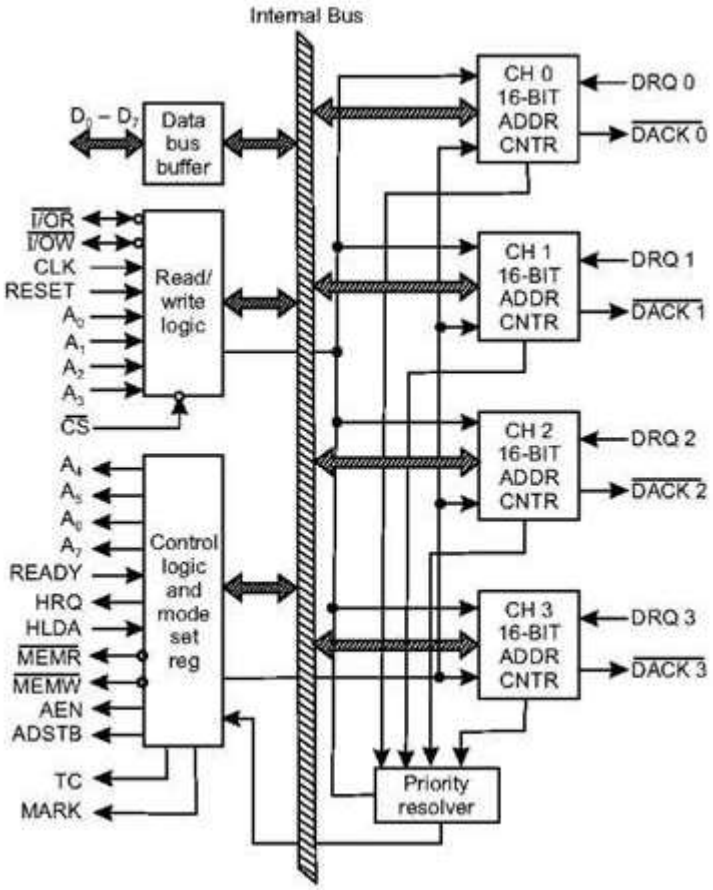

DRQ_0–DRQ3

These are the four individual channel DMA request inputs, which are used by the peripheral devices for using DMA services. When the fixed priority mode is selected, then DRQ_0 has the highest priority and DRQ_3 has the lowest priority among them.

$DACK_o$ – $DACK_3$

These are the active-low DMA acknowledge lines, which updates the requesting peripheral about the status of their request by the CPU.

D_o – D_7

These are bidirectional, data lines which are used to interface the system bus with the internal data bus of DMA controller. **In the Slave mode**, it carries command words to 8257 and status word from 8257. In the master mode, these lines are used to send **higher byte of the generated address** to the latch. This address is further latched using ADSTB signal.

IOR

It is an active-low bidirectional tri-state input line, which is used by the CPU to read internal registers of 8257 in the Slave mode. In the master mode, it is used to read data from the peripheral devices during a memory write cycle.

IOW

It is an active low bi-direction tri-state line, which is used to load the contents of the data bus to the 8-bit mode register or upper/lower byte of a 16-bit DMA address register or terminal count register. In the master mode, it is used to load the data to the peripheral devices during DMA memory read cycle.

CLK

It is a clock frequency signal which is required for the internal operation of 8257.

RESET

This signal is used to RESET the DMA controller by disabling all the DMA channels.

A_o - A_3

These are the four least significant address lines.

CS

It is an active-low chip select line. In the Slave mode, it enables the read/write operations to/from 8257. In the master mode, it disables the read/write operations to/from 8257.

A_4 - A_7

These are the higher nibble of the lower byte address generated by DMA in the master mode.

READY

It is an active-high asynchronous input signal, which makes DMA ready by inserting wait states.

HRQ

This signal is used to receive the hold request signal from the output device. In the slave mode, it is connected with a DRQ input line 8257. In Master mode, it is connected with HOLD input of the CPU.

HLDA

It is the hold acknowledgement signal which indicates the DMA controller that the bus has been granted to the requesting peripheral by the CPU when it is set to 1.

MEMR

It is the low memory read signal, which is used to read the data from the addressed memory locations during DMA read cycles.

MEMW

It is the active-low three state signal which is used to write the data to the addressed memory location during DMA write operation.

ADST

This signal is used to convert the higher byte of the memory address generated by the DMA controller into the latches.

AEN

This signal is used to disable the address bus/data bus.

TC

It stands for 'Terminal Count', which indicates the present DMA cycle to the present peripheral devices.

MARK

The mark will be activated after each 128 cycles or integral multiples of it from the beginning. It indicates the current DMA cycle is the 128th cycle since the previous MARK output to the selected peripheral device.

V_{cc}

It is the power signal which is required for the operation of the circuit.

For the below figure, find out the effective address (EA) and operand value by considering following addressing

modes: (a) Register Indirect Addressing Mode. (b) Immediate Addressing Mode

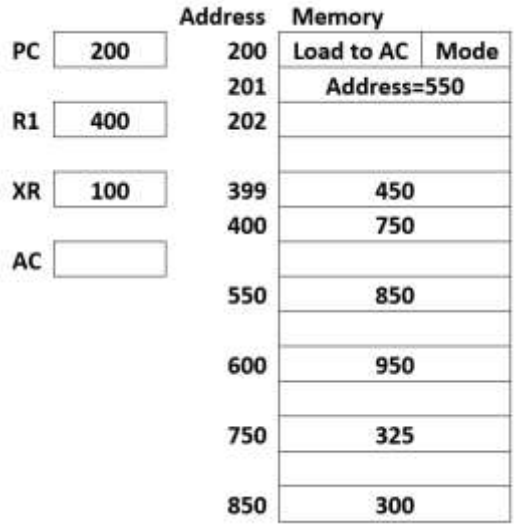

Ans. (a) Register Indirect:

EA: 750

Content: 325

(b) Immediate:

EA: 201

Content: 550

Q10. Specify the control word that must be applied to CPU with seven general register to implement the following microoperation:

R1 ← R2 + R5 (where operation code for '+' is 00010)

Ans:

Binary Code	SELA	SELB	SELD
000	Input	Input	None
001	R1	R1	R1
010	R2	R2	R2
011	R3	R3	R3
100	R4	R4	R4
101	R5	R5	R5
110	R6	R6	R6
111	R7	R7	R7



Control Word:
SELA: 010
SELB: 101
SELD: 001
OPR: 00010

CONTROL WORD: 01010100100010