

GATE EE 2023

EE:1205 Signals and System
Indian Institute of Technology, Hyderabad

Prashant Maurya
EE23BTECH11218

Question: The Z-transform of a discrete signal $x(n)$ is

$$X(z) = \frac{4z}{\left(z - \frac{1}{5}\right)\left(z - \frac{2}{3}\right)(z - 3)} \text{ with ROC} = R \quad (1)$$

Which one of the following statements is TRUE?

- (a) Discrete time Fourier transform of $x[n]$ converges if R is $|z| > 3$
- (b) Discrete time Fourier transform of $x[n]$ converges if R is $\frac{2}{3} < |z| < 3$
- (c) Discrete time Fourier transform of $x[n]$ converges if R is such that $x[n]$ is a left-sided sequence.
- (d) Discrete time Fourier transform of $x[n]$ converges if R is such that $x[n]$ is a right-sided sequence.

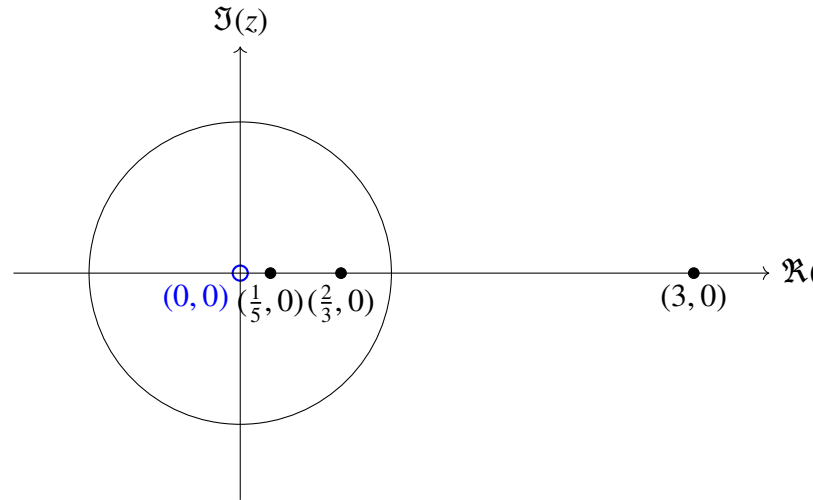


Fig. 1: Representation of Poles

- (c) If $x(n)$ is a left-sided sequence, then ROC will be $|z| < \frac{1}{5}$, which does not include the unit circle.
Option (c) is wrong.

- (d) If $x(n)$ is a right-sided sequence, then the ROC is $|z| > 3$, which does not include the unit circle.
Option (d) is wrong.

Hence, the correct option is (b).

GATE EE 2023

Solution:

Poles of $X(z)$ are located at $z = \frac{1}{5}$, $z = \frac{2}{3}$, and $z = 3$.

For DTFT to converge, the ROC of Z-transform of $x[n]$ should contain unit circle.

- (a) If ROC is $|z| > 3$, it does not include unit circle
Option (a) is wrong.
- (b) If ROC is $\frac{2}{3} < |z| < 3$, the ROC includes unit circle.
So, option (b) is correct.