

Neural Network-Based Intelligent Reflecting Surface Assisted Direction of Arrival Estimation

Yasin Azhdari and Mahmoud Farhang

Abstract—Direction-of-Arrival (DoA) estimation assisted with an Intelligent Reflecting Surface (IRS) is crucial for various wireless applications, especially in challenging Non-Line-of-Sight (NLoS) environments. This paper presents a novel neural network-based architecture to address this challenge.

The key innovation is the introduction of a dedicated, learnable IRS layer integrated within a carefully designed network structure established upon the physical and geometrical basis of the problem. Unlike conventional neural network layers, this specific layer incorporates block diagonal sinusoidal weight constraints, where the phase arguments of these sinusoids are learned during training to directly emulate the phase shifts of the IRS elements. This allows the network to optimize the IRS configuration for enhanced DoA estimation, eliminating the need for separate IRS optimization algorithms. Moreover, various trainable DoA regressors, including a proposed structure, are presented and examined.

Numerical simulations, conducted under various conditions and noise levels, where controlled coherent multi-path components are introduced due to the presence of the IRS, demonstrate the superior performance of the novel learning-based approach compared to others and highlight its potential to significantly improve the accuracy of DoA estimation in complex IRS-assisted wireless systems. Besides, corresponding computational complexities of different approaches are also compared.

Index Terms—Direction of arrival (DoA) estimation, Intelligent Reflecting Surface (IRS), Neural Network (NN).

I. INTRODUCTION

ESTIMATION of parameters corresponding to exponential signals contaminated in noise is a crucial problem in various signal processing applications, including array signal processing [1]. Array signal processing aims to estimate parameters by exploiting both temporal and spatial information. Estimating the angular position of some sources by a set of sensors forming an array, known as Direction of Arrival (DoA) Estimation, is among main problems in the field of array signal processing. DoA estimation concerns determination of the angle of arrival of signals, in electromagnetic or acoustic wave forms, impinging on an array of antennas. DoA estimation has a variety of applications in wireless communications, sonar, radar, navigation and so on [2]–[7].

Intelligent Reflecting Surfaces (IRSs) or Reconfigurable Intelligent Surfaces (RISs) have been applied in numerous fields in recent years, including wireless communications and radars. The main characteristic of these surfaces is that they have adjustable phase, amplitude, frequency and polarization,

i.e., tunable electromagnetic response [8]. Non-line of sight paths are established in dead zones by proper exploit of an IRS and adjustment of its reflection coefficients, where line of sight links do not exist [9].

An IRS-assisted approach is proposed to improve the SNR of received signals in order to enhance the performance of a detection system [10] by adjusting phases of the IRS. Moreover, the phase of the IRS is adjusted to maximize the signal-to-noise ratio (SNR) in the direction corresponding to the user equipment for localization in wireless communication under near-field propagation regime [11]. Additionally, the IRS-assisted scheme is employed for Direction of Arrival (DoA) estimation problem, too. For example, in [12], a coprime linear array (CLA) is implemented by controlling IRS units. Also a DoA estimation method is presented corresponding to the IRS-based CLA. In [13], a cost-effective direction-finding system using an unmanned aerial vehicle (UAV) swarm is presented. This system includes a central full-functional receiving unit that performs DoA estimation by solely receiving the signals reflected by the IRS. Furthermore, [14] explores a method where the array receiver collects both the reflected signal from the IRS and the direct-path signal. By designing the phase of the IRS, the reflected path can be leveraged to enhance the accuracy of DoA estimation. Additionally, [15] formulates and addresses the DoA estimation problem in the presence of wireless communication interference using an IRS. An atomic norm-based approach is then proposed for joint DoA estimation and interference removal, where the optimization problem is also solved to design the matrix containing IRS characteristics for interference mitigation.

An important subject under IRS-related topics is how to adjust and tune its response, specifically the phase response, in order to attain the desired performance. In related works phase design is implemented to maximize the SNR towards the desired user equipment, to maximize the coherence of the signals from direct and reflected paths, to minimize the Cramer-Rao Lower Bound (CRLB) of the problem, or to remove the interference [11], [14]–[16]. Moreover, a reasonable approach is to employ Artificial Neural Networks (ANNs) to solve the associated optimization problems [17]. For example, [18] proposed machine-learning-based algorithms for the online implementation of active and passive beamforming to enhance energy efficiency for a IRS assisted single cellular network. However, to the best of our knowledge, no prior work has integrated a dedicated Neural Network (NN) layer as the IRS for DoA estimation-oriented phase design. This paper introduces a novel framework that embeds the IRS functionality within a dedicated NN layer, thereby directly tailoring the phase design

Y. Azhdari is with the Faculty of Electrical and Computer Engineering, Shiraz University, Shiraz, Iran (e-mail: yasin.azhdari@hafez.shirazu.ac.ir).

M. Farhang is with the Faculty of Electrical and Computer Engineering, Shiraz University, Shiraz, Iran (e-mail: mfarhang@shirazu.ac.ir).

to the DoA estimation task. Additionally, the idea of using a dedicated NN layer as the IRS can also be employed for other similar tasks.

An Artificial Neural Network (ANN) has shown the capability to establish the mapping between some input features (usually the raw measurements or the correlation matrix) and directions of sources. Both fully-connected and convolutional neural networks with different modifications are used to address the problem of DoA estimation under variety of scenarios and have showed superior performance compared to the classical methods under certain conditions [19]–[24].

The main contribution of this paper is introduction of a novel neural network layer, which acts as the IRS (NN-based IRS layer) in a well-established structure based on physical principles of the problem and providing its corresponding mathematics in order to learn the optimal phase design with respect to the task of DoA estimation, which has not been done yet to our best knowledge. Moreover, different DoA regressor structures, including a proposed architecture, are used. Also we will compare the performance of the proposed learning-based method with non learning approaches. In this research, Uniform Planar Arrays (UPAs) are considered. But the method can be extended to other types of arrays.

The remainder of this paper is structured as follows: The problem model and formulation is described in Section 2. Section 3 reviews well-known traditional IRS assisted DoA estimation techniques and their corresponding algorithms. Section 4 presents the novel NN-based IRS layer and its corresponding pre-processing and mathematics, employed in well-thought-out neural network structures for the task of DoA estimation. Numerical simulations and results are provided in Section 5. Finally, conclusions are given in Section 6.

Notations: $j = \sqrt{-1}$ represents the imaginary unit. Bold-face lower case letters refer to vectors and boldface upper case letters denote matrices. For a square matrix $\mathbf{S}$, $\mathbf{S}^{-1}$ and $\text{tr}(\mathbf{S})$ denote its inverse and trace, respectively. For an arbitrary matrix $\mathbf{M}$, $\mathbf{M}^T$, $\mathbf{M}^H$, and $\mathbf{M}^*$ are its transpose, conjugate transpose, and conjugate, respectively. The matrix $\mathbf{I}_m$ represents the identity matrix with dimension $m \times m$. We use $CN(\mathbf{m}; \mathbf{C})$ to show the distribution of a complex Gaussian random vector with mean of vector $\mathbf{m}$ and covariance of matrix $\mathbf{C}$. The real and imaginary parts of a complex number are denoted by $\text{Re}\{\cdot\}$ and $\text{Im}\{\cdot\}$, respectively. $|\cdot|$ represents the magnitude of a complex number and $\|\cdot\|$ stands for the Euclidean norm. $\text{diag}(a_1, \dots, a_N)$ represents the diagonalization operator which results in a diagonal matrix with diagonal elements of $a_1, \dots, a_N$. $\odot$ denotes element-wise product between two matrices or vectors of the same dimension.

II. PROBLEM MODEL

An IRS-assisted scenario as shown in Fig. 1 is considered. According to figure 1, initially, it is assumed that there is no line of sight path between the source and the antenna array. Thus the only path available is through IRS reflection. The antenna array and the IRS are both considered to be uniform planar arrays (UPAs). The antenna array is placed on the yz

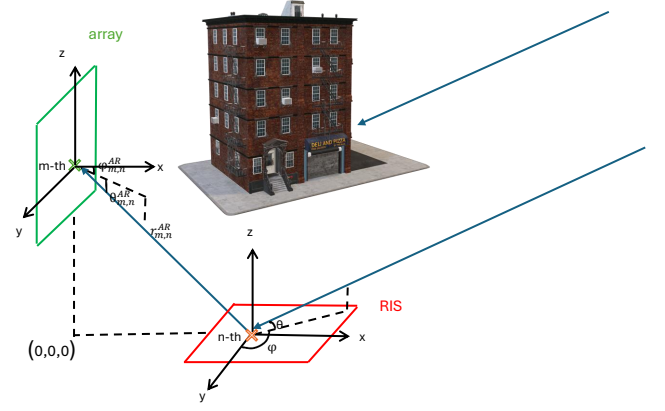


Fig. 1: Problem Model

plane of the coordinate system and the IRS is placed on the xy plane. The target is assumed to be in the far-field region with respect to the IRS and antenna, whereas the IRS is placed in the near-field region with respect to the antenna. Without loss of generality, one target at the non line of sight far-field region of the array is assumed, i.e., the most powerful one. Narrow-band waveform is assumed to prevent the effect of signal propagation on the IRS and the array. Also, unit gains and isotropic power receiving patterns are considered for both array antennas and IRS unit cells. As optimizing those factors are out of scope of this paper.

Let M_y^A and M_z^A denote the number of UPA elements along the y and z axes, with inter-element spacings of d_y^A and d_z^A , respectively. Similarly, let M_x^R and M_y^R denote the number of IRS unit cells along the x and y axes, with inter-element spacings of d_x^R and d_y^R . $M^A = M_y^A \times M_z^A$ and $M^R = M_x^R \times M_y^R$ denote the total number of ULA elements and IRS unit cells, respectively. The angle between the wavefront incident on the IRS and its projection on the xy plane is denoted as θ . Moreover the angle between the projection on the xy plane and the y-axis is represented as ϕ . The position of the (m_y, m_z) -th UPA element with respect to the assumed coordinate center is given as:

$$p_m^A = p_{m_y, m_z}^A = (0, m_y d_y^A, m_z d_z^A), \quad (1)$$

where $1 \leq m_y \leq M_y^A$, $1 \leq m_z \leq M_z^A$. The position of the (n_x, n_y) -th IRS unit cell is:

$$p_n^R = p_{n_x, n_y}^R = (n_x d_x^R, n_y d_y^R, 0), \quad (2)$$

where $1 \leq n_x \leq M_x^R$, $1 \leq n_y \leq M_y^R$.

The path difference for the signal from the source to the IRS and from the RIS to the UPA is now computed considering the spatial configuration. The distance between the (m_x, m_y) -th UPA element and the (n_x, n_y) -th IRS unit cell is:

$$r_{m,n}^{AR} = \|p_m^A - p_n^R\|. \quad (3)$$

Additionally, $\theta_{m,n}^{AR}$ denotes the angle between the n -th IRS unit cell and the m -th array element shown in Fig. 1, respectively. Moreover,

$$r_n^{RT} = r_{n_x, n_y}^{RT} = n_x d_x^R \cos(\theta) \cos(\phi) + n_y d_y^R \cos(\theta) \sin(\phi) \quad (4)$$

denotes the path difference between the reference and the n th IRS unit cell.

Also $\gamma_n = |\gamma_n| e^{j\phi_n}$ denote the adjustable reflection coefficient of the n th unit cell. $|\gamma_n|$ s are assumed to be 1 throughout this paper. Considering Φ as the IRS phase shifts vector, $\omega = e^{j\Phi} = [e^{j\phi_1}, e^{j\phi_2}, \dots, e^{j\phi_{M^R}}]$ denotes the corresponding reflective steering vector. Then Ω is defined as the $M^R \times M^R$ matrix containing the IRS phases as follows:

$$\Omega = \text{diag}(\omega) = \text{diag}([e^{j\phi_1}, e^{j\phi_2}, \dots, e^{j\phi_{M^R}}]) \quad (5)$$

Considering a far-field deterministic impinging source, the received signal from the reflection path can be modeled as [11], [14]:

$$\mathbf{y}_r = (\mathbf{H}^{AR} \odot \mathbf{A}^{AR}) \Omega \mathbf{a}^{RT} s = \mathbf{a}_r s \quad (6)$$

where $\mathbf{A}^{AR}$ and $\mathbf{a}^{RT}$ are the array-IRS steering matrix and IRS-target steering vector, respectively.

$$\mathbf{A}^{AR} = \begin{bmatrix} e^{-j2\pi r_{1,1}^{AR}/\lambda} & \dots & e^{-j2\pi r_{1,M^R}^{AR}/\lambda} \\ \dots & \dots & \dots \\ e^{-j2\pi r_{M^A,1}^{AR}/\lambda} & \dots & e^{-j2\pi r_{M^A,M^R}^{AR}/\lambda} \end{bmatrix} \quad (7)$$

$$\mathbf{a}^{RT} = [e^{j2\pi r_1^{RT}/\lambda}, \dots, e^{j2\pi r_{M^R}^{RT}/\lambda}]^T \quad (8)$$

Also, $\mathbf{H}^{AR}$ is the matrix representing the amplitude of the received signal from the near-field reflection paths [25]

$$H_{m,n}^{AR} = \sqrt{\frac{P_r}{4\pi(r_{m,n}^{AR})^2}} \quad (9)$$

where P_r denotes the received power at the IRS which is assumed to be the same as the received power at the array due to the far-field assumption.

Thus the received signal at the array can be written as:

$$\mathbf{y} = \mathbf{y}_r + \mathbf{n} = (\mathbf{H}^{AR} \odot \mathbf{A}^{AR}) \Omega \mathbf{a}^{RT} s + \mathbf{n} = \mathbf{a}_r s + \mathbf{n} \quad (10)$$

where $\mathbf{n}$ is the additive noise distributed as $CN(\mathbf{0}, \sigma_n^2 \mathbf{I})$.

Besides, if the Line-of-Sight (LoS) path exists, the received signal will also include a term corresponding to the direct path denoted as $\mathbf{y}_d$, defined as follows:

$$\mathbf{y}_d = \sqrt{P_r} \mathbf{a}^{AT} s = \mathbf{a}_d s \quad (11)$$

where:

$$\mathbf{a}^{AT} = [e^{j2\pi r_1^{AT}/\lambda}, \dots, e^{j2\pi r_{M^A}^{AT}/\lambda}]^T \quad (12)$$

and

$$r_m^{AT} = r_{m_y, m_z}^{AT} = m_y d_y^A \cos(\theta) \sin(\phi) + m_z d_z^A \sin(\theta) \quad (13)$$

denotes the path difference between the reference and the m th array element.

The signal s in the above formulation can also represent a vector containing multiple snapshots of the source signal. In this case, $\mathbf{s}$ has dimensions $L \times 1$, where L is the number of snapshots. Consequently, the received signal $\mathbf{y}$ becomes:

$$\mathbf{Y} = \mathbf{a} \mathbf{s} + \mathbf{N}, \quad (14)$$

where $\mathbf{a}$ denotes the steering vector corresponding to the NLoS ($\mathbf{a}_r$) or both LoS and NLoS paths ($\mathbf{a}_r + \mathbf{a}_d$) defined previously. $\mathbf{Y} \in \mathbb{C}^{M^A \times L}$ is the matrix of received signals, $\mathbf{s} \in \mathbb{C}^{1 \times L}$ is the vector of source signals, and $\mathbf{N} \in \mathbb{C}^{M^A \times L}$ represents the noise matrix.

III. CLASSIC IRS ASSISTED DOA ESTIMATION

A. Phase adjustment method

Considering the fact that in the non line of sight scenario, maximizing the coherence between direct and reflected path signals can not be considered, and also due to the fact that the phase adjustment based on maximizing the received SNR at the array antenna is outperformed by CRLB minimization criterion [16], minimizing the CRLB by selecting proper set of phases Φ in our specific problem model is considered [14].

$$\min_{\omega} \text{CRLB}_{\theta}(\omega) + \text{CRLB}_{\phi}(\omega) \quad \text{s.t.} \quad |\omega_i| = 1 \quad \forall i = 1, \dots, M^R \quad (15)$$

where $\text{CRLB}_{\theta}(\omega)$ and $\text{CRLB}_{\phi}(\omega)$ for our specific problem model and formulation, can be obtained in a similar fashion to [26] (signal and noise variance are assumed to be known):

$$\text{CRLB}_x = \frac{\sigma_n^2}{2\sigma_s^2} \text{Re} \left\{ \frac{\partial \mathbf{a}^H}{\partial x} (I - \mathbf{a}(\mathbf{a}^H \mathbf{a})^{-1} \mathbf{a}^H) \frac{\partial \mathbf{a}}{\partial x} \right\}^{-1} \quad (16)$$

where $x = \theta$, or ϕ and $\sigma_s^2 = E\{|s|^2\} = |s|^2$. Because the CRLB function and the unit-modulus constraints are not convex, The optimization problem of the IRS phase design is not convex and thus is challenging and complicated. In order to transform this problem into a convex optimization problem, the semi definite relaxation (SDR) and successive convex approximation (SCA) techniques can be employed [16]. Also the method of Riemannian manifold optimization can be applied for designing optimal phase shifts [14]. Here we have complex circle manifold, and to solve the Riemannian manifold-based optimization problem (15) the Riemannian Steepest Descent (SD), Conjugate Gradient (CG), and Trust-Region (TR) methods are proposed before [27]. The TR method is used through this paper.

B. Doa estimation methods

1) *Maximum Likelihood Doa Estimation:* The Maximum Likelihood (ML) DoA estimator for a deterministic source signal is implemented as follows and requires a grid search [28]:

$$\hat{\theta}, \hat{\phi} = \underset{\theta, \phi}{\text{argmax}} \lambda_{\max}[(\mathbf{a}^H \mathbf{a})^{-\frac{1}{2}} (\mathbf{a}^H \mathbf{y} \mathbf{y}^H \mathbf{a}) (\mathbf{a}^H \mathbf{a})^{-\frac{1}{2}}] \quad (17)$$

where $\lambda_{\max}[\mathbf{M}]$ represents the maximum eigenvalue of the matrix $\mathbf{M}$.

2) *MUSIC*: The MUSIC (Multiple Signal Classification) algorithm [29] is a widely-used subspace-based DoA estimation technique. It operates by separating the orthogonal noise and signal subspaces, which are derived from the eigenvectors of the covariance matrix ($\mathbf{R} = E\{\mathbf{y}\mathbf{y}^H\}$). Specifically, if $\mathbf{v}_1$ to $\mathbf{v}_M$ are the eigenvectors of $\mathbf{R}$, sorted in descending order of their corresponding eigenvalues, and K is the number of sources (assumed to be one throughout the paper), the MUSIC output power is defined as:

$$P(\theta, \phi) = \frac{1}{\sum_{i=K+1}^M |\mathbf{a}^H \mathbf{v}_i|^2} = \frac{1}{\mathbf{a}^H \mathbf{V}_n \mathbf{V}_n^H \mathbf{a}} \quad (18)$$

where $\mathbf{v}_{K+1}$ to $\mathbf{v}_M$ form the matrix $\mathbf{V}_n$.

IV. LEARNING-BASED IRS ASSISTED DOA ESTIMATION

As previously discussed, various non-learning optimization methods have been proposed to adjust the phases of IRS units. In this paper, we propose a novel approach by implementing the IRS using a dedicated neural network layer. This layer is designed to learn phase adjustments specifically tailored for the task of Direction of Arrival (DoA) estimation. The pre-processings needed, corresponding mathematics, and the overall network structure are presented.

Concerning the NLoS scenario, during training, the network takes raw measurements at the IRS as inputs in order to optimize corresponding IRS phases regarding the DoA estimation performance, while under test conditions the array observations based on the optimized IRS phases are used for DoA estimation. Since inputs to a neural network must be real-valued, the complex measurements obtained at each IRS unit are pre-processed by separating and interleaving their real and imaginary components. The pre-processed measurements are subsequently passed to the IRS layer.

A. Proposed IRS Layer Mechanism

Forward propagation (FP) and backward propagation (BP) form the backbone of training and optimization in neural networks.

Unlike common neural network layers with tunable constant weights, the IRS layer requires weights that are sinusoidal in nature, where the arguments (or phases) of these weights must be tuned during the training process in order to optimize the IRS phases. Consequently, both the forward propagation (FP) and backward propagation (BP) procedures must be adapted to accommodate this unique weight structure.

The following subsections detail the process.

1) *Mathematical Foundation*: Under NLoS scenario, a complex-valued element of the IRS observation vector can be represented as: $z_i = a_i + jb_i$ for $i = 1, \dots, M^R$, where a_i and b_i denote the real and imaginary components, respectively. Multiplying this observation by a complex exponential $e^{j\phi_i}$ results in the following expression per each element:

$$z_i e^{j\phi_i} = (a_i \cos(\phi_i) - b_i \sin(\phi_i)) + j(a_i \sin(\phi_i) + b_i \cos(\phi_i)). \quad (19)$$

Separating the real and imaginary components of the result and interleaving them for each element as follows, this operation can be expressed in the matrix form.

$$\mathbf{z} = [a_1, b_1, a_2, b_2, \dots, a_{M^R}, b_{M^R}]^T. \quad (20)$$

The result is then achieved through applying a block diagonal matrix $\mathbf{W}$ to the $\mathbf{z}$, where each 2×2 block $\mathbf{W}_i$ is parameterized by the phase angle ϕ_i :

$$\mathbf{W}_i = \begin{bmatrix} \cos(\phi_i) & \sin(\phi_i) \\ -\sin(\phi_i) & \cos(\phi_i) \end{bmatrix}. \quad (21)$$

The complete block diagonal weight matrix $\mathbf{W}$ is then represented as:

$$\mathbf{W} = \text{diag}(\mathbf{W}_1, \mathbf{W}_2, \dots, \mathbf{W}_{M^R}). \quad (22)$$

The transformed vector $\mathbf{z}'$, which includes the interleaved real and imaginary parts of the desired result, is then obtained as:

$$\mathbf{z}' = \mathbf{W}\mathbf{z}. \quad (23)$$

This formulation reveals that the multiplication of each complex observation $z_i = a_i + jb_i$ by $e^{j\phi_i}$ for $i = 1, \dots, M^R$ is equivalent to applying a block diagonal transformation matrix $\mathbf{W}$ in the real domain.

2) *Definition of the Weight Matrix*: The proposed IRS layer employs the weight matrix $\mathbf{W}$ described in (22), consisting of M^R trainable 2×2 blocks, described in the previous part. Each block is parameterized by a single variable ϕ_i , corresponding to a phase adjustment.

The parameters ϕ_i for $i = 1, \dots, M^R$ are initialized uniformly within $[-\pi, \pi]$ and updated during training to optimize the phase adjustments for the observations.

3) *Forward Propagation and Backward Propagation for the IRS Layer*: In the forward pass, the IRS layer applies the block diagonal transformation $\mathbf{W}$ to the input vector $\mathbf{x}$, which consists of the interleaved real and imaginary components of the IRS observations. The output of the layer, which has the same dimension as input, is formulated as follows (no biases are considered for this layer and it applies no activation function):

$$\mathbf{y} = \mathbf{W}\mathbf{x}. \quad (24)$$

The backward pass involves calculating the gradients of the loss function E with respect to the trainable parameters ϕ_i and the inputs $\mathbf{x}$.

Each block $\mathbf{W}_i$ is parameterized by ϕ_i , and the derivative of $\mathbf{W}_i$ with respect to ϕ_i is:

$$\frac{\partial \mathbf{W}_i}{\partial \phi_i} = \begin{bmatrix} -\sin(\phi_i) & \cos(\phi_i) \\ -\cos(\phi_i) & -\sin(\phi_i) \end{bmatrix}. \quad (25)$$

Since $\mathbf{y} = \mathbf{W}\mathbf{x}$, and $\mathbf{W}$ is block diagonal, only the elements y_{2i-1} and y_{2i} depend on ϕ_i . Therefore:

$$\begin{aligned} \frac{\partial y_{2i-1}}{\partial \phi_i} &= [1 \ 0] \frac{\partial \mathbf{W}_i}{\partial \phi_i} \begin{bmatrix} x_{2i-1} \\ x_{2i} \end{bmatrix} \\ &= -x_{2i-1} \sin(\phi_i) + x_{2i} \cos(\phi_i) \end{aligned} \quad (26)$$

$$\begin{aligned} \frac{\partial y_{2i}}{\partial \phi_i} &= [0 \ 1] \frac{\partial \mathbf{W}_i}{\partial \phi_i} \begin{bmatrix} x_{2i-1} \\ x_{2i} \end{bmatrix} \\ &= -x_{2i-1} \cos(\phi_i) - x_{2i} \sin(\phi_i) \end{aligned} \quad (27)$$

Using the chain rule, the gradient of the loss with respect to ϕ_i is:

$$\frac{\partial E}{\partial \phi_i} = \frac{\partial E}{\partial y_{2i-1}} \frac{\partial y_{2i-1}}{\partial \phi_i} + \frac{\partial E}{\partial y_{2i}} \frac{\partial y_{2i}}{\partial \phi_i}. \quad (28)$$

Moreover, the gradient of the loss with respect to the inputs $\mathbf{x}$ is computed as:

$$\frac{\partial E}{\partial \mathbf{x}} = \mathbf{W}^T \frac{\partial E}{\partial \mathbf{y}}. \quad (29)$$

The trainable parameters ω_i are then updated using gradient descent:

$$\phi_i \leftarrow \phi_i - \eta \cdot \frac{\partial E}{\partial \phi_i}, \quad (30)$$

where η is the learning rate. This procedure ensures convergence to optimal phase adjustments during the training.

The Mean Squared Error (MSE) is employed as the loss function for the DoA regression task:

$$E = \frac{1}{n} \sum_{i=1}^n (y_i^* - y_i)^2, \quad (31)$$

where y_i^* and y_i are the ground truth and predicted outputs, respectively. Besides, the gradient of the loss with respect to $\mathbf{y}$ is:

$$\frac{\partial E}{\partial \mathbf{y}} = \frac{2}{n} (\mathbf{y} - \mathbf{y}^*). \quad (32)$$

All in all, 1) Unlike conventional layers, the proposed IRS layer explicitly models the phase-shifting behavior of IRS-aided systems using a trainable block diagonal matrix. This is a unique contribution to the field. 2) By parameterizing each 2×2 block with a single phase variable ω_i , the IRS layer achieves a compact representation with minimal computational overhead. 3) The sinusoidal structure of the weight matrix ensures smooth gradients, facilitating effective training using backpropagation. 4) The layer is fully consistent with the physical principles of the IRS-aided wireless communication system.

These features underscore the innovation and applicability of the proposed IRS layer in modern deep learning architectures for DoA estimation and also other parameter estimation tasks.

B. Implementation of the network

As discussed before, considering the NLoS scenario, during training inputs of the network are measurements of IRS unit cells. Thus in order to formulate the input of the network during training, we consider the target-IRS link as a direct path and simulate IRS observations as following:

$$\mathbf{x} = \mathbf{a}^{RT} \mathbf{s} \quad (33)$$

where $\mathbf{x}$ denotes observations of IRS unit cells. Also, $\mathbf{a}^{RT}$ represents the IRS-target steering vector introduced before.

In the pre-processing phase, the real and imaginary components of observation of each unit are extracted. A new observation vector is then constructed by interleaving the imaginary components with their respective real counterparts.

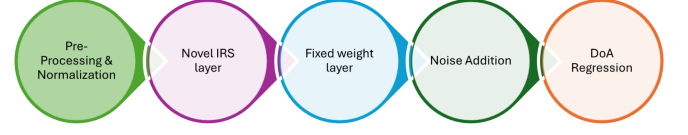


Fig. 2: The overall network structure

Subsequent to this, a normalization is applied to bound the measurements between -1 and +1.

Next, IRS layer is applied. Following the IRS layer, a fixed weight layer is employed to implement the mapping of IRS observations (after applying the corresponding phases) to array measurements using the fixed weight matrix as defined in equation (6). This mapping is determined based on the geometric configuration of the problem, which is assumed to remain constant throughout. Then the noise addition layer applies Additive White Gaussian Noise (AWGN) with corresponding SNR of 20 dB through training.

Subsequently, a DoA regressor is applied to resulting array measurements. The complete network architecture is illustrated in Fig. 2.

DoA regressors: Different architectures, including a proposed structure, are assumed as DoA regressors. Scheme of DoA regressors with corresponding details are illustrated through figures 3, 4, 5, and 6.

In order to have a fair comparison, all structures have approximately the same number of trainable parameters, with 49,109, 48,683, 50,649, and 48,027 trainable parameters for Fully Connected (FC) network [20], Convolutional Neural Network (CNN) [21], [24], Dimension Alternating Fully Connected (DAFC) network [22], and the proposed structure under 10 snapshots and 50 features per each snapshot (i.e., interleaved real and imaginary parts of 5×5 IRS observations).

The number of nodes corresponding to the output layer is determined based on the number of sources, e.g., equals 2 for the case of one source, representing elevation and azimuth angles. Due to the fact that input measurements contain both positive and negative values with the same probability, activation functions are chosen to be $\tanh(\cdot)$ through the network architectures.

The proposed network architecture (illustrated in Fig. 6) effectively captures both temporal and spatial information. Array measurements separate into two parallel branches: a Recurrent Neural Network (RNN) branch using Gated Recurrent Units (GRUs) [30] for temporal processing and a Convolutional Neural Network (CNN) branch using 1D convolutional layers



Fig. 3: Architecture of the FC network (MLP).

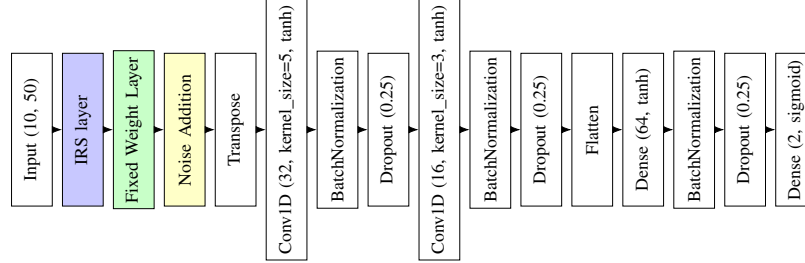


Fig. 4: Architecture of the CNN.

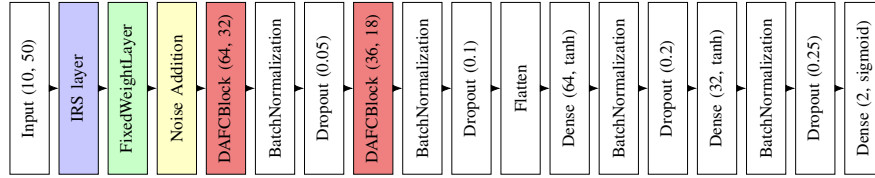


Fig. 5: Architecture of the DAFC network.

for spatial processing:

- **GRU Branch:** This branch is designed to capture temporal features and dependencies within the data. It comprises two stacked GRU layers. The first GRU layer has 64 units and is configured to return the full sequence of outputs. This is followed by a BatchNormalization layer. The second GRU layer has 32 units and returns only the final output state of the sequence, which is then also followed by a BatchNormalization layer. The output of this branch is a feature vector of shape (batch size, 32).
- **Conv1D Branch:** This branch aims to extract local dependencies and features from the data. First, a layer transposes the dimensions of the input, changing its shape from (batch size, 10, 50) to (batch size, 50, 10). This transposed data is then processed by two 1D convolutional layers. The first Conv1D layer has 64 filters, a kernel size of 5, and uses a hyperbolic tangent activation function, followed by BatchNormalization. The second Conv1D layer has 32 filters, a kernel size of 3, and also uses tanh activation, followed by BatchNormalization. Finally, a GlobalAveragePooling1D layer reduces the spatial dimension of the output to a single feature vector of shape (batch size, 32), summarizing the learned local patterns.

The outputs from the GRU branch (shape (batch size, 32)) and the Conv1D branch (shape (batch size, 32)) are then combined using a Concatenate layer, resulting in a combined feature vector of shape (batch size, 64).

This combined feature vector is then processed by two dense

layers with tanh activation, each followed by a BatchNormalization layer. Dropout layers with a rate of 0.25 are applied to prevent overfitting.

Finally, the network concludes with a Dense output layer with 2 units and a sigmoid activation function (both elevation and azimuth angles are normalized to the range of 0 to 1).

This dual-branch architecture, integrating both recurrent and convolutional processing, allows the model to capture both temporal and spatial features from the input data, potentially leading to more robust and accurate predictions.

Thus the overall network can be represented with the following transform:

$$\hat{\theta} = N(x) = \text{DoANET}(\mathbf{W} \cdot R(P(x)) + \mathbf{N}') \quad (34)$$

where $P(\cdot)$ represents the pre-processing and normalization performed, $R(\cdot)$ represents the IRS layer, and $\mathbf{W}$ represents the fixed weight matrix. $\mathbf{N}'$ denotes the corresponding real noise matrix. Finally, $\text{DoANET}(\cdot)$ represents the network associated with the DoA regression based on overall array observations.

The overall network, including both the IRS block and the DoA estimator block will be tuned and adjusted simultaneously during the training phase concerning the ultimate task of DoA estimation. Once trained, the array observations regarding the optimized IRS phases are used for DoA estimation. The details and parameters of the network and also the generation procedure of the corresponding datasets are presented in the next section, where the performance of the proposed scheme is compared with other IRS-based DoA estimation methods through extensive simulations.

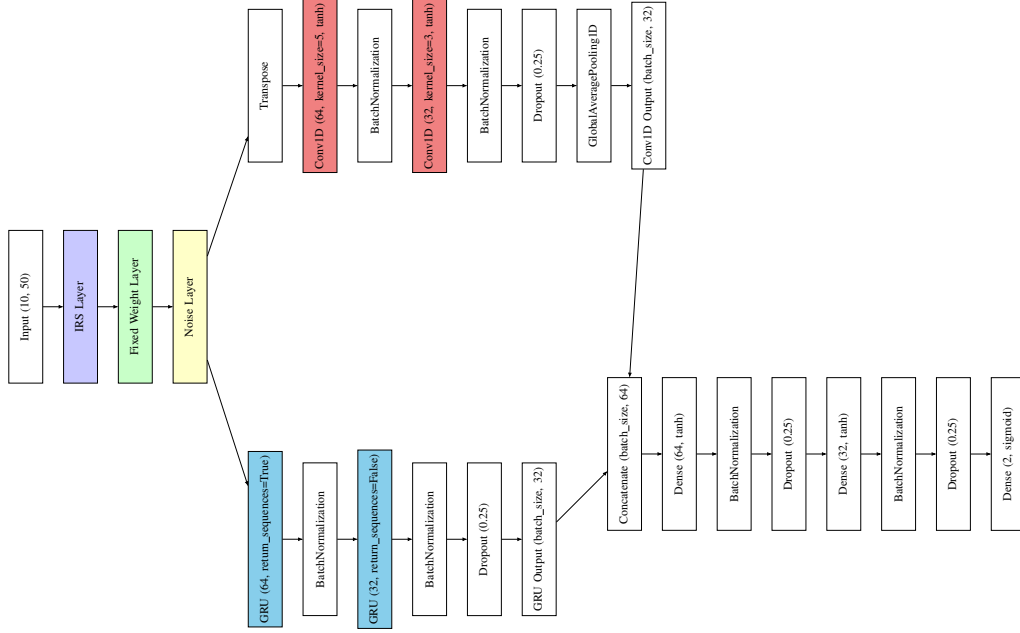


Fig. 6: Architecture of the Proposed Network.

V. NUMERICAL SIMULATIONS AND RESULTS

A. Setup

The number of array elements and the number of IRS unit cells are assumed to be the same and equal to 5 at each dimension (25 in total). The problem model with simulation presets is illustrated in Fig. 7. The source signal is assumed to be a narrow-band deterministic exponential with a frequency of 1 GHz. Since the far-field range includes distances greater than $\frac{2D^2}{\lambda}$ (where D denotes the largest antenna dimension) and respecting that for the IRS and the array, the inter-element spacing is considered to be $\lambda/4$ and $\lambda/2$, respectively, $D = (M^A - 1)\lambda/2 = 2.5\lambda = 0.75$ m. Thus, the far-field range in our considered setup will be any distance greater than 3.75 meters. Based on the above far-field range threshold, we have considered the distances mentioned in Fig. 7.

The optimization process for training the neural network employs the Adam optimizer. The initial learning rate is set to 0.015. Training is conducted with a batch size of 64. The model is trained over 50 epochs. To further enhance the training process and prevent overfitting, we use learning rate reduction callback. Moreover, the loss function is assumed to be the MSE.

Initialization for both manifold-based optimization algorithm phases and also the sinusoidal weights phases of the IRS layer is done based on a uniform distribution over the set $[-\pi, \pi]$.

The additive white Gaussian noise matrix $\mathbf{N}' \in \mathbb{R}^{2M^A \times L}$ is defined as

$$\mathbf{N}' = \sqrt{\frac{P_r}{2.M^A.L.SNR}} \mathbf{N}_0, \quad (35)$$

where P_r denotes the power of the received signal at the array, SNR is the linear Signal-to-Noise Ratio, and $\mathbf{N}_0 \in \mathbb{R}^{2M^A \times L}$ is the matrix of independent, zero-mean, unit-variance Gaussian random variables.

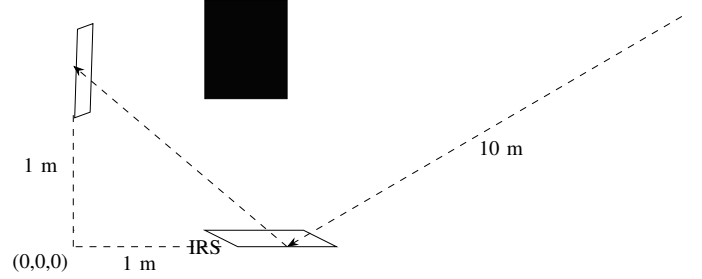


Fig. 7: Problem Model with Simulation Presets

B. DataSets

For training, we generate a dataset of $N_{train} = 25,000$ examples, where each example is an input-DoA pair $(\mathbf{x}, (\theta, \phi))$. The source direction-of-arrival angles, elevation (θ) and azimuth (ϕ), are uniformly distributed within the FoV of 0° to 90° and 0° to 180° , respectively, with a resolution of 0.5° . The signal-to-noise ratio (SNR) was set to be 20 dB during training. 20% of the training set was randomly separated for validation.

The test set consists of $N_{test} = 1000$ examples with random DoAs per each SNR value. The reported performance is the average over these independent test realizations for both classic and learning-based methods.

The root mean squared error (RMSE) defined below, is used as the main performance metric and is plotted against the signal-to-noise ratio (SNR):

$$\text{RMSE} = \sqrt{\frac{1}{2C} \sum_{c=1}^C ((\hat{\theta}_c - \theta)^2 + (\hat{\phi}_c - \phi)^2)}, \quad (36)$$

where C represents the number of Monte Carlo simulations, θ, ϕ denote the actual angular location of the source, and $\hat{\theta}_c, \hat{\phi}_c$

represent the estimated angular location obtained in the c -th simulation run (expressed in degrees).

C. Results

We conduct a comparative performance analysis of the proposed learning-based method (with different DoA regression structures) and manifold optimization-based classical direction-of-arrival (DoA) estimation techniques: Maximum Likelihood (ML) and MUSIC. This evaluation is performed assuming 10 snapshots and a randomly located source within the field of view (FoV) over 1000 independent runs per each SNR value. Initially, learning curves corresponding to different DoA regression structures are provided in Fig. 8. As observed, since the validation loss is not above the training loss, no overfitting occurs during training regarding the learning based structures.

The resulting RMSE depicted in Fig. 9, is averaged over Monte Carlo runs. It is worth noting that CRLB for classic methods is derived in prior based on a coarse estimate of the DoA, obtained from ML method with randomly initialized IRS phases.

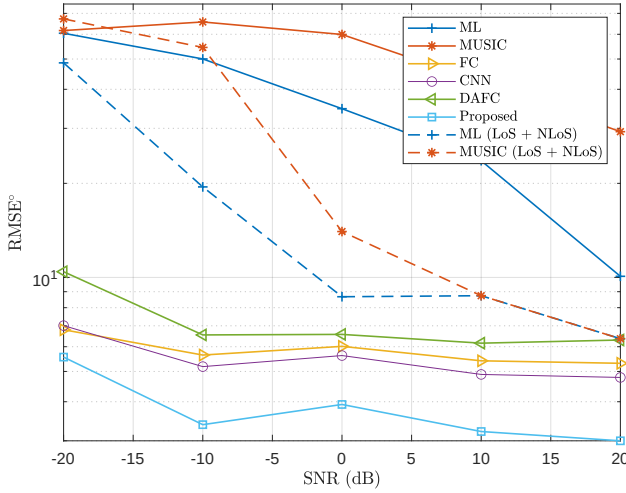


Fig. 9: RMSE vs. SNR - 10 Snapshots

The results demonstrate that proposed learning-based IRS-assisted DoA estimators under different structures achieve superior performance compared to the non-learning methods across the entire range of considered SNR values, especially under low SNR values. Besides, among learning-based DoA regressor structures, the proposed structure consistently outperforms other approaches. Moreover, under considered conditions, the convolutional structure shows slightly lower RMSE than its fully-connected counterparts.


Due to the fact that IRS-assisted NLoS channels introduce controlled coherent multi-path components, classic approaches, especially MUSIC algorithm, experiences significant performance degradation, which is more obvious for lower SNR values. This phenomenon mirrors traditional multi-path coherence challenges but is exacerbated by the deterministic phase-shifting behavior of the IRS, which amplifies signal

correlation [31], [32]. This indicates another advantage of the proposed learning-based approach compared to the classic subspace-based methods like MUSIC under such NLoS scenarios. Surprisingly, the proposed learning-based scheme, under various structures, outperforms classic approaches under the case where the LoS path also exists.


Moreover, a key advantage of the learning-based approach is its computational efficiency. Unlike the classical methods, which necessitate performing manifold optimization for every randomly positioned test instance, the neural network provides rapid estimations after training.

In the next experiment, we evaluate the performance of the proposed novel learning-based method and other approaches through prediction scatter plot, i.e., predicted angles versus true angle indices, regarding each approach and the ideal condition (represented as a dashed diagonal line). This evaluation is performed assuming 10 snapshots and a randomly located source within the field of view (FoV), under the SNR value of 0 dB and based on 1000 independent runs. As observed through figures 10, 11, and 12, overall, the learning-based approach based on the proposed DoA regressor outperforms others. Besides, learning-based approaches outperform classic ones under assumed conditions. As discussed before, controlled coherent multi-path components suppress performance of classic approaches, specially under low SNR values, which is obvious for MUSIC. Additionally, Absolute angular error depicted over the true angle reconfirm these results.


The final experiment assesses the impact of varying the number of snapshots on DOA estimation accuracy under the SNR value of -10 dB. Same as before, a randomly located source with varying number of snapshots is considered. Real-world DoA estimation—especially in dynamic environments like automotive radar—often operates with extremely few snapshots due to hardware constraints or fast-moving sources, thus the number of snapshots is assumed to be below 10. For each snapshot count, the RMSE was averaged over 1000 independent Monte Carlo trials. Neural networks were trained using data with corresponding snapshots number. The result, presented in Fig. 13, demonstrate that learning-based approaches maintain superior performance compared to classic ones, under low SNR value of -10 dB with different number of snapshots from 2 to 10. Besides, the proposed learning-based structure outperforms other learning-based methods under different number of snapshots. This highlights the potential of the proposed approach for real-world applications with limited data.

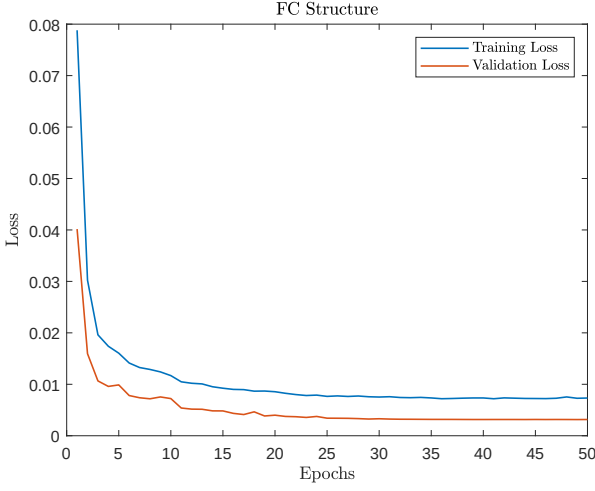


(a) FC (MLP) Structure

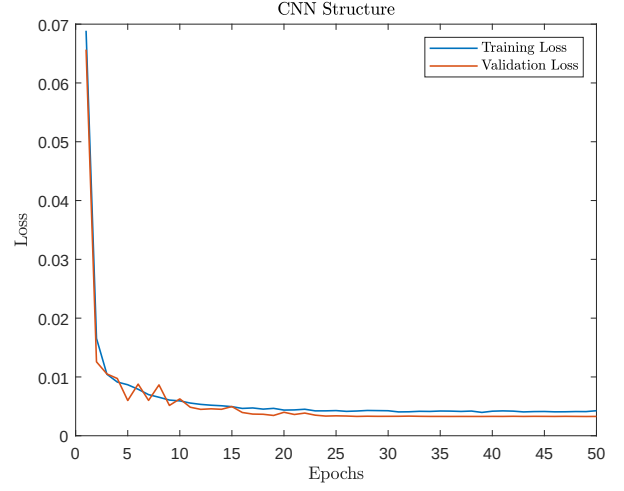

(b) CNN Structure

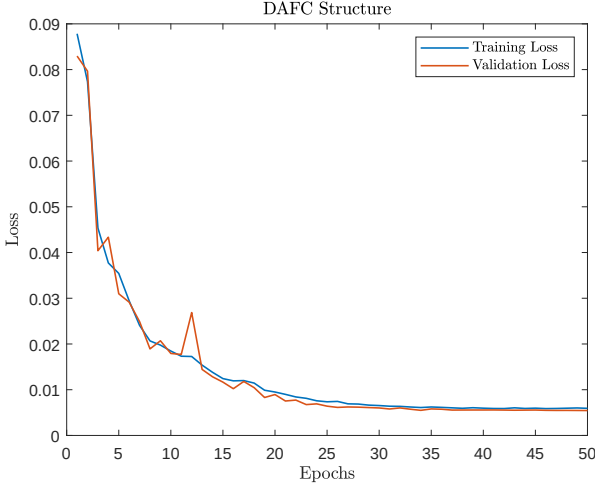

(c) DAFC Structure

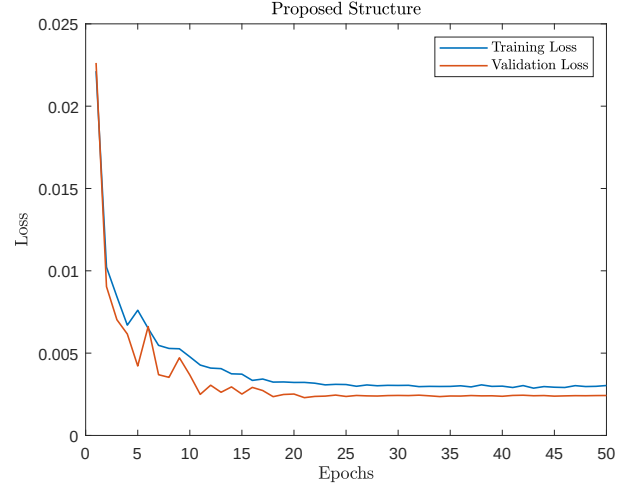

(d) Proposed Structure

Fig. 8: Learning Curves

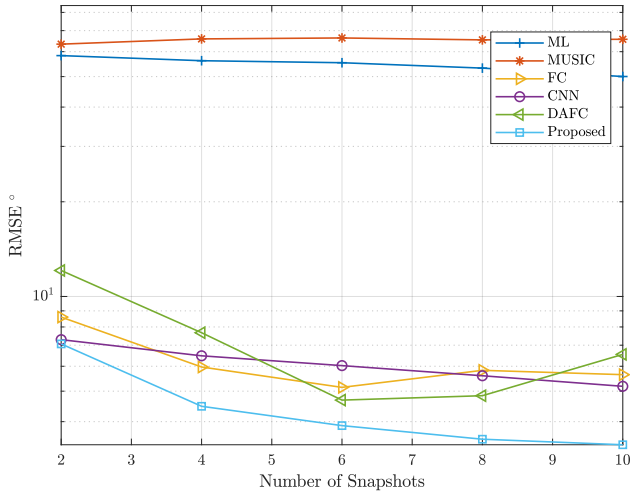


Fig. 13: RMSE vs. Number of Snapshots - SNR = -10 dB

D. Computational Complexities

To evaluate the computational efficiency of the proposed methods, we analyze the inference complexity of the classic approaches (ML and MUSIC) and the learning-based approaches (FC, CNN, DAFC, and proposed) for DoA estimation. The complexity is measured in floating-point operations (FLOPs) per sample, assuming an array with $M_A = 25$ antennas, $M_R = 25$ IRS elements, and $L = 10$ snapshots. The system operates with a field of view of $\theta \in [0^\circ, 90^\circ]$ (grid size $G_\theta = 181$, 0.5-degree resolution) and $\phi \in [0^\circ, 180^\circ]$ (grid size $G_\phi = 361$, 0.5-degree resolution).

For ML and MUSIC, the complexity comprises two stages: (1) Riemannian optimization of IRS phase shifts (ω) using Manopt [33] trust-regions solver on a complex circle manifold, and (2) DoA estimation via grid search. The Riemannian optimization involves computing the cost function, gradient, and Hessian approximation, dominated by matrix operations ($O(M_A \cdot M_R)$) involving the channel matrix ($M_A \times M_R$).

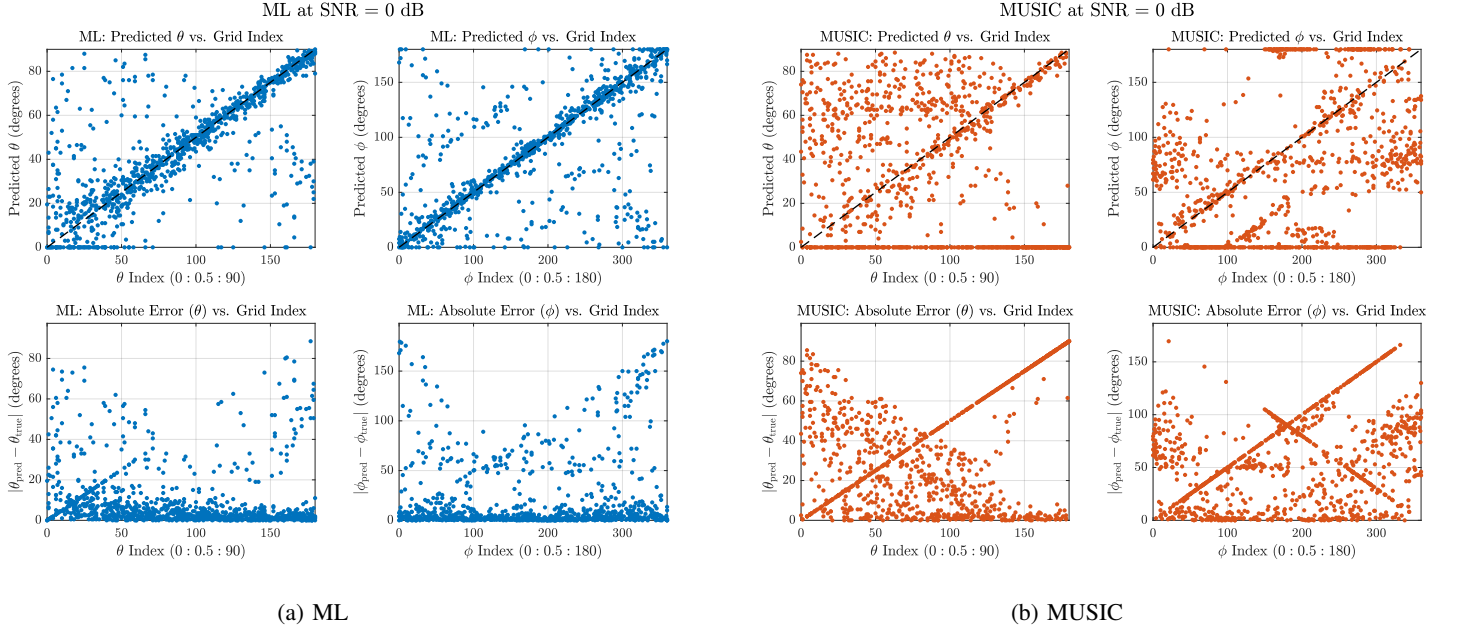


Fig. 10: Prediction Scatter and Absolute Error Plots - SNR = 0 dB - Part 1

and multiple evaluations per iteration. The DoA estimation dominates the overall complexity due to the exhaustive grid search over $G_\theta \times G_\phi = 65,341$ points.

The learning-based approaches perform a single forward pass through neural networks, processing complex-valued inputs ($M_A \times L = 25 \times 10$) split into 25 real and 25 imaginary parts, forming a $(10, 50)$ input tensor. Neural network inference was conducted with a batch size of 64, consistent with training, to leverage computational efficiency. To ensure a fair comparison with ML and MUSIC, which process single samples, we report per-sample FLOPs by dividing batch FLOPs by 64. As shown in Fig. 3–6, the FC model uses Dense layers with 86 and 64 neurons, CNN uses Conv1D layers with 32 and 16 filters (kernel sizes 5 and 3) plus a 64-neuron Dense layer, DAFC employs two Dense layers (referred to as DAFC blocks) with 96 (64+32) and 54 (36+18) units, plus additional Dense layers with 64 and 32 neurons, and the proposed model combines GRU layers (64 and 32 units) with Conv1D layers (64 and 32 filters, kernel sizes 5 and 3) and Dense layers (64 and 32 neurons). FLOPs are calculated by summing the contributions of all relevant layers, using exact layer-specific input sizes (D_i , D_j , D_k). GRU layers involve 9x higher FLOPs than Dense layers due to multiple gates (update, reset, candidate), reflected in FLOP calculations (e.g., $9 \cdot 2 \cdot D_k \cdot U_k$) but simplified as $D_k \cdot U_k \cdot 2$ in complexity formulas for consistency.

For neural methods, complexity formulas use N_i , the number of neurons in Dense layers; F_j , the number of filters in Conv1D layers; K_j , the kernel size in Conv1D layers; U_k , the number of units in GRU layers; and D_i , D_j , D_k , the input sizes to Dense, Conv1D, and GRU layers, respectively. Table I summarizes the approximate per-sample FLOPs and

complexity formulas. The complexity formulas for neural methods reflect their specific layer compositions (e.g., Dense for FC, Conv1D and Dense for CNN), with summations over layer-specific input sizes and parameters. The classic approaches (ML and MUSIC) require 10^8 FLOPs, driven by the grid search, while neural networks require 10^5 to 10^6 FLOPs, making them 2–3 orders of magnitude more efficient. The higher complexity of the proposed approach (5×10^6 FLOPs) compared to its learning-based counterparts is justified by its superior RMSE performance (see Fig. 9), reflecting a trade-off for enhanced accuracy.

In Table I, $M_A = 25$ is the number of antennas, $M_R = 25$ is the number of IRS elements, $L = 10$ is the number of snapshots, $G_\theta = 181$ and $G_\phi = 361$ are the grid sizes for elevation and azimuth (0.5-degree resolution), and $I = 100$ is the number of Manopt iterations. For neural methods, $N = 86, 64$ (FC), $N = 64 + 32, 36 + 18, 64, 32$ (DAFC), $F = 32, 16$, $K = 5, 3$ (CNN), and $U = 64, 32$, $F = 64, 32$, $K = 5, 3$ (Proposed) are layer-specific parameters, with D_i , D_j , D_k representing input sizes to each layer.

VI. CONCLUSION

This paper proposes a novel neural network-based solution for IRS-assisted DoA estimation under NLoS scenarios, centered around a new trainable IRS layer. The neural network architecture is carefully designed to incorporate the necessary considerations in modeling the problem, enabling the network to effectively learn and adjust the IRS phase configurations. This integrated approach unifies the processes of IRS phase adjustment and DoA estimation, eliminating the need for separate, often complex, optimization algorithms. Numerical simulations across various scenarios confirm the effectiveness and

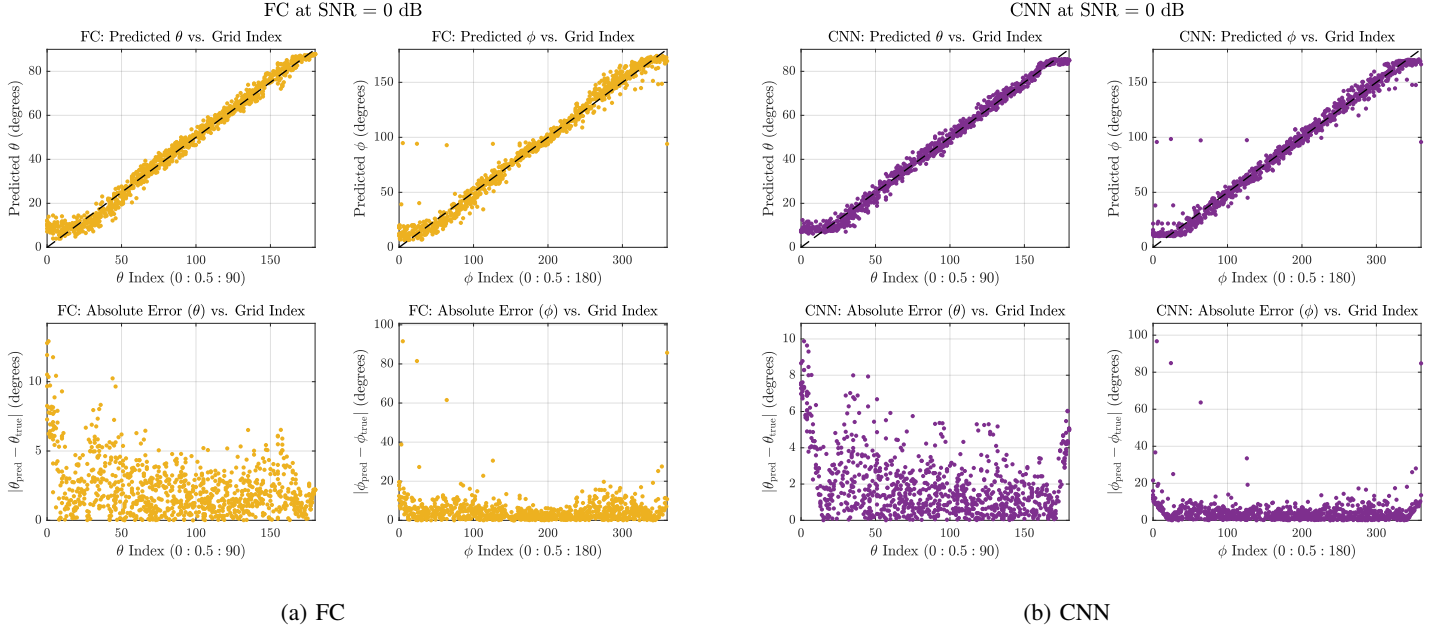


Fig. 11: Prediction Scatter and Absolute Error Plots - SNR = 0 dB - Part 2

TABLE I: Computational Complexity of DoA Estimation Methods (Per Sample). Grid resolution: 0.5 degrees ($G_\theta = 181$, $G_\phi = 361$). Neural parameters: N_i , neurons (86, 64 for FC; 64+32, 36+18, 64, 32 for DAFC; 64, 32 for Proposed); F_j , filters (32, 16 for CNN; 64, 32 for Proposed); K_j , kernel sizes (5, 3); U_k , GRU units (64, 32 for Proposed); D_i , D_j , D_k , layer-specific input sizes.

Method	FLOPs (Per Sample)	Complexity Formula
ML	2.5×10^8	$O(M_A^2 \cdot L + G_\theta \cdot G_\phi \cdot M_A^2 + I \cdot M_A \cdot M_R)$
MUSIC	1.75×10^8	$O(M_A^2 \cdot L + G_\theta \cdot G_\phi \cdot M_A^2 + M_A^3 + I \cdot M_A \cdot M_R)$
FC	1×10^5	$O\left(\sum_{i=1}^2 D_i \cdot N_i \cdot 2\right)$
CNN	1.25×10^5	$O\left(\sum_{j=1}^2 D_j \cdot F_j \cdot K_j \cdot 2 + D_i \cdot N_i \cdot 2\right)$
DAFC	1.25×10^5	$O\left(\sum_{i=1}^4 D_i \cdot N_i \cdot 2\right)$
Proposed	5×10^6	$O\left(\sum_{k=1}^2 D_k \cdot U_k \cdot 2 + \sum_{j=1}^2 D_j \cdot F_j \cdot K_j \cdot 2 + \sum_{i=1}^2 D_i \cdot N_i \cdot 2\right)$

robustness of the proposed method, demonstrating superior performance compared to existing non-learning DoA estimation techniques in complex IRS-assisted NLoS environments under controlled coherent multipath components. Moreover, the proposed learning-based approach (under different implementations) also exhibits lower computational complexity than non-learning ones.

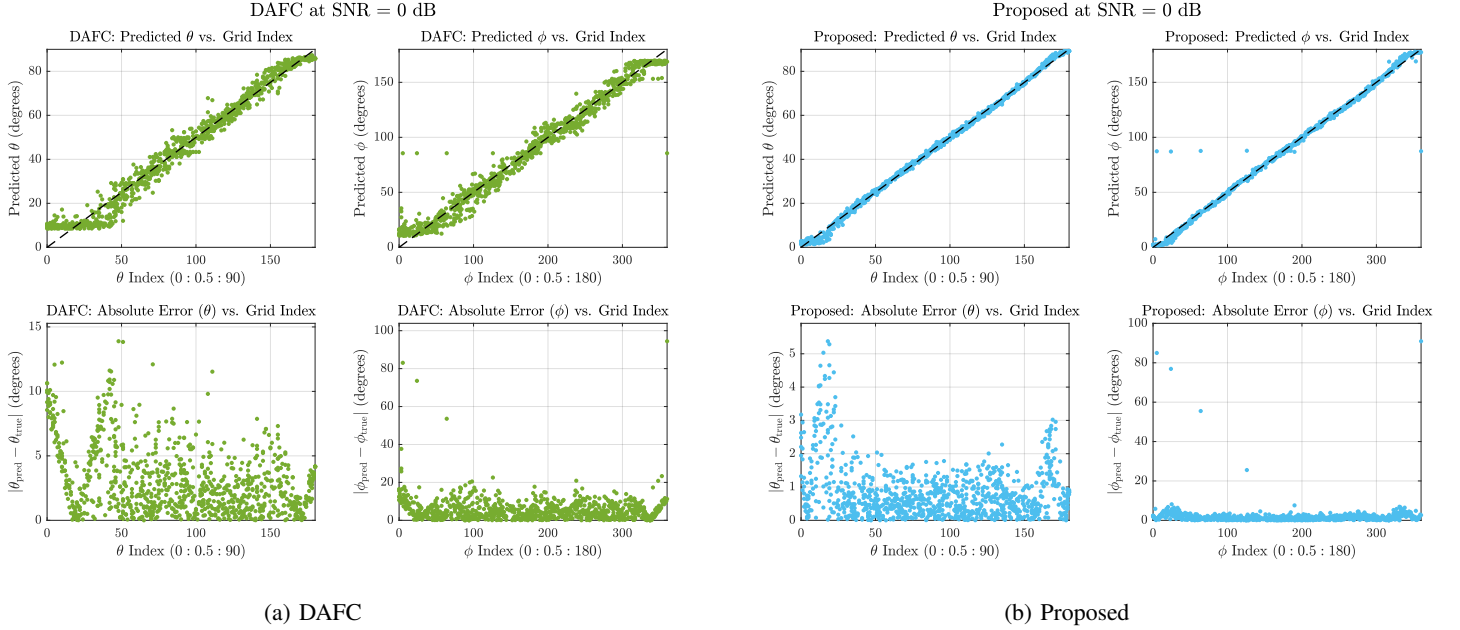


Fig. 12: Prediction Scatter and Absolute Error Plots - SNR = 0 dB - Part 3

REFERENCES

- [1] H. Ye and D. DeGroat, "Maximum likelihood doa estimation and asymptotic cramer-rao bounds for additive unknown colored noise," *IEEE Transactions on Signal Processing*, vol. 43, no. 4, pp. 938–949, 1995.
- [2] H. Krim and M. Viberg, "Two decades of array signal processing research: the parametric approach," *IEEE signal processing magazine*, vol. 13, no. 4, pp. 67–94, 1996.
- [3] H. L. Van Trees, *Optimum array processing: Part IV of detection, estimation, and modulation theory*. Wiley-Interscience, 2008.
- [4] P.-J. Chung, M. Viberg, and J. Yu, "Doa estimation methods and algorithms," in *Academic Press Library in Signal Processing*. Elsevier, 2014, vol. 3, pp. 599–650.
- [5] R. O. Nielsen, *Sonar signal processing*. Artech House, Inc., 1991.
- [6] Z. Chen, G. Gokeda, and Y. Yu, *Introduction to Direction-of-arrival Estimation*. Artech House, 2010.
- [7] T. E. Tuncer and B. Friedlander, *Classical and modern direction-of-arrival estimation*. Academic Press, 2009.
- [8] C. Huang, A. Zappone, G. C. Alexandropoulos, M. Debbah, and C. Yuen, "Reconfigurable intelligent surfaces for energy efficiency in wireless communication," *IEEE transactions on wireless communications*, vol. 18, no. 8, pp. 4157–4170, 2019.
- [9] D. Dardari, N. Decarli, A. Guerra, and F. Guidi, "Los/nlos near-field localization with a large reconfigurable intelligent surface," *IEEE Transactions on Wireless Communications*, vol. 21, no. 6, pp. 4282–4294, 2021.
- [10] S. Buzzi, E. Grossi, M. Lops, and L. Venturino, "Radar target detection aided by reconfigurable intelligent surfaces," *IEEE Signal Processing Letters*, vol. 28, pp. 1315–1319, 2021.
- [11] A. Elzanaty, A. Guerra, F. Guidi, and M.-S. Alouini, "Reconfigurable intelligent surfaces for localization: Position and orientation error bounds," *IEEE Transactions on Signal Processing*, vol. 69, pp. 5386–5402, 2021.
- [12] T. Lan, K. Huang, L. Jin, X. Xu, X. Sun, and Z. Zhong, "Doa estimation algorithm for reconfigurable intelligent surface co-prime linear array based on multiple signal classification approach," *Information*, vol. 13, no. 2, p. 72, 2022.
- [13] P. Chen, Z. Chen, B. Zheng, and X. Wang, "Efficient doa estimation method for reconfigurable intelligent surfaces aided uav swarm," *IEEE Transactions on Signal Processing*, vol. 70, pp. 743–755, 2022.
- [14] H. Chen, Y. Bai, Q. Wang, H. Chen, L. Tang, and P. Han, "Doa estimation assisted by reconfigurable intelligent surfaces," *IEEE Sensors Journal*, 2023.
- [15] Z. Chen, P. Chen, Z. Guo, Y. Zhang, and X. Wang, "A ris-based vehicle doa estimation method with integrated sensing and communication system," *IEEE Transactions on Intelligent Transportation Systems*, 2023.
- [16] X. Song, J. Xu, F. Liu, T. X. Han, and Y. C. Eldar, "Intelligent reflecting surface enabled sensing: Cramer-rao bound optimization," *IEEE Transactions on Signal Processing*, 2023.
- [17] M. Tariq, S. Ahmad, M. Ahmad Jan, and H. Song, "Deep learning aided intelligent reflective surfaces for 6g: A survey," *ACM Computing Surveys*, vol. 57, no. 3, pp. 1–37, 2024.
- [18] M. Fathy, Z. Fei, J. Guo, and M. S. Abood, "Machine-learning-based optimization for multiple-irs-aided communication system," *Electronics*, vol. 12, no. 7, p. 1703, 2023.
- [19] M. Agatonović, Z. Stanković, N. Dončov, L. Sit, B. Milovanović, and T. Zwick, "Application of artificial neural networks for efficient high-resolution 2d doa estimation," *Radioengineering*, vol. 21, no. 4, pp. 1178–1186, 2012.
- [20] J. Fuchs, R. Weigel, and M. Gardill, "Single-snapshot direction-of-arrival estimation of multiple targets using a multi-layer perceptron," in *2019 IEEE MTT-S International Conference on Microwaves for Intelligent Mobility (ICMIM)*. IEEE, 2019, pp. 1–4.
- [21] Y. Liu, H. Chen, and B. Wang, "Doa estimation based on cnn for underwater acoustic array," *Applied Acoustics*, vol. 172, p. 107594, 2021.
- [22] S. Feintuch, J. Tabrikian, I. Bilik, and H. Permuter, "Neural-network-based doa estimation in the presence of non-gaussian interference," *IEEE Transactions on Aerospace and Electronic Systems*, vol. 60, no. 1, pp. 119–132, 2023.
- [23] K. Liu, X. Wang, J. Yu, and J. Ma, "Attention based doa estimation in the presence of unknown nonuniform noise," *Applied Acoustics*, vol. 211, p. 109506, 2023.
- [24] S. Zheng, Z. Yang, W. Shen, L. Zhang, J. Zhu, Z. Zhao, and X. Yang, "Deep learning-based doa estimation," *IEEE Transactions on Cognitive Communications and Networking*, 2024.
- [25] W. Tang, M. Z. Chen, X. Chen, J. Y. Dai, Y. Han, M. Di Renzo, Y. Zeng, S. Jin, Q. Cheng, and T. J. Cui, "Wireless communications with reconfigurable intelligent surface: Path loss modeling and experimental measurement," *IEEE transactions on wireless communications*, vol. 20, no. 1, pp. 421–439, 2020.
- [26] P. Stoica and A. Nehorai, "Music, maximum likelihood, and cramer-rao

- bound,” *IEEE Transactions on Acoustics, speech, and signal processing*, vol. 37, no. 5, pp. 720–741, 1989.
- [27] N. Boumal, *An introduction to optimization on smooth manifolds*. Cambridge University Press, 2023. [Online]. Available: <https://www.nicolasboumal.net/book>
 - [28] K. Boman and P. Stoica, “Low angle estimation: models, methods, and bounds,” *Digital Signal Processing*, vol. 11, no. 1, pp. 35–79, 2001.
 - [29] R. Schmidt, “Multiple emitter location and signal parameter estimation,” *IEEE transactions on antennas and propagation*, vol. 34, no. 3, pp. 276–280, 1986.
 - [30] K. Cho, B. Van Merriënboer, C. Gulcehre, D. Bahdanau, F. Bougares, H. Schwenk, and Y. Bengio, “Learning phrase representations using rnn encoder-decoder for statistical machine translation,” *arXiv preprint arXiv:1406.1078*, 2014.
 - [31] J. Du, D. Wang, W. Yu, and H. Yu, “Direct position determination of unknown signals in the presence of multipath propagation,” *Sensors*, vol. 18, no. 3, p. 892, 2018.
 - [32] Y. Zhang, C. Liu, Y. Gang, and Y. Wang, “Tdoa-aoa localization algorithm for 5g intelligent reflecting surfaces,” *Electronics*, vol. 13, no. 22, p. 4347, 2024.
 - [33] N. Boumal, B. Mishra, P.-A. Absil, and R. Sepulchre, “Manopt, a Matlab toolbox for optimization on manifolds,” *Journal of Machine Learning Research*, vol. 15, no. 42, pp. 1455–1459, 2014. [Online]. Available: <https://www.manopt.org>