TECHNICAL INFORMATION

Telegram Listing

Ranging sensors LMS1xx, LMS5xx, TiM5xx, NAV310, LD-OEM15xx, LD-LRS36xx

SICK
Sensor Intelligence.

Described product

Ranging sensors LMS1xx, LMS5xx, TiM5xx, NAV310, LD-OEM15xx, LD-LRS36xx

Manufacturer

SICK AG
Erwin-Sick-Str. 1
79183 Waldkirch

Germany

Legal information

Original document

This document is an original document of SICK AG.

Contents

1 About this document 6

2 Communication format 7

2.1 Binary telegram (CoLa B) 7
2.2 ASCII telegram (CoLa A) 8
2.3 Variable types 9
2.4 Command basics 9
2.5 Log in: Required user level 10

3 Workflows 11

3.1 Parameterize the scan 11
3.2 Set timestamp/data angle 11

4 Telegrams 12

4.1 Log in 12
4.2 Basic Settings 14
4.2.1 Set frequency and angular resolution/measurement sectors 14
4.2.2 Read for frequency and angular resolution 24
4.2.3 Set scan configuration 27
4.2.4 Activate Standby mode 29
4.2.5 Start measurement 30
4.2.6 Stop measurement 31
4.2.7 Autostart measurement 33
4.2.8 Activate/deactivate field application 35
4.2.9 Load factory defaults 36
4.2.10 Load application defaults 37
4.2.11 Change password 39
4.2.12 Check password 41
4.2.13 Reboot device 42
4.2.14 Set contamination settings 44
4.2.15 Read for contamination settings 45
4.2.16 Read for contamination measurement 47
4.2.17 Save parameters permanently 48
4.2.18 Set to run 49
4.3 Measurement output telegram 51
4.3.1 Configure the data content for the scan 51
4.3.2 Configure measurement angle of the scandata for output 54
4.3.3 Read for actual output range 56
4.3.4 Poll one Telegram 58
4.3.5 Send data permanently 59
4.4 Time stamp 75

4.4.1 Set time stamp 75
4.4.2 Read for time stamp and device status 77
4.4.3 Read for device time 79
4.4.4 Set NTP (Network Time Protocol) parameters 80
4.5 Filter 91
4.5.1 Set particle filter 91
4.5.2 Set mean filter 92
4.5.3 Set n-pulse to 1-pulse filter 93
4.5.4 Set echo filter 94
4.5.5 Set and read fog filter 96
4.5.6 Enable/disable digital nearfield filter 101
4.5.7 Set digital nearfield filter sector selection 102
4.6 Encoder 104
4.6.1 Set increment source 104
4.6.2 Set encoder settings 105
4.6.3 Set encoder resolution 106
4.6.4 Set fixed speed 108
4.6.5 Read speed threshold 109
4.6.6 Read encoder speed 110
4.7 Outputs 112
4.7.1 Read state of the outputs 112
4.7.2 Send outputstate by event 113
4.7.3 Set output state 116
4.7.4 Change output 6/3 function 118
4.7.5 Change output 1 function 119
4.7.6 Change output 1 logic state 121
4.7.7 Change output 2 function 122
4.7.8 Change output 2 logic state 123
4.7.9 Set synchronization mode 124
4.7.10 Set synchronization phase 126
4.8 Inputs 127
4.8.1 Change input 4 function 127
4.8.2 Set debouncing time for input x 128
4.8.3 Read status of external sync signal 129
4.9 Status 131
4.9.1 Read the status of the LMS 131
4.9.2 Read device ident 132
4.9.3 Read device state 133
4.9.4 Status commands for LD-XXX and NAV310 135
4.9.5 Read device information 141
4.9.6 Read operating hours 144
4.9.7 Read power on counter 145
4.9.8 Read temperature 146
4.9.9 Set device name 148

4.9.10 Read for device name 149
4.9.11 Read angle compensation sine 150
4.9.12 Reset output counter 152
4.10 Interfaces 154
4.10.1 Set IP address 154
4.10.2 Read IP address 155
4.10.3 Set Ethernet gateway 156
4.10.4 Read Ethernet gateway 157
4.10.5 Set IP mask 158
4.10.6 Read IP mask 160
4.10.7 Set baud rate for host interface 161
4.10.8 Read baud rate of host interface 162
4.10.9 Set interface type 164
4.10.10 Read interface type 165
4.10.11 Set function front panel 167
4.10.12 Set front LEDs 168
4.10.13 Set function of LED1 170
4.10.14 Set function of LED2 171
4.10.15 Switch on/off LED1 or LED2 172

5 Diagnostics 174
5.1 SOPAS error codes 174
5.2 Additional information 176

6 List of tables 177

1 About this document

Please read this chapter carefully before beginning to use the telegram listing.

The document shows how to send telegrams via a terminal program using the SICK protocol CoLa A (ASCII and hexadecimal values, with TCP port 2111 or 2112) or CoLa B (binary/hexadecimal values, with TCP port 2112 only) to the laserscanners LMS1xx, LMS5xx, TiM5xx (TiM55x, TiM56x, TiM57x), NAV310, LD-OEM15xx and LD-LRS36xx. This comprises the query of the current device state or certain parameter values, how to modify parameter values and the way in which the device confirms or responds to commands/telegrams.

The devices generally support automatic IP address discovery. Default IP address is:

- LMSxxx: 192.168.0.1
- TiM5xx: 192.168.0.1
- NAV310: 192.168.1.10
- LD-XXXxxxx: 192.168.1.10

Subnet mask is 255.255.255.0.

IP ports:

- 2111: CoLa A (fixed)
- 2112: CoLa A (can be switched to CoLa B)
- 2213: UDP

The document does not or only in a few exceptional cases differentiate between individual device versions or sub product families such as LMS5xx Lite and LMS5xx PRO. Most parameter changes also require certain user levels. Additionally, commands may change during the product lifecycle and development process with a new firmware.

This telegram listing is based on the following firmware statuses (or newer):

- LMS1xx: V1.80 (V1.21 for LMS12x/13x)
- LMS5xx: V1.50.6 (V31.39 for LMS531)
- TiM5xx: V2.51
- NAV310: V1.03
- LD-OEM15xx: V1.12 (V1.32 for OEM1500)
- LD-LRS36xx: V1.12 (V1.32 for LRS3600)

If commands do not seem to work, please verify that your device version supports this functionality, that the minimum required user level has been selected and check on updates of this documentation.

2 Communication format

2.1 Binary telegram (CoLa B)

The binary telegram is the basic protocol of the scanner (CoLa B). All values are in hexadecimal code and grouped into pairs of two digits (= 1 byte). The string consists of four parts: header, data length, data and checksum (CS).

The header indicates with 4 × STX (02 02 02 02) the start of the telegram.

The data length defines the size of the data part (command part) by indicating the number of digit pairs in the third part. The size of the data length itself is 4 bytes, which means that the data part might have a maximum of 16^8 = 4,294,967,295 digit pairs.

The data part comprises the actual command with letters and characters converted to Hex (according to the ASCII chart) and the parameters of either decimal numbers converted to Hex or fixed Hex values with a specific, intrinsic meaning (no conversion). There is always a blank (20) between the command and the parameters, but not between the different parameter values.

The checksum finally serves to verify that the telegram has been transferred correctly. It is calculated with XOR.

Example: Binary telegram

02 02 02 02	00 00 00 17	73 4D 4E 20 53 65 74 41 63 63 65 73 73 4D 6F 64 65 20 03 F4 72 47 44	B3
Header	Length	Data	CS

Table 1: Example: Binary telegram

This is an example telegram for setting the user level “Authorized Client”:

- Header = 02 02 02 02
- Length = 23 digit pairs (17h)
- Data:
  - 73 4D 4E 20 = sMN = start of Sopas command (and blank)
  - 53 65 74 41 63 63 65 73 73 4D 6F 64 65 20 = Set Access Mode = the actual command for setting the user level (and blank)
  - 03 = fixed Hex value meaning user level “Authorized Client”
  - F4 72 47 44 = fixed Hex value, serving as password for the selected user level “Authorized Client”
- Checksum = B3 from XOR calculation

2.2 ASCII telegram (CoLa A)

The ASCII telegram is an alternative to the binary telegram. Due to the variable string length of ASCII telegrams, the Binary telegram is recommended when using scanners with a PLC.

The ASCII telegram has the advantage that commands can be written in plaintext. The string consists only of two parts: the framing and the data part.

The framing indicates with <STX> and <ETX> the start and stop of each telegram.

The data part comprises the actual command with letters and characters (plaintext), parameter values either in decimal (special indicator required) or in hexadecimal (example: a frequency of 25 Hz = +2500 (decimal) = 09C4 (Hex)) and fixed hexadecimal values with a specific, intrinsic meaning. As leading zeros are being deleted, there is always a blank required between all command parts and parameter parts.

NOTE

The device will comfirm parameter values always in hexadecimal code, regardless of the code sent.

As further alternative within CoLa A, depending on the preferences of the user, all values can be written directly in Hex. This means however a 1:1 conversion of all letters and characters including numbers and fixed hexadecimal values via the ASCII chart.

Example: ASCII telegram

ASCII	<STX>	sMN{SPC}SetAccessMode{SPC}03{SPC}F4724744	<ETX>
Hex	02	73 4D 4E 20 53 65 74 41 63 63 65 73 73 4D 6F 64 65 20 30 33 20 46 34 37 32 34 37 34 34	03
	Start	Data	Stop

Table 2: Example: ASCII telegram

This is again an example telegram for setting the user level “Authorized Client”. As only fixed hexadecimal parameter values are needed, the option to use parameter values in decimal code with special indicator cannot be applied here:

- Framing = <STX> = telegram start = 02 (Hex)
- Data:
  - sMN = start of Sopas command (and blank) = 73 4D 4E 20 (Hex)
  - SetAccessMode = the actual command for setting the user level (and blank) = 53 65 74 41 63 63 65 73 73 4D 6F 64 65 20 (Hex)
  - 03 = fixed Hex value meaning user level “Authorized Client” (and blank) = 30 33 20 (Hex)
  - F4 72 47 44 = fixed Hex value, serving as password for the selected user level “Authorized Client” = 46 34 37 32 34 37 34 34 (Hex)
- Framing = <ETX> = telegram stop = 03 (Hex)

2.3 Variable types

Variable type	Length (byte)	Value range	Sign
Bool_1	1	0 or 1	No
Uint_8	1	0 ... 255	No
Int_8	1	-128 ... +127	Yes
Uint_16	2	0 ... 65,535	No
Int_16	2	-32,768 ... +32,767	Yes
Uint_32	4	0 ... 4,294,967,295	No
Int_32	4	-2,147,483,648 ... +2,147,483,647	Yes
Enum_8	1	Certain values defined in a list of Choices (0 ... 255)	No
Enum_16	2	Certain values defined in a list of Choices (0 ... 65535)	No
String	Context-dependent	Strings are not terminated in zeroes	
Real		Float nach IEEE754 (see www.h-schmidt.net/FloatConverter/IEEE754de.html)	

Data length is always given in Bytes!

2.4 Command basics

Description	Value ASCII	Value Hex	Value Binary
Start of text	<STX>	02	02 02 02 02 + given length
End of text	<ETX>	03	Calculated checksum
Read	sRN	73 52 4E	
Write	sWN	73 57 4E	
Method	sMN	73 4D 4E	
Event	sEN	73 45 4E	
Answer	sRA	73 52 41	
	sWA	73 57 41	
	sAN	73 41 4E	
	sEA	73 45 41	
	sSN	73 53 4E	
Space	{SPC}	20	20

If values are divided into two parts (e.g. measurement data), they are documented according to LSB 0 (e.g. 00 07), output however is according to MSB (e.g. 07 00).

2.5 Log in: Required user level

Task	Required user level
Change sensor parameters	Authorized Client
Requests or queries (e.g. for measurement data or device state)	None
Manage password	Service

3 Workflows

3.1 Parameterize the scan

1 Log in: sMN SetAccessMode (see 4.1, page 12)
2 Set frequency and resolution: sMN mLMPsetscancfg (see 4.2.1, page 14)
3 Configure scandata content: sWN LMDscandatacfg (see 4.3.1, page 51)
4 Configure scandata output: sWN LMPoutputRange (see 4.3.2 page 54)
5 Store parameters: sMN mEEwriteall (see 4.2.17, page 48)
6 Log out: sMN Run (see 4.2.18, page 49)
7 Request scan:
sRN LMDscandata (see 4.3.4, page 58)
sEN LMDscandata (see 4.3.5, page 59)

(Device output ...)

More detailed command descriptions can be found in the course of this document.

Example: Sequence for LD-OEM1501, NAV310, LD-LR3601, LD-LR3611 to configure 2 sectors and get measurement scans

Sector configuration: Resolution: 10Hz; 0,125°;
Sector 1: 0° ... 44°(0h ... 6B6C0h);
Sector 2: 45° ... 180° (6DDD6h ... 1B7740h)

1 Stop measurement: sMN LMCstopmeas
sAN LMCstopmeas 0
2 Log in: sMN SetAccessMode (see 4.1, page 12)
3 Set Sectors : LCMstate001B7740 04E2 000000 0000000 04E2 000000 000000
sAN mLMPsetscancfg 0 3E8 2 4E2 0 6B6C0 4E2 6DDD6 1B7740 4E2 0 0 4E2 0 0
4 Store parameters: sMN mEEwriteall (see 4.2.17, page 48)
5 Log out: sMN Run (see 4.2.18, page 49)
6 Start Measurement: sMN LMCstartmeas
sAN LMCstartmeas 0
7 Request scan:
sRN LMDscandata (see 4.3.4, page 58)
sEN LMDscandata (see 4.3.5, page 59)

(Device output ...)

3.2 Set timestamp/data angle

1 Log in: sMN SetAccessMode (see 4.1, page 12)
2 Sopas command: sMN LSPsetdatetime (see 4.4.1, page 75)
3 Log out: sMN Run (see 4.2.18, page 49)

4 Telegrams

4.1 Log in



Telegram structure: sMN SetAccessMode						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	User level	String	13	All	SetAccessMode	53 65 74 41 63 63 65 73 73 4D 6F 64 65
User level	Select user level	Int_8	1	All	Maintenance: 02 Authorized client: 03 Service: 04	Maintenance: 02 Authorized client: 03 Service: 04
Password	Hash value for the selected user level	Uint_32	4	All	Maintenance: B21ACE26 Authorized client: F4724744 Service: 81BE23AA	Maintenance: B2 1A CE 26 Authorized client: F4 72 47 44 Service: 81 BE 23 AA

Table 3: Telegram structure: sMN SetAccessMode

Example: sMN SetAccessMode

Log in as “Authorized client” with password “F4724744”.

CoLa A	ASCII	<STX>sMN{SPC}SetAccessMode{SPC}03{SPC}F4724744<ETX>
	Hex	02 73 4D 4E 20 53 65 74 41 63 63 65 73 73 4D 6F 64 65 20 30 33 20 46 34 37 32 34 37 34 34 03
CoLa B	Binary	02 02 02 02 00 00 00 17 73 4D 4E 20 53 65 74 41 63 63 65 73 73 4D 6F 64 65 20 03 F4 72 47 44 B3

Table 4: Example: sMN SetAccessMode

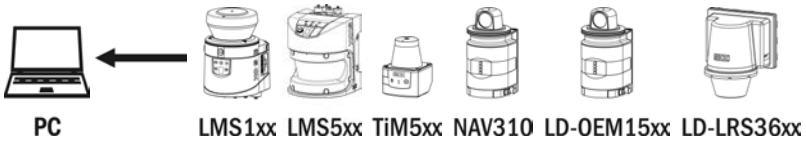

Telegram structure: sAN SetAccessMode						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	User level	String	13	All	SetAccessMode	53 65 74 41 63 63 65 73 73 4D 6F 64 65
Change user level	Changed level	Bool_1	1	All	Error: 0 Success: 1	Error: 00 Success: 01

Table 5: Telegram structure: sAN SetAccessMode

Example for LMS100: sAN SetAccessMode

CoLa A	ASCII	<STX>sAN{SPC}SetAccessMode{SPC}1<ETX>
	Hex	02 73 41 4E 20 53 65 74 41 63 63 65 73 73 4D 6F 64 65 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 41 4E 20 53 65 74 41 63 63 65 73 73 4D 6F 64 65 20 01 39

Table 6: Example for LMS100: sAN SetAccessMode

4.2 Basic Settings

4.2.1 Set frequency and angular resolution/measurement sectors

NOTES

- Please note that the new values will be activated only after log out (from the user level), when re-entering the Run mode (see Table 84 on page 49).

Coordination system of:

LMS5xx (-5° to 190°)

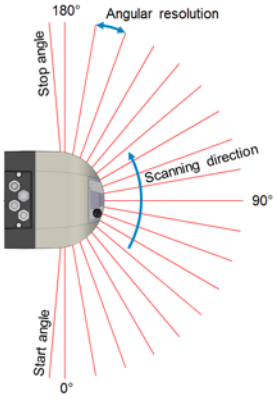

LMS1xx and TiM5xx (-45° to 225°)



The LD series is available in two versions having a different rotation direction and coordinate system:

LD-OEM1501, NAV310, LD-LR3601, LD-LR3611 (0° to 360°)

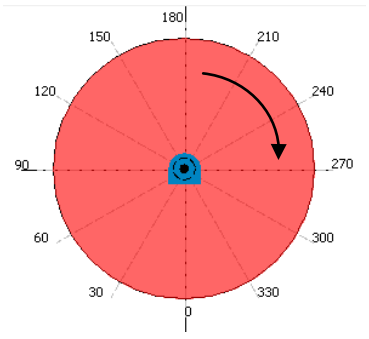

LD-OEM1500 and LD-LR3600 (–90° to +270°)



For sending the sector configuration there follow these rules:

- Send the sectors in their ascending sequence.
- For LD and NAV products: Send allways the definition for all sectors (unused sector as “{SPC}0{SPC}0”.)
- For LMS products: They have only one measurement sector, send only the first one and leave the rest away.

For more details on sector configuration see examples below.

For complete workflow see example in section 3, page 11.

Telegram structure: sMN mLMPsetscancfg (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Configuration of scan frequency and angular resolution	String	14	All	mLMPsetscancfg	6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67
Scan frequency	[1/100 Hz]	Uint_32	4	LMS1xx	25 Hz: +2500d (9C4h) 50 Hz: +5000d (1388h)	25 Hz: 00 00 09 C4 50 Hz: 00 00 13 88
				LMS5xx	25 Hz: +2500d (9C4h) 35 Hz: +3500d (DACh) 50 Hz: +5000d (1388h) 75 Hz: +7500d (1A0Bh) 100 Hz: +10000d (2710h)	25 Hz: 00 00 09 C4 35 Hz: 00 00 0D AC 50 Hz: 00 00 13 88 75 Hz: 00 00 1A 0B 100 Hz: 00 00 27 10
				NAV310 LD-OEM15xx	5 Hz ... 20 Hz: 500d ... 2000d (1F4h ... 7D0h)	5 Hz ... 20 Hz: 00 00 01 F4 ... 00 00 07 D0
				LD-LRS36xx	5 Hz ... 15 Hz: +500d ... +1500d (1F4h ... 5DCh)	5 Hz ... 15 Hz: 00 00 01 F4 ... 00 00 05 DC
Number of active sectors	Indicates the number of active sectors (e. g. NAV310 with 2 active sectors out of available 4)	Int_16	2	LMS1xx LMS5xx	+1 (0001h)	0001
				NAV310 LD-OEM15xx LD-LRS36xx	+1 ... +4 (0001 ... 0004h)	0001 ... 0100 (binary)

Telegram structure: sMN mLMPsetscancfg (Authorized client)							
Telegram part		**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Per sector (active and inactive sectors)	Angular resolution	[1/10000°] Same value for each sector required.	Uint_32	4	LMS1xx	0.25°: +2500d (9C4h) 0.5°: +5000d (1388h)	0.25°: 00 00 09 C4 0.5°: 00 00 13 88
					LMS5xx	0.1667°: +1667d (683h) 0.25°: +2500d (9C4h) 0.333°: +3333d (D05h) 0.5°: +5000d (1388h) 0.667°: +6667d (1A0Bh) 1°: +10000d (2710h)	0.1667°: 00 00 06 83 0.25°: 00 00 09 C4 0.333°: 00 00 0D 05 0.5°: 00 00 13 88 0.667°: 00 00 1A 0B 1°: 00 00 27 10
					NAV310 LD-OEM15xx LD-LRS36xx	0.125°... 1°: +1250d°... +10000d (4E2h°... 2710h)	0.125°... 1°: 00 00 04 E2 ... 00 00 27 10
	Start angle	[1/10000°] Value for start angle musst always be greater than Stop angle of previous sector. Set to 0 if sector is inactive (not used). Values for LMSxxx are fixed.	Int_32	4	LMS1xx	-450000d (FFF92230h)	FF F9 22 30
					LMS5xx	-50000d (FFFF3CB0h)	FF FF 3C B0
					NAV310 LD-OEM15x1 LD-LRS36x1	0°... +3600000d (0h ... 36EE80h)	00 00 00 00 ... 00 36 EE 80
					LD-OEM15x0 LD-LRS36x0	-900000d ... +2700000d (FFF24460h ... 41EB0h)	FF F2 44 60 ... 00 04 1E B0
	Stop angle	[1/10000°] Value for stop angle musst always be greater than start angle of previous sector. Set to 0 if sector is inactive (not used). Values for LMSxxx are fixed.	Int_32	4	LMS1xx	+2250000d (225510h)	00 22 55 10
					LMS5xx	+1850000d (1C3A90h)	00 1C 3A 90
					NAV310 LD-OEM15x1 LD-LRS36x1	0 ... +3600000d (0h ... 36EE80h)	00 00 00 00 ... 00 36 EE 80
					LD-OEM15x0 LD-LRS36x0	-900000d ... +2700000d (FFF24460h ... 41EB0h)	FF F2 44 60 ... 00 04 1E B0

Table 7: Telegram structure: sMN mLMPsetscancfg

Example for LMS1xx

Example for LMS1xx with 1 measurement sector of 270°

ATTENTION: Scan angle can not be changed here, only in the data output!

Scan frequency = 50 Hz

Sectors = 1 sector (This value is always 1 for these devices)

Angular resolution = 0, 5°

Start angle of sector = -45° (Fix values, angle not changeable)

Stop angle of sector = 225° (Fix values, angle not changeable)



CoLa A	ASCII	<STX>sMN{SPC}mLMPsetscancfg{SPC}+5000{SPC}+1{SPC}+5000{SPC}-450000{SPC}+2250000<ETX> Alternatively: <STX>sMN{SPC}mLMPsetscancfg{SPC}1388{SPC}1{SPC}1388{SPC}FFF92230{SPC}225510<ETX>
	Hex	02 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 2B 35 30 30 30 20 2B 31 20 2B 35 30 30 30 20 2D 34 35 30 30 30 30 20 2B 32 32 35 30 30 30 30 03 Alternatively: 02 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 31 33 38 38 20 31 20 31 33 38 38 20 46 46 4639 32 32 33 30 20 32 32 35 35 31 30 03
CoLa B	Binary	02 02 02 02 00 00 00 25 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 00 00 13 88 00 01 00 00 13 88 FF F9 22 30 00 22 55 10 21

Table 8: Example: sMN mLMPsetscancfg for LMS1xx with 1 measurement sector of 270°

Examples for LD-OEM1501, NAV310, LD-LR3601, LD-LR3611

Example for LD-xxx###1 with 1 measurement sector of 360°

Scan frequency = 8 Hz

Sectors = 1 sector

Angular resolution = 0,25°

Start angle of sector = 0°

Stop angle of sector = 360°



CoLa A	ASCII	<STX>sMN{SPC}mLMPsetscancfg{SPC}0320{SPC}01{SPC}09C4{SPC}0{SPC}0036EE80{SPC}09C4{SPC}0{SPC}0{SPC}09C4{SPC}0{SPC}0{SPC}09C4{SPC}0{SPC}0<ETX>
	Hex	02 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 30 33 32 30 20 30 31 20 30 39 43 34 20 30 20 30 30 33 36 45 45 38 30 20 30 39 43 34 20 30 20 30 20 30 39 43 34 20 30 20 30 20 30 39 43 34 20 30 20 30 30 03
CoLa B	Binary	02 02 02 02 00 00 00 55 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 00 00 03 20 00 01 00 00 09 C4 00 00 00 00 00 36 EE 80 00 00 09 C4 00 00 00 00 00 00 00 00 00 09 C4 00 00 00 00 00 00 00 00 00 00 09 C4 00 00 00 00 00 00 00 00 00 09 C4 00 00 00 00 00 00 00 00 E4

Table 9: Example: sMN mLMPsetscancfg for LD-XXX###1 with 1 measurement sector of 360°

Example for LD-XXX###1 with 1 measurement sector of 270°

Scan frequency = 10 Hz

Sectors = 1 sector

Angular resolution = 0,50°

Start angle of sector = +45°

Stop angle of sector = +315°



CoLa A	ASCII	<STX>sMN{SPC}mLMPsetscancfg{SPC}+1000{SPC}+1{SPC}+5000{SPC}+450000{SPC}+315000{SPC}+5000{SPC}0{SPC}0{SPC}+5000{SPC}0{SPC}0{SPC}+5000{SPC}0{SPC}0<ETX>
	Hex	02 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 2B 31 30 30 30 20 2B 31 20 2B 35 30 30 30 20 2B 34 35 30 30 30 30 20 2B 33 31 35 30 30 30 30 20 2B 35 30 30 30 20 30 30 30 30 30 30 30 20 30 30 30 30 30 30 20 2B 35 30 30 30 20 30 30 30 30 30 30 20 30 30 30 30 30 30 20 2B 35 30 30 30 20 30 30 30 30 30 30 20 30 30 30 30 30 30 03
CoLa B	Binary	02 02 02 02 00 00 00 49 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 00 00 03 E8 00 01 00 00 13 88 00 06 DD DE 00 30 10 B0 00 00 13 88 00 00 00 00 00 00 00 00 00 13 88 00 00 00 00 00 00 00 00 00 00 00 13 88 00 00 00 00 00 00 00 00 2C

Table 10: Example: sMN mLMPsetscancfg for LD-XXX###1 with 1 measurement sector of 270°

Example for LD-xxx###1 with 2 measurement sectors

Scan frequency = 8 Hz

Sectors = 2 sectors

Sector 1 = +70° ... +90°
Sector 2 = +120° ... +150°

Angular resolution = 0,25°



CoLa A	ASCII	<STX>sMN{SPC}mLMPsetscancfg{SPC}0320{SPC}02{SPC}09C4{SPC}+700000{SPC}+900000{SPC}09C4{SPC}+1200000{SPC}+1500000{SPC}09C4{SPC}0{SPC}0{SPC}09C4{SPC}0{SPC}0<ETX>
	Hex	02 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 30 33 32 30 20 30 32 20 30 39 43 34 20 2B 37 30 30 30 30 30 20 2B 39 30 30 30 30 30 20 30 39 43 34 20 2B 31 32 30 30 30 30 30 20 2B 31 35 30 30 30 30 30 20 30 39 43 34 20 30 20 30 20 30 39 43 34 20 30 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 49 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 00 00 03 20 00 02 00 00 09 C4 00 0A AE 60 00 0D BB A0 00 00 09 C4 00 12 4F 80 00 16 E3 60 00 00 09 C4 00 00 00 00 00 00 00 00 00 00 09 C4 00 00 00 00 00 00 00 00 E8

Table 11: Example: sMN mLMPsetscancfg for LD-XXX###1 with 2 measurement sectors

Example for LD-xxx###1 with 4 measurement sectors

Scan frequency = 8 Hz

Sectors = 4 sectors

Sector 1 = +320° ... +45°
Sector 2 = +70° ... +90°
Sector 3 = +120° ... +150°
Sector 4 = +210° ... +240°

Angular resolution = 0,25°



CoLa A	ASCII	<STX>sMN{SPC}mLMPsetscancfg{SPC}0320{SPC}04{SPC}09C4{SPC}+3200000{SPC}+450000{SPC}09C4{SPC}+700000{SPC}+900000{SPC}09C4{SPC}+1200000{SPC}+1500000{SPC}09C4{SPC}+2100000{SPC}+2400000<ETX>
	Hex	02 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 30 33 32 30 20 30 34 20 30 39 43 34 20 2B 33 32 30 30 30 30 30 20 2B 34 35 30 30 30 30 20 30 39 43 34 20 2B 37 30 30 30 30 30 20 2B 39 30 30 30 30 30 20 30 39 43 34 20 2B 31 32 30 30 30 30 30 20 2B 31 35 30 30 30 30 30 20 30 39 43 34 20 2B 32 31 30 30 30 30 30 20 2B 32 34 30 30 30 30 30 03
CoLa B	Binary	02 02 02 02 00 00 00 49 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 00 00 03 20 00 04 00 00 09 C4 00 30 D4 00 00 06 DD D0 00 00 09 C4 00 0A AE 60 00 0D BB A0 00 00 09 C4 00 12 4F 80 00 16 E3 60 00 00 09 C4 00 20 0B 20 00 24 9F 00 B1

Table 12: Example: sMN mLMPsetscancfg for LD-XXX###1 with 4 measurement sectors

Examples for LD-OEM1500 and LD-LR3600

Example for LD-xxx###0 with 1 measurement sector of 360°

Scan frequency = 8 Hz

Sectors = 1 sector

Angular resolution = 0,25°

Start angle of sector = –90°

Stop angle of sector = +270°



CoLa A	ASCII	<STX>sMN{SPC}mLMPsetscancfg{SPC}0320{SPC}01{SPC}09C4{SPC}-900000{SPC}+2700000{SPC}09C4{SPC}00000000{SPC}000000{SPC}09C4{SPC}000000{SPC}0000000{SPC}09C4{SPC}000000{SPC}000000<ETX>
	Hex	02 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 30 33 32 30 20 30 31 20 30 39 43 34 20 2D 39 30 30 30 30 30 20 2B 32 37 30 30 30 30 30 20 30 39 43 34 20 30 30 30 30 30 30 30 30 20 30 30 30 30 30 30 20 30 39 43 34 20 30 30 30 30 30 30 20 30 30 30 30 30 30 30 20 30 39 43 34 20 30 30 30 30 30 30 20 30 30 30 30 30 30 03
CoLa B	Binary	02 02 02 02 00 00 00 49 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 00 00 03 20 00 01 00 00 09 C4 FF F2 44 60 00 29 32 E0 00 00 09 C4 00 00 00 00 00 00 00 00 00 09 C4 00 00 00 00 00 00 00 00 00 00 09 C4 00 00 00 00 00 00 00 00 A3

Table 13: Example: sMN mLMPsetscancfg for LD-XXX###0 with 1 measurement sector of 360°

Example for LD-xxx###0 with 1 measurement sector of 270°

Scan frequency = 10 Hz

Sectors = 1 sector

Angular resolution = 0,50°

Start angle of sector = –45°

Stop angle of sector = +225°



CoLa A	ASCII	<STX>sMN{SPC}mLMPsetscancfg{SPC}+1000{SPC}+1{SPC}+5000{SPC}-450000{SPC}+225000{SPC}+5000{SPC}0{SPC}0{SPC}+5000{SPC}0{SPC}0{SPC}+5000{SPC}0{SPC}0<ETX>
	Hex	02 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 2B 31 30 30 30 20 2B 31 20 2B 35 30 30 30 20 2D 34 35 30 30 30 30 20 2B 32 32 35 30 30 30 30 20 2B 35 30 30 30 20 2D 34 35 30 30 30 30 20 2B 32 32 35 30 30 30 30 20 2B 35 30 30 30 20 30 20 30 20 2B 35 30 30 30 20 30 20 30 20 2B 35 30 30 30 20 30 20 30 30 03
CoLa B	Binary	02 02 02 02 00 00 00 49 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 00 00 03 E8 00 01 00 00 13 88 FF F9 22 30 00 22 55 10 00 00 13 88 00 00 00 00 00 00 00 00 00 13 88 00 00 00 00 00 00 00 00 00 00 13 88 00 00 00 00 00 00 00 00 CA

Table 14: Example: sMN mLMPsetscancfg for LD-XXX###0 with 1 measurement sector of 270°

Example for LD-xxx###0 with 2 measurement sectors

Scan frequency = 8 Hz

Sectors = 2 sectors

Sector 1 = +120° ... +150°
Sector 2 = +180° ... +200°

Angular resolution = 0,25°



CoLa A	ASCII	<STX>sMN{SPC}mLMPsetscancfg{SPC}320{SPC}2{SPC}9C4{SPC}+1200000{SPC}+1500000{SPC}9C4{SPC}+1800000{SPC}+2000000{SPC}9C4{SPC}0{SPC}0{SPC}9C4{SPC}0{SPC}0<ETX>
	Hex	02 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 33 32 30 20 32 20 39 43 34 20 2B 31 32 30 30 30 30 30 20 2B 31 35 30 30 30 30 30 20 39 43 34 20 2B 31 38 30 30 30 30 30 20 2B 32 30 30 30 30 30 30 20 39 43 34 20 30 20 30 20 39 43 34 20 30 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 49 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 00 00 03 20 00 02 00 00 09 C4 00 12 4F 80 00 16 E3 60 00 00 09 C4 00 1B 77 40 00 1E 84 80 00 00 09 C4 00 00 00 00 00 00 00 00 00 00 09 C4 00 00 00 00 00 00 00 00 0C

Table 15: Example: sMN mLMPsetscancfg for LD-XXX###0 with 2 measurement sectors

Example for LD-xxx###0 with 4 measurement sectors

Scan frequency = 8 Hz

Sectors = 4 sectors

Sector 1 = +230° ... –50°
Sector 2 = +30° ... +60°
Sector 3 = +120° ... +150°
Sector 4 = +210° ... +200°

Angular resolution = 0,25°



CoLa A	ASCII	<STX>sMN{SPC}mLMPsetscancfg{SPC}320{SPC}4{SPC}9C4{SPC}+2300000{SPC}-500000{SPC}9C4{SPC}+300000{SPC}+600000{SPC}9C4{SPC}+1200000{SPC}+1500000{SPC}9C4{SPC}+1800000{SPC}+2000000<ETX>
	Hex	02 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 33 32 30 20 34 20 39 43 34 20 2B 32 33 30 30 30 30 30 20 2D 35 30 30 30 30 30 20 39 43 34 20 2B 33 30 30 30 30 30 20 2B 36 30 30 30 30 30 20 39 43 34 20 2B 31 32 30 30 30 30 30 20 2B 31 35 30 30 30 30 30 20 39 43 34 20 2B 31 38 30 30 30 30 30 20 2B 32 30 30 30 30 30 30 03
CoLa B	Binary	02 02 02 02 00 00 00 49 73 4D 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 00 00 03 20 00 04 00 00 09 C4 00 23 18 60 FF F8 5E E0 00 00 09 C4 00 04 93 E0 00 09 27 C0 00 00 09 C4 00 12 4F 80 00 16 E3 60 00 00 09 C4 00 1B 77 40 00 1E 84 80 71

Table 16: Example: sMN mLMPsetscancfg for LD-XXX###0 with 4 measurement sectors

Telegram structure: sAN mLMPsetscancfg						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Info of scan frequency and angular resolution	String	14	All	mLMPsetscancfg	6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67
Status code	Accepted when value is 0	Enum_8	1	All	No error: 0 Frequency error: 1 Resolution error: 2 Resolution and scanarea error: 3 Scanarea error: 4 Other errors: 5	No error: 00 Frequency error: 01 Resolution error: 02 Resolution and scan area error: 03 Scanarea error: 04 Other errors: 05
Scan frequency	[1/100 Hz]	Uint_32	4	LMS1xx	25 Hz: +2500d (9C4h) 50 Hz: +5000d (1388h)	25 Hz: 00 00 09 C4 50 Hz: 00 00 13 88
				LMS5xx	25 Hz: +2500d (9C4h) 35 Hz: +3500d (DACh) 50 Hz: +5000d (1388h) 75 Hz: +7500d (1A0Bh) 100 Hz: +10000d (2710h)	25 Hz: 00 00 09 C4 35 Hz: 00 00 0D AC 50 Hz: 00 00 13 88 75 Hz: 00 00 1A 0B 100 Hz: 00 00 27 10
				NAV310 LD-OEM 15xx	5 Hz ... 20 Hz: +500d ... +2000d (1F4h ... 7D0h)	5 Hz ... 20 Hz: 00 00 01 F4 ... 00 00 07 D0
				LD-LRS 36xx	5 Hz ... 15 Hz: +500d ... +1500d (1F4h ... 5DCh)	5 Hz ... 15 Hz: 00 00 01 F4 ... 00 00 05 DC
Number of active sectors	Indicates the number of active sectors	Int_16	2	LMS1xx LMS5xx	1 (0001h)	0001
				NAV310 LD-OEM 15xx LD-LRS 36xx	1 ... 4 (0001h ... 0004h)	0001 ... 0100 (binary)

Telegram structure: sAN mLMPsetscancfg							
Telegram part		Description	Variable	Length	Sensor	Values CoLa A (ASCII)	Values CoLa B (Binary)
Per sector (active and inactive sectors)	Angular resolution	[1/10000°]	Uint_32	4	LMS1xx	0.25°: +2500d (9C4h) 0.5°: +5000d (1388h)	0.25°: 00 00 09 C4 0.5°: 00 00 13 88
					LMS5xx	0.1667°: +1667d (683h) 0.25°: +2500d (9C4h) 0.333°: +3333d (D05h) 0.5°: +5000d (1388h) 0.667°: +6667d (1A0Bh) 1°: +10000d (2710h)	0.1667°: 00 00 06 83 0.25°: 00 00 09 C4 0.333°: 00 00 0D 05 0.5°: 00 00 13 88 0.667°: 00 00 1A 0B 1°: 00 00 27 10
					NAV310 LD-OEM 15xx LD-LRS 36xx	0.125°... 1°: +1250d°... +10000d (4E2h°... 2710h)	0.125°... 1: 00 00 04 E2 ... 00 00 27 10
	Start angle	[1/10000°]	Int_32	4	LMS1xx	-450000d (FFF92230h)	FF F9 22 30
					LMS5xx	-50000d (FFFF3CB0h)	FF FF 3C B0
					NAV310 LD-OEM 15x1 LD-LRS 36x1	0°... +3600000d (0h ... 36EE80h)	00 00 00 00 ... 00 36 EE 80
					LD-OEM 15x0 LD-LRS 36x0	-900000d ... +2700000d (FFF24460h ... 41EB0h)	FF F2 44 60 ... 00 04 1E B0
	Stop angle	[1/10000°]	Int_32	4	LMS1xx	+2250000d (225510h)	00 22 55 10
					LMS5xx	+1850000d (1C3A90h)	00 1C 3A 90
					NAV310 LD-OEM 15x1 LD-LRS 36x1	0 ... +3600000d (0h ... 36EE80h)	00 00 00 00 ... 00 36 EE 80
					LD-OEM 15x0 LD-LRS 36x0	-900000d ... +2700000d (FFF24460h ... 41EB0h)	FF F2 44 60 ... 00 04 1E B0

Table 17: Telegram structure: sAN mLMPsetscancfg

Example: sAN mLMPsetscancfg

CoLa A	ASCII	<STX>sAN{SPC}mLMPsetscancfg{SPC}0{SPC}1388{SPC}1{SPC}1388{SPC}FFF92230{SPC}225510<ETX>
	Hex	02 73 41 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 30 20 31 33 38 38 20 31 20 31 33 38 38 20 46 46 46 39 32 32 33 30 20 32 32 35 35 31 30 03
CoLa B	Binary	02 02 02 02 00 00 00 26 73 41 4E 20 6D 4C 4D 50 73 65 74 73 63 61 6E 63 66 67 20 00 00 00 13 88 00 01 00 00 13 88 FF F9 22 30 00 22 55 10 2D

Table 18: Example: sAN mLMPsetscancfg

4.2.2 Read for frequency and angular resolution



Telegram structure: sRN LMPscancfg						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Info of scan frequency and angular resolution	String	10	All	LMPscancfg	4C 4D 50 73 63 61 6E 63 66 67

Table 19: Telegram structure: sRN LMPscancfg

Example for LMS100: sRN LMPscancfg

CoLa A	ASCII	<STX>sRN{SPC}LMPscancfg<ETX>
	Hex	02 73 52 4E 20 4C 4D 50 73 63 61 6E 63 66 67 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 52 4E 20 4C 4D 50 73 63 61 6E 63 66 67 63

Table 20: Example for LMS100: sRN LMPscancfg

Telegram structure: sRA LMPscancfg						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Info of scan frequency and angular resolution	String	10	All	LMPscancfg	4C 4D 50 73 63 61 6E 63 66 67

Telegram structure: sRA LMPscancfg						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Scan frequency	[1/100 Hz]	Uint_32	4	LMS1xx	25 Hz: +2500d (9C4h) 50 Hz: +5000d (1388h)	25 Hz: 00 00 09 C4 50 Hz: 00 00 13 88
				LMS5xx	25 Hz: +2500d (9C4h) 35 Hz: +3500d (DACh) 50 Hz: +5000d (1388h) 75 Hz: +7500d (1A0Bh) 100 Hz: +10000d (2710h)	25 Hz: 00 00 09 C4 35 Hz: 00 00 0D AC 50 Hz: 00 00 13 88 75 Hz: 00 00 1A 0B 100 Hz: 00 00 27 10
				TiM5xx	15 Hz: +1500d (5DCh)	15 Hz: 00 00 05 DC
				NAV310 LD-OEM 15xx	5 Hz ... 20 Hz: +500d ... +2000d (1F4h ... 7D0h)	5 Hz ... 20 Hz: 00 00 01 F4 ... 00 00 07 D0
				LD-LRS 36xx	5 Hz ... 15 Hz: +500d ... +1500d (1F4h ... 5DCh)	5 Hz ... 15 Hz: 00 00 01 F4 ... 00 00 05 DC
Number of sectors	Indicates the number of sectors. The subsequent values will be transmitted 1 ... 4 accordingly.	Int_16	2	LMS1xx LMS5xx TiM5xx	Sector 1: 0001h	Sector 1: 0001
				NAV310 LD-OEM 15xx LD-LRS 36xx	Sector 1: 0001h Sector 2: 0002h Sector 3: 0003h Sector 4: 0004h	Sector 1: 0001 Sector 2: 0010 Sector 3: 0011 Sector 4: 0100
Angular resolution	[1/10000°]	Uint_32	4	LMS1xx	0.25°: +2500d (9C4h) 0.5°: +5000d (1388h)	0.25°: 00 00 09 C4 0.5°: 00 00 13 88
				LMS5xx	0.1667°: +1667d (683h) 0.25°: +2500d (9C4h) 0.333°: +3333d (D05h) 0.5°: +5000d (1388h) 0.667°: +6667d (1A0Bh) 1°: +10000d (2710h)	0.1667°: 00 00 06 83 0.25°: 00 00 09 C4 0.333°: 00 00 0D 05 0.5°: 00 00 13 88 0.667°: 00 00 1A 0B 1°: 00 00 27 10
				TiM5xx	0.333°: +3333d (D05h) 1°: +10000d (2710h)	0.333°: 00 00 0D 05 1°: 00 00 27 10
				NAV310 LD-OEM 15xx LD-LRS 36xx	0.125°... 1°: +1250d°... +10000d (4E2h°... 2710h)	0.125°... 1: 00 00 04 E2 ... 00 00 27 10

Telegram structure: sRA LMPscancfg						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Start angle	[1/10000°]	Int_32	4	LMS1xx TiM5xx	-450000d ... +2250000d (FFF92230h ... 225510h)	FF F9 22 30 ... 00 22 55 10
				LMS5xx	-50000d ... +1850000d (FFFF3CB0h ... 1C3A90h)	FF FF 3C B0 ... 00 1C 3A 90
				NAV310 LD-0EM 15x1 LD-LRS 36x1	0° ... +3600000d (0h ... 36EE80h)	00 00 00 00 ... 00 36 EE 80
				LD-0EM 15x0 LD-LRS 36x0	-900000d ... +2700000d (FFF24460h ... 41EB0h)	FF F2 44 60 ... 00 04 1E B0
Stop angle	[1/10000°]	Int_32	4	LMS1xx TiM5xx	-450000d ... +2250000d (FFF92230h ... 225510h)	FF F9 22 30 ... 00 22 55 10
				LMS5xx	-50000d ... +1850000d (FFFF3CB0h ... 1C3A90h)	FF FF 3C B0 ... 00 1C 3A 90
				NAV310 LD-0EM 15x1 LD-LRS 36x1	0 ... +3600000d (0h ... 36EE80h)	00 00 00 00 ... 00 36 EE 80
				LD-0EM 15x0 LD-LRS 36x0	-900000d ... +2700000d (FFF24460h ... 41EB0h)	FF F2 44 60 ... 00 04 1E B0

Table 21: Telegram structure: sRA LMPscancfg

Example: sRA LMPscancfg

CoLa A	ASCII	<STX>sRA{SPC}LMPscancfg{SPC}1388{SPC}1{SPC}1388{SPC}FFF92230{SPC}225510<ETX>
	Hex	02 73 52 41 20 4C 4D 50 73 63 61 6E 63 66 67 20 31 33 38 38 20 31 20 31 33 38 38 20 46 46 46 39 32 32 33 30 20 32 32 35 35 31 30 03
CoLa B	Binary	02 02 02 02 00 00 00 21 73 52 41 20 4C 4D 50 73 63 61 6E 63 66 67 20 00 00 13 88 00 01 00 00 13 88 FF F9 22 30 00 22 55 10 3E

Table 22: Example: sRA LMPscancfg

4.2.3 Set scan configuration

Sets the device to an defined scan configuration, consisting of scan frequency, angular resolution, sector definition and interlace mode.

Telegram structure: sMN mCLsetscancfglist						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Set scan configuration	String	17	All	mCLsetscancfglist	6D 43 4C 73 65 74 73 63 61 6E 63 66 67 6C 69 73 74
Mode	Interlace mode (see table below)	Enum_8	1	All	+1d, +2d, +3d ... (01h, 02h, 03h ...)	01, 02, 03 ...

Table 23: Telegram structure: sMN mCLsetscancfglist

Interlace mode

The interlace mode allows to achieve a higher angular resolution by combining scans with lower resolution. The individual scans are shifted to each other.

The command *mCLsetscancfglist* selects combinations of scan resolution, scan frequency and resolution. If the scan area will not match to the application then an adjustment is possible by the command “mLMPsetscancfg” (see section 4.2.1 “Set frequency and angular resolution/measurement sectors” on page 14).

Mode	Inter-laced	Scan freq.	Result. scan freq.	Reso-lution	Total Resol.	Field of view	Sector	LRS 3601 3611	OEM 1501	NAV 310	LRS 3600	OEM 1500
1	0x	8 Hz	8 Hz	0.25°	0.25°	360°	0 ... 360°	x	x	x	(x)	(x)
2	0x	15 Hz	15 Hz	0.5°	0.5°	360°	0 ... 360°	x	x	x	(x)	(x)
3	0x	10 Hz	10 Hz	0.25°	0.25°	300°	30 ... 330°	x	x	x	x	x
4	0x	5 Hz	5 Hz	0.125°	0.125°	300°	30 ... 330°	x	x	x	x	x
5	0x	6 Hz	6 Hz	0.1875°	0.1875°	360°	0 ... 360°	x	x	x	(x)	(x)
6	0x	8Hz	8 Hz	0.25°	0.25°	359.5°	0.25° ...359.25°				x	X
8	0x	15 Hz	15 Hz	0.375°	0,375°	300°	30...330°	x	X	x	x	x
9	0x	15 Hz	15 Hz	0.5°	0.5°	359°	0.5 ... . 359.5°				x	x
21	0x	20 Hz	20 Hz	0.5°	0.5°	300°	30 ... 330°		X	x		x
22	0x	20 Hz	20 Hz	0.75°	0.75°	360°	0 ... 360°		x	x		(x)
44	4x	10 Hz	2.5 Hz	0.25°	0.0625°	300°	30 ... 330°	x	x		(x)	(x)
46	4x	16 Hz	4 Hz	0.5°	0.125°	300°	30 ... 330°		x			(x)

Table 24: Interlace mode for sMN mCLsetscancfglist

(x): Only at raw data scan (field application)

Example: Set scan configuration 1: sMN mCLsetscancfglist 1

CoLa A	ASCII	<STX>sMN{SPC}mCLsetscancfglist{SPC}1<ETX>
	Hex	02 73 4D 4E 20 6D 43 4C 73 65 74 73 63 61 6E 63 66 67 6C 69 73 74 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 17 20 73 4D 4E 20 6D 43 4C 73 65 74 73 63 61 6E 63 66 67 6C 69 73 74 20 01 0F

Table 25: Example: Set scan configuration 1: sMN mCLsetscancfglist 1

Telegram structure: sAN mCLsetscancfglist						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Confirm scan configuration	String	17	All	mCLsetscancfglist	6D 43 4C 73 65 74 73 63 61 6E 63 66 67 6C 69 73 74
Status code	Wrong setting	Enum_8	1	All	Ok: 0 Error frequency: 1 Error resolution: 2 Err. res. and freq.: 3 Err. scan field: 4 Error: 5	Ok: 00 Error frequency: 01 Error resolution: 02 Err. res. and freq.: 03 Err. scan field: 04 Error: 05

Table 26: Telegram structure: sAN mCLsetscancfglist

Example: sAN mCLsetscancfglist Ok

CoLa A	ASCII	<STX>sAN{SPC}mCLsetscancfglist{SPC}0<ETX>
	Hex	02 73 41 4E 20 6D 43 4C 73 65 74 73 63 61 6E 63 66 67 6C 69 73 74 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 17 73 41 4E 20 6D 43 4C 73 65 74 73 63 61 6E 63 66 67 6C 69 73 74 20 00 10

Table 27: Example: sAN mCLsetscancfglist Ok

4.2.4 Activate Standby mode

Telegram structure: sMN LMCstandby (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Set device to standby	String	10	All	LMCstandby	4C 4D 43 73 74 61 6E 64 62 79

Table 28: Telegram structure: sMN LMCstandby

Example: sMN LMCstandby

CoLa A	ASCII	<STX>sMN{SPC}LMCstandby<ETX>
	Hex	02 73 4D 4E 20 4C 4D 43 73 74 61 6E 64 62 79 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 4D 4E 20 4C 4D 43 73 74 61 6E 64 62 79 65

Table 29: Example: sMN LMCstandby



Telegram structure: sAN LMCstandby						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Set device to standby	String	10	All	LMCstandby	4C 4D 43 73 74 61 6E 64 62 79
Status code	Accepted when value is 0	Enum_8	1	All	No error: 0	No error: 00

Table 30: Telegram structure: sAN LMCstandby

Example: sAN LMCstandby

CoLa A	ASCII	<STX>sAN{SPC}LMCstandby{SPC}0<ETX>
	Hex	02 73 41 4E 20 4C 4D 43 73 74 61 6E 64 62 79 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 10 73 41 4E 20 4C 4D 43 73 74 61 6E 64 62 79 20 00 49

Table 31: Example: sAN LMCstandby

4.2.5 Start measurement

Telegram structure: sMN LMCstartmeas (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Start measurement	String	12	All	LMCstartmeas	4C 4D 43 73 74 61 72 74 6D 65 61 73

Table 32: Telegram structure: sMN LMCstartmeas

Example: sMN LMCstartmeas

CoLa A	ASCII	<STX>sMN{SPC}LMCstartmeas<ETX>
	Hex	02 73 4D 4E 20 4C 4D 43 73 74 61 72 74 6D 65 61 73 03
CoLa B	Binary	02 02 02 02 00 00 00 10 73 4D 4E 20 4C 4D 43 73 74 61 72 74 6D 65 61 73 68

Table 33: Example: sMN LMCstartmeas

Telegram structure: sAN LMCstartmeas						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Start measurement	String	12	All	LMCstartmeas	4C 4D 43 73 74 61 72 74 6D 65 61 73
Status code	Accepted when value is 0	Enum_8	1	All	No error: 0 Not allowed: 1	No error: 00 Not allowed: 01

Table 34: Telegram structure: sAN LMCstartmeas

Example: sAN LMCstartmeas

CoLa A	ASCII	<STX>sAN{SPC}LMCstartmeas{SPC}0<ETX>
	Hex	02 73 41 4E 20 4C 4D 43 73 74 61 72 74 6D 65 61 73 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 41 4E 20 4C 4D 43 73 74 61 72 74 6D 65 61 73 20 00 44

Table 35: Example: sAN LMCstartmeas

4.2.6 Stop measurement



Telegram structure: sMN LMCstopmeas (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Stop measurement	String	11	All	LMCstopmeas	4C 4D 43 73 74 6F 70 6D 65 61 73

Table 36: Telegram structure: sMN LMCstopmeas

Example: sMN LMCstopmeas

CoLa A	ASCII	<STX>sMN{SPC}LMCstopmeas<ETX>
	Hex	02 73 4D 4E 20 4C 4D 43 73 74 6F 70 6D 65 61 73 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 4D 4E 20 4C 4D 43 73 74 6F 70 6D 65 61 73 10

Table 37: Example: sMN LMCstopmeas

Telegram structure: sAN LMCstopmeas						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Stop measurement	String	11	All	LMCstopmeas	4C 4D 43 73 74 6F 70 6D 65 61 73
Status code	Accepted when value is 0	Enum_8	1	All	No error: 0 Not allowed: 1	No error: 00 Not allowed: 01

Table 38: Telegram structure: sAN LMCstopmeas

Example: sAN LMCstopmeas

CoLa A	ASCII	<STX>sAN{SPC}LMCstopmeas{SPC}0<ETX>
	Hex	02 73 41 4E 20 4C 4D 43 73 74 6F 70 6D 65 61 73 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 41 4E 20 4C 4D 43 73 74 6F 70 6D 65 61 73 20 00 3C

Table 39: Example: sAN LMCstopmeas

4.2.7 Autostart measurement

Telegram structure: sMN LMPautostartmeas (AutoStartMeasure) (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sWN	73 57 4E
Command	Autostart measurement	String	16	All	LMPautostartmeas	4C 4D 50 61 75 74 6F 73 74 61 72 74 6D 65 61 73
Status code	Accepted when value is 0	Bool_1	1	All	Autostart off: False = 0 Autostart on: Ture = 1	Autostart off: False = 00 Autostart on :True = 01

Table 40: Telegram structure: sMN LMPautostartmeas

Example: sMN LMPautostartmeas 1

CoLa A	ASCII	<STX>sWN{SPC}LMPautostartmeas{SPC}1 <ETX>
	Hex	02 73 4D 4E 20 4C 4D 50 61 75 74 6F 73 74 61 72 74 6D 65 61 73 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 16 73 57 4E 20 4C 4D 50 61 75 74 6F 73 74 61 72 74 6D 65 61 73 20 31 7F

Table 41: Example: sMN LMPautostartmeas

This parameter defines wether the scanner will start upon powering up to rotate and measure of remain in the idle mode.

The setting should be stored in the flash memory by the command sMN mEEWriteall.

After the next powering up the scanner will be either in the idle or in the measurment mode.

Telegram structure: sWA LMPautostartmeas						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Autostart measure-ment	String	14	All	LMPautostartmeas	4C 4D 43 73 74 61 72 74 6D 65 61 73

Table 42: Telegram structure: sWA LMDautostartmeas

Example: sAN LMPautostartmeas

CoLa A	ASCII	<STX>sWA{SPC}LMPautostartmeas<ETX>
	Hex	02 73 57 41 20 4C 4D 43 73 74 61 72 74 6D 65 61 73 03
CoLa B	Binary	02 02 02 02 00 00 00 15 73 57 41 20 4C 4D 50 61 75 74 6F 73 74 61 72 74 6D 65 61 73 20 41

Table 43: Example: sWA LMPautostartmeas

4.2.8 Activate/deactivate field application

With the aid of the integrated field application, the LD-OEM1500/LD-LRS3600 evaluates up to four evaluation fields within its scan area.



Telegram structure: sWN CLApplication (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Activate/deactivate field application	String	13	All	CLApplication	43 4C 41 70 70 6C 69 63 61 74 69 6F 6E
Mode	Application	Enum_ 16	2	All	Scan only: 00 Field application: 11	Scan only: 00 00 Field application: 00 11

Table 44: Telegram structure: sWN CLApplication

Example: Activate the field application: sWN CLApplication 11

CoLa A	ASCII	<STX>sWN{SPC}CLApplication{SPC}11<ETX>
	Hex	02 73 57 4E 20 43 4C 41 70 70 6C 69 63 61 74 69 6F 6E 20 31 31 03
CoLa B	Binary	02 02 02 02 00 00 00 17 73 57 4E 20 43 4C 41 70 70 6C 69 63 61 74 69 6F 6E 20 00 11 1F

Table 45: Example: Activate the field application: sWN CLApplication 11



Telegram structure: sWA CLApplication						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Activate/deactivate field application	String	13	All	CLApplication	43 4C 41 70 70 6C 69 63 61 74 69 6F 6E

Table 46: Telegram structure: sWA CLApplication

Example: sWA CLApplication correct and accepted

CoLa A	ASCII	<STX>sWA{SPC}CLApplication<ETX>
	Hex	02 73 57 41 20 43 4C 41 70 70 6C 69 63 61 74 69 6F 6E 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 57 41 20 43 4C 41 70 70 6C 69 63 61 74 69 6F 6E 1A

Table 47: Example: sWA CLApplication correct and accepted

4.2.9 Load factory defaults

NOTE

The Factory-Reset (Load factory defaults) deletes the entire parametrization of the device.All parameters, settings and system applications will be set to default.

Telegram structure: sMN mSCloadfacdef (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	Not possible
Command	Load factory defaults	String	13	All	mSCloadfacdef	Not possible

Table 48: Telegram structure: sMN mSCloadfacdef

Example: sMN mSCloadfacdef

CoLa A	ASCII	<STX>sMN{SPC}mSCloadfacdef<ETX>
	Hex	02 73 4D 4E 20 6D 53 43 6C 6F 61 64 66 61 63 64 65 66 03
CoLa B	Binary	Not possible

Table 49: Example: sMN mSCloadfacdef

Telegram structure: sAN mSCloadfacdef						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	Not possible
Command	Load factory defaults	String	13	All	mSCloadfacdef	Not possible

Table 50: Telegram structure: sAN mSCloadfacdef

Example: sAN mSCloadfacdef

CoLa A	ASCII	<STX>sAN{SPC}mSCloadfacdef<ETX>
	Hex	02 73 41 4E 20 6D 53 43 6C 6F 61 64 66 61 63 64 65 66 03
CoLa B	Binary	Not possible

Table 51: Example: sAN mSCloadfacdef

4.2.10 Load application defaults

NOTE

The Application-Reset (Load application defaults) deletes only the user parametrization of the Fields and Evaluation cases (EVC). Other parameters like Interface settings, Echo Filter, etc. remain unaffected.



Telegram structure: sMN mSCloadappdef (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	Not possible
Command	Load application defaults	String	13	All	mSCloadappdef	Not possible

Table 52: Telegram structure: sMN mSCloadappdef

Example: sMN mSCloadappdef

CoLa A	ASCII	<STX>sMN{SPC}mSCloadappdef<ETX>
	Hex	02 73 4D 4E 20 6D 53 43 6C 6F 61 64 61 70 70 64 65 66 03
CoLa B	Binary	Not possible

Table 53: Example: sMN mSCloadappdef

Telegram structure: sAN mSCloadappdef						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	Not possible
Command	Load application defaults	String	13	All	mSCloadappdef	Not possible

Table 54: Telegram structure: sAN mSCloadappdef

Example: sAN mSCloadappdef

CoLa A	ASCII	<STX>sAN{SPC}mSCloadappdef<ETX>
	Hex	02 73 41 4E 20 6D 53 43 6C 6F 61 64 61 70 70 64 65 66 03
CoLa B	Binary	Not possible

Table 55: Example: sAN mSCloadappdef

4.2.11 Change password

NOTE

If logged in with a higher level you may set the password for lower levels as well.



Telegram structure: sMN SetPassword (the same User level or higher)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Set password request	String	13	All	SetPassword	53 65 74 50 61 73 73 77 6F 72 64
User level	User level that the password will be applied to	Int_8	1	All	Maintenance: 02 Authorized client: 03 Service: 04	Maintenance: 02 Authorized client: 03 Service: 04
Password	Hash value of the new password	Uint_32	4	All	<Hash value>	<Hash value>

Table 56: Telegram structure: sMN SetPassword

Example: sMN SetPassword

Set password for Authorized user to “testtest”.

CoLa A	ASCII	<STX>sMN{SPC}SetPassword{SPC}03{SPC}19 20 E4 C9<ETX>
	Hex	02 73 4D 4E 20 53 65 74 50 61 73 73 77 6F 72 64 20 30 33 20 19 20 E4 C9 03
CoLa B	Binary	02 02 02 02 00 00 00 17 73 4D 4E 20 53 65 74 50 61 73 73 77 6F 72 64 20 30 33 20 19 20 E4 C9 3A

Table 57: Example: sMN SetPassword

Calculating the hash value of the password

- Login SOPAS with user level “Service”.
- Select **[Device]** > **Password** > **Calculate Hash value**.

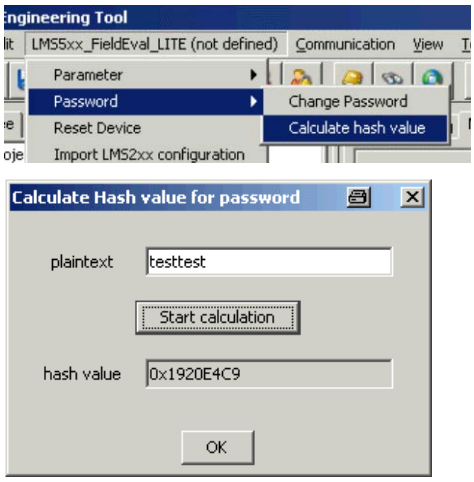

Telegram structure: sAN SetPassword						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	Not possible
Command	Set password requested	String	13	All	SetPassword	53 65 74 50 61 73 73 77 6F 72 64
Success	Confirmation	Int_8	1	All	0: Failed 1: Success	0: Failed 1: Success

Table 58: Telegram structure: sAN SetPassword

Example: sAN SetPassword

CoLa A	ASCII	<STX>sAN{SPC}SetPassword{SPC}1<ETX>
	Hex	02 73 4D 4E 20 53 65 74 50 61 73 73 77 6F 72 64 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 41 4E 20 53 65 74 50 61 73 73 77 6F 72 64 20 31 30

Table 59: Example: sAN SetPassword

4.2.12 Check password

Telegram structure: sMN CheckPassword (the same User level or higher)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Check password request	String	13	All	CheckPassword	43 68 65 63 6B 50 61 73 73 77 6F 72 64
User level	User level to check the password for	Int_8	1	All	Maintenance: 02 Authorized client: 03 Service: 04	Maintenance: 02 Authorized client: 03 Service: 04
Password	Hash value of the password to be checked	Uint_32	4	All	<Hash value>	<Hash value>

Table 60: Telegram structure: sMN CheckPassword

Example: sMN CheckPassword

Check password “testtest” for Authorized user.

CoLa A	ASCII	<STX>sMN{SPC}CheckPassword{SPC}03{SPC}19 20 E4 C9<ETX>
	Hex	02 73 4D 4E 20 43 68 65 63 6B 50 61 73 73 77 6F 72 64 20 30 33 20 19 20 E4 C9 03
CoLa B	Binary	02 02 02 02 00 00 00 19 73 4D 4E 20 43 68 65 63 6B 50 61 73 73 77 6F 72 64 20 30 33 20 19 20 E4 C9 0E

Table 61: Example: sMN CheckPassword

Telegram structure: sAN CheckPassword						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	Not possible
Command	Check password requested	String	13	All	CheckPassword	43 68 65 63 6B 50 61 73 73 77 6F 72 64
Success	Confirmation	Int_8	1	All	0: Failed 1: Success	0: Failed 1: Success

Table 62: Telegram structure: sAN CheckPassword

Example: sAN CheckPassword

CoLa A	ASCII	<STX>sAN{SPC}CheckPassword{SPC}1<ETX>
	Hex	02 73 41 4E 20 43 68 65 63 6B 50 61 73 73 77 6F 72 64 20 30 31 03
CoLa B	Binary	02 73 41 4E 20 43 68 65 63 6B 50 61 73 73 77 6F 72 64 20 31 03

Table 63: Example: sAN CheckPassword

4.2.13 Reboot device

This command includes saving all parameters.

Telegram structure: sMN mSCreboot (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Reboot device	String	9	All	mSCreboot	6D 53 43 72 65 62 6F 6F 74

Table 64: Telegram structure: sMN mSCreboot

Example: sMN mSCreboot

CoLa A	ASCII	<STX>sMN{SPC}mSCreboot<ETX>
	Hex	02 73 4D 4E 20 6D 53 43 72 65 62 6F 6F 74 03
CoLa B	Binary	02 02 02 02 00 00 00 0D 73 4D 4E 20 6D 53 43 72 65 62 6F 6F 74 2C

Table 65: Example: sMN mSCreboot

Telegram structure: sAN mSCreboot						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Reboot device	String	9	All	mSCreboot	6D 53 43 72 65 62 6F 6F 74

Table 66: Telegram structure: sAN mSCreboot

Example: sAN mSCreboot

CoLa A	ASCII	<STX>sAN{SPC}mSCreboot<ETX>
	Hex	02 73 41 4E 20 6D 53 43 72 65 62 6F 6F 74 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 41 4E 20 6D 53 43 72 65 62 6F 6F 74 00

Table 67: Example: sAN mSCreboot

4.2.14 Set contamination settings

Telegram structure: sWN LCMcfg (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Contamination config	String	6	All	LCMcfg	4C 43 4D 63 66 67
Strategy	Strategy code	Enum_8	1	All	Inactive: 0 High available: 1 Available: 2 Sensitive: 3 Semi-sensitive: 4	Inactive: 00 High available: 01 Available: 02 Sensitive: 03 Semi-sensitive: 04
Response time	Time lapse	Uint_32	4	All	+1d ... +60d (01h ... 3Ch)	00 00 00 01 ... 00 00 00 3C
Threshold warning	Threshold value	Uint_32	4	All	0d ... +100d (00h ... 64h)	00 00 00 00 ... 00 00 00 64
Threshold error	Threshold value	Uint_32	4	All	0d ... +100d (00h ... 64h)	00 00 00 00 ... 00 00 00 64

Table 68: Telegram structure: sWN LCMcfg

Example: sWN LCMcfg

CoLa A	ASCII	<STX>sWN{SPC}LCMcfg{SPC}1{SPC}+30{SPC}+65{SPC}+45<ETX>
	Hex	02 73 57 4E 20 4C 43 4D 63 66 67 20 31 20 2B 33 30 20 2B 36 35 20 2B 34 35 03
CoLa B	Binary	02 02 02 02 00 00 00 18 73 57 4E 20 4C 43 4D 63 66 67 20 01 00 00 00 1E 00 00 00 41 00 00 00 2D 39

Table 69: Example: sWN LCMcfg

Telegram structure: sWA LCMcfg						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Contamination settings	String	6	All	LCMcfg	4C 43 4D 63 66 67

Table 70: Telegram structure: sWA LCMcfg

Example: sWA LCMcfg

CoLa A	ASCII	<STX>sWA{SPC}LCMcfg<ETX>
	Hex	02 73 57 41 20 4C 43 4D 63 66 67 03
CoLa B	Binary	02 02 02 02 00 00 00 0B 73 57 41 20 4C 43 4D 63 66 67 45

Table 71: Example: sWA LCMcfg

4.2.15 Read for contamination settings

Telegram structure: sRN LCMcfg						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read settings	String	6	All	LCMcfg	4C 43 4D 63 66 67

Table 72: Telegram structure: sRN LCMcfg

Example: sRN LCMcfg

CoLa A	ASCII	<STX>sRN{SPC}LCMcfg<ETX>
	Hex	02 73 52 4E 20 4C 43 4D 63 66 67 03
CoLa B	Binary	02 02 02 02 00 00 00 0A 73 52 4E 20 4C 43 4D 63 66 67 6F

Table 73: Example: sRN LCMcfg

Telegram structure: sRA LCMcfg						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read for settings	String	6	All	LCMcfg	4C 43 4D 63 66 67
Strategy	Strategy code	Enum_8	1	All	Inactive: 0 High available: 1 Available: 2 Sensitive: 3 Semi-sensitive: 4	Inactive: 00 High available: 01 Available: 02 Sensitive: 03 Semi-sensitive: 04
Response time	Time lapse	Uint_16	2	All	+1d ... +60d (00h ... 3Ch)	00 00 ... 00 3C
Threshold warning	Threshold value	Uint_16	2	All	0d ... +100d (00h ... 64h)	00 00 ... 00 64
Threshold error	Threshold value	Uint_16	2	All	0d ... +100d (00h ... 64h)	00 00 ... 00 64

Table 74: Telegram structure: sRA LCMcfg

Example: sRA LCMcfg

CoLa A	ASCII	<STX>sRA{SPC}LCMcfg{SPC}1{SPC}1{SPC}46{SPC}1E<ETX>
	Hex	02 73 57 41 20 4C 43 4D 63 66 67 20 31 20 31 20 34 36 20 31 45 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 52 41 20 4C 43 4D 63 66 67 20 01 00 01 00 46 00 1E 18

Table 75: Example: sRA LCMcfg

4.2.16 Read for contamination measurement

Telegram structure: sRN CMContLvlM						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read for contamination of the front screen	String	10	All	CMContLvlM	43 4D 43 6F 6E 74 4C 76 6C 4D

Table 76: Telegram structure: sRN CMContLvlM

Example: sRN CMContLvlM

CoLa A	ASCII	<STX>sRN{SPC}CMContLvlM<ETX>
	Hex	02 73 52 4E 20 43 4D 43 6F 6E 74 4C 76 6C 4D 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 52 4E 20 43 4D 43 6F 6E 74 4C 76 6C 4D 6C

Table 77: Example: sRN CMContLvlM

Telegram structure: sRA CMContLvlM						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read for contamination of the front screen	String	10	All	CMContLvlM	43 4D 43 6F 6E 74 4C 76 6C 4D
Contamination data for different channels	[% of availability] in order of the different channels	Uint_8	1	LMS1xx	Order of 7 channels: -25.8°/12.8°/51.4°/90°/128.6°/167.2°/205.8° 0d … +100d (00h … 64h)	Order of 7 channels: -25.8°/12.8°/51.4°/90°/128.6°/167.2°/205.8° 00 … 64
				LMS5xx NAV310 LD-OEM 15xx LD-LRS 36xx	Order of 6 channels: 5°/35°/70°/110°/145°/175° 0d … +100d (00h … 64h)	Order of 6 channels: 5°/35°/70°/110°/145°/175° 00 … 64

Table 78: Telegram structure: sRA CMContLvlM

Example for LMS5xx: sRA CMContLvlM

5°- to 110°-channel: 100 %, 145°- and 175°-channel only 84 % availability:

CoLa A	ASCII	<STX>sRA{SPC}CMContLvlM{SPC}64{SPC}64{SPC}64{SPC}64{SPC}54{SPC}54{SPC}<ETX>
	Hex	02 73 52 41 20 43 4D 43 6F 6E 74 4C 76 6C 4D 20 64 64 64 64 54 54 03
CoLa B	Binary	02 02 02 02 00 00 00 15 73 52 41 20 43 4D 43 6F 6E 74 4C 76 6C 4D 20 64 64 64 64 54 54 43

Table 79: Example for LMS5xx: sRA CMContLvlM

4.2.17 Save parameters permanently

Telegram structure: sMN mEEwriteall (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Store parameters permanently	String	11	All	mEEwriteall	6D 45 45 77 72 69 74 65 61 6C 6C

Table 80: Telegram structure: sMN mEEwriteall

Example: sMN mEEwriteall

CoLa A	ASCII	<STX>sMN{SPC}mEEwriteall<ETX>
	Hex	02 73 4D 4E 20 6D 45 45 77 72 69 74 65 61 6C 6C 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 4D 4E 20 6D 45 45 77 72 69 74 65 61 6C 6C 21

Table 81: Example: sMN mEEwriteall

Telegram structure: sAN mEEwriteall						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Store parameters permanently	String	11	All	mEEwriteall	6D 45 45 77 72 69 74 65 61 6C 6C
Status code	Accepted when value is 1	Bool_1	1	All	Error: 0 Success: 1	Error: 00 Success: 01

Table 82: Telegram structure: sAN mEEwriteall

Example: sAN mEEwriteall

CoLa A	ASCII	<STX>sAN{SPC}mEEwriteall{SPC}1<ETX>
	Hex	02 73 41 4E 20 6D 45 45 77 72 69 74 65 61 6C 6C 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 41 4E 20 6D 45 45 77 72 69 74 65 61 6C 6C 20 01 0C

Table 83: Example: sAN mEEwriteall

4.2.18 Set to run

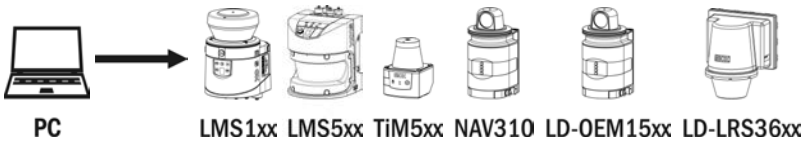

Telegram structure: sMN Run						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Start the device	String	3	All	Run	52 75 6E

Table 84: Telegram structure: sMN Run

Example: sMN Run

CoLa A	ASCII	<STX>sMN{SPC}Run<ETX>
	Hex	02 73 4D 4E 20 52 75 6E 03

CoLa B	Binary	02 02 02 02 00 00 00 07 73 4D 4E 20 52 75 6E 19

Table 85: Example: sMN Run

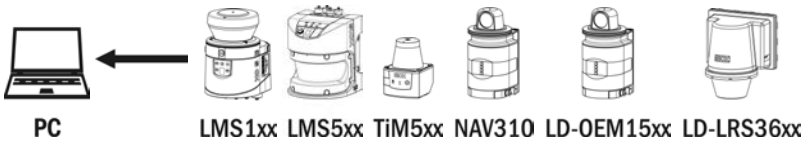

Telegram structure: sAN Run						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Start the device	String	3	All	Run	52 75 6E
Status code	Accepted when value is 1	Bool_1	1	All	Error: 0 Success: 1	Error: 00 Success: 01

Table 86: Telegram structure: sAN Run

Example: sAN Run

CoLa A	ASCII	<STX>sAN{SPC}Run{SPC}1<ETX>
	Hex	02 73 41 4E 20 52 75 6E 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 09 73 41 4E 20 52 75 6E 20 01 34

Table 87: Example: sAN Run

4.3 Measurement output telegram

4.3.1 Configure the data content for the scan



Telegram structure: sWN LMDscandatacfg (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Configure scandata	String	14	All	LMDscandatacfg	4C 4D 44 73 63 61 6E 64 61 74 61 63 66 67
Data channel	Defines the telegram content	Uint_8	2	LMS1xx	Output channel 1: 01 00 Output channel 2: 02 00 Output channel 1+2: 03 00	Output channel 1: 01 00 Output channel 2: 02 00 Output channel 1+2: 03 00
				LMS5xx	Set via Echo Filter. Set this value to 0.	Set via Echo Filter. Set this value to 00.
				TiM5xx NAV310 LD-OEM 15xx LD-LRS 36xx	Output channel 1: 01 00	Output channel 1: 01 00
Remission	Remission data output	Bool_1	1	All	No: 0 Yes: 1	No: 00 Yes: 01
Resolution	Resolution of remission data [1]	Enum_8	1	All	8 Bit: 0 16 Bit: 1	8 Bit: 00 16 Bit: 01
Unit	Unit of remission data	Enum_8	1	All	Digits: 0	Digits: 00
Encoder	Encoder data	Uint_8	2	LMS1xx LMS5xx	No encoder: 0 Channel 1: 01 00	No encoder: 00 00 Channel 1: 01 00
				NAV310 LD-OEM 15xx LD-LRS 36xx TiM5xx	No encoder: 00 00	No encoder: 00 00
Position	Position values	Bool_1	1	All	No: 0 Yes: 1	No: 00 Yes: 01
Device name	Sends the device name	Bool_1	1	All	No: 0 Yes: 1	No: 00 Yes: 01

[1] LMS5xx V1.10 only 8 bit.

Telegram structure: sWN LMDscandatacfg (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Comment	Saved comment	Bool_1	1	All	No: 0 Yes: 1	No: 00 Yes: 01
Time	Sends time information	Bool_1	1	All	No: 0 Yes: 1	No: 00 Yes: 01
Output rate	Sends the output rate	Uint_16	2	LMS1xx LMS5xx TiM5xx	All scans: +1d (1h) Each 2nd scan: +2d (2h) Each 50000th scan: +50000d (C350h)	All scans: 00 01 Each 2nd scan: 00 02 Each 50000th scan: C3 50
				NAV310 LD-0EM 15xx LD-LRS 36xx	All scans: +1d (1h) Each 2nd scan: +2d (2h) Each 200th scan: +200d (C8h)	All scans: 00 01 Each 2nd scan: 00 02 Each 200th scan: 00 C8

Table 88: Telegram structure: sWN LMDscandatacfg

Example 1: output channel 1, no encoder and all scans

CoLa A	ASCII	<STX>sWN{SPC}LMDscandatacfg{SPC}01{SPC}00{SPC}1{SPC}1{SPC}0{SPC}00{SPC}00{SPC}0{SPC}0 {SPC}0{SPC}0{SPC}+1<ETX>
	Hex	02 73 57 4E 20 4C 4D 44 73 63 61 6E 64 61 74 61 63 66 67 20 30 31 20 30 30 20 31 20 31 20 30 20 30 30 20 30 30 20 30 20 30 20 30 20 30 20 2B 31 03
CoLa B	Binary	02 02 02 02 00 00 00 20 73 57 4E 20 4C 4D 44 73 63 61 6E 64 61 74 61 63 66 67 20 01 00 01 01 00 00 00 00 00 00 00 00 01 43

Table 89: Example 1: sWN LMDscandatacfg

Example 2: output channel 1, remission, no encoder, each 10th scan

CoLa A	ASCII	<STX>sWN{SPC}LMDscandatacfg{SPC}01{SPC}00{SPC}1{SPC}1{SPC}0{SPC}00{SPC}00{SPC}0{SPC}0 {SPC}0{SPC}0{SPC}+10<ETX>
	Hex	02 73 57 4E 20 4C 4D 44 73 63 61 6E 64 61 74 61 63 66 67 20 30 31 20 30 30 20 30 20 31 20 30 20 30 30 20 30 30 20 30 20 30 20 30 20 30 20 2B 31 30 03
CoLa B	Binary	02 02 02 02 00 00 00 20 73 57 4E 20 4C 4D 44 73 63 61 6E 64 61 74 61 63 66 67 20 01 00 00 01 00 00 00 00 00 00 00 00 10 52

Table 90: Example 2: sWN LMDscandatacfg

Example 3: output channel 2, encoder active, each 10th scan

CoLa A	ASCII	<STX>sWN{SPC}LMDscandatacfg{SPC}02{SPC}0{SPC}0{SPC}1{SPC}0{SPC}01{SPC}0{SPC}0{SPC}0 {SPC}0{SPC}0{SPC}+10<ETX>
	Hex	02 73 57 4E 20 4C 4D 44 73 63 61 6E 64 61 74 61 63 66 67 20 30 32 20 30 20 30 20 31 20 30 20 30 31 20 30 20 30 20 30 20 30 20 30 20 2B 31 30 03
CoLa B	Binary	02 02 02 02 00 00 00 20 73 57 4E 20 4C 4D 44 73 63 61 6E 64 61 74 61 63 66 67 20 02 00 00 01 00 01 00 00 00 00 00 00 4A 63

Table 91: Example3: sWN LMDscandatacfg



Telegram structure: sWA LMDscandatacfg						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Configure scandata	String	14	All	LMDscandatacfg	4C 4D 44 73 63 61 6E 64 61 74 61 63 66 67

Table 92: Telegram structure: sWA LMDscandatacfg

Example: sWA LMDscandatacfg

CoLa A	ASCII	<STX>sWA{SPC}LMDscandatacfg<ETX>
	Hex	02 73 57 41 20 4C 4D 44 73 63 61 6E 64 61 74 61 63 66 67 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 57 41 20 4C 4D 44 73 63 61 6E 64 61 74 61 63 66 67 4D

Table 93: Example: sWA LMDscandatacfg

4.3.2 Configure measurement angle of the scandata for output

Telegram structure: sWN LMPoutputRange (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Change output angle range	String	14	All	LMPoutputRange	4C 4D 50 6F 75 74 70 75 74 52 61 6E 67 65
Status code	Length	Int_16	2	All	1	00 01
Angular resolution [2]	[1/10000°]	Uint_32	4	LMS1xx	0.25°: +2500d (9C4h) 0.5°: +5000d (1388h)	0.25°: 00 00 09 C4 0.5°: 00 00 13 88
				LMS5xx	0.1667°: +1667d (683h) 0.25°: +2500d (9C4h) 0.333°: +3333d (D05h) 0.5°: +5000d (1388h) 0.667°: +6667d (1A0Bh) 1°: +10000d (2710h)	0.1667°: 00 00 06 83 0.25°: 00 00 09 C4 0.333°: 00 00 0D 05 0.5°: 00 00 13 88 0.667°: 00 00 1A 0B 1°: 00 00 27 10
				TiM5xx	0.333°: +3333d (D05h) 1°: +10000d (2710h)	0.333°: 00 00 0D 05 1°: 00 00 27 10
Start angle	[1/10000°]	Int_32	4	LMS1xx TiM5xx	-450000d ... +2250000d (FFF92230h ... 225510h)	FF F9 22 30 ... 00 22 55 10
				LMS5xx	-50000d ... +1850000d (FFFF3CB0h ... 1C3A90h)	FF FF 3C B0 ... 00 1C 3A 90
Stop angle	[1/10000°]	Int_32	4	LMS1xx TiM5xx	-450000d ... +2250000d (FFF92230h ... 225510h)	FF F9 22 30 ... 00 22 55 10
				LMS5xx	-50000d ... +1850000d (FFFF3CB0h ... 1C3A90h)	FF FF 3C B0 ... 00 1C 3A 90

Table 94: Telegram structure: sWN LMPoutputRange

[2] Note: Angular resolution can not be changed here, it is taken automatically from the basic scan settings! The angular resolution is not exactly 0.1667 degree, and this value should not be used for calculations. The result is an angular resolution of 0,1$\overline{6}$ or 1/6 of a degree (six measurements per degree). When used for calculations a customer should recover the real value, e.g. by double AngRes = 2.0 / round(2.0 / GivenAngRes).

Example: sWN LMPoutputRange 0,50° resolution, 0°-90°

CoLa A	ASCII	<STX>sWN{SPC}LMPoutputRange{SPC}1{SPC}1388{SPC}0{SPC}DBBA0<ETX>
	Hex	02 73 57 4E 20 4C 4D 50 6F 75 74 70 75 74 52 61 6E 67 65 20 31 20 31 33 38 38 20 30 20 44 42 42 41 30 03
CoLa B	Binary	02 02 02 02 00 00 00 21 73 57 4E 20 4C 4D 50 6F 75 74 70 75 74 52 61 6E 67 65 20 00 01 00 00 13 88 00 00 00 00 00 0D BB A0 F7

Table 95: Example: sWN LMPoutputRange 0,50° resolution, 0°-90°

Telegram structure: sWA LMPoutputRange						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Store parameters	String	14	All	LMPoutputRange	4C 4D 50 6F 75 74 70 75 74 52 61 6E 67 65

Table 96: Telegram structure: sWA LMPoutputRange

Example: sWA LMPoutputRange

CoLa A	ASCII	<STX>sWA{SPC}LMPoutputRange<ETX>
	Hex	02 73 57 41 20 4C 4D 50 6F 75 74 70 75 74 52 61 6E 67 65 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 57 41 20 4C 4D 50 6F 75 74 70 75 74 52 61 6E 67 65 74

Table 97: Example: sWA LMPoutputRange

4.3.3 Read for actual output range

Telegram structure: sRN LMPoutputRange						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Output range	String	14	All	LMPoutputRange	4C 4D 50 6F 75 74 70 75 74 52 61 6E 67 65

Table 98: Telegram structure: sRN LMPoutputRange

Example: sRN LMPoutputRange

CoLa A	ASCII	<STX>sRN{SPC}LMPoutputRange<ETX>
	Hex	02 73 52 4E 20 4C 4D 50 6F 75 74 70 75 74 52 61 6E 67 65 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 52 4E 20 4C 4D 50 6F 75 74 70 75 74 52 61 6E 67 65 5E

Table 99: Example: sRN LMPoutputRange

Telegram structure: sRA LMPoutputRange						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Output range	String	14	All	LMPoutputRange	4C 4D 50 6F 75 74 70 75 74 52 61 6E 67 65
Number of sectors	Indicates the number of sectors. The subsequent values will be transmitted 1 ... 4 accordingly.	Int_16	2	LMS1xx LMS5xx TiM5xx	Sector 1: 0001h	Sector 1: 0001
Angular resolution	[1/10000°]	Uint_32	4	LMS1xx	0.25°: +2500d (9C4h) 0.5°: +5000d (1388h)	0.25°: 00 00 09 C4 0.5°: 00 00 13 88
				LMS5xx	0.1667°: +1667d (683h) 0.25°: +2500d (9C4h) 0.333°: +3333d (D05h) 0.5°: +5000d (1388h) 0.667°: +6667d (1A0Bh) 1°: +10000d (2710h)	0.1667°: 00 00 06 83 0.25°: 00 00 09 C4 0.333°: 00 00 0D 05 0.5°: 00 00 13 88 0.667°: 00 00 1A 0B 1°: 00 00 27 10
				TiM5xx	0.333°: +3333d (D05h) 1°: +10000d (2710h)	0.333°: 00 00 0D 05 1°: 00 00 27 10
Start angle	[1/10000°]	Int_32	4	LMS1xx TiM5xx	-450000d ... +2250000d (FFF92230h ... 225510h)	FF F9 22 30 ... 00 22 55 10
				LMS5xx	-50000d ... +1850000d (FFFF3CB0h ... 1C3A90h)	FF FF 3C B0 ... 00 1C 3A 90
Stop angle	[1/10000°]	Int_32	4	LMS1xx TiM5xx	-450000d ... +2250000d (FFF92230h ... 225510h)	FF F9 22 30 ... 00 22 55 10
				LMS5xx	-50000d ... +1850000d (FFFF3CB0h ... 1C3A90h)	FF FF 3C B0 ... 00 1C 3A 90

Table 100: Telegram structure: sRA LMPoutputRange

Example: sRA LMPoutputRange

CoLa A	ASCII	<STX>sRA{SPC}LMPoutputRange{SPC}1{SPC}1388{SPC}FFF92230{SPC}225510<ETX>
	Hex	02 73 52 41 20 4C 4D 50 6F 75 74 70 75 74 52 61 6E 67 65 20 31 20 31 33 38 38 20 46 46 46 39 32 32 33 30 20 32 32 35 35 31 30 03
CoLa B	Binary	02 02 02 02 00 00 00 21 73 52 41 20 4C 4D 50 6F 75 74 70 75 74 52 61 6E 67 65 20 00 01 00 00 13 88 FF F9 22 30 00 22 55 10 98

Table 101: Example: sRA LMPoutputRange

4.3.4 Poll one Telegram

Output of values from last scan.

Asking the device for the measurement values of the last valid scan. The device will respond, even if it is not running at the moment.

NOTE

After changing the scanning frequency, there will be no data telegram or answer from the devices LMS1xx, LMS5xx and TiM5xx for up to 30 seconds.The same applies when the device is powering up or rebooting.



Telegram structure: sRN LMDscandata						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Only one telegram	String	11	All	LMDscandata	4C 4D 44 73 63 61 6E 64 61 74 61

Table 102: Telegram structure: sRN LMDscandata

Example: sRN LMDscandata

CoLa A	ASCII	<STX>sRN{SPC}LMDscandata<ETX>
	Hex	02 73 52 4E 20 4C 4D 44 73 63 61 6E 64 61 74 61 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 52 4E 20 4C 4D 44 73 63 61 6E 64 61 74 61 05

Table 103: Example: sRN LMDscandata



Telegram structure: sRA LMDscandata						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Find complete telegram structure of the answer in section 4.3.5 „Send data permanent“ on page 59.						

Table 104: Telegram structure: sRA LMDscandata

Example: sRA LMDscandata

CoLa A	ASCII	No ASCII answer possible.
	Hex	02 73 52 41 20 4C 4D 44 73 63 61 6E 64 61 74 61 20 01 20 01 20 89 C9 97 20 00 20 00 20 1A AE 1A B1 20 58 1C BC 15 20 58 1D 15 3D 20 00 20 00 20 07 20 00 20 00 20 13 88 20 15 20 F6 20 F9 20 F5 20 EF 20 F6 20 F2 20 EF 20 ED 20 F5 20 E9 20 F2 20 FA 20 FC 20 FF 20 F1 20 F2 20 01 07 20 FC 20 FC 20 01 02 20 FF 20 00 20 00 20 00 20 00 20 00 20 00 03
CoLa B	Binary	Find complete telegram structure of the answer in section 4.3.5 „Send data permanent“ on page 59.

Table 105: Example: sRA LMDscandata

4.3.5 Send data permanently

NOTE

After changing the scanning frequency, there will be no data telegram or answer from the devices LMS1xx, LMS5xx and TiM5xx for up to 30 seconds.The same applies when the device is powering up or rebooting.

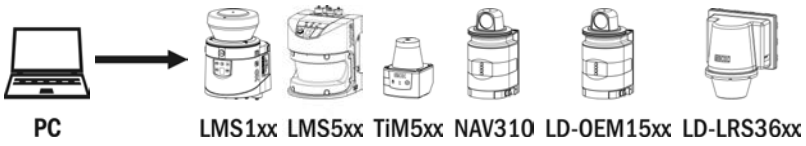

Telegram structure: sEN LMDscandata						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Event	String	3	All	sEN	73 45 4E
Command	Data telegram	String	11	All	LMDscandata	4C 4D 44 73 63 61 6E 64 61 74 61
Measure-ment	Start/stop	Enum_8	1	All	Stop: 0 Start: 1	Stop: 00 Start: 01

Table 106: Telegram structure: sEN LMDscandata

Example: sEN LMDscandata

CoLa A	ASCII	<STX>sEN{SPC}LMDscandata{SPC}1<ETX>
	Hex	02 73 45 4E 20 4C 4D 44 73 63 61 6E 64 61 74 61 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 45 4E 20 4C 4D 44 73 63 61 6E 64 61 74 61 20 01 33

Table 107: Example: sEN LMDscandata

Telegram structure: sEA LMDscandata						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sEA	73 45 41
Command	Data telegram	String	11	All	LMDscandata	4C 4D 44 73 63 61 6E 64 61 74 61
Measure-ment	Start/stop	Enum_8	1	All	Stop: 0 Start: 1	Stop: 00 Start: 01

Table 108: Telegram structure: sEA LMDscandata

Example: Confirmation of sEA LMDscandata

CoLa A	ASCII	<STX>sEA{SPC}LMDscandata{SPC}1<ETX>
	Hex	02 73 45 41 20 4C 4D 44 73 63 61 6E 64 61 74 61 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 45 41 20 4C 4D 44 73 63 61 6E 64 61 74 61 20 01 33

Table 109: Example: Confirmation of sEA LMDscandata

Telegram stream

The answer to the telegram will be followed by the scandata:

NOTE

Leading zeros of a value will not be displayed in ASCII.

Telegram structure: sRA LMDscandata/sSN LMDscandata							
Telegram part		**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type		Read	String	3	All	sRA sSN	73 52 41 73 53 4E
Command		Data telegram	String	11	All	LMDscandata	4C 4D 44 73 63 61 6E 64 61 74 61
Version number		For detecting format changes by the version. Version is always 1 up to now.	Uint_16	2	All	0000h ... FFFFh	00 00 ... FF FF
Device	Device number	Defined with SOPAS	Uint_16	2	All	0000h ... FFFFh	00 00 ... FF FF
	Serial number	Defined in factory	Uint_32	4	All	00000000h ... FFFFFFFFh	00 00 00 00 ... FF FF FF FF

Telegram structure: sRA LMDscandata/sSN LMDscandata							
Telegram part		**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
	Device status	(See values column)	Uint_8	2 × 1	All	Ok: 00 00 Error: 00 01 Pollution warning: 00 02 Pollution error: 00 05 (Not available for TiM, LD-Series and NAV310)	00 00 00 01 00 02 00 05 (Not available for TiM, LD-Series and NAV310)
Status info	Telegram counter	Number of measurement telegrams finished in the scanner and given to the interface. [3)]	Uint_16	2	All	0000h ... FFFFh	00 00 ... FF FF
	Scan counter	Number of scans which were created in the device; counts how many scans were really done.	Uint_16	2	All	0000h ... FFFFh	00 00 ... FF FF
	Time since start up	Counting the time since power up the device; starting with 0. In the output telegram this is the time at the zero index (-14°) before the measurement itself starts.	Uint_32	4	All	00000000h ... FFFFFFFFh	00 00 00 00 ... FF FF FF FF

[3)] Does not count how many telegrams were really given out; is relevant if not all scans are delivered from the scan core.

Telegram structure: sRA LMDscandata/sSN LMDscandata							
Telegram part		Description	Variable	Length	Sensor	Values CoLa A (ASCII)	Values CoLa B (Binary)
	Time of transmission	Time in µs when the complete scan is transmitted to the buffer for data output; starting with 0 at scanner bootup.	Uint_32	4	All	00000000h ... FFFFFFFFh	00 00 00 00 ... FF FF FF FF
	Status of digital inputs	Low byte represents input 1.	Uint_8	2 × 1	LMS1xx LMS5xx TiM5xx	All inputs low: 00 00 All inputs high: 00 03	00 00 00 03
	Status of digital outputs	Low byte represents output 1.	Uint_8	2 × 1	All	All outputs low: 00 00 TiM3xx: • All internal outputs high: 00 0F LMS1xx: • All internal outputs high: 00 07 •All outputs high (inkl. Ext. Out): 07 FF LMS5xx: • All internal outputs high: 00 3F • All outputs high (inkl. Ext. Out): 3F FF LDXXX •All outputs high: 00 0F	All outputs low: 00 00 TiM3xx: • All internal outputs high: 00 0F LMS1xx: • All internal outputs high: 00 07 •All outputs high (inkl. Ext. Out): 07 FF LMS5xx: • All internal outputs high: 00 3F • All outputs high (inkl. Ext. Out): 3F FF LDXXX All outputs high: 00 0F
	Reserved	–	Uint_16	2	All	0	0

Telegram structure: sRA LMDscandata/sSN LMDscandata							
Telegram part		**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Frequencies	Scan frequency	[1/100 Hz]	Uint_32	4	LMS1xx	25 Hz: +2500d (9C4h) 50 Hz: +5000d (1388h)	09 C4 13 88
					LMS5xx	25 Hz: +2500d (9C4h) 35 Hz: +3500d (DACh) 50 Hz: +5000d (1388h) 75 Hz: +7500d (1A0Bh) 100 Hz: +10000d (2710h)	09 C4 0D AC 13 88 1A 0B 27 10
					TiM5xx	15 Hz: +1500d (5DCh)	05 DC
					NAV310 LD-OEM 15xx	5 Hz ... 20 Hz: +500d ... +2000d (1F4h ... 7D0h)	01 F4 ... 07 D0
					LD-LRS 36xx	5 Hz ... 15 Hz: +500d ... +1500 (1F4h ... 5DCh))	01 F4 ... 05 DC
	Measurement frequency	Inverse of the time between two measurement shots (in 100 Hz), Example: 50 Hz, 0.5° resolution ➜ 720 shots/20 ms ➜ 36 kHz	Uint_32	4	All	00000000h ... FFFFFFFFh	00 00 00 00 ... FF FF FF FF
Amount of encoder			Enum_16	2	All	0 ... 3 If 0, then next two values are missing.	00 ... 03
Values	Encoder position	Info in ticks	Uint_32	4	LMS1xx LMS5xx	00000000h ... FFFFFFFFh	00 00 00 00 ... FF FF FF FF
	Encoder speed	Ticks/mm	Uint_16	2	LMS1xx LMS5xx	0000h ... FFFFh	00 00 ... FF FF
Amount of 16 bit channels		Number of 16 bit channels that provide measured data	Uint_16	2	TiM5xx	Output channel: 1	Output channel: 01
					LMS1xx	Output channels: 1, 2 or 4	Output channels: 01, 02 or 04
					LMS5xx	Output channels: 1 or 5	Output channels: 01 or 05
					NAV310 LD-OEM 15xx LD-LRS 36xx	Depending on amount of sectors and selection of output of distance or distance and remission RSSI	Depending on amount of sectors and selection of output of distance or distance and remission RSSI
						Example (2 sectors): If 2 channels: sectors 1 + 2 contain Dist1 If 4 channels: sectors 1 + 2 contain Dist + RSSI1	Example (2 sectors): If 2 channels: sectors 1 + 2 contain Dist1 If 4 channels: sectors 1 + 2 contain Dist + RSSI1

Telegram structure: sRA LMDscandata/sSN LMDscandata							
Telegram part		Description	Variable	Length	Sensor	Values CoLa A (ASCII)	Values CoLa B (Binary)
Output channel (16 bit)	Content	Defines the content of the output channel	String	5	LMS1xx	DIST1: Radial values of first pulse in mm	44 49 53 54 31
						DIST2: Radial values of second pulse in mm	44 49 53 54 32
						RSSI1: Energy values of first pulse	52 53 53 49 31
						RSSI2: Energy values of second pulse	52 53 53 49 32
					LMS5xx (with Software ≥V1.10 only)	DIST1	44 49 53 54 31
						DIST2	44 49 53 54 32
						DIST3	44 49 53 54 33
						DIST4	44 49 53 54 34
						DIST5	44 49 53 54 35
					TiM5xx	DIST1	44 49 53 54 31
					NAV310 LD-OEM 15xx LD-LRS 36xx	DIST1: Radial values of first pulse in mm	44 49 53 54 31
						RSSI1: Energy values of first pulse	52 53 53 49 31
	Scale factor	Scale factor or factor of the measurement values (for the LMS5xx this depends on the angular resolution)	Real as float according to IEEE754	4	LMS1xx LMS5xx TiM5xx	Factor × 1: 3F800000h	3F 80 00 00
						Factor × 2: 40000000h	40 00 00 00
					NAV310 LD-OEM 15xx LD-LRS 36xx	Factor × 4: 40800000h	04 08 00 00
	Scale factor offset	Sets starting point of measurement	Real as float according to IEEE754	4	LMS1xx LMS5xx TiM5xx	00000000h	00 00 00 00
					NAV310 LD-OEM 15xx LD-LRS 36xx	00000000h ... FFFFFFFFh	00 00 00 00 ... FF FF FF FF
	Start angle	[1/10000°]	Uint_32	4	LMS1xx TiM5xx	-450000d ... +2250000d (FFF92230h ... 225510h)	FF F9 22 30 ... 00 22 55 10
					LMS5xx	-50000d ... +1850000d (FFFF3CB0h ... 1C3A90h)	FF FF 3C B0 ... 00 1C 3A 90
					NAV310 LD-OEM 15x1 LD-LRS 36x1	0d ... +3600000d (0h ... 36EE80h)	00 00 00 00 ... 00 36 EE 80
					LD-OEM 15x0 LD-LRS 36x0	-900000d ... +2700000d (FFF24460h ... 41EB0h)	FF F2 44 60 ... 00 04 1E B0

Telegram structure: sRA LMDscandata/sSN LMDscandata							
Telegram part		**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
	Size of single angular step	Output format in degree: 1/10000°	Uint_16	2	LMS1xx	+2500d ... +5000d (9C4h ... 1388h)	09 C4 ... 13 88
					LMS5xx	+1667d ... +10000d (683h ... 2710h)	06 83 ... 27 10
					TiM5xx	+333d ... +10000d (D05h ... 2710h)	0D 05 ... 27 10
					NAV310 LD-OEM 15xx LD-LRS 36xx	0,125° ... 1° def. 0,25° +1250d ... +10000d (4E2h ... 2710h) (Default: 09C4h = 0,25°)	00 00 04 E2 ... 00 00 27 10 (Default: 09 C4)
	Amount of data	Defines the number of items on measured output	Uint_16	2	All	0000h ... FFFFh	00 00 ... FF FF
	Data_1 Data_n	Data stream starting Data_1 to Data_n [4]	Uint_16	2	LMS100	0000h ... 4E20h	00 00 00 00 ... 00 00 4E 20
					LMS150	0000h ... C350h	00 00 00 00 ... 00 00 C3 50
					LMS5xx	0000h ... FDE8h	00 00 00 00 ... 00 00 FD E8
					TiM5xx	0000h ... FA0h	00 00 00 00 ... 00 00 0F A0
					TiM5xx	0000h ... 2710h	00 00 00 00 ... 00 00 27 10
					NAV310 LD-OEM 15xx LD-LRS 36xx	0000h ... 0992h	00 00 00 00 ... 00 00 09 92
For NAV310/LD-OEM15xx/LRS: The array “Output channel 16 bit ” has various dimensions “Amount of 16 Bit Channels”, depending on the amount of sectors and if RSSI (output of remission values) is selected as on or off: • If RSSI was not selected (by LMDscandatacfg); there are 2 channels with the contents ○ Channel 1: First sector (Test target), content: DIST1 ○ Channel 2: Second sector (Main profile data), content: DIST1 • If RSSI was selected (by LMDscandatacfg); there are 4 channels with the contents ○ Channel 1: First sector (Test target), content: DIST1 ○ Channel 2: First sector (Test target), content: RSSI1 ○ Channel 3: Second sector (Main profile data), content: DIST1 ○ Channel 4: Second sector (Main profile data), content: RSSI1 The number behind DIST and RSSI is the order number of the pulse. As the NAV310/LD-OEM15xx/LD-LRS36xx scanner are working with a single pulse measurement, it is always “1”.							
Amount of 8 bit		Amount of 8 bit channels, giving out	Enum_16	2	LMS1xx	Output channels: 1 or 2	Output channels: 01 or 02
					LMS5xx	Output channels: 1 or 5	Output channels: 01 or 05

[4] LMS1xx without limit.

Telegram structure: sRA LMDscandata/sSN LMDscandata							
Telegram part		**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
channels		the measured data			TiM5xx NAV310 LD-OEM 15xx LD-LRS 36xx	Output channels: 0	Output channels: 00
Output channel (8 bit)	Con-tent	Defines the content of the output channel	String	5	LMS1xx	DIST1 DIST2 RSSI1 RSSI2	44 49 53 54 31 44 49 53 54 32 52 53 53 49 31 52 53 53 49 32
				5	LMS5xx (with Software ≥V1.10 only)	DIST1 DIST2 DIST3 DIST4 DIST5	44 49 53 54 31 44 49 53 54 32 44 49 53 54 33 44 49 53 54 34 44 49 53 54 35
				5	TiM5xx	DIST1 RSSI1	44 49 53 54 31 52 53 53 49 31
	Scale factor	Scale factor or of the measurement values (in LMS5xx depends on the angular resolution)	Real as float according to IEEE754	4	All	Factor × 1: 3F800000h Factor × 2 (values have to be scaled by factor two): 40000000h	3F 80 00 00 40 00 00 00
	Scale factor offset	Sets starting point of measurement	Real as float according to IEEE754	4	LMS1xx LMS5xx	00000000h	00 00 00 00
	Start angle	Output format: 1/10000°	Int_32	4	LMS1xx	-450000d … +2250000d	FF F9 22 30 … 00 22 55 10
					LMS5xx	-50000d … 1850000d	FF FF 3C B0 … 00 1C 3A 90
	Size of single angu-lar step	Output format: 1/10000°	Uint_16	2	LMS1xx	+1000d … +10000d	03 E8 … 27 10
					LMS5xx	+1667d … +10000d	06 83 … 27 10
	Amou nt of data	Amount	Uint_16	2	All	0000h … FFFFh	00 00 … FF FF
	Data_ 1 Data_ n	Data stream starting Data_1 to Data_n	Uint_8	1	All	00h … FFh	00 … FF

Telegram structure: sRA LMDscandata/sSN LMDscandata							
Telegram part		**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Position		Output of position data	Enum_16	2	All	No position data: 0 Position data: 1	No position data: 00 00 Position data: 00 01
Position information	X position	X-coordinate as float acco. to IEEE754	Real	4	All	0h … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Y position	Y-coordinate as float acco. to IEEE754	Real	4	All	0h … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Z position	Z-coordinate as float acco. to IEEE754	Real	4	All	0h … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	X rotation	X rotation in the coordinate system	Real	4	All	0h … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Y rotation	Y rotation in the coordinate system	Real	4	All	0h … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Z rotation	Z rotation in the coordinate system	Real	4	All	0h … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Rotations type	Kind of rotation	Enum_8	1	All	No rotation: 0 Pitch: 1 Roll: 2 Free: 3	No rotation: 00 Pitch: 01 Roll: 02 Free: 03
	Transmits the name of device	Device name	Uint_8	1	All	No name: 0 Name: 1	No name: 00 Name: 01
Name		Device name	Uint_16	2	All	No name: 0 Name: 1	No name: 00 00 Name: 00 01
Name information	Length	Length of name	Uint_8	1	All	0h … Fh	00 … 0F
	Name	Device name in characters	String	16	All	20h … 7Ah	20 … 7A
Comment		Comment	Uint_16	2	All	No comment: 0 Comment: 1	No comment: 00 00 Comment: 00 01
Comment information	Length	Length of comment	Uint_8	1	All	0h … Fh	00 … 0F
	Comment	Transmits a comment in characters	String	16	All	20h … 7Ah	20 … 7A

Telegram structure: sRA LMDscandata/sSN LMDscandata							
Telegram part		Description	Variable	Length	Sensor	Values CoLa A (ASCII)	Values CoLa B (Binary)
Time		Transmits a time stamp	Uint_16	2	All	No time: 0 Time: 1	No time: 00 00 Time: 00 01
Time info	Year		Uint_16	2	All	0000h … 270Fh	00 00 … 27 0F
	Month	1 to 12	Uint_8	1	All	00h … 0Ch	00 … 0C
	Day	Day of month 1 to 31	Uint_8	1	All	00h … 1Fh	00 … 1F
	Hour	0 to 23	Uint_8	1	All	00h … 17h	00 … 17
	Min-ute	0 to 59	Uint_8	1	All	00h … 3Bh	00 … 3B
	Sec-ond	0 to 59	Uint_8	1	All	00h … 3Bh	00 … 3B
	Micro-sec-ond	0 to 999999	Uint_32	4	All	00000000h … 000F423Fh	00 00 00 00 … 00 0F 42 3F
Event info		Display event info	Uint_16	2	All	No info: 0 Transmit info: 1	No info: 00 00 Transmit info: 00 01
Event Information	Type	Fast digital input	String	4	All	FDIN	FDIN
	Encod er posi-tion	Position of encoder when event happened	Uint_32	4	All	00000000h … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Time of event	Time (µs) of encoder when event happened	Uint_32	4	All	00000000h … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Angle of event	Angle of encoder when event happened	Int_32	4	All	0 … 3600000	00 00 00 00 … 00 36 EE 80

Table 110: Telegram structure: Datastream of sRA LMDscandata/sSN LMDscandata

NOTE

- The grey written parts are not given out by the sensor.
- The event information is not available with the LMS1xx and with the LMS5xx only with firmware V1.20 or higher.
- The order of events within the data structure is “newest” first.

LMDscandata - reserved values

Valid measurement values are values starting from 16d upwards, everything below has the following meaning:

Value	RSSI	Description
0d	0h	no meas value detected; means that in the angle, there was no valid measurement value. Probably the object to measure was out of the range of the or the object was reflecting too less light back (black objects)
1d	FFFFh (16Bit output) FFh (8Bit output)	dazzled, geblendet
2d	0h	implausible measurement values
3d	0h	value was set to invalid by a filter (Echo Filter, Particle Filter in old firmware)
4d – 15d	0h	reserved, at the moment not given out, if there occurs a value in that range anyway → perform a Softwareupdate
>16d	>0h	valid measurement values

Valid for LMS1xx/5xx, TiM5xx

max. measurement value TiM5xx: Dez: 10.000mm --> Hex: 2710
max. measurement value TiM57x: Dez: 25.000mm --> Hex: 61A8
max. measurement value LMS1xx: Dez: 20.000mm --> Hex: 4E20
max. measurement value LMS15x: Dez: 50.000mm --> Hex: C350
max. measurement value LMS5xx: Dez: 65.000mm --> Hex: FDE8
max. measurement value LMS5xx: Dez: 80.000mm --> Hex: 9C40 with scale factor 2 --> 13880

Higher measurement values will be given out with a zero, that means no measurement value detected.

Calculation and amount of data for LMS5xx

Example how to calculate the amount of data for a measurement telegram.

Sizes of values and telegram parts:

- one measurement value: 5 byte (4 byte value itself, 1 byte blank after the value)
- one RSSI value: 3 byte (2 byte value itself, 1 byte blank after the value)
- telegram header: 81 byte
- telegram end: 12 byte

Calculation of number of Measurement values depends always on the resolution:

0.5° = 2 measurements per degree

0.25° = 4 measurements per degree

Always one additional measurement for the last measurement

Number of measurement values =

Number of degrees × measurements per degree + 1

Example for measurement of 56° in 0.5° resolution (without RSSI data):

56 × 2 + 1 = 113 Measurement values

Amount of Data for this measurement values:

113 × 5 Byte = 565 Byte

Calculation of amount of data per telegram:

Data of one Telegram = Header + Measurements + end of telegram

81 Byte + 113 Measurements + 12 Byte

81 Byte + (113 × 5Byte) + 12 Byte =

658 Byte per Telegram (= 5264 Bit (658 × 8 Bit))

Possible amout for delivery with special Speed:

Number of telegrams per second = Speed ÷ telegram size

Speed Example:

115200 Bit/s = 11520 Byte/s = 11,52 Byte/s

11520 (Byte/s) ÷ 658 Byte = 17,5 Telegrams/s

Telegram size with **0,25°** resolution:

Degrees: 270°

Resolution: 0.25°

→Measurement Values = 270 × 4 + 1 = 1081

Data per Telegram =

81 Byte + (1081 × 5 Byte) + 12 Byte = **5498 Byte** (= 43984 Bit)

Telegram size with **0,5°** resolution:

Degrees: 270°

Resolution: 0.5°

→Measurement Values = 270 × 2 + 1 = 541

Data per Telegram =

81 Byte + (541 × 5 Byte) + 12 Byte = **2798 Byte** (= 22384 Bit)

As a result in that configuration a 10 MBit connection will not be enough. With a 100 MBit Hub, 3-4 scanner can be used, with a 1 GBit Hub accordingly more.

Example of a telegram stream

Example: telegram LMS1xx, LMS5xx similar with corresponding values (10°-20° data range)

ASCII

<STX>sRA{SPC}LMDscandata{SPC}1{SPC}1{SPC}89A27F{SPC}0{SPC}0{SPC}343{SPC}347{SPC}27477BA9{SPC}2747813B{SPC}0{SPC}0{SPC}7{SPC}0{SPC}0{SPC}1388{SPC}168{SPC}0{SPC}1{SPC}DIST1{SPC}3F800000{SPC}00000000{SPC}186A0{SPC}1388{SPC}15{SPC}8A1{SPC}8A5{SPC}8AB{SPC}8AC{SPC}8A6{SPC}8AC{SPC}8B6{SPC}8C8{SPC}8C2{SPC}8C9{SPC}8CB{SPC}8C4{SPC}8E4{SPC}8E1{SPC}8EB{SPC}8E0{SPC}8F5{SPC}908{SPC}8FC{SPC}907{SPC}906{SPC}0{SPC}0{SPC}0{SPC}0{SPC}0{SPC}0<ETX>

BINARY

02 02 02 02 00 00 00 83 73 52 41 20 4C 4D 44 73 63 61 6E 64 61 74 61 20 00 01 00 01 00 89 A2 7F 00 00 03 43 03 47 27 47 7B A9 27 47 81 3B 00 00 07 00 00 00 00 00 13 88 00 00 01 68 00 00 00 01 44 49 53 54 31 3F 80 00 00 00 00 00 00 00 01 86 A0 13 88 00 15 08 93 08 95 08 AF 08 B3 08 B0 08 A4 08 B0 08 BF 08 B9 08 BA 08 D0 08 D3 08 CF 08 DE 08 EB 08 E3 08 FE 08 EC 09 03 08 FD 08 FD 00 00 00 00 00 00 00 00 00 00 00 00 2B

Telegram structure: sRA LMDscandata (Example)				
Telegram part	**Variable**	**Length**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Frame/header			02 <STX>	02 02 02 02
Length				00 00 00 83
Command type	String	3	sRA{SPC}	73 52 41 20
Command	String	11	LMDscandata{SPC}	4C 4D 44 73 63 61 6E 64 61 74 61 20
Version number	Uint_16	2	1{SPC}	00 01
Device number	Uint_16	2	1{SPC}	00 01

Telegram structure: sRA LMDscandata (Example)					
Telegram part		Variable	Length	Values CoLa A (ASCII)	Values CoLa B (Binary)
	Serial number	Uint_32	4	89A27F{SPC} Dec: 9020031	00 89 A2 7F
	Device status	Uint_8	2 × 1	0{SPC}0{SPC}	00 00
Status information	Telegram counter	Uint_16	2	343{SPC} Dec: 835	03 43
	Scan counter	Uint_16	2	347{SPC} Dec: 839	03 47
	Time since start up [µs]	Uint_32	4	27477BA9{SPC} Dec: 658996137	27 47 7B A9
	Time of transmission [µs]	Uint_32	4	2747813B{SPC} Dec: 568997563	27 47 81 3B
	Status of digital inputs	Uint_8	2 × 1	0{SPC}0{SPC}	00 00
	Status of digital outputs	Uint_8	2 × 1	7{SPC}0{SPC} Corresponds to status 0111	07 00
	Reserved	Uint_16	2	0{SPC}	00 00
Frequencies	Scan frequency	Uint_32	4	1388{SPC} Dec: 50 Hz: 5000	00 00 13 88
	Measurement frequency	Uint_32	4	168{SPC}	00 00 01 68
Amount of encoder		Enum_16	2	0{SPC} No encoder data	00 00
Position information	Encoder position	Uint_16	2	Not generated, not existing because amount is 0	Not generated, not existing because amount is 0
	Encoder speed	Uint_16	2	Not generated, not existing because amount is 0	Not generated, not existing because amount is 0
Amount of 16 bit channels		Enum_16	2	1{SPC}	00 01
Output channel (16 bit)	Content	String	5	DIST1{SPC}	44 49 53 54 31
	Scale factor according to IEEE754	Real	4	3F800000{SPC} Floating Point: Value = 1	3F 80 00 00
	Scale factor offset acco. to IEEE754	Real	4	0{SPC} Floating Point: Value = 0	00 00 00 00
	Start angle	Int_32	4	186A0{SPC} Dec: 100000	00 01 86 A0
	Size of single angular step	Uint_16	2	1388{SPC} Dec: 5000	13 88
	Amount of data	Uint_16	2	15{SPC} Dec: 21 measurement points	00 15
	Data_1 ... Data_21	Uint_16	2	8A1{SPC}8A5{SPC}8AB{SPC}8AC{SPC}8A6{SPC}8AC{SPC}8B6{SPC}8C8{SPC}8C2{SPC}8C9{SPC}8CB{SPC}8C4{SPC}8E4{SPC}8E1{SPC}8EB{SPC}8E0{SPC}8F5{SPC}908{SPC}8FC{SPC}907{SPC}906{SPC} Measurement data Min. 22 mm: 16h Max. 20000 mm: 4E20h	08 A1 08 A5 08 AB 08 AC 08 A6 08 AC 08 B6 08 C8 08 C2 08 C9 08 CB 08 C4 08 E4 08 E1 08 EB 08 E0 08 F5 09 08 08 FC 09 07 09 06

Telegram structure: sRA LMDscandata (Example)					
Telegram part		**Variable**	**Length**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Amount of 8 bit channels		Enum_16	2	0{SPC} No 8 bit data	00 00 No 8 bit data
Output channel (8 bit)	Content	String	5	–	–
	Scale factor	Real	4	–	–
	Scale factor offset	Real	4	–	–
	Start angle	Int_32	4	–	–
	Size of single angular step	Uint_16	2	–	–
	Amount of data	Uint_16	2	–	–
	Data_1 Data_n	Uint_8	1	–	–
Position		Enum_16	2	0{SPC} No position data	00 00 No position data
Position information	X position	Real	4	–	–
	Y position	Real	4	–	–
	Z position	Real	4	–	–
	X rotation	Real	4	–	–
	Y rotation	Real	4	–	–
	Z rotation	Real	4	–	–
	Rotations type	Enum_8	1	–	–
	Transmits the name of device	Uint_8	1	–	–
Name		Enum_16	2	0{SPC} No device name	00 00 No device name
Name info	Length of name	Enum_8	1	–	–
	Name in characters	String	2	–	–
Comment		Enum_16	2	0{SPC} No comment	00 00 No comment
Com-ment	Length of comment	Enum_8	1	–	–
	Comment in characters	String	2	–	–

Telegram structure: sRA LMDscandata (Example)					
Telegram part		Variable	Length	Values CoLa A (ASCII)	Values CoLa B (Binary)
Time		Enum_16	2	0{SPC} No time transmitted	00 00 No time transmitted
Time info	Year	Uint_16	2	–	–
	Month	Uint_8	1	–	–
	Day	Uint_8	1	–	–
	Hour	Uint_8	1	–	–
	Minute	Uint_8	1	–	–
	Second	Uint_8	1	–	–
	Microsecond	Uint_32	4	–	–
Event info		Enum_16	2	0{SPC} No event info available	00 00 No event info available
Event information	Type	String	4	–	–
	Encoder position	Uint_32	4	–	–
	Time of event	Uint_32	4	–	–
	Angle of event	Int_32	4	–	–
Frame				03 <ETX>	2B Checksum

Table 111: Example of one telegram stream

4.4 Time stamp

4.4.1 Set time stamp

The data format in the telegram is:
+2009{SPC}+7{SPC}+22{SPC}+12{SPC}+0{SPC}+0{SPC}+0.
The numbers represent year, month, day, hour, minute, second, microsecond).

If plus is used up-front the data it is interpreted as an integer decimal number, without the plus it's the scanner reads the data as hex format.

The answer is always in ASCII format.

Attention: There is no real time clock inside the device. When the scanner is switched off and after a reboot, the time has to be set again.

However, it is possible to analyze the Off-time in order to evade this issue.

Telegram structure: sMN LSPsetdatetime (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Set time stamp	String	14	All	LSPsetdatetime	4C 53 50 73 65 74 64 61 74 65 74 69 6D 65
Year		Uint_16	2	All	1970d ... +2099d (07B2h ... 0833h)	07 b2 ... 08 33
Month		Uint_8	1	All	01d ... +12d (01h ... 0Ch)	01 ... 0C
Day		Uint_8	1	All	01d ... +31d (01h ... 1Fh)	00 ... 1F
Hour		Uint_8	1	All	00d ... +23d (00h ... 17h)	00 ... 17
Minute		Uint_8	1	All	00d ... +59d (00h ... 3Bh)	00 ... 3B
Second		Uint_8	1	All	00d ... +59d (00h ... 3Bh)	00 ... 3B
Micro-second		Uint_32	4	All	00000000d ... +00999999d (00000000h ... 000F423Fh)	00 00 00 00 ... 00 0F 42 3F

Table 112: Telegram structure: sMN LSPsetdatetime

Example 1: sMN LSPsetdatetime

CoLa A	ASCII	<STX>sMN{SPC}LSPsetdatetime{SPC}7D9{SPC}2{SPC}11{SPC}10{SPC}22{SPC}0{SPC}0<ETX>
	Hex	02 73 4D 4E 20 4C 53 50 73 65 74 64 61 74 65 74 69 6D 65 20 37 44 39 20 32 20 31 31 20 31 30 20 32 32 20 30 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 1E 73 4D 4E 20 4C 53 50 73 65 74 64 61 74 65 74 69 6D 65 20 07 D9 02 11 10 22 00 00 00 00 00 A3

Table 113: Example 1: sMN LSPsetdatetime

Example 2: sMN LSPsetdatetime

CoLa A	ASCII	<STX>sMN{SPC}LSPsetdatetime{SPC}+2010{SPC}+01{SPC}+26{SPC}+10{SPC}+35{SPC}0{SPC}0<ETX>
	Hex	02 73 4D 4E 20 4C 53 50 73 65 74 64 61 74 65 74 69 6D 65 20 2B 32 30 31 30 20 2B 30 31 20 2B 32 36 20 2B 31 30 20 2B 33 35 20 2B 30 30 20 2B 30 30 30 30 03
CoLa B	Binary	02 02 02 02 00 00 00 1E 73 4D 4E 20 4C 53 50 73 65 74 64 61 74 65 74 69 6D 65 20 07 DA 01 1A 0A 23 00 00 00 00 00 A3

Table 114: Example 2: sMN LSPsetdatetime

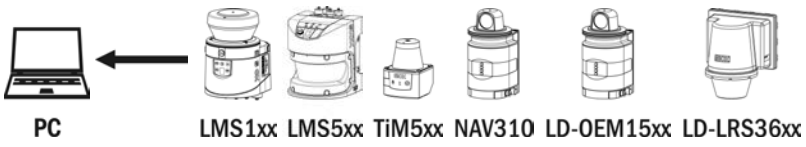

Telegram structure: sAN LSPsetdatetime						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Set time stamp	String	14	All	LSPsetdatetime	4C 53 50 73 65 74 64 61 74 65 74 69 6D 65
Status code	Code number	Enum_8	1	All	Success: 1	Success: 01

Table 115: Telegram structure: sAN LSPsetdatetime

Example 1, 2: sAN LSPsetdatetime

CoLa A	ASCII	<STX>sAN{SPC}LSPsetdatetime{SPC}1<ETX>
	Hex	02 73 41 4E 20 4C 53 50 73 65 74 64 61 74 65 74 69 6D 65 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 14 73 41 4E 20 4C 53 50 73 65 74 64 61 74 65 74 69 6D 65 20 01 51

Table 116: Example 1, 2: sAN LSPsetdatetime

Activate time stamp in the output string format or on SOPAS page “data processing”.

4.4.2 Read for time stamp and device status

Command: sRN STIms



Telegram structure: sRN STIms						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Status and time	String	5	All	STIms	53 54 6C 6D 73

Table 117: Telegram structure: sRN STIms

Example: sRN STIms

CoLa A	ASCII	<STX>sRN{SPC}STIms<ETX>
	Hex	02 73 52 4E 20 53 54 6C 6D 73 03
CoLa B	Binary	02 02 02 02 00 00 00 09 73 52 4E 20 53 54 6C 6D 73 3A

Table 118: Example: sRN STIms

Answer: sRA STIms

Telegram structure: sRA STIms						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Status and time	String	5	All	STIms	53 54 6C 6D 73
Status code	Device status	Enum_ 16	2	All	Undefined: 0 Initialization: 1 Configuration: 2 Lower case: 3 Rotating: 4 In preparation: 5 Ready: 6 Measurement active: 7	Undefined: 00 00 Initialization: 00 01 Configuration: 00 02 Lower case: 00 03 Rotating: 00 04 In preparation: 00 05 Ready: 00 06 Measurement active: 00 07
Temp. out of range	Device running in temp. range or not	Uint_8	1	All	False (in range) = 0	False (in range) = 00

Telegram structure: sRA STIms						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
					True (out of range = 1	True (out of range = 01
Length (of time parameter)		Uint_16	2	All	0d ... +65535d (00h ... FFFFh)	00 00 ... FF FF
Time	HH HH	Uint_16	2	All	0d ... 99d	00 00 ... 00 63
	:	Uint_8	1	All	:	3A
	MM MM	Uint_16	2	All	0d ... 99d	00 00 ... 00 63
	:	Uint_8	1	All	:	3A
	SS SS	Uint_16	2	All	0d ... 99d	00 00 ... 00 63
Length (of date parameter)		Uint_16	2	All	0d ... +65535d (00h ... FFFFh)	00 00 ... FF FF
Date	DD DD	Uint_16	2	All	0d ... 99d	00 00 ... 00 63
	.	Uint_8	1	All	.	2E
	MM MM	Uint_16	2	All	0d ... 99d	00 00 ... 00 63
	.	Uint_8	1	All	.	2E
	YY YY YY YY	Uint_32	4	All	0d ... 9999d	00 00 00 00 ... 00 00 27 0F
LED1		Uint_16	2	All	Inactive: 0 Active: 1	Inactive: 00 00 Active: 00 01
LED2		Uint_16	2	All	Inactive: 0 Active: 1	Inactive: 00 00 Active: 00 01
LED3		Uint_16	2	All	Inactive: 0 Active: 1	Inactive: 00 00 Active: 00 01
Reserved		Uint_16	3 × 2	All	0 0 0	00 00 00 00 00 00

Table 119: Telegram structure: sRA STIms

Example: sRA STIms

CoLa A	ASCII	<STX>sRA{SPC}STIms{SPC}7{SPC}0{SPC}8{SPC}16:36:54{SPC}10{SPC}17.03.2030{SPC}0{SPC}0{SPC}0<ETX>
	Hex	Not available
CoLa B	Binary	02 02 02 02 00 00 00 2F 73 52 41 20 53 54 6C 6D 73 20 00 07 00 00 08 00 10 3A 00 24 3A 00 36 00 0A 00 11 2E 00 03 2E 00 00 07 EE 00 00 00 00 00 00 00 00 00 00 00 00 17

Table 120: Example: sRA STIms

4.4.3 Read for device time

Command to read the actual time of the internal clock (ms).

The timer is 32 counter with a resolution of 1 ms.

Telegram structure: sRN DeviceTime						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Timer of device	String	10	All	DeviceTime	44 65 76 69 63 65 54 69 6D 65

Table 121: Telegram structure: sRN DeviceTime

Example: sRN DeviceTime

CoLa A	ASCII	<STX>sRN{SPC}DeviceTime<ETX>
	Hex	02 73 52 4E 20 44 65 76 69 63 65 54 69 6D 65 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 52 4E 20 44 65 76 69 63 65 54 69 6D 65 42

Table 122: Example: sRN DeviceTime

Telegram structure: sRA DeviceTime						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Timer of device	String	10	All	DeviceTime	44 65 76 69 63 65 54 69 6D 65
Device time	Time	Uint_32	4	All	0d ... +9999d (0h ... 270Fh)	00 00 00 00 ... 00 00 27 0F

Table 123: Telegram structure: sRA DeviceTime

Example: sRA DeviceTime 0

CoLa A	ASCII	<STX>sRA{SPC}DeviceTime{SPC}0<ETX>
	Hex	0273 52 41 20 44 65 76 69 63 65 54 69 6D 65 20 00 03
CoLa B	Binary	02 02 02 02 00 00 00 10 73 52 41 20 44 65 76 69 63 65 54 69 6D 65 00 00 00 00 6D

Table 124: Example: sRA DeviceTime 0

4.4.4 Set NTP (Network Time Protocol) parameters

Set time synchronization

Telegram structure: sWN TSCRole (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set NTP role	String	7	All	TSCRole	54 53 43 52 6F 6C 65
Variable data	NTP role	Uint_8	1	All	None: 0 Client: 1 Server: 2	None: 00 Client: 01 Server: 02

Table 125: Telegram structure: sWN TSCRole

Example: sWN TSCRole

CoLa A	ASCII	<STX>sWN{SPC}TSCRole{SPC}1<ETX>
	Hex	02 73 57 4E 20 54 53 43 52 6F 6C 65 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 0D 73 57 4E 20 54 53 43 52 6F 6C 65 20 01 1B

Table 126: Example: sWN TSCRole

Telegram structure: sWA TSCRole						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set NTP role	String	7	All	TSCRole	54 53 43 52 6F 6C 65

Table 127: Telegram structure: sWA TSCRole

Example: sWA TSCRole

CoLa A	ASCII	<STX>sWA{SPC}TSCRole<ETX>
	Hex	02 73 57 41 20 54 53 43 52 6F 6C 65 03
CoLa B	Binary	02 02 02 02 00 00 00 0C 73 57 41 20 54 53 43 52 6F 6C 65 20 15

Table 128: Example: sWA TSCRole

Set time synchronization interface

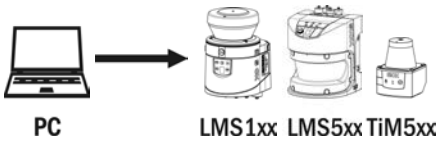

Telegram structure: sWN TSCTCInterface (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set time synchronization interface	String	14	All	TSCTCInterface	54 53 43 54 43 49 6E 74 65 72 66 61 63 65
Variable data	Time synchronization interface data	Uint_8	1	All	Ethernet: 0 CAN: 1	Ethernet: 00 CAN: 01

Table 129: Telegram structure: sWN TSCTCInterface

Example: sWN TSCTCInterface

CoLa A	ASCII	<STX>sWN{SPC}TSCTCInterface{SPC}0<ETX>
	Hex	02 73 57 4E 20 54 53 43 54 43 49 6E 74 65 72 66 61 63 65 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 14 73 57 4E 20 54 53 43 54 43 49 6E 74 65 72 66 61 63 65 20 00 7C

Table 130: Example: sWN TSCTCInterface

Telegram structure: sWA TSCTCInterface						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set time synchronization	String	14	All	TSCTCInterface	54 53 43 54 43 49 6E 74 65 72 66 61 63 65

Table 131: Telegram structure: sWA TSCTCInterface

Example: sWA TSCTCInterface

CoLa A	ASCII	<STX>sWA{SPC}TSCTCInterface<ETX>
	Hex	02 73 57 41 20 54 53 43 54 43 49 6E 74 65 72 66 61 63 65 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 57 41 20 54 53 43 54 43 49 6E 74 65 72 66 61 63 65 20 73

Table 132: Example: sWA TSCTCInterface

Set time server IP address



Telegram structure: sWN TSCTCSrvAddr (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set time server IP address	String	12	All	TSCTCSrvAddr	54 53 43 54 43 53 72 76 41 64 64 72
IP address data	Set values in hex	Uint_32	4	All	00 00 00 00h ... FF FF FF FFh (decimal values unwieldy)	00 00 00 00 ... FF FF FF FF

Table 133: Telegram structure: sWN TSCTCSrvAddr

Example: sWN TSCTCSrvAddr 192.168.0.11

CoLa A	ASCII	<STX>sWN{SPC}TSCTCSrvAddr{SPC}C0{SPC}A8{SPC}00{SPC}0B<ETX>
	Hex	02 73 57 4E 20 54 53 43 54 43 53 72 76 41 64 64 72 20 C0 A8 00 0B 03

CoLa B	Binary	02 02 02 02 00 00 00 15 73 57 4E 20 54 53 43 54 43 53 72 76 41 64 64 72 20 C0 A8 00 0B 3E

Table 134: Example: sWN TSCTCSrvAddr 192.168.0.11

Telegram structure: sWA TSCTCSrvAddr						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set time server IP address	String	12	All	TSCTCSrvAddr	54 53 43 54 43 53 72 76 41 64 64 72

Table 135: Telegram structure: sWA TSCTCSrvAddr

Example: sWA TSCTCSrvAddr

CoLa A	ASCII	<STX>sWA{SPC}TSCTCSrvAddr<ETX>
	Hex	02 73 57 41 20 54 53 43 54 43 53 72 76 41 64 64 72 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 57 41 20 54 53 43 54 43 53 72 76 41 64 64 72 20 52

Table 136: Example: sWA TSCTCSrvAddr

Set time zone



Telegram structure: sWN TSCTCtimezone (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set time zone	String	13	All	TSCTCtimezone	54 53 43 54 43 74 69 6D 65 7A 6F 6E 65
Time zone data	Set values in number of hours relative to GMT, hex specially coded	Int_8	1	All	[GMT + ...] -12d ... +12d (00h ... 18h)	[GMT + ...] 00 ... 18

Table 137: Telegram structure: sWN TSCTCtimezone

Example: sWN TSCTCtimezone GMT + 1 hour

CoLa A	ASCII	<STX>sWN{SPC}TSCTCtimezone{SPC}+1<ETX>
	Hex	02 73 57 4E 20 54 53 43 54 43 74 69 6D 65 7A 6F 6E 65 20 0D 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 57 4E 20 54 53 43 54 43 74 69 6D 65 7A 6F 6E 65 20 0D 3F

Table 138: Example: sWN TSCTCtimezone GMT + 1 hour

Telegram structure: sWA TSCTCtimezone						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set time zone	String	13	All	TSCTCtimezone	54 53 43 54 43 74 69 6D 65 7A 6F 6E 65

Table 139: Telegram structure: sWA TSCTCtimezone

Example: sWA TSCTCtimezone

CoLa A	ASCII	<STX>sWA{SPC}TSCTCtimezone<ETX>
	Hex	02 73 57 41 20 54 53 43 54 43 74 69 6D 65 7A 6F 6E 65 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 57 41 20 54 53 43 54 43 74 69 6D 65 7A 6F 6E 65 20 3D

Table 140: Example: sWA TSCTCtimezone

Set update time



Telegram structure: sWN TSCTCupdatetime (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set update time of synchronization	String	15	All	TSCTCupdatetime	54 53 43 54 43 75 70 64 61 74 65 74 69 6D 65
Update time of synchroni-zation	Set values in seconds	Uint_32	4	All	+1d ... +3600d (01h ... 0E10h)	00 00 00 00 ... 00 00 0E 10

Table 141: Telegram structure: sWN TSCTCupdatetime

Example: sWN TSCTCupdatetime 600 s

CoLa A	ASCII	<STX>sWN{SPC}TSCTCupdatetime{SPC}+600<ETX>
	Hex	02 73 57 4E 20 54 53 43 54 43 75 70 64 61 74 65 74 69 6D 65 20 02 58 03
CoLa B	Binary	02 02 02 02 00 00 00 18 73 57 4E 20 54 53 43 54 43 75 70 64 61 74 65 74 69 6D 65 20 00 00 02 58 67

Table 142: Example: sWN TSCTCupdatetime 600 s

Telegram structure: sWA TSCTCupdatetime						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set update time of synchronization	String	15	All	TSCTCupdatetime	54 53 43 54 43 75 70 64 61 74 65 74 69 6D 65

Table 143: Telegram structure: sWA TSCTCupdatetime

Example: sWA TSCTCupdatetime

CoLa A	ASCII	<STX>sWA{SPC}TSCTCupdatetime<ETX>
	Hex	02 73 57 41 20 54 53 43 54 43 75 70 64 61 74 65 74 69 6D 65 03
CoLa B	Binary	02 02 02 02 00 00 00 14 73 57 41 20 54 53 43 54 43 75 70 64 61 74 65 74 69 6D 65 20 32

Table 144: Example: sWA TSCTCupdatetime

Read for maximum offset time



Telegram structure: sRN TSCTCmaxoffset (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read maximum offset time	String	14	All	TSCTCmaxoffset	54 53 43 54 43 6D 61 78 6F 66 66 73 65 74

Table 145: Telegram structure: sRN TSCTCmaxoffset

Example: sRN TSCTCmaxoffset

CoLa A	ASCII	<STX>sRN{SPC}TSCTCmaxoffset<ETX>
	Hex	02 73 52 4E 20 54 53 43 54 43 6D 61 78 6F 66 66 73 65 74 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 52 4E 20 54 53 43 54 43 6D 61 78 6F 66 66 73 65 74 65

Table 146: Example: sRN TSCTCmaxoffset

Telegram structure: sRA TSCTCmaxoffset						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read maximum offset time	String	14	All	TSCTCmaxoffset	54 53 43 54 43 6D 61 78 6F 66 66 73 65 74
Max. offset time	[Seconds as float according to IEEE754]	Real	4	All	0h ... FFFFFFFFh Min Value ~ -3.403*10^38 s Max Value ~+3.403*10^38 s	00 00 00 00 ... FF FF FF FF

Table 147: Telegram structure: sRA TSCTCmaxoffset

Example: sRA TSCTCmaxoffset (18000 s)

CoLa A	ASCII	<STX>sRA{SPC}TSCTCmaxoffset{SPC}468CA000<ETX>
	Hex	02 73 52 41 20 54 53 43 54 43 6D 61 78 6F 66 66 73 65 74 20 46 8C A0 00 03
CoLa B	Binary	02 02 02 02 00 00 00 17 73 52 41 20 54 53 43 54 43 6D 61 78 6F 66 66 73 65 74 20 46 8C A0 00 20

Table 148: Example: sRA TSCTCmaxoffset 18000 s

Read for delay time



Telegram structure: sRN TSCTCdelay (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read delay time	String	10	All	TSCTCdelay	54 53 43 54 43 64 65 6C 61 79

Table 149: Telegram structure: sRN TSCTCdelay

Example: sRN TSCTCdelay

CoLa A	ASCII	<STX>sRN{SPC}TSCTCdelay<ETX>
	Hex	02 73 52 4E 20 54 53 43 54 43 64 65 6C 61 79 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 52 4E 20 54 53 43 54 43 64 65 6C 61 79 69

Table 150: Example: sRN TSCTCdelay

Telegram structure: sRA TSCTCdelay						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read for delay time	String	10	All	TSCTCdelay	54 53 43 54 43 64 65 6C 61 79
Max. offset time	[Seconds as float according to IEEE754]	Real	4	All	0h ... FFFFFFFFh	00 00 00 00 ... FF FF FF FF

Table 151: Telegram structure: sRA TSCTCdelay

Example: sRA TSCTCdelay (0.003 s)

CoLa A	ASCII	<STX>sRA{SPC}TSCTCdelay{SPC}3B435B02<ETX>
	Hex	02 73 52 41 20 54 53 43 54 43 64 65 6C 61 79 20 3B 43 5B 02 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 52 41 20 54 53 43 54 43 64 65 6C 61 79 20 3B 43 5B 02 67

Table 152: Example: sRA TSCTCdelay 0.003 s

Reset maximum offset time

This command resets the maximum offset time, i.e. sets it to zero (0).

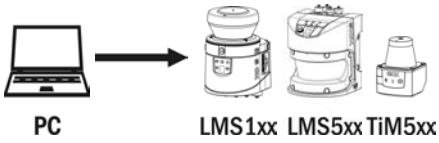

Telegram structure: sMN mResetMaxOff (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Reset maximum offset time	String	12	All	mResetMaxOff	6D 52 65 73 65 74 4D 61 78 4F 66 66

Table 153: Telegram structure: sMN mResetMaxOff

Example: sMN mResetMaxOff

CoLa A	ASCII	<STX>sMN{SPC}mResetMaxOff<ETX>
	Hex	02 73 4D 4E 20 6D 52 65 73 65 74 4D 61 78 4F 66 66 03
CoLa B	Binary	02 02 02 02 00 00 00 10 73 4D 4E 20 6D 52 65 73 65 74 4D 61 78 4F 66 66 73

Table 154: Example: sMN mResetMaxOff

Telegram structure: sAN mResetMaxOff						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Read maximum offset time	String	12	All	mResetMaxOff	6D 52 65 73 65 74 4D 61 78 4F 66 66

Table 155: Telegram structure: sAN mResetMaxOff

Example: sAN mResetMaxOff

CoLa A	ASCII	<STX>sAN{SPC}mResetMaxOff<ETX>
	Hex	02 73 41 4E 20 6D 52 65 73 65 74 4D 61 78 4F 66 66 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 41 4E 20 6D 52 65 73 65 74 4D 61 78 4F 66 66 20 5F

Table 156: Example: sAN mResetMaxOff

4.5 Filter

4.5.1 Set particle filter



Telegram structure: sWN LFPparticle (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set particle filter	String	11	All	LFPparticle	4C 46 50 70 61 72 74 69 63 6C 65
Status code	Code number	Bool_1	1	All	Inactive: 0 Active: 1	Inactive: 00 Active: 01
Thresh-old [5]	Particle threshold in mm	Uint_16	2	All	+500d (must be taken) (1F4h)	01 F4 (must be taken)

Table 157: Telegram structure: sWN LFPparticle

Example: sWN LFPparticle

CoLa A	ASCII	<STX>sWN{SPC}LFPparticle{SPC}1{SPC}+500<ETX>
	Hex	02 73 57 4E 20 4C 46 50 70 61 72 74 69 63 6C 65 20 31 20 2B 35 30 30 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 57 4E 20 4C 46 50 70 61 72 74 69 63 6C 65 20 01 01 F4 D0

Table 158: Example: sWN LFPparticle

Telegram structure: sWA LFPparticle						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set particle filter	String	11	All	LFPparticle	4C 46 50 70 61 72 74 69 63 6C 65

Table 159: Telegram structure: sWA LFPparticle

[5] Never change the threshold here, it is taken by the device to handle the particles.

Example: sWA LFPparticle

CoLa A	ASCII	<STX>sWA{SPC}LFPparticle<ETX>
	Hex	02 73 57 41 20 4C 46 50 70 61 72 74 69 63 6C 65 03
CoLa B	Binary	02 02 02 02 00 00 00 10 73 57 41 20 4C 46 50 70 61 72 74 69 63 6C 65 20 2B

Table 160: Example: sWA LFPparticle

4.5.2 Set mean filter



Telegram structure: sWN LFPmeanfilter (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set mean filter	String	13	All	LFPmeanfilter	4C 46 50 6D 65 61 6E 66 69 6C 74 65 72
Status code	Code number	Bool_1	1	All	Inactive: 0 Active: 1	Inactive: 00 Active: 01
Number of scans	Number	Uint_16	2	All	+2d ... +100d (00 02h ... 00 64h)	00 02 ... 00 64
Final part	Reserved	Enum_8	1	All	0	00

Table 161: Telegram structure: sWN LFPmeanfilter

Example: sWN LFPmeanfilter

CoLa A	ASCII	<STX>sWN{SPC}LFPmeanfilter{SPC}1{SPC}+10{SPC}0<ETX>
	Hex	02 73 57 4E 20 4C 46 50 6D 65 61 6E 66 69 6C 74 65 72 20 31 20 2B 31 30 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 16 73 57 4E 20 4C 46 50 6D 65 61 6E 66 69 6C 74 65 72 20 01 00 64 00 52

Table 162: Example: sWN LFPmeanfilter

Telegram structure: sWA LFPmeanfilter						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set mean filter	String	13	All	LFPmeanfilter	4C 46 50 6D 65 61 6E 66 69 6C 74 65 72

Table 163: Telegram structure: sWA LFPmeanfilter

Example: sWA LFPmeanfilter

CoLa A	ASCII	<STX>sWA{SPC}LFPmeanfilter<ETX>
	Hex	02 73 57 41 20 4C 46 50 6D 65 61 6E 66 69 6C 74 65 72 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 57 41 20 4C 46 50 6D 65 61 6E 66 69 6C 74 65 72 38

Table 164: Example: sWA LFPmeanfilter

4.5.3 Set n-pulse to 1-pulse filter

Only LMS1xx, for LMS5xx take the echo filter.

Telegram structure: sWN LFPnto1filter (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	LMS1xx	sWN	73 57 4E
Command	Set n-to-1 filter	String	13	LMS1xx	LFPnto1filter	4C 46 50 6E 74 6F 31 66 69 6C 74 65 72
Status code	Code number	Bool_1	1	LMS1xx	Inactive: 0 Active: 1	Inactive: 00 Active: 01

Table 165: Telegram structure: sWN LFPnto1filter

Example: sWN LFPnto1filter

CoLa A	ASCII	<STX>sWN{SPC}LFPnto1filter{SPC}1<ETX>
	Hex	02 73 57 4E 20 4C 46 50 6E 74 6F 31 66 69 6C 74 65 72 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 57 4E 20 4C 46 50 6E 74 6F 31 66 69 6C 74 65 72 20 01 75

Table 166: Example: sWN LFPnto1filter



Telegram structure: sWA LFPnto1filter						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	LMS1xx	sWA	73 57 41
Command	Set n-to-1 filter	String	13	LMS1xx	LFPnto1filter	4C 46 50 6E 74 6F 31 66 69 6C 74 65 72

Table 167: Telegram structure: sWA LFPnto1filter

Example: sWA LFPnto1filter

CoLa A	ASCII	<STX>sWA{SPC}LFPnto1filter<ETX>
	Hex	02 73 57 41 20 4C 46 50 6E 74 6F 31 66 69 6C 74 65 72 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 57 41 20 4C 46 50 6E 74 6F 31 66 69 6C 74 65 72 7B

Table 168: Example: sWA LFPnto1filter

4.5.4 Set echo filter

Only LMS5xx, for LMS1xx take the n-pulse to 1-pulse filter.



Telegram structure: sWN FREchoFilter (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set echo filter	String	12	All	FREchoFilter	46 52 45 63 68 6F 46 69 6C 74 65 72

Telegram structure: sWN FREchoFilter (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Status code	Code number	Enum_8	1	All	First echo: 0 All echos: 1 Last echo: 2	First echo: 00 All echos: 01 Last echo: 02

Table 169: Telegram structure: sWN FREchoFilter

Example: sWN FREchoFilter

CoLa A	ASCII	<STX>sWN{SPC}FREchoFilter{SPC}1<ETX>
	Hex	02 73 57 4E 20 46 52 45 63 68 6F 46 69 6C 74 65 72 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 57 4E 20 46 52 45 63 68 6F 46 69 6C 74 65 72 20 01 7E Only available with firmware versions > V1.10.

Table 170: Example: sWN FREchoFilter

Telegram structure: sWA FREchoFilter						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set echo filter	String	12	All	FREchoFilter	46 52 45 63 68 6F 46 69 6C 74 65 72

Table 171: Telegram structure: sWA FREchoFilter

Example: sWa FREchoFilter

CoLa A	ASCII	<STX>sWA{SPC}FREchoFilter<ETX>
	Hex	02 73 57 41 20 46 52 45 63 68 6F 46 69 6C 74 65 72 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 57 41 20 46 52 45 63 68 6F 46 69 6C 74 65 72 20 70 Only available with firmware versions > V1.10.

Table 172: Example: sWa FREchoFilter

4.5.5 Set and read fog filter

Set fog filter (LMS1xx)

Telegram structure: sWN MSsuppmode (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set fog filter	String	10	All	MSsuppmode	4D 53 73 75 70 70 6D 6F 64 65
Status code	Code number	Bool_1	1	All	Glitch: 0 Fog: 1	Glitch: 00 Fog: 01

Table 173: Telegram structure: sWN MSsuppmode

Example: sWN MSsuppmode

CoLa A	ASCII	<STX>sWN{SPC}MSsuppmode{SPC}1<ETX>
	Hex	02 73 57 4E 20 4D 53 73 75 70 70 6D 6F 64 65 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 10 73 57 4E 20 4D 53 73 75 70 70 6D 6F 64 65 20 01 70

Table 174: Example: sWN MSsuppmode

Telegram structure: sWA MSsuppmode						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set fog filter	String	10	All	MSsuppmode	4D 53 73 75 70 70 6D 6F 64 65

Table 175: Telegram structure: sWA MSsuppmode

Example: sWA MSsuppmode

CoLa A	ASCII	<STX>sWA{SPC}MSsuppmode<ETX>
	Hex	02 73 57 41 20 4D 53 73 75 70 70 6D 6F 64 65 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 57 41 20 4D 53 73 75 70 70 6D 6F 64 65 7E

Table 176: Example: sWA MSsuppmode

Set fog filter (LMS5xx)



Telegram structure: sWN CLFogFilterEn (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Enable fog filter	String	13	All	CLFogFilterEn	43 4C 46 6F 67 46 69 6C 74 65 72 45 6E
Status code	Enable or disable fog filter	Bool_1	1	All	Disable: 0 Enable: 1	Disable: 00 Enable: 01

Table 177: Telegram structure: sWN CLFogFilterEn

Example: sWN CLFogFilterEn

CoLa A	ASCII	<STX>sWN{SPC}CLFogFilterEn{SPC}1<ETX>
	Hex	02 73 57 4E 20 43 4C 46 6F 67 46 69 6C 74 65 72 45 6E 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 57 4E 20 43 4C 46 6F 67 46 69 6C 74 65 72 45 6E 20 01 21

Table 178: Example: sWN CLFogFilterEn

Telegram structure: sWA CLFogFilterEn						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Enable fog filter	String	13	All	CLFogFilterEn	43 4C 46 6F 67 46 69 6C 74 65 72 45 6E

Table 179: Telegram structure: sWA CLFogFilterEn

Example: sWA CLFogFilterEn

CoLa A	ASCII	<STX>sWA{SPC}CLFogFilterEn<ETX>
	Hex	02 73 57 41 20 43 4C 46 6F 67 46 69 6C 74 65 72 45 6E 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 57 41 20 43 4C 46 6F 67 46 69 6C 74 65 72 45 6E 20 2F

Table 180: Example: sWA CLFogFilterEn

Read for enabled fog filter (LMS5xx)



Telegram structure: sRN CLFogFilterEn						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Enabled fog filter	String	13	All	CLFogFilterEn	43 4C 46 6F 67 46 69 6C 74 65 72 45 6E

Table 181: Telegram structure: sRN CLFogFilterEn

Example: sRN CLFogFilterEn

CoLa A	ASCII	<STX>sRN{SPC}CLFogFilterEn<ETX>
	Hex	02 73 52 4E 20 43 4C 46 6F 67 46 69 6C 74 65 72 45 6E 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 52 4E 20 43 4C 46 6F 67 46 69 6C 74 65 72 45 6E 05

Table 182: Example: sRN CLFogFilterEn

Telegram structure: sRA CLFogFilterEn						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Enabled fog filter	String	13	All	CLFogFilterEn	43 4C 46 6F 67 46 69 6C 74 65 72 45 6E
Status code	Fog filter enabled or disabled	Bool_1	1	All	Disabled: 0 Enabled: 1	Disabled: 00 Enabled: 01

Table 183: Telegram structure: sRA CLFogFilterEn

Example: sRA CLFogFilterEn

CoLa A	ASCII	<STX>sRA{SPC}CLFogFilterEn{SPC}1<ETX>
	Hex	02 73 52 41 20 43 4C 46 6F 67 46 69 6C 74 65 72 45 6E 20 01 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 52 41 20 43 4C 46 6F 67 46 69 6C 74 65 72 45 6E 20 01 2B

Table 184: Example: sRA CLFogFilterEn

Set sensitivity fog filter (LMS5xx)



Telegram structure: sWN MCSenseLevel (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Sense level	String	12	All	MCSenseLevel	4D 43 53 65 6E 73 65 4C 65 76 65 6C
Sensitivity level		Uint_8	1	All	1 … 6	01 … 06

Table 185: Telegram structure: sWN MCSenseLevel

Example: sWN MCSenseLevel

CoLa A	ASCII	<STX>sWN{SPC}MCSenseLevel{SPC}1<ETX>
	Hex	02 73 57 4E 20 4D 43 53 65 6E 73 65 4C 65 76 65 6C 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 10 73 57 4E 20 4D 43 53 65 6E 73 65 4C 65 76 65 6C 20 01 70

Table 186: Example: sWN MCSenseLevel



Telegram structure: sWA MCSenseLevel						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Sense level	String	12	All	MCSenseLevel	4D 43 53 65 6E 73 65 4C 65 76 65 6C

Table 187: Telegram structure: sWA MCSenseLevel

Example: sWA MCSenseLevel

CoLa A	ASCII	<STX>sWA{SPC}MCSenseLevel<ETX>
	Hex	02 73 57 41 20 4D 43 53 65 6E 73 65 4C 65 76 65 6C 20 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 57 41 20 4D 43 53 65 6E 73 65 4C 65 76 65 6C 20 7E

Table 188: Example: sWA MCSenseLevel

4.5.6 Enable/disable digital nearfield filter

Activates or deactivates the nearfield filter of the LD series.

Do not change the setting on LD-LRS XXXX !



Telegram structure: sWN CLNFDigFilterEn (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Digital nearfield filter	String	15	All	CLNFDigFilterEn	43 4C 4E 46 44 69 67 46 69 6C 74 65 72 45 6E
Status code	Code number	Bool_1	1	All	Inactive: 0 Active: 1	Inactive: 00 Active: 01

Table 189: Telegram structure: sWN CLNFDigFilterEn

Example: sWN CLNFDigFilterEn

CoLa A	ASCII	<STX>sWN{SPC}CLNFDigFilterEn{SPC}1<ETX>
	Hex	02 73 57 4E 20 43 4C 4E 46 44 69 67 46 69 6C 74 65 72 45 6E 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 16 73 57 4E 20 43 4C 4E 46 44 69 67 46 69 6C 74 65 72 45 6E 20 01 51

Table 190: Example: sWN CLNFDigFilterEn



Telegram structure: sWA CLNFDigFilterEn						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Digital nearfield filter	String	15	All	CLNFDigFilterEn	43 4C 4E 46 44 69 67 46 69 6C 74 65 72 45 6E

Table 191: Telegram structure: sWA CLNFDigFilterEn

Example: sWA CLNFDigFilterEn

CoLa A	ASCII	<STX>sWA{SPC}CLNFDigFilterEn<ETX>
	Hex	02 73 57 41 20 43 4C 4E 46 44 69 67 46 69 6C 74 65 72 45 6E 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 57 41 20 43 4C 4E 46 44 69 67 46 69 6C 74 65 72 45 6E 03

Table 192: Example: sWA CLNFDigFilterEn

4.5.7 Set digital nearfield filter sector selection

Do not change the setting on LD-LRS XXXX !

Telegram structure: sWN CLHWFilterSectEn (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Sector function	String	16	All	CLHWFilterSectEn	43 4C 48 57 46 69 6C 74 65 72 53 65 63 74 45 6E
Status code	Active sector vector	Bool_1	4 × 1	All	Active in none of the sectors: 0 0 0 0 Active in all sectors: 1 1 1 1	Active in none of the sectors: 00 00 00 00 Active in all sectors: 01 01 01 01

Table 193: Telegram structure: sWN CLHWFilterSectEn

Example: sWN CLHWFilterSectEn

Enable Nearfield Suppression for sector 1, disable for sectors 2, 3 and 4.

CoLa A	ASCII	<STX>sWN{SPC}CLHWFilterSectEn{SPC}1{SPC}0{SPC}0{SPC}0<ETX>
	Hex	02 73 57 4E 20 43 4C 48 57 46 69 6C 74 65 72 53 65 63 74 45 6E 20 31 20 30 20 30 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 19 73 57 4E 20 43 4C 48 57 46 69 6C 74 65 72 53 65 63 74 45 6E 20 31 30 30 30 51

Table 194: Example: sWN CLHWFilterSectEn 1 0 0 0



Telegram structure: sWA CLHWFilterSectEn						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Sector function	String	16	All	CLHWFilterSectEn	43 4C 48 57 46 69 6C 74 65 72 53 65 63 74 45 6E

Table 195: Telegram structure: sWA CLHWFilterSectEn

Example: sWA CLHWFilterSectEn

CoLa A	ASCII	<STX>sWA{SPC}CLHWFilterSectEn<ETX>
	Hex	02 73 57 41 20 43 4C 48 57 46 69 6C 74 65 72 53 65 63 74 45 6E 03
CoLa B	Binary	02 02 02 02 00 00 00 15 73 57 41 20 43 4C 48 57 46 69 6C 74 65 72 53 65 63 74 45 6E 20 5F

Table 196: Example: sWA CLHWFilterSectEn

4.6 Encoder

4.6.1 Set increment source

Telegram structure: sWN LICsrc (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set increment source	String	6	All	LICsrc	4C 49 43 73 72 63
Increment source		Enum_8	1	All	Fixed speed: 0 Encoder: 1	Fixed speed: 00 Encoder: 01

Table 197: Telegram structure: sWN LICsrc

Example: sWN LICsrc

CoLa A	ASCII	<STX>sWN{SPC}LICsrc{SPC}0<ETX>
	Hex	02 73 57 4E 20 4C 49 43 73 72 63 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 0C 73 57 4E 20 4C 49 43 73 72 63 20 01 4F

Table 198: Example: sWN LICsrc

Telegram structure: sWA LICsrc						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set increment source	String	6	All	LICsrc	4C 49 43 73 72 63

Table 199: Telegram structure: sWA LICsrc

Example: sWA LICsrc

CoLa A	ASCII	<STX>sWA{SPC}LICsrc<ETX>
	Hex	02 73 57 41 20 4C 49 43 73 72 63 03
CoLa B	Binary	02 02 02 02 00 00 00 0B 73 57 41 20 4C 49 43 73 72 63 41

Table 200: Example: sWA LICsrc

4.6.2 Set encoder settings

Telegram structure: sWN LICencset (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Encoder settings	String	9	All	LICencset	4C 49 43 65 6E 63 73 65 74
Encoder setting		Enum_8	1	All	Off: 0 Single increment/INC1: 1 Direction recognition (phase): 2 Direction recognition (level): 3	Off: 00 Single increment/INC1: 01 Direction recognition (phase): 02 Direction recognition (level): 03

Table 201: Telegram structure: sWN LICencset

Example: sWN LICencset

CoLa A	ASCII	<STX>sWN{SPC}LICencset{SPC}0<ETX>
	Hex	02 73 57 4E 20 4C 49 43 65 6E 63 73 65 74 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 57 4E 20 4C 49 43 65 6E 63 73 65 74 20 03 25

Table 202: Example: sWN LICencset

Telegram structure: sWA LICencset						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Encoder settings	String	9	All	LICencset	4C 49 43 65 6E 63 73 65 74

Table 203: Telegram structure: sWA LICencset

Example: sWA LICencset

CoLa A	ASCII	<STX>sWA{SPC}LICencset<ETX>
	Hex	02 73 57 41 20 4C 49 43 65 6E 63 73 65 74 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 57 41 20 4C 49 43 65 6E 63 73 65 74 29

Table 204: Example: sWA LICencset

4.6.3 Set encoder resolution

Telegram structure: sWN LICencres (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set encoder resolution	String	9	All	LICencres	4C 49 43 65 6E 63 72 65 73
Encoder resolution	Resolution value in mm/Inc as float according to IEEE754	Real	4	All	+0.001d ... +2000d	3A 83 12 6F ... 44 FA 00 00 (see IEEE 754)

Table 205: Telegram structure: sWN LICencres

Example: sWN LICencres

CoLa A	ASCII	<STX>sWN{SPC}LICencres{SPC}+1000<ETX>
	Hex	02 73 57 4E 20 4C 49 43 65 6E 63 72 65 73 20 2B 31 30 30 30 03
CoLa B	Binary	02 02 02 02 00 00 00 10 73 57 4E 20 4C 49 43 65 6E 63 72 65 73 20 44 7A 00 00 1E

Table 206: Example: sWN LICencres

Telegram structure: sWA LICencres						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set encoder resolution	String	9	All	LICencres	4C 49 43 65 6E 63 72 65 73

Table 207: Telegram structure: sWA LICencres

Example: sWA LICencres

CoLa A	ASCII	<STX>sWA{SPC}LICencres<ETX>
	Hex	02 73 57 41 20 4C 49 43 65 6E 63 72 65 73 03
CoLa B	Binary	02 02 02 02 00 00 00 0D 73 57 41 20 4C 49 43 65 6E 63 72 65 73 00

Table 208: Example: sWA LICencres

4.6.4 Set fixed speed

Telegram structure: sWN LICFixVel (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set fixed speed	String	9	All	LICFixVel	4C 49 43 46 69 78 56 65 6C
Fixed speed	Speed in m/s as float according to IEEE754	Real	4	All	+0.001d ... +10.0d	3A 83 12 6F... 41 20 00 00

Table 209: Telegram structure: sWN LICFixVel

Example: sWN LICFixVel

CoLa A	ASCII	<STX>sWN{SPC}LICFixVel{SPC}+5<ETX>
	Hex	02 73 57 4E 20 4C 49 43 46 69 78 56 65 6C 20 2B 35 03
CoLa B	Binary	02 02 02 02 00 00 00 0B 73 57 4E 20 4C 49 43 46 69 78 56 65 6C 20 40 A0 00 00 C4

Table 210: Example: sWN LICFixVel

Telegram structure: sWA LICFixVel						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set fixed speed	String	9	All	LICFixVel	4C 49 43 46 69 78 56 65 6C

Table 211: Telegram structure: sWA LICFixVel

Example: sWA LICFixVel

CoLa A	ASCII	<STX>sWA{SPC}LICFixVel<ETX>
	Hex	02 73 57 41 20 4C 49 43 46 69 78 56 65 6C 03

CoLa B	Binary	02 02 02 02 00 00 00 0D 73 57 41 20 4C 49 43 46 69 78 56 65 6C 0B

Table 212: Example: sWA LICFixVel

4.6.5 Read speed threshold

Telegram structure: sRN LICSpTh						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read speed threshold	String	7	All	LICSpTh	4C 49 43 53 70 54 68

Table 213: Telegram structure: sRN LICSpTh

Example: sRN LICSpTh

CoLa A	ASCII	<STX>sRN{SPC}LICSpTh<ETX>
	Hex	02 73 52 4E 20 4C 49 43 53 70 54 68 03
CoLa B	Binary	02 02 02 02 00 00 00 0D 73 52 4E 20 4C 49 43 53 70 54 68 16

Table 214: Example: sRN LICSpTh

Telegram structure: sRA LICSpTh						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Speed threshold	String	7	All	LICSpTh	4C 49 43 53 70 54 68
Speed threshold	Speed threshold in %	Uint_8	2	All	+1d ... +20d (01h ... 20h)	01 ... 20

Table 215: Telegram structure: sRA LICSpTh

Example: sRA LICSpTh

CoLa A	ASCII	<STX>sRA{SPC}LICSpTh{SPC}5<ETX>
	Hex	02 73 52 41 20 4C 49 43 53 70 54 68 20 35 03
CoLa B	Binary	02 02 02 02 00 00 00 0D 73 52 41 20 4C 49 43 53 70 54 68 20 05 3C

Table 216: Example: sRA LICSpTh

4.6.6 Read encoder speed



Telegram structure: sRN LICencsp						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read encoder speed	String	8	All	LICencsp	4C 49 43 65 6E 63 73 70

Table 217: Telegram structure: sRN LICencsp

Example: sRN LICencsp

CoLa A	ASCII	<STX>sRN{SPC}LICencsp <ETX>
	Hex	02 73 52 4E 20 4C 49 43 65 6C 63 73 70 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 52 4E 20 4C 49 43 65 6E 63 73 70 62

Table 218: Example: sRN LICencsp

Telegram structure: sRA LICencsp						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read encoder speed	String	8	All	LICencsp	4C 49 43 65 6E 63 73 70
Encoder speed	[Speed in m/s as float according to IEEE754]	Real	4	All	0h ... FFFFFFFFh	00 00 00 00 ... FF FF FF FF

Table 219: Telegram structure: sRA LICencsp

Example: sRA LICencsp (0 m/s)

CoLa A	ASCII	<STX>sRA{SPC}LICencsp{SPC}0<ETX>
	Hex	02 73 52 41 20 4C 49 43 65 6C 63 73 70 20 30 30 30 30 30 30 30 30 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 52 41 20 4C 49 43 65 6E 63 73 70 20 00 00 00 00 4D

Table 220: Example: sRA LICencsp

4.7 Outputs

4.7.1 Read state of the outputs

Telegram structure: sRN LIDoutputstate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Output state	String	14	All	LIDoutputstate	4C 49 44 6F 75 74 70 75 74 73 74 61 74 65

Table 221: Telegram structure: sRN LIDoutputstate

Example: sRN LIDoutputstate

CoLa A	ASCII	<STX>sRN{SPC}LIDoutputstate<ETX>
	Hex	02 73 52 4E 20 4C 49 44 6F 75 74 70 75 74 73 74 61 74 65 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 52 4E 20 4C 49 44 6F 75 74 70 75 74 73 74 61 74 65 66

Table 222: Example: sRN LIDoutputstate

Telegram structure: sRA LIDoutputstate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Find complete telegram structure of the answer in section 4.7.2 „Send outputstate by event “ on page 113.						

Table 223: Telegram structure: sRA LIDoutputstate

4.7.2 Send outputstate by event

Output telegram is sent every time an output state changes.



Telegram structure: sEN LIDoutputstate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Event	String	3	All	sEN	73 45 4E
Command	Output state	String	14	All	LIDoutputstate	4C 49 44 6F 75 74 70 75 74 73 74 61 74 65
	Start/stop	Enum_8	1	All	Start: 1 Stop: 0	Start: 01 Stop: 00

Table 224: Telegram structure: sEN LIDoutputstate

Example: sEN LIDoutputstate

CoLa A	ASCII	<STX>sEN{SPC}LIDoutputstate{SPC}1<ETX>
	Hex	02 73 45 4E 20 4C 49 44 6F 75 74 70 75 74 73 74 61 74 65 20 01 03
CoLa B	Binary	02 02 02 02 00 00 00 14 73 45 4E 20 4C 49 44 6F 75 74 70 75 74 73 74 61 74 65 20 31 60

Table 225: Example: sEN LIDoutputstate



Telegram structure: sRA/sSN LIDoutputstate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA/sSN	73 52 41 / 73 53 4E
Command	Output state	String	14	All	LIDoutputstate	4C 49 44 6F 75 74 70 75 74 73 74 61 74 65

Telegram structure: sRA/sSN LIDoutputstate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Status code	Version number	Uint_16	2	All	0	00 00
	System counter (time in µs since power up max. 71min then starting from 0 again)	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
State of the outputs and count value in hex. (values of an example)	Out1 state	Enum_8	1	All	0 … 2	00 … 02
	Out1 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Out2 state	Enum_8	1	LMS1xx LMS5xx LD-OEM15x1 LD-LRS36x1 LD-OEM15x0 LD-LRS36x0	0 … 2	00 … 02
	Out2 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Out3 state	Enum_8	1		0 … 2	00 … 02
	Out3 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Out4 state	Enum_8	1	LMS5xx LD-OEM15x1 LD-LRS36x1 LD-OEM15x0 LD-LRS36x0	0 … 2	00 … 02
	Out4 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Out5 state	Enum_8	1		0 … 2	00 … 02
	Out5 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Out6 state	Enum_8	1		0 … 2	00 … 02
	Out6 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Ext.Out1 state	Enum_8	1	LMS1xx LMS5xx	0 … 2	00 … 02
	Ext.Out1 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Ext.Out2 state	Enum_8	1		0 … 2	00 … 02
	Ext.Out2 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Ext.Out3 state	Enum_8	1		0 … 2	00 … 02
	Ext.Out3 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Ext.Out4 state	Enum_8	1		0 … 2	00 … 02
	Ext.Out4 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Ext.Out5 state	Enum_8	1		0 … 2	00 … 02
	Ext.Out5 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Ext.Out6 state	Enum_8	1		0 … 2	00 … 02
	Ext.Out6 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Ext.Out7 state	Enum_8	1		0 … 2	00 … 02
	Ext.Out7 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
	Ext.Out8 state	Enum_8	1		0 … 2	00 … 02
	Ext.Out8 count	Uint_32	4		0 … FFFFFFFFh	00 00 00 00 … FF FF FF FF
Time	States code	Enum_8	1	All	No time data: 0 Time data: 1	No time data: 00 Time data: 01

Telegram structure: sRA/sSN LIDoutputstate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Time Block (sensor-time from the last change of min. one of the outputs)	Year	Array	2	LMS1xx	e.g. 1970	e.g. 07 B2
	Month		1		1 … 12	01 … 0C
	Day		1		1 … 31	01 … 1F
	Hour		1		0 … 23	00 … 17
	Minute		1		0 … 59	00 … 3B
	Second		1		0 … 59	00 … 3B
	Microsecond		4		0 … 999999	00 00 00 00 … 00 0F 42 3F

Table 226: Telegram structure: sRA/sSN LIDoutputstate

Example: sRA LIDoutputstate

CoLa A	ASCII	<STX>sRA{SPC}LIDoutputstate{SPC}1{SPC}41F84EC5{SPC}1{SPC}5{SPC}1{SPC}5{SPC}1{SPC}5{SPC}2{SPC}0{SPC}2{SPC}0{SPC}2{SPC}0{SPC}2{SPC}0{SPC}2{SPC}0{SPC}2{SPC}0{SPC}2{SPC}0{SPC}2{SPC}0{SPC}1{SPC}7D9{SPC}2{SPC}12{SPC}C{SPC}29{SPC}E{SPC}975E0<ETX>
	Hex	02 73 52 41 20 4C 49 44 6F 75 74 70 75 74 73 74 61 74 65 20 31 20 41 F8 4E C5 20 31 20 35 20 31 20 35 20 31 20 35 20 32 20 30 20 32 20 30 20 32 20 30 20 32 20 30 20 32 20 30 20 32 20 30 20 32 20 30 20 32 20 30 20 32 20 30 20 31 20 07 D9 20 02 20 12 20 0C 20 29 20 0E 20 09 75 E0 03
CoLa B	Binary	02 02 02 02 00 00 00 5D 73 52 41 20 4C 49 44 6F 75 74 70 75 74 73 74 61 74 65 20 00 01 41 F8 4E C5 01 00 00 00 05 01 00 00 00 05 01 00 00 00 05 02 00 00 00 00 02 00 00 00 00 02 00 00 00 00 02 00 00 00 00 02 00 00 00 00 02 00 00 00 00 02 00 00 00 00 02 00 00 00 00 02 00 00 00 00 02 00 00 00 00 02 00 00 00 00 01 07 D9 02 12 0C 29 0E 00 09 75 E0 06

Table 227: Example: sRA LIDoutputstate

4.7.3 Set output state



Telegram structure: sMN mDOSetOutput						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Set output state	String	12	All	mDOSetOutput	6D 44 4F 53 65 74 4F 75 74 70 75 74
Output number		Uint_8	1	LMS1xx	1 ... 3	01 ... 03
				LMS12x	1 ... 2	01 ... 02
				LMS5xx	1 ... 6	01 ... 06
				TiM3xx	1 ... 4	01 ... 04
				TiM5xx	1	01
Output state		Enum_8	1	All	Inactive: 0 Active: 1	Inactive: 00 Active: 01

Table 228: Telegram structure: sMN mDOSetOutput

Example: sMN mDOSetOutput

CoLa A	ASCII	<STX>sMN{SPC}mDOSetOutput{SPC}1{SPC}1<ETX>
	Hex	02 73 4D 4E 20 6D 44 4F 53 65 74 4F 75 74 70 75 74 20 31 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 4D 4E 20 6D 44 4F 53 65 74 4F 75 74 70 75 74 20 01 01 69

Table 229: Example: sMN mDOSetOutput

Telegram structure: sAN mDOSetOutput						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Set output state	String	12	All	mDOSetOutput	6D 44 4F 53 65 74 4F 75 74 70 75 74
Status Code	Status code	Bool_1	1	All	Error: 0 Success: 1	Error: 00 Success: 01

Table 230: Telegram structure: sAN mDOSetOutput

Example: sAN mDOSetOutput

CoLa A	ASCII	<STX>sAN{SPC}mDOSetOutput{SPC}1<ETX>
	Hex	02 73 41 4E 20 6D 44 4F 53 65 74 4F 75 74 70 75 74 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 41 4E 20 6D 44 4F 53 65 74 4F 75 74 70 75 74 20 01 67

Table 231: Example: sAN mDOSetOutput

4.7.4 Change output 6/3 function



Telegram structure: sWN DO6Fnc/sWN DO3Fnc (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Output function	String	6	LMS5xx PRO	D06Fnc	44 4F 36 46 6E 63
				LMS5xx Lite	D03Fnc	44 4F 33 46 6E 63
Output state		Enum_8	1	All	No Function: 0 SOPAS command: 1 Device Ready: 2 Application: 3 Applic./Device Ready: 4 Dev.ready/Contamination: 5 Contamination: 6 Master Synchronisation: 7	Not available

Table 232: Telegram structure PRO: sWN DO6Fnc/Lite: sWN DO3Fnc

Example: sWN DO6Fnc ➜ Set Out6 to Master Synchronisation

CoLa A	ASCII	<STX>sWN{SPC}DO6Fnc{SPC}7<ETX>
	Hex	02 73 57 4E 20 44 4F 36 46 6E 63 20 37 03
CoLa B	Binary	Unavailable with current firmware.

Table 233: Example: sWN DO6Fnc ➜ Out6 to master sync

Telegram structure: sWA DO6Fnc						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Output function	String	6	LMS5xx PRO	DO6Fnc	44 4F 36 46 6E 63
				LMS5xx Lite	DO3Fnc	44 4F 33 46 6E 63

Table 234: Telegram structure: PRO: sWN DO6Fnc/Lite: sWN DO3Fnc

Example: sWA DO6Fnc

CoLa A	ASCII	<STX>sWA{SPC}DO6Fnc<ETX>
	Hex	02 73 57 41 20 44 4F 36 46 6E 63 03
CoLa B	Binary	Not available with firmware V1.10

Table 235: Example: sWA DO6Fnc

4.7.5 Change output 1 function

Telegram structure: sWN DO1Fnc (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Output function	String	6	All	DO1Fnc	44 4F 31 46 6E 63
Output 1 function	Selected function	Enum_8	1	All	No function: 0 Command: 1 Device ready: 2 Application dev. ready: 3 Sync pulse: 4 Sync index: 5	No function: 00 Command: 01 Device ready: 02 Application dev. ready: 03 Sync pulse: 04 Sync index: 05

Table 236: Telegram structure: sWN DO1Fnc

Example: sWN DO1Fnc ➜ Set Out1 to Device Ready

CoLa A	ASCII	<STX>sWN{SPC}DO1Fnc{SPC}2<ETX>
	Hex	02 73 57 4E 20 44 4F 31 46 6E 63 20 32 03
CoLa B	Binary	02 02 02 02 00 00 00 0C 73 57 4E 20 44 4F 31 46 6E 63 20 02 19

Table 237: Example: sWN DO1Fnc ➜ Out1 to device ready

Telegram structure: sWA DO1Fnc						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Output function	String	6	All	DO1Fnc	44 4F 31 46 6E 63

Table 238: Telegram structure: sWA DO1Fnc

Example: sWA DO1Fnc

CoLa A	ASCII	<STX>sWA{SPC}DO1Fnc<ETX>
	Hex	02 73 57 41 20 44 4F 31 46 6E 63 03
CoLa B	Binary	02 02 02 02 00 00 00 0A 73 57 41 20 44 4F 31 46 6E 63 34

Table 239: Example: sWA DO1Fnc

Functions:

No function: 0

Command: 1

Device ready (for field application): 2

Application dev. ready: 3

Sync pulse (10 ms puls when timer register is read “sRN STIms”): 4

Sync index: 5
The output signal depends on the scanner head position
(high (+24 V): 0° ... 179°/low (0 V): 180° ... 360°).

4.7.6 Change output 1 logic state

Telegram structure: sWN DO1Logic (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Output function	String	8	All	DO1Logic	44 4F 31 4C 6F 67 69 63
Output 1 logic state	State of the output	Enum_8	1	All	Active_High: 0 Active_Low: 1	Active_High: 00 Active_Low: 01

Table 240: Telegram structure: sWN DO1Logic

Example: sWN DO1Logic ➜ Active_High

CoLa A	ASCII	<STX>sWN{SPC}DO1Logic{SPC}1<ETX>
	Hex	02 73 57 4E 20 44 4F 31 4C 6F 67 69 63 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 57 4E 20 44 4F 31 4C 6F 67 69 63 20 01 1F

Table 241: Example: sWN DO1Logic ➜ Active_Low

Telegram structure: sWA DO1Logic						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Output logic	String	8	All	DO1Logic	44 4F 31 4C 6F 67 69 63

Table 242: Telegram structure: sWA DO1Logic

Example: sWA DO1Logic

CoLa A	ASCII	<STX>sWA{SPC}DO1Logic<ETX>
	Hex	02 73 57 41 20 44 4F 31 4C 6F 67 69 63 03
CoLa B	Binary	02 02 02 02 00 00 00 0C 73 57 41 20 44 4F 31 4C 6F 67 69 63 31

Table 243: Example: sWA DO1Logic

4.7.7 Change output 2 function

Telegram structure: sWN DO2Fnc (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Output function	String	6	All	DO2Fnc	44 4F 32 46 6E 63
Output 2 function	Code number	Enum_8	1	All	No function: 0 Command: 1 Device ready: 2 Application dev. ready: 3	No function: 00 Command: 01 Device ready: 02 Application dev. ready: 03

Table 244: Telegram structure: sWN DO2Fnc

Example: sWN DO2Fnc ➜ Out2 to device ready

CoLa A	ASCII	<STX>sWN{SPC}DO2Fnc{SPC}2<ETX>
	Hex	02 73 57 4E 20 44 4F 32 46 6E 63 20 32 03
CoLa B	Binary	02 02 02 02 00 00 00 0C 73 57 4E 20 44 4F 32 46 6E 63 20 02 1A

Table 245: Example: sWN DO2Fnc ➜ Out2 to device ready

Telegram structure: sWA DO2Fnc						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Output function	String	6	All	DO2Fnc	44 4F 32 46 6E 63

Table 246: Telegram structure: sWA DO2Fnc

Example: sWA DO2Fnc

CoLa A	ASCII	<STX>sWA{SPC}DO2Fnc<ETX>
	Hex	02 73 57 41 20 44 4F 32 46 6E 63 03
CoLa B	Binary	02 02 02 02 00 00 00 0A 73 57 41 20 44 4F 32 46 6E 63 37

Table 247: Example: sWA DO2Fnc

4.7.8 Change output 2 logic state

Telegram structure: sWN DO2Logic (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Output function	String	8	All	DO2Logic	44 4F 32 4C 6F 67 69 63
Output 2 logic state	State of the output	Enum_8	1	All	Active_High: 0 Active_Low: 1	Active_High: 00 Active_Low: 01

Table 248: Telegram structure: sWN DO2Logic

Example: sWN DO2Logic ➜ Active_High

CoLa A	ASCII	<STX>sWN{SPC}DO2Logic{SPC}0<ETX>
	Hex	02 73 57 4E 20 44 4F 32 4C 6F 67 69 63 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 57 4E 20 44 4F 32 4C 6F 67 69 63 20 00 1C

Table 249: Example: sWN DO2Logic ➜ Active_High

Telegram structure: sWA DO2Logic						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Output logic	String	8	All	DO2Logic	44 4F 32 4C 6F 67 69 63

Table 250: Telegram structure: sWA DO2Logic

Example: sWA DO2Logic

CoLa A	ASCII	<STX>sWA{SPC}DO2Logic<ETX>
	Hex	02 73 57 41 20 44 4F 32 4C 6F 67 69 63 03
CoLa B	Binary	02 02 02 02 00 00 00 0C 73 57 41 20 44 4F 32 4C 6F 67 69 63 32

Table 251: Example: sWA DO2Logic

4.7.9 Set synchronization mode



Telegram structure: sWN SYMode (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set sync mode	String	6	All	SYMode	53 59 4D 6F 64 65
Sync mode data	Synchronization mode data	Bool_1	1	All	No sync = 0 Sync by wire = 1 Sync by CAN = 2	Not possible

Table 252: Telegram structure: sWN SYMode

Example: sWN SYMode

CoLa A	ASCII	<STX>sWN{SPC}SYMode{SPC}1<ETX>
	Hex	02 73 57 4E 20 53 59 4D 6F 64 65 20 31 03
CoLa B	Binary	Not possible

Table 253: Example: sWN SYMode

Telegram structure: sWA SYMode						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set sync mode	String	6	All	SYMode	53 59 4D 6F 64 65

Table 254: Telegram structure: sWA SYMode

Example: sWA SYMode

CoLa A	ASCII	<STX>sWA{SPC}SYMode<ETX>
	Hex	02 73 57 41 20 53 59 4D 6F 64 65 03
CoLa B	Binary	Not possible

Table 255: Example: sWA SYMode

4.7.10 Set synchronization phase



Telegram structure: sWN SYPhase (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	Not possible
Command	Set sync phase	String	7	All	SYPhase	Not possible
Sync phase data	Synchronization phase data	Int_16	2	All	-180d ... +180d (FF4Ch ... 00B4h)	Not possible

Table 256: Telegram structure: sWN SYPhase

Example: sWN SYPhase +90

CoLa A	ASCII	<STX>sWN{SPC}SYPhase{SPC}+90<ETX>
	Hex	02 73 57 4E 20 53 59 50 68 61 73 65 20 2B 39 30 03
CoLa B	Binary	Not possible

Table 257: Example: sWN SYPhase +90



Telegram structure: sWA SYPhase						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	Not possible
Command	Set sync phase	String	7	All	SYPhase	Not possible

Table 258: Telegram structure: sWA SYPhase

Example: sWA SYPhase

CoLa A	ASCII	<STX>sWA{SPC}SYPhase<ETX>
	Hex	02 73 57 41 20 53 59 50 68 61 73 65 03
CoLa B	Binary	Not possible

Table 259: Example: sWA SYPhase

4.8 Inputs

4.8.1 Change input 4 function



Telegram structure: sWN DO3And4Fnc (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Input function	String	10	All	DO3And4Fnc	44 4F 33 41 6E 64 34 46 6E 63
Input state	Code number	Enum_8	1	All	No function: 0 Encoder: 1 Slave sync: 2 Digital input: 3	

Table 260: Telegram structure: sWN DO3And4Fnc

Example: sWN In4 ➜ In3+4 to slave sync

CoLa A	ASCII	<STX>sWN{SPC}DO3And4Fnc{SPC}2<ETX>
	Hex	02 73 57 4E 20 44 4F 33 41 6E 64 34 46 6E 63 20 02 03
CoLa B	Binary	Not available with firmware V1.10

Table 261: Example: sWN In4 ➜ In3+4 to slave sync



Telegram structure: sWA DO3And4Fnc						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Input function	String	10	All	DO3And4Fnc	44 4F 33 41 6E 64 34 46 6E 63

Table 262: Telegram structure: sWA DO3And4Fnc

Example: sWA DO3And4Fnc

CoLa A	ASCII	<STX>sWA{SPC}DO3And4Fnc<ETX>
	Hex	02 73 57 41 20 44 4F 33 41 6E 64 34 46 6E 63 03
CoLa B	Binary	Not available with firmware V1.10

Table 263: Example: sWA DO3And4Fnc

4.8.2 Set debouncing time for input x

The telegram applies for the inputs 1 to 4 (DIxDebTim, x = 1 ... 4). The following tables show the data for input 3.

Telegram structure: sWN DI3DebTim (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set debouncing time for input 3	String	9	All	DI3DebTim	44 49 33 44 65 62 54 69 6D
Debouncing time data	[ms]	Uint_16	2	All	0d ... +10000d (00h ... 2710h)	00 00 ... 27 10

Table 264: Telegram structure: sWN DI3DebTim

Example: sWN DI3DebTim

CoLa A	ASCII	<STX>sWN{SPC}DI3DebTim{SPC}+10<ETX>
	Hex	02 73 57 4E 20 44 49 33 44 65 62 54 69 6D 20 2B 31 30 03
CoLa B	Binary	02 02 02 02 00 00 00 10 73 57 4E 20 44 49 33 44 65 62 54 69 6D 20 00 0A 77

Table 265: Example: sWN DI3DebTim

Telegram structure: sWA DI3DebTim						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set debouncing time for input 3	String	9	All	DI3DebTim	44 49 33 44 65 62 54 69 6D

Table 266: Telegram structure: sWA DI3DebTim

Example: sWA DI3DebTim

CoLa A	ASCII	<STX>sWA{SPC}DI3DebTim<ETX>
	Hex	02 73 57 4E 20 44 49 33 44 65 62 54 69 6D 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 57 41 20 44 49 33 44 65 62 54 69 6D 20 48

Table 267: Example: sWA DI3DebTim

4.8.3 Read status of external sync signal



Telegram structure: sRN SYextmon						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Status of external sync signal	String	8	All	SYextmon	53 59 65 78 74 6D 6F 6E

Table 268: Telegram structure: sRN SYextmon

Example: sRN SYextmon

CoLa A	ASCII	<STX>sRN{SPC}SYextmon<ETX>
	Hex	02 73 52 4E 20 53 59 65 78 74 6D 6F 6E 03
CoLa B	Binary	02 02 02 02 00 00 00 0C 73 52 4E 20 53 59 65 78 74 6D 6F 6E 40

Table 269: Example: sRN SYextmon



Telegram structure: sRA SYextmon						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Status of external sync signal	String	8	All	SYextmon	53 59 65 78 74 6D 6F 6E
Sync status data	Synchronization status data	Uint_8	1	All	None: 1 Too slow: 2 Good: 4 Too fast: 8	None: 01 Too slow: 02 Good: 04 Too fast: 08
Signal frequency	[Frequency in Hz as float according to IEEE754]	Real	4	All	0h ... FFFFFFFFh	00 00 00 00 ... FF FF FF FF

Table 270: Telegram structure: sRA SYextmon

Example: sRA SYextmon (49.9 Hz)

CoLa A	ASCII	<STX>sRA{SPC}SYextmon{SPC}4{SPC}4247BD87<ETX>
	Hex	02 73 52 41 20 53 59 65 78 74 6D 6F 6E 20 04 42 47 BD 87 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 52 41 20 53 59 65 78 74 6D 6F 6E 20 04 42 47 BD 87 54

Table 271: Example: sRA SYextmon

4.9 Status

4.9.1 Read the status of the LMS

Telegram structure: sRN LCMstate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Status of LMS	String	8	All	LCMstate	4C 43 4D 73 74 61 74 65

Table 272: Telegram structure: sRN LCMstate

Example: sRN LCMstate

CoLa A	ASCII	<STX>sRN{SPC}LCMstate<ETX>
	Hex	02 73 52 4E 20 4C 43 4D 73 74 61 74 65 03
CoLa B	Binary	02 02 02 02 00 00 00 0C 73 52 4E 20 4C 43 4D 73 74 61 74 65 7A

Table 273: Example: sRN LCMstate

Telegram structure: sRA LCMstate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Status of LMS	String	8	All	LCMstate	4C 43 4D 73 74 61 74 65
Status code	Accepted when value is 0	Enum_8	1	All	No error: 0 Pollution warning: 1 Pollution error: 2 Fatal Error: 3	No error: 00 Pollution warning: 01 Pollution error: 02 Fatal Error: 03

Table 274: Telegram structure: sRA LCMstate

Example for LMS100: sRA LCMstate

CoLa A	ASCII	<STX>sRA{SPC}LCMstate{SPC}0<ETX>
	Hex	02 73 52 41 20 4C 43 4D 73 74 61 74 65 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 52 41 20 4C 43 4D 73 74 61 74 65 20 00 55

Table 275: Example for LMS100: sRA LCMstate

4.9.2 Read device ident



Telegram structure: sRN DeviceIdent						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read ident	String	11	All	DeviceIdent	44 65 76 69 63 65 49 64 65 6E 74

Table 276: Telegram structure: sRN DeviceIdent

Example: sRN DeviceIdent

CoLa A	ASCII	<STX>sRN{SPC}DeviceIdent<ETX>
	Hex	02 73 52 4E 20 44 65 76 69 63 65 49 64 65 6E 74 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 52 4E 20 44 65 76 69 63 65 49 64 65 6E 74 25

Table 277: Example: sRN DeviceIdent

Telegram structure: sRA DeviceIdent						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Start the device	String	11	All	DeviceIdent	44 65 76 69 63 65 49 64 65 6E 74
Value	Length of ident	Enum_16	1	All	0 ... 22h	0 ... 22h
Value	Ident information	String		All	(See example)	(See example)
Value	Length of version	Enum_16	1	All	0 ... 22h	0 ... 22h
Value	Version information	String		All	(See example)	(See example)

Table 278: Telegram structure: sRA DeviceIdent

Example: sRA DeviceIdent

CoLa A	ASCII	<STX>sRA{SPC}DeviceIdent{SPC}10{SPC}LMS10x_FieldEval{SPC}10{SPC}V1.36-21.10.2010<ETX>
	Hex	Always ASCII answer
CoLa B	Binary	02 02 02 02 00 00 00 34 73 52 41 20 44 65 76 69 63 65 49 64 65 6E 74 20 00 10 4C 4D 53 31 30 78 5F 46 69 65 6C 64 45 76 61 6C 00 10 56 31 2E 33 36 2D 32 31 2E 31 30 2E 32 30 31 30 62

Table 279: Example: sRA DeviceIdent

4.9.3 Read device state

This telegram reads the device state.



Telegram structure: sRN SCdevicestate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read state	String	13	All	SCdevicestate	53 43 64 65 76 69 63 65 73 74 61 74 65

Table 280: Telegram structure: sRN SCdevicestate

Example: sRN SCdevicestate

CoLa A	ASCII	<STX>sRN{SPC}SCdevicestate<ETX>
	Hex	02 73 52 4E 20 53 43 64 65 76 69 63 65 73 74 61 74 65 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 52 4E 20 53 43 64 65 76 69 63 65 73 74 61 74 65 30

Table 281: Example: sRN SCdevicestate



Telegram structure: sRA SCdevicestate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read state	String	13	All	SCdevicestate	53 43 64 65 76 69 63 65 73 74 61 74 65
Status code	Code number	Enum_8	1	LMS1xx NAV310 LD-OEM 15xx LD-LRS 36xx	Busy: 0 Ready: 1 Error: 2	Busy: 00 Ready: 01 Error: 02
				LMS5xx TiM5xx	Busy: 0 Ready: 1 Error: 2 Standby: 3	Busy: 00 Ready: 01 Error: 02 Standby: 03

Table 282: Telegram structure: sRA SCdevicestate

Example: sRA SCdevicestate

CoLa A	ASCII	<STX>sRA{SPC}SCdevicestate{SPC}0<ETX>
	Hex	02 73 52 41 20 53 43 64 65 76 69 63 65 73 74 61 74 65 20 00 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 52 41 20 53 43 64 65 76 69 63 65 73 74 61 74 65 20 00 1F

Table 283: Example: sRA SCdevicestate

4.9.4 Status commands for LD-XXX and NAV310

The following status commands will be explained in the subsequent sections:

- LMCmeasstate: Status of the internal Statemachine
- SCdevicestate: Status of the Sensors (actual measurement status)
- EMCustomerInfo: Additional error information
- LDMSenStat: Status of the state machine of the measurment core, Motor status

How status commands for for LD-XXX and NAV310 work together:

- If LMCmeasstate changes to “Idle” or an other status, although the measurement status “Measure2D” is expected, there is an error during the measurement (or during start up of the measurement).
- SCdevicestate is always "Ready", if the measurement is active.
  If “Busy” will be indicated the unit is not measuring (e.g, IDLE). If there is any failure “Error” will be indicated. (However LMCmeasstate could indicate “Measure2D”, if the failure occurs during the measurement, because it is only an indication of the status of the State machine).
- In case of a failure EMCustomerInfo can provide an information about the error.
  In case of an motor failure there are following condition visible:
  - Motor blocked during operation ➜ DEVICE_FAILURE
  - Motor blocked during spin up ➜ CHECK_PARAMETER
- It is also possible to read LDMSenStat (and to register as an event). This value equals the Sensorstatus of the NAV310/LD-XXX. A status “B1” of the measurement core means “Motor error and Idle”).
- During the measurement it is possible to monitor a deviation of the target rotation frequency. (If the device detects rotation values that are too slow, it will terminate the measurement.)

In case of an failure this value will not always be updated, therefore it is necessary to monitor LMCmeasstate and SCdevicestate in parallel.

NOTE

- In case of an failure (Scanner does not change to MEASURE2D or switches back to IDLE), it is necessary to send the command LMCstopmeas (even if the Status is indicated as IDLE)
- If at EMCustomerInfo the message CHECK_PARAMETER is indicated, a reset is only possible by a power cycle of the scanner.

Ask for Device Measurement State

Telegram structure: sRN LMCmeasstate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Ask for measurement state	String	12	All	LMCmeasstate	4C 4D 43 6D 65 61 73 73 74 61 74 65

Table 284: Telegram structure: sRN LMCmeasstate

Example: sRN LMCmeasstate

CoLa A	ASCII	<STX>sRN{SPC}sRN LMCmeasstate<ETX>
	Hex	02 73 52 4E 20 4C 4D 43 6D 65 61 73 73 74 61 74 65 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 52 4E 20 4C 4D 43 6D 65 61 73 73 74 61 74 65 30

Table 285: Example: sRN LMCmeasstate

Telegram structure: sRA LMCmeasstate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Report measurement state	String	12	All	LMCmeasstate	4C 4D 43 6D 65 61 73 73 74 61 74 65
Status code	Current measurement state	Enum_16	2	All	Idle: 3 Ready 2D: 6 Measure 2D: 7 Other state codes may show up during booting, firmware update or transition between states.	Idle: 0003 Ready 2D: 0006 Measure 2D: 0007

Table 286: Telegram structure: sRA LMCmeasstate

Example: sRA LMCmeasstate is Measure 2D

CoLa A	ASCII	<STX>sRA{SPC}LMCmeasstate{SPC}7<ETX>
	Hex	02 73 52 41 20 4C 4D 43 6D 65 61 73 73 74 61 74 65 20 00 07 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 52 41 20 4C 4D 43 6D 65 61 73 73 74 61 74 65 20 00 07 1F

Table 287: Example: sRA LMCmeasstate is Measure 2D

Ask for customer info of sensor

This telegram will provide additional error information.

Telegram structure: sRN EMCustomerInfo						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Ask for customer info	String	14	All	EMCustomerInfo	45 4D 43 75 73 74 6F 6D 65 72 49 6E 66 6F

Table 288: Telegram structure: sRN EMCustomerInfo

Example: sRN EMCustomerInfo

CoLa A	ASCII	<STX>sRN{SPC}EMCustomerInfo<ETX>
	Hex	02 73 52 4E 20 45 4D 43 75 73 74 6F 6D 65 72 49 6E 66 6F 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 52 4E 20 45 4D 43 75 73 74 6F 6D 65 72 49 6E 66 6F 4D

Table 289: Example: sRN EMCustomerInfo

Telegram structure: sRA EMCustomerInfo						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Report customer info	String	14	All	EMCustomerInfo	45 4D 43 75 73 74 6F 6D 65 72 49 6E 66 6F
Status code	Customer info	Enum_16	2	All	0: DEVICE_OK 1: DEFECTIVE_DEVICE 2: DEVICE_TEMP_FAILURE 3: DEVICE_FAILURE 4: DEVICE_NOT_READY 5: CHECK_PARAMETER	0000: DEVICE_OK 0001: DEFECTIVE_DEVICE 0002: DEVICE_TEMP_FAILURE 0003: DEVICE_FAILURE 0004: DEVICE_NOT_READY 0005: CHECK_PARAMETER
					DEFECTIVE_DEVICE: Please return device to SICK DEVICE_TEMP_FAILURED: Device failure. Please check temperature. DEVICE_FAILURE : Please switch off for 20 seconds and power up again. DEVICE_NOT_READY: Please wait. CHECK_PARAMETER: Warning – please check parametrization.	

Table 290: Telegram structure: sRA EMCustomerInfo

Example: sRA EMCustomerInfo = Device OK

CoLa A	ASCII	<STX>sRA{SPC}EMCustomerInfo{SPC}0<ETX>
	Hex	02 73 52 41 20 45 4D 43 75 73 74 6F 6D 65 72 49 6E 66 6F 20 00 03
CoLa B	Binary	02 02 02 02 00 00 00 14 73 52 4E 20 45 4D 43 75 73 74 6F 6D 65 72 49 6E 66 6F 20 00 6D

Table 291: Example: sRA EMCustomerInfo = Device OK

Ask for Sensorstatus

This telegram provides status information of the State Machine of measurement core and the Motor Status

Telegram structure: sRN LDMSenStat						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Ask for state	String	10	All	LDMSenStat	4C 44 4D 53 65 6E 53 74 61 74

Table 292: Telegram structure: sRN LDMSenStat

Example: sRN LDMSenStat

CoLa A	ASCII	<STX>sRN{SPC}LDMSenStat<ETX>
	Hex	02 73 52 4E 20 4C 44 4D 53 65 6E 53 74 61 74 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 52 4E 20 4C 44 4D 53 65 6E 53 74 61 74 60

Table 293: Example: sRN LDMSenStat

Telegram structure: sRA LDMSenStat						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Report state	String	10	All	LDMSenStat	4C 44 4D 53 65 6E 53 74 61 74

Telegram structure: sRA LDMSenStat						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Status code	Current state regarding ...	Uint_32	4	All	Idle: 3 Ready 2D: 6 Measure 2D: 7 Other state codes may show up during booting, firmware update or transition between states.	Idle: 0003 Ready 2D: 0006 Measure 2D: 0007
	Working mode		Bit 0...3		Idle: 1 Rotate: 2 Measure: 3 Error: 4 (Other bits: reserved)	Idle: 1 Rotate: 2 Measure: 3 Error: 4 (Other bits: reserved)
	Motor mode		Bit 4...7		Motor ok: 0 Motor spin to low: 4 Motor spin to high: 9 Motor stops or coder error: B (Other bits: reserved)	Motor ok: 0 Motor spin to low: 4 Motor spin to high: 9 Motor stop or coder error: B (Other bits: reserved)
	(Reserved)		Bit 8...31		(Reserved)	(Reserved)

Table 294: Telegram structure: sRA LDMSenStat

Example: sRA LDMSenStat is in error mode

CoLa A	ASCII	<STX>sRA{SPC}LDMSenStat{SPC}B4<ETX>
	Hex	02 73 52 41 20 4C 44 4D 53 65 6E 53 74 61 74 20 00 B4 03
CoLa B	Binary	

Table 295: Example: sRA LDMSenStat is in error mode, motor has stopped or coder error

4.9.5 Read device information

Device order number

This telegram reads the device order number.

Telegram structure: sRN DIornr						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read state	String	6	All	DIornr	44 49 6F 72 6E 72

Table 296: Telegram structure: sRN DIornr

Example: sRN DIornr

CoLa A	ASCII	<STX>sRN{SPC}DIornr<ETX>
	Hex	02 73 52 4E 20 44 49 6F 72 6E 72 03
CoLa B	Binary	02 02 02 02 00 00 00 0A 73 52 4E 20 44 49 6F 72 6E 72 43

Table 297: Example: sRN DIornr

Telegram structure: sRA Dlornr						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read state	String	6	All	Dlornr	44 49 6F 72 6E 72
Order number	Order number in 7 digits	String	7	All	0000000 ... 9999999	00 00 00 00 00 00 00 ... FF FF FF FF FF FF FF

Table 298: Telegram structure: sRA Dlornr

Example: sRA Dlornr 1047782 (Order Number for LMS511-20100)

CoLa A	ASCII	<STX>sRA{SPC}Dlornr{SPC}1047782<ETX>
	Hex	02 73 52 41 20 44 49 6F 72 6E 72 20 31 30 34 37 37 38 32 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 52 41 20 44 49 6F 72 6E 72 20 31 30 34 37 37 38 32 53

Table 299: Example for LMS511-20100: sRA Dlornr

Example: sRA Dlornr 1067299 (Order Number for TIM351-2134001)

CoLa A	ASCII	<STX>sRA{SPC}Dlornr{SPC}1067299<ETX>
	Hex	02 73 52 41 20 44 49 6F 72 6E 72 20 31 30 36 37 32 39 39 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 52 41 20 44 49 6F 72 6E 72 20 31 30 36 37 32 39 39 5E

Table 300: Example for TiM561-2050101: sRA Dlornr

Device type

This telegram asks for the device type.

Telegram structure: sRN Dltype						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Ask state	String	6	All	Dltype	44 49 74 79 70 65

Table 301: Telegram structure: sRN Dltype

Example: sRN DItype

CoLa A	ASCII	<STX>sRN{SPC}DItype<ETX>
	Hex	02 73 52 4E 20 44 49 74 79 70 65 03
CoLa B	Binary	02 02 02 02 00 00 00 0A 73 52 4E 20 44 49 74 79 70 65 5A

Table 302: Example: sRN DItype

Telegram structure: sRA DItype						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Ask state	String	6	All	DItype	44 49 74 79 70 65
Length of type key	Number of digits of the following type code length	Uint_8	1	All	0d ... 255d (0h ... FF)	00 ... FF
Device type	Type code of the device	String	(var.)	All	(Device type)	(Device type)

Table 303: Telegram structure: sRA DItype

Example for LMS511-20100

CoLa A	ASCII	<STX>sRA{SPC}DItype{SPC}C{SPC}LMS511-20100<ETX>
	Hex	02 73 52 41 20 44 49 74 79 70 65 20 43 20 4C 4D 53 35 31 31 2D 32 30 31 30 30 03
CoLa B	Binary	02 02 02 02 00 00 00 18 73 52 41 20 44 49 74 79 70 65 20 0C 4C 4D 53 35 31 31 2D 32 30 31 30 30 00

Table 304: Example for LMS511-20100: sRA DItype

Example for TiM561-2050101

CoLa A	ASCII	<STX>sRA{SPC}DItype{SPC}E{SPC}TIM561-2050101<ETX>
	Hex	02 73 52 41 20 44 49 74 79 70 65 20 45 20 54 49 4D 35 36 31 2D 32 30 35 30 31 30 31 03
CoLa B	Binary	02 02 02 02 00 00 00 1A 73 52 41 20 44 49 74 79 70 65 20 0E 54 49 4D 35 36 31 2D 32 30 35 30 31 30 31 03

Table 305: Example for TiM561-2050101: sRA DItype

4.9.6 Read operating hours

Telegram structure: sRN ODoprh						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read operating hours	String	6	All	ODoprh	4F 44 6F 70 72 68

Table 306: Telegram structure: sRN ODoprh

Example: sRN ODoprh

CoLa A	ASCII	<STX>sRN{SPC}ODoprh<ETX>
	Hex	02 73 52 4E 20 4F 44 6F 70 72 68 03
CoLa B	Binary	02 02 02 02 00 00 00 0A 73 52 4E 20 4F 44 6F 70 72 68 41

Table 307: Example: sRN ODoprh

Telegram structure: sRA ODoprh						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read operating hours	String	6	All	ODoprh	4F 44 6F 70 72 68
Value	Operating hours in 1/10 h	Uint_32	4	All	0h ... FFFFFFFFh	00 00 00 00 ... FF FF FF FF

Table 308: Telegram structure: sRA ODoprh

Example: sRA ODoprh

CoLa A	ASCII	<STX>sRA{SPC}ODoprh{SPC}2DC8B<ETX>
	Hex	02 73 52 41 20 4F 44 6F 70 72 68 20 32 44 43 38 42 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 52 41 20 4F 44 6F 70 72 68 20 00 02 DC 8B 36

Table 309: Example: sRA ODoprh

Calculation of the value: 2DC8B (hex) ➜ 187531 (dez) × 1/10 h = 18753.1 h

4.9.7 Read power on counter



Telegram structure: sRN ODpwrc						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read power on counter	String	6	All	ODpwrc	4F 44 70 77 72 63

Table 310: Telegram structure: sRN ODpwrc

Example: sRN ODpwrc

CoLa A	ASCII	<STX>sRN{SPC}ODpwrc<ETX>
	Hex	02 73 52 4E 20 4F 44 70 77 72 63 03
CoLa B	Binary	02 02 02 02 00 00 00 0A 73 52 4E 20 4F 44 70 77 72 63 52

Table 311: Example: sRN ODpwrc

Telegram structure: sRA ODpwrc						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read power on counter	String	6	All	ODpwrc	4F 44 70 77 72 63
Value	Power on counter	Uint_32	4	All	0h ... FFFFFFFFh	00 00 00 00 ... FF FF FF FF

Table 312: Telegram structure: sRA ODpwrc

Example: sRA ODpwrc

CoLa A	ASCII	<STX>sRA{SPC}ODpwrc{SPC}752D<ETX>
	Hex	02 73 52 41 20 4F 44 70 77 72 63 20 752D 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 52 41 20 4F 44 70 77 72 63 20 00 00 75 2D 36

Table 313: Example: sRA ODpwrc

4.9.8 Read temperature

With this command the internal temperature of the device can be identified. Please note that it does not give an indication of the current ambient temperature.

Telegram structure: sRN OPcurtmpdev						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read temperature of the device	String	11	All	OPcurtmpdev	4F 50 63 75 72 74 6D 70 64 65 76

Table 314: Telegram structure: sRN OPcurtmpdev

Example: sRN OPcurtmpdev

CoLa A	ASCII	<STX>sRN{SPC}OPcurtmpdev<ETX>
	Hex	02 73 52 4E 20 4F 50 63 75 72 74 6D 70 64 65 76 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 52 4E 20 4F 50 63 75 72 74 6D 70 64 65 76 2A

Table 315: Example: sRN OPcurtmpdev

Telegram structure: sRA OPcurtmpdev						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read temperature of the device	String	11	All	OPcurtmpdev	4F 50 63 75 72 74 6D 70 64 65 76
Tempera-ture data	[°C as float accord-ing to IEEE754]	Real	4	All	C2480000h ... 42C80000h (-50 °C ... +100 °C)	C2 48 00 00 ... 42 C8 00 00

Table 316: Telegram structure: sRA OPcurtmpdev

Example: sRA OPcurtmpdev (-50 °C)

CoLa A	ASCII	<STX>sRA{SPC}OPcurtmpdev{SPC}420C0000<ETX>
	Hex	02 73 52 41 20 4F 50 63 75 72 74 6D 70 64 65 76 20 42 0C 00 00 03
CoLa B	Binary	02 02 02 02 00 00 00 14 73 52 41 20 4F 50 63 75 72 74 6D 70 64 65 76 20 42 0C 00 00 4B

Table 317: Example: sRA OPcurtmpdev

4.9.9 Set device name

Telegram structure: sWN LocationName (Maintenance)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set device name	String	12	All	LocationName	4C 6F 63 61 74 69 6F 6E 4E 61 6D 65
Value	Array of characters of the following device name	Uint_16	2	All	0d ... +16d (0h ... 10h)	00 00 ... 00 10
Value	Device name	String	16	All	[Device name]	[Device name]

Table 318: Telegram structure: sWN LocationName

Example: sWN LocationName +13 OutdoorDevice

CoLa A	ASCII	<STX>sWN{SPC}LocationName{SPC}+13{SPC}OutdoorDevice<ETX>
	Hex	02 73 57 4E 20 4C 6F 63 61 74 69 6F 6E 4E 61 6D 65 20 2B 31 33 20 4F 75 74 64 6F 6F 72 44 65 76 69 63 65 03
CoLa B	Binary	02 02 02 02 00 00 00 20 73 57 4E 20 4C 6F 63 61 74 69 6F 6E 4E 61 6D 65 20 00 0D 4F 75 74 64 6F 6F 72 44 65 76 69 63 65 1D

Table 319: Example: sWN LocationName +13 OutdoorDevice

Telegram structure: sWA LocationName						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set device name	String	12	All	LocationName	4C 6F 63 61 74 69 6F 6E 4E 61 6D 65

Table 320: Telegram structure: sWA LocationName

Example: sWA LocationName

CoLa A	ASCII	<STX>sWA{SPC}LocationName<ETX>
	Hex	02 73 57 41 20 4C 6F 63 61 74 69 6F 6E 4E 61 6D 65 03
CoLa B	Binary	02 02 02 02 00 00 00 20 73 57 41 20 4C 6F 63 61 74 69 6F 6E 4E 61 6D 65 74

Table 321: Example: sWA LocationName

4.9.10 Read for device name



Telegram structure: sRN LocationName						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read device name	String	12	All	LocationName	4C 6F 63 61 74 69 6F 6E 4E 61 6D 65

Table 322: Telegram structure: sRN LocationName

Example: sRN LocationName

CoLa A	ASCII	<STX>sRN{SPC}LocationName<ETX>
	Hex	02 73 52 4E 20 4C 6F 63 61 74 69 6F 6E 4E 61 6D 65 03
CoLa B	Binary	02 02 02 02 00 00 00 10 73 52 4E 20 4C 6F 63 61 74 69 6F 6E 4E 61 6D 65 55

Table 323: Example: sRN LocationName

Telegram structure: sRA LocationName						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read device name	String	12	All	LocationName	4C 6F 63 61 74 69 6F 6E 4E 61 6D 65
Value	Array of characters of the following device name	Uint_16	2	All	0d ... +16d (0h ... 10h)	00 00 ... 00 10
Value	Device name	String	16	All	[Device name]	[Device name]

Table 324: Telegram structure: sRA LocationName

Example: sRA LocationName

CoLa A	ASCII	<STX>sRA{SPC}LocationName{SPC}D{SPC}OutdoorDevice<ETX>
	Hex	02 73 52 41 20 4C 6F 63 61 74 69 6F 6E 4E 61 6D 65 20 44 20 4F 75 74 64 6F 6F 72 44 65 76 69 63 65 03
CoLa B	Binary	02 02 02 02 00 00 00 17 73 52 41 20 4C 6F 63 61 74 69 6F 6E 4E 61 6D 65 20 00 0D 4F 75 74 64 6F 6F 72 44 65 76 69 63 65 20

Table 325: Example: sRA LocationName

4.9.11 Read angle compensation sine



Telegram structure: sRN MCAngleCompSin						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read angle compensation sine	String	14	All	MCAngleCompSin	4D 43 41 6E 67 6C 65 43 6F 6D 70 53 69 6E

Table 326: Telegram structure: sRN MCAngleCompSin

Example: sRN MCAngleCompSin

CoLa A	ASCII	<STX>sRN{SPC}MCAngleCompSin<ETX>
	Hex	02 73 52 4E 20 4D 43 41 6E 67 6C 65 43 6F 6D 70 53 69 6E 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 52 4E 20 4D 43 41 6E 67 6C 65 43 6F 6D 70 53 69 6E 65

Table 327: Example: sRN MCAngleCompSin



Telegram structure: sRA MCAngleCompSin						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Angle compensation sine	String	14	All	MCAngleCompSin	4D 43 41 6E 67 6C 65 43 6F 6D 70 53 69 6E
Amplitude	[1/10000°]	Int_16	2	All	-10000d ... +10000d (D8F0h ... 2710h)	D8 F0 ... 27 10
Phase	[1/10000°]	Int_32	4	All	-3600000d ... +3600000d (FFC91180h ... 36EE80h)	FF C9 11 80 ... 00 36 EE 80
Offset	[1/10000°]	Int_16	2	All	-10000d ... +10000d (D8F0h ... 2710h)	D8 F0 ... 27 10

Table 328: Telegram structure: sRA MCAngleCompSin

Example: sRA MCAngleCompSin

CoLa A	ASCII	<STX>sRA{SPC}MCAngleCompSin{SPC}0{SPC}0{SPC}0<ETX>
	Hex	02 73 52 41 20 4D 43 41 6E 67 6C 65 43 6F 6D 70 53 69 6E 20 30 20 30 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 18 73 52 41 20 4D 43 41 6E 67 6C 65 43 6F 6D 70 53 69 6E 20 00 00 00 00 00 00 00 00 4A

Table 329: Example: sRA MCAngleCompSin

The values of the angular compensation could be retrieved form the memory of the NAV310 to improve the angular measurement accuracy.

The applied formula is:

AngleComp = AngleRaw + (AngleCompAmp * sin(AngleRaw - AngleCompPhase) + AngleCompOffset

Example (C coded):

```
angleRaw: Raw angle as float in degrees (0.000 ... 359999)
angleComp:Compensated angle as float in degrees (0.000 ... 359999)
AngleCompAmp
AngleCompPhase
AngleCompOffset: Compensation parameters as int in 1/1000 degrees
float compensateAngle(float angleRaw)
{
    float angleComp;
    angleRaw += ((float) AngleCompOffset)/1000.0;
    angleRaw += (((float) AngleCompAmp)/1000.0) *
        sin((DEGTORAD * (angle - ((float) AngleCompPhase)/1000.0)));
    return angleComp;
}
```

4.9.12 Reset output counter



Telegram structure: sMN LIDrstoutpcnt (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Reset output counter	String	13	All	LIDrstoutpcnt	4C 49 44 72 73 74 6F 75 74 70 63 6E 74

Table 330: Telegram structure: sMN LIDrstoutpcnt

Example: sMN LIDrstoutpcnt

CoLa A	ASCII	<STX>sMN{SPC}LIDrstoutpcnt<ETX>
	Hex	02 73 4D 4E 20 4C 49 44 72 73 74 6F 75 74 70 63 6E 74 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 4D 4E 20 4C 49 44 72 73 74 6F 75 74 70 63 6E 74 03

Table 331: Example: sMN LIDrstoutpcnt

Telegram structure: sAN LIDrstoutpcnt						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Reset state	String	13	All	LIDrstoutpcnt	4C 49 44 72 73 74 6F 75 74 70 63 6E 74
Status code	Code number	Bool_1	1	All	Success: 0 Error: 1	Success: 00 Error: 01

Table 332: Telegram structure: sAN LIDrstoutpcnt

Example: sAN LIDrstoutpcnt

CoLa A	ASCII	<STX>sAN{SPC}LIDrstoutpcnt{SPC}0<ETX>
	Hex	02 73 41 4E 20 4C 49 44 72 73 74 6F 75 74 70 63 6E 74 20 30 03
CoLa B	Binary	02 02 02 02 00 00 00 13 73 41 4E 20 4C 49 44 72 73 74 6F 75 74 70 63 6E 74 20 00 2F

Table 333: Example: sAN LIDrstoutpcnt

4.10 Interfaces

4.10.1 Set IP address

IMPORTANT

- Save permanently to set values. Changes will be active after rebooting the device.
- Settings must correspond with network in which scanner is used. Else device cannot be found any more.



Telegram structure: sWN EIIpAddr (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set IP address	String	8	All	EIIpAddr	45 49 49 50 41 64 64 72
IP address	Set values in hex	Uint_32	4	All	00 00 00 00h ... FF FF FF FFh (decimal values unwieldy)	00 00 00 00 ... FF FF FF FF

Table 334: Telegram structure: sWN EIIpAddr

Example: sWN EIIpAddr 192.168.0.2

CoLa A	ASCII	<STX>sWN{SPC}EIIpAddr{SPC}C0{SPC}A8{SPC}0{SPC}2<ETX>
	Hex	02 73 57 4E 20 45 49 49 70 41 64 64 72 20 43 30 20 41 38 20 30 20 32 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 57 4E 20 45 49 49 70 41 64 64 72 20 C0 A8 00 02 05

Table 335: Example: sWN EIIpAddr 192.168.0.2



Telegram structure: sWA EIIpAddr						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set IP address	String	8	All	EIIpAddr	45 49 49 50 41 64 64 72

Table 336: Telegram structure: sWA EIIpAddr

Example: sWA EIIpAddr

CoLa A	ASCII	<STX>sWA{SPC}EIIpAddr<ETX>
	Hex	02 73 57 41 20 45 49 49 70 41 64 64 72 03
CoLa B	Binary	02 02 02 02 00 00 00 0D 73 57 41 20 45 49 49 70 41 64 64 72 63

Table 337: Example: sWA EIIpAddr

4.10.2 Read IP address



Telegram structure: sRN EIIpAddr						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read IP address	String	8	All	EIIpAddr	45 49 49 50 41 64 64 72

Table 338: Telegram structure: sRN EIIpAddr

Example: srN EIIpAddr

CoLa A	ASCII	<STX>sRN{SPC}EIIpAddr<ETX>
	Hex	02 73 57 4E 20 45 49 49 70 41 64 64 72 03
CoLa B	Binary	02 02 02 02 00 00 00 0C 73 52 4E 20 45 49 49 70 41 64 64 72 49

Table 339: Example: srN EIIpAddr



Telegram structure: sRA EIIpAddr						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Set IP address	String	8	All	EIIpAddr	45 49 49 50 41 64 64 72
IP address	Set values in hex	Uint_32	4	All	00 00 00 00h ... FF FF FF FFh (decimal values unwieldy)	00 00 00 00 ... FF FF FF FF

Table 340: Telegram structure: sRA EIIpAddr

Example: sRA EIIpAddr 192.168.0.2

CoLa A	ASCII	<STX>sRA{SPC}EIIpAddr{SPC}C0{SPC}A8{SPC}00{SPC}02<ETX>
	Hex	02 73 57 41 20 45 49 49 70 41 64 64 72 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 52 41 20 45 49 49 70 41 64 64 72 20 C0 A8 00 02 0C

Table 341: Example: sRA EIIpAddr 192.168.0.2

4.10.3 Set Ethernet gateway

Change Ethernet gateway IP address (TCP/IP)

IMPORTANT

- Save permanently to set values. Changes will be active after rebooting the device.
- Settings must correspond with network in which scanner is used. Else device cannot be found any more.



Telegram structure: sWN EIgate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set gateway adress	String	6	All	EIgate	45 49 67 61 74 65
Gateway address	Set values in hex	Uint_32	4	All	00 00 00 00h ... FF FF FF FFh (decimal values unwieldy)	00 00 00 00 ... FF FF FF FF

Table 342: Telegram structure: sWN EIgate

Example: sWN EIgate 192.168.0.1

CoLa A	ASCII	<STX>sWN{SPC}EIgate{SPC}C0{SPC}A8{SPC}00{SPC}01<ETX>
	Hex	02 73 57 4E 20 45 49 67 61 74 65 20 43 30 20 41 38 20 30 30 20 30 31 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 57 4E 20 45 49 67 61 74 65 20 C0 A8 00 01 5A

Table 343: Example: sWN EIgate 192.168.0.1



Telegram structure: sWA Elgate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set gateway address	String	6	All	Elgate	45 49 67 61 74 65

Table 344: Telegram structure: sWA Elgate

Example: sWA Elgate

CoLa A	ASCII	<STX>sWA{SPC}Elgate<ETX>
	Hex	02 73 57 41 20 45 49 67 61 74 65 03
CoLa B	Binary	02 02 02 02 00 00 00 0A 73 57 41 20 45 49 67 61 74 65 5E

Table 345: Example: sWA Elgate

4.10.4 Read Ethernet gateway

Read for the Ethernet gateway (TCP/IP)



Telegram structure: sRN Elgate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read gateway address	String	6	All	Elgate	45 49 67 61 74 65

Table 346: Telegram structure: sRN Elgate

Example: sRN Elgate

CoLa A	ASCII	<STX>sRN{SPC}Elgate<ETX>
	Hex	02 73 52 4E 20 45 49 67 61 74 65 03
CoLa B	Binary	02 02 02 02 00 00 00 0A 73 52 4E 20 45 49 67 61 74 65 54

Table 347: Example: sRN Elgate



Telegram structure: sRA Elgate						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read gateway address	String	6	All	Elgate	45 49 67 61 74 65
Gateway address	Values in hex	Uint_32	4	All	00 00 00 00h ... FF FF FF FFh (decimal values unwieldy)	00 00 00 00 ... FF FF FF FF

Table 348: Telegram structure: sRA Elgate

Example: sRA Elgate 192.168.0.1

CoLa A	ASCII	<STX>sRA{SPC}Elgate{SPC}C0{SPC}A8{SPC}00{SPC}01<ETX>
	Hex	02 73 52 41 20 45 49 67 61 74 65 20 C0 A8 00 01 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 52 41 20 45 49 67 61 74 65 20 C0 A8 00 01 12

Table 349: Example: sRA Elgate 192.168.0.1

4.10.5 Set IP mask

IMPORTANT

- Save permanently to set values. Changes will be active after rebooting the device.
- Settings must correspond with network in which scanner is used. Else device cannot be found any more.

Telegram structure: sWN EImask						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set IP mask	String	6	All	EImask	45 49 6D 61 73 6B
IP mask	Set values in hex	Uint_32	4	All	00 00 00 00h ... FF FF FF FFh (decimal values unwieldy)	00 00 00 00 ... FF FF FF FF

Table 350: Telegram structure: sWN EImask

Example: sWN EImask 255.255.254.0

CoLa A	ASCII	<STX>sWN{SPC}EImask{SPC}FF{SPC}FF{SPC}FE{SPC}00<ETX>
	Hex	02 73 57 4E 20 45 49 6D 61 73 6B 20 46 46 20 46 46 20 46 45 20 30 30 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 57 4E 20 45 49 6D 61 73 6B 20 FF FF FE 00 8C

Table 351: Example: sWN EImask 255.255.254.0

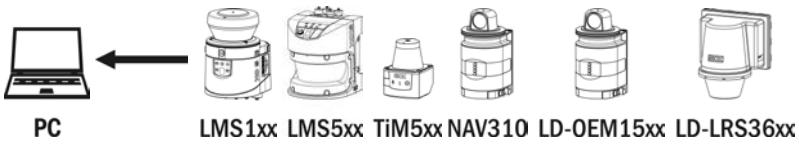

Telegram structure: sWA EImask						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set IP mask	String	6	All	EImask	45 49 6D 61 73 6B

Table 352: Telegram structure: sWA EImask

Example: sWA EImask

CoLa A	ASCII	<STX>sWA{SPC}EImask<ETX>
	Hex	02 73 57 41 20 45 49 6D 61 73 6B 03
CoLa B	Binary	02 02 02 02 00 00 00 0A 73 57 41 20 45 49 6D 61 73 6B 63

Table 353: Example: sWA EImask

4.10.6 Read IP mask



Telegram structure: sRN EImask						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read IP mask	String	6	All	EImask	45 49 6D 61 73 6B

Table 354: Telegram structure: sRN EImask

Example: sRN EImask

CoLa A	ASCII	<STX>sRN{SPC}EImask<ETX>
	Hex	02 73 52 4E 20 45 49 6D 61 73 6B 03
CoLa B	Binary	02 02 02 02 00 00 00 0A 73 52 4E 20 45 49 6D 61 73 6B 57

Table 355: Example: sRN EImask



Telegram structure: sRA EImask						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read IP mask	String	6	All	EImask	45 49 6D 61 73 6B
IP mask	Values in hex	Uint_32	4	All	00 00 00 00h ... FF FF FF FFh (decimal values unwieldy)	00 00 00 00 ... FF FF FF FF

Table 356: Telegram structure: sRA EImask

Example: sRA EImask 255.255.254.0

CoLa A	ASCII	<STX>sRA{SPC}EImask{SPC}FF{SPC}FF{SPC}FE{SPC}00<ETX> <STX>sRN{SPC}EImask<ETX>
	Hex	02 73 52 41 20 45 49 6D 61 73 6B 20 45 49 6D 61 73 6B 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 52 41 20 45 49 6D 61 73 6B 20 FF FF FE 00 86

Table 357: Example: sRA EImask 255.255.254.0

4.10.7 Set baud rate for host interface

Telegram structure: sWN SIHstBaud (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set baud rate for host interface	String	9	All	SIHstBaud	53 49 48 73 74 42 61 75 64
Baud rate data	Baud rate data for host interface	Enum_8	1	All	9600: +5d (05h) 19200: +6d (06h) 38400: +7d (07h) 57600: +8d (08h) 115200: +9d (09h)	9600: 05 19200: 06 38400: 07 57600: 08 115200: 09
				LMS1xx, LMS5xx	250000: +10d (0Ah) 500000: +11d (0Bh)	250000: 0A 500000: 0B

Table 358: Telegram structure: sWN SIHstBaud

Example: sWN SIHstBaud

CoLa A	ASCII	<STX>sWN{SPC}SIHstBaud{SPC}+8<ETX>
	Hex	02 73 57 4E 20 53 49 48 73 74 42 61 75 64 20 08 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 57 4E 20 53 49 48 73 74 42 61 75 64 20 08 05

Table 359: Example: sWN SIHstBaud

Telegram structure: sWA SIHstBaud						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set baud rate for host interface	String	9	All	SIHstBaud	53 49 48 73 74 42 61 75 64

Table 360: Telegram structure: sWA SIHstBaud

Example: sWA SIHstBaud

CoLa A	ASCII	<STX>sWA{SPC}SIHstBaud<ETX>
	Hex	02 73 57 41 20 53 49 48 73 74 42 61 75 64 03
CoLa B	Binary	02 02 02 02 00 00 00 0E 73 57 41 20 53 49 48 73 74 42 61 75 64 20 02

Table 361: Example: sWA SIHstBaud

4.10.8 Read baud rate of host interface

Telegram structure: sRN SIHstBaud						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read baud rate of host interface	String	9	All	SIHstBaud	53 49 48 73 74 42 61 75 64

Table 362: Telegram structure: sRN SIHstBaud

Example: sRN SIHstBaud

CoLa A	ASCII	<STX>sRN{SPC}SIHstBaud<ETX>
	Hex	02 73 52 4E 20 53 49 48 73 74 42 61 75 64 03
CoLa B	Binary	02 02 02 02 00 00 00 0D 73 52 4E 20 53 49 48 73 74 42 61 75 64 28

Table 363: Example: sRN SIHstBaud



Telegram structure: sRA SIHstBaud						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read baud rate of host interface	String	9	All	SIHstBaud	53 49 48 73 74 42 61 75 64
Baud rate data	Baud rate data of host interface	Enum_8	1	All	9600: 5d (05h) 19200: 6d (06h) 38400: 7d (07h) 57600: 8d (08h) 115200: 9d (09h)	9600: 05 19200: 06 38400: 07 57600: 08 115200: 09
				LMS1xx, LMS5xx	250000: 10d (0Ah) 500000: 11d (0Bh)	250000: 0A 500000: 0B

Table 364: Telegram structure: sRA SIHstBaud

Example: sRA SIHstBaud

CoLa A	ASCII	<STX>sRA{SPC}SIHstBaud{SPC}8<ETX>
	Hex	02 73 52 41 20 53 49 48 73 74 42 61 75 64 20 08 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 52 41 20 53 49 48 73 74 42 61 75 64 20 08 0F

Table 365: Example: sRA SIHstBaud

4.10.9 Set interface type

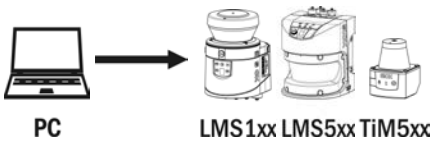

Telegram structure: sWN SIHstHw (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set hardware settings for host interface	String	7	All	SIHstHw	53 49 48 73 74 48 77
Interface type data	Hardware settings data for host interface	Enum_8	1	All	TX_RS232: 0 TX_RS485_2WIRE: 1 TX_RS422_485_4WIRE: 2	TX_RS232: 00 TX_RS485_2WIRE: 01 TX_RS422_485_4WIRE: 02

Table 366: Telegram structure: sWN SIHstHw

Example: sWN SIHstHw

CoLa A	ASCII	<STX>sWN{SPC}SIHstHw{SPC}0<ETX>
	Hex	02 73 57 4E 20 53 49 48 73 74 48 77 20 00 03
CoLa B	Binary	02 02 02 02 00 00 00 0D 73 57 4E 20 53 49 48 73 74 48 77 20 00 00

Table 367: Example: sWN SIHstHw

Telegram structure: sWA SIHstHw						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Set hardware settings for host interface	String	7	All	SIHstHw	53 49 48 73 74 48 77

Table 368: Telegram structure: sWA SIHstHw

Example: sWA SIHstHw

CoLa A	ASCII	<STX>sWA{SPC}SIHstHw<ETX>
	Hex	02 73 57 41 20 53 49 48 73 74 48 77 03
CoLa B	Binary	02 02 02 02 00 00 00 0C 73 57 41 20 53 49 48 73 74 48 77 20 0F

Table 369: Example: sWA SIHstHw

4.10.10 Read interface type

Telegram structure: sRN SIHstHw						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Read	String	3	All	sRN	73 52 4E
Command	Read hardware settings of host interface	String	7	All	SIHstHw	53 49 48 73 74 48 77

Table 370: Telegram structure: sRN SIHstHw

Example: sRN SIHstHw

CoLa A	ASCII	<STX>sRN{SPC}SIHstHw<ETX>
	Hex	02 73 52 4E 20 53 49 48 73 74 48 77 03
CoLa B	Binary	02 02 02 02 00 00 00 0B 73 52 4E 20 53 49 48 73 74 48 77 25

Table 371: Example: sRN SIHstHw

Telegram structure: sRA SIHstHw						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sRA	73 52 41
Command	Read hardware settings of host interface	String	7	All	SIHstHw	53 49 48 73 74 48 77
Interface type data	Hardware settings data of host interface	Enum_8	1	All	TX_RS232: 0 TX_RS485_2WIRE: 1 TX_RS422_485_4WIRE: 2	TX_RS232: 00 TX_RS485_2WIRE: 01 TX_RS422_485_4WIRE: 02

Table 372: Telegram structure: sRA SIHstHw

Example: sRA SIHstHw

CoLa A	ASCII	<STX>sRA{SPC}SIHstHw{SPC}0<ETX>
	Hex	02 73 57 41 20 53 49 48 73 74 48 77 20 00 03
CoLa B	Binary	02 02 02 02 00 00 00 0D 73 52 41 20 53 49 48 73 74 48 77 20 00 0A

Table 373: Example: sRA SIHstHw

4.10.11 Set function front panel

Telegram structure: sWN LMLfpFcn (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set function of the front panel	String	8	All	LMLfpFcn	4C 4D 4C 66 70 46 63 6E
Reserved	Reserved	Bool_1	1	All	1	01
LED function Q1/Q2	Code number	Enum_8	1	All	No function: 0 Application: 1 Command: 2	No function: 00 Application: 01 Command: 02
LED function OK/Stop	Code number	Enum_8	1	All	Application: 0 Command: 1	Application: 00 Command: 01
Display function	Code number	Enum_8	1	All	No function: 0 Application: 1 Command: 2	No function: 00 Application: 01 Command: 02

Table 374: Telegram structure: sWN LMLfpFcn

Example: sWN LMLfpFcn

CoLa A	ASCII	<STX>sWN{SPC}LMLfpFcn{SPC}1{SPC}1{SPC}0{SPC}1<ETX>
	Hex	02 73 57 4E 20 4C 4D 4C 66 70 46 63 6E 20 31 20 31 20 30 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 57 4E 20 4C 4D 4C 66 70 46 63 6E 20 01 01 00 01 7B

Table 375: Example: sWN LMLfpFcn

Telegram structure: sWA LMLfpFcn						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	Front panel function	String	8	All	LMLfpFcn	4C 4D 4C 66 70 46 63 6E

Table 376: Telegram structure: sWA LMLfpFcn

Example: sWA LMLfpFcn

CoLa A	ASCII	<STX>sWA{SPC}LMLfpFcn<ETX>
	Hex	02 73 57 41 20 4C 4D 4C 66 70 46 63 6E 03
CoLa B	Binary	02 02 02 02 00 00 00 0D 73 57 41 20 4C 4D 4C 66 70 46 63 6E 75

Table 377: Example: sWA LMLfpFcn

4.10.12 Set front LEDs

To use this command, it is necessary to set the function of the LED to “Command” (use sWN LMLfpFcn), otherwise this command will have no influence to the LEDs.

OK and Stop LED can only alternate, if one is switched on, the other will turn automatically off.

Telegram structure: sMN mLMLSetLed						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Set front LED	String	10	All	mLMLSetLed	6D 4C 4D 4C 53 65 74 4C 65 64
LED	LED to turn on/off	Int_8	1	All	Stop: 1 OK: 2 Q1: 3 Q2: 4	Stop: 01 OK: 02 Q1: 03 Q2: 04
Status	On or Off	Int_8	1	All	On: 1 Off: 0	On: 01 Off: 00

Table 378: Telegram structure: sMN mLMLSetLed

Example: sMN mLMLSetLed 1 1 (Stop LED)

CoLa A	ASCII	<STX>sMN{SPC}mLMLSetLed{SPC}1{SPC}1<ETX>
	Hex	02 73 4D 4E 20 6D 4C 4D 4C 53 65 74 4C 65 64 20 31 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 4D 4E 20 6D 4C 4D 4C 53 65 74 4C 65 64 20 01 20 01 7F

Table 379: Example: sMN mLMLSetLed 1 1 (Stop LED)

Telegram structure: sAN mLMLSetLed						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	Front LED	String	10	All	mLMLSetLed	6D 4C 4D 4C 53 65 74 4C 65 64
Status code	Code number	Bool_1	1	All	Error: 0 Success: 1	Error: 00 Success: 01

Table 380: Telegram structure: sAN mLMLSetLed

Example: sAN mLMLSetLed

CoLa A	ASCII	<STX>sAN{SPC}mLMLSetLed{SPC}0<ETX>
	Hex	02 73 41 4E 20 6D 4C 4D 4C 53 65 74 4C 65 64 20 00 03
CoLa B	Binary	02 02 02 02 00 00 00 10 73 41 4E 20 6D 4C 4D 4C 53 65 74 4C 65 64 20 00 53

Table 381: Example: sAN mLMLSetLed

4.10.13 Set function of LED1

With this command the operation of LED1 can be defined. Either it has no function (00), it flashes when output Q1 or application is active (01) or it can be turned on and off (02) by another telegram command (sMN mHMISetLed).



Telegram structure: sWN HMIfpFcn_Y1 (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set function of the front panel LED1	String	11	All	HMIfpFcn_Y1	48 4D 49 66 70 46 63 6E 5F 59 31
LED1 function Q1	Code number	Enum_8	1	All	No function: 0 Application: 1 Command: 2	No function: 00 Application: 01 Command: 02

Table 382: Telegram structure: sWN HMIfpFcn_Y1

Example: sWN HMIfpFcn_Y1 = Command

CoLa A	ASCII	<STX>sWN{SPC}HMIfpFcn_Y1{SPC}2<ETX>
	Hex	02 73 57 4E 20 48 4D 49 66 70 46 63 6E 5F 59 31 20 32 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 57 4E 20 48 4D 49 66 70 46 63 6E 5F 59 31 20 02 4E

Table 383: Example: sWN HMIfpFcn_Y1 = Command



Telegram structure: sWA HMIfpFcn_Y1						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	LED1 function	String	11	All	HMIfpFcn_Y1	48 4D 49 66 70 46 63 6E 5F 59 31

Table 384: Telegram structure: sWA HMIfpFcn_Y1

Example: sWA HMIfpFcn_Y1

CoLa A	ASCII	<STX>sWA{SPC}HMIfpFcn_Y1<ETX>
	Hex	02 73 57 41 20 48 4D 49 66 70 46 63 6E 5F 59 31 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 57 41 20 48 4D 49 66 70 46 63 6E 5F 59 31 63

Table 385: Example: sWA HMIfpFcn_Y1

4.10.14 Set function of LED2

With this command the operation of LED2 can be defined. Either it has no function (00), it flashes when output Q2 or application is active (01) or it can be turned on and off (02) by another telegram command (sMN mHMISetLed).

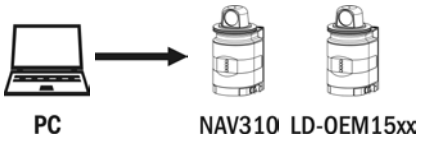

Telegram structure: sWN HMIfpFcn_Y2 (Authorized client)						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Write	String	3	All	sWN	73 57 4E
Command	Set function of the front panel LED2	String	11	All	HMIfpFcn_Y2	48 4D 49 66 70 46 63 6E 5F 59 32
LED2 function Q2	Code number	Enum_8	1	All	No function: 0 Application: 1 Command: 2	No function: 00 Application: 01 Command: 02

Table 386: Telegram structure: sWN HMIfpFcn_Y2

Example: sWN HMIfpFcn_Y2 = Command

CoLa A	ASCII	<STX>sWN{SPC}HMIfpFcn_Y2{SPC}2<ETX>
	Hex	02 73 57 4E 20 48 4D 49 66 70 46 63 6E 5F 59 32 20 32 03
CoLa B	Binary	02 02 02 02 00 00 00 11 73 57 4E 20 48 4D 49 66 70 46 63 6E 5F 59 32 20 02 7D

Table 387: Example: sWN HMIfpFcn_Y2 = Command

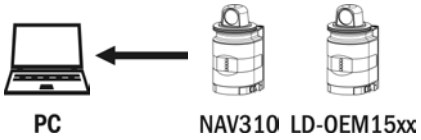

Telegram structure: sWA HMIfpFcn_Y2						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sWA	73 57 41
Command	LED2 function	String	11	All	HMIfpFcn_Y2	48 4D 49 66 70 46 63 6E 5F 59 32

Table 388: Telegram structure: sWA HMIfpFcn_Y2

Example: sWA HMIfpFcn_Y2

CoLa A	ASCII	<STX>sWA{SPC}HMIfpFcn_Y2<ETX>
	Hex	02 73 57 41 20 48 4D 49 66 70 46 63 6E 5F 59 32 03
CoLa B	Binary	02 02 02 02 00 00 00 0F 73 57 41 20 48 4D 49 66 70 46 63 6E 5F 59 32 60

Table 389: Example: sWA HMIfpFcn_Y2

4.10.15 Switch on/off LED1 or LED2

With this command the LEDs can be switched on and off (e.g. to locate the sensor or test the conncection). As a prerequisite, the operation of LED1 and LED2 must have been set to the right function (sWN HMIfpFcn_).

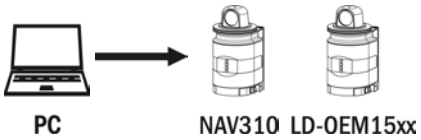

Telegram structure: sMN mHMISetLed						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Method	String	3	All	sMN	73 4D 4E
Command	Set function of the front panel	String	10	All	mHMISetLed	6D 48 4D 49 53 65 74 4C 65 64
LED number 1/2	LED number	Uint_8	1	All	LED 1: 3 LED 2: 4	LED 1: 03 LED 2: 04
LED function off/on	Code number	Uint_8	1	All	Off: 0 On: 1	Off: 00 On: 01

Table 390: Telegram structure: sMN mHMISetLed

Example: sMN mHMISetLed 1 = On

CoLa A	ASCII	<STX>sMN{SPC}mHMISetLed{SPC}3{SPC}1<ETX>
	Hex	02 73 4D 4E 20 6D 48 4D 49 53 65 74 4C 65 64 20 33 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 12 73 4D 4E 20 6D 48 4D 49 53 65 74 4C 65 64 20 03 20 01 7C

Table 391: Example: sMN mHMISetLed 1 = On



Telegram structure: sAN mHMISetLed						
Telegram part	**Description**	**Variable**	**Length**	**Sensor**	**Values CoLa A (ASCII)**	**Values CoLa B (Binary)**
Command type	Answer	String	3	All	sAN	73 41 4E
Command	LED status	String	10	All	mHMISetLed	6D 48 4D 49 53 65 74 4C 65 64
Result	Code number	Bool_1	1	All	No success: 0 Success: 1	No success: 00 Success: 01

Table 392: Telegram structure: sAN mHMISetLed

Example: sAN mHMISetLed 01

CoLa A	ASCII	<STX>sAN{SPC}mHMISetLed{SPC}1<ETX>
	Hex	02 73 41 4E 20 6D 48 4D 49 53 65 74 4C 65 64 20 31 03
CoLa B	Binary	02 02 02 02 00 00 00 10 73 41 4E 20 6D 48 4D 49 53 65 74 4C 65 64 20 01 53

Table 393: Example: sAN mHMISetLed 01

5 Diagnostics

5.1 SOPAS error codes

sFA ErrorCode

Telegram structure: sFA ErrorCode			
Error code	**Description**	**Dec.**	**Hex.**
Sopas_Ok	No error	0	0
Sopas_Error_METHODIN_ACCESSDENIED	Wrong userlevel, access to method not allowed	1	1
Sopas_Error_METHODIN_UNKNOWNINDEX	Trying to access a method with an unknown Sopas index	2	2
Sopas_Error_VARIABLE_UNKNOWNINDEX	Trying to access a variable with an unknown Sopas index	3	3
Sopas_Error_LOCALCONDITIONFAILED	Local condition violated, e.g. giving a value that exceeds the minimum or maximum allowed value for this variable	4	4
Sopas_Error_INVALID_DATA	Invalid data given for variable, this errorcode is deprecated (is not used anymore).	5	5
Sopas_Error_UNKNOWN_ERROR	An error with unknown reason occurred, this errorcode is deprecated.	6	6
Sopas_Error_BUFFER_OVERFLOW	The communication buffer was too small for the amount of data that should be serialised.	7	7
Sopas_Error_BUFFER_UNDERFLOW	More data was expected, the allocated buffer could not be filled.	8	8
Sopas_Error_ERROR_UNKNOWN_TYPE	The variable that shall be serialised has an unknown type. This can only happen when there are variables in the firmware of the device that do not exist in the released description of the device. This should never happen.	9	9
Sopas_Error_VARIABLE_WRITE_ACCESSDENIED	It is not allowed to write values to this variable. Probably the variable is defined as read-only.	10	A
Sopas_Error_UNKNOWN_CMD_FOR_NAMESERVER	When using names instead of indices, a command was issued that the nameserver does not understand.	11	B
Sopas_Error_UNKNOWN_COLA_COMMAND	The CoLa protocol specification does not define the given command, command is unknown.	12	C
Sopas_Error_METHODIN_SERVER_BUSY	It is not possible to issue more than one command at a time to an SRT device.	13	D
Sopas_Error_FLEX_OUT_OF_BOUNDS	An array was accessed over its maximum length.	14	E
Sopas_Error_EVENTREG_UNKNOWNINDEX	The event you wanted to register for does not exist, the index is unknown.	15	F

Telegram structure: sFA ErrorCode			
Error code	**Description**	**Dec.**	**Hex.**
Sopas_Error_COLA_A_VALUE_OVERFLOW	The value does not fit into the value field, it is too large.	16	10
Sopas_Error_COLA_A_INVALID_CHARACTER	Character is unknown, probably not alphanumeric.	17	11
Sopas_Error_OSAI_NO_MESSAGE	Only when using SRTOS in the firmware and distributed variables this error can occur. It is an indication that no operating system message could be created. This happens when trying to GET a variable.	18	12
Sopas_Error_OSAI_NO_ANSWER_MESSAGE	This is the same as `Sopas_Error_OSAI_NO_MESSAGE` with the difference that it is thrown when trying to PUT a variable.	19	13
Sopas_Error_INTERNAL	Internal error in the firmware, problably a pointer to a parameter was null.	20	14
Sopas_Error_HubAddressCorrupted	The Sopas Hubaddress is either too short or too long.	21	15
Sopas_Error_HubAddressDecoding	The Sopas Hubaddress is invalid, it can not be decoded (Syntax).	22	16
Sopas_Error_HubAddressAddressExceeded	Too many hubs in the address	23	17
Sopas_Error_HubAddressBlankExpected	When parsing a HubAddress an expected blank was not found. The HubAddress is not valid.	24	18
Sopas_Error_AsyncMethodsAreSuppressed	An asynchronous method call was made although the device was built with “AsyncMethodsSuppressed”. This is an internal error that should never happen in a released device.	25	19
Sopas_Error_ComplexArraysNotSupported	Device was built with „ComplexArraysSuppressed“ because the compiler does not allow recursions. But now a complex array was found. This is an internal error that should never happen in a released device.	26	20

Table 394: SOPAS error codes

Example: sFA ErrorCode Wrong userlevel

CoLa A	ASCII	<STX>sFA{SPC}01<ETX>
	Hex	02 73 46 41 20 30 31 03
CoLa B	Binary	02 02 02 02 00 00 00 05 73 46 41 20 01 55

Table 395: Example: sFA ErrorCode Wrong userlevel

5.2 Additional information

Every response telegram starts with a separat framed string:

<STX>sSI 2 1<ETX><STX>“Answer”<ETX>

If it is an event from SOPAS, send command: <STX>sEN SCParmChngd 0<ETX> to deactivate that event.

6 List of tables

Table 1: Example: Binary telegram 7
Table 2: Example: ASCII telegram 8
Table 3: Telegram structure: sMN SetAccessMode 12
Table 4: Example: sMN SetAccessMode 12
Table 5: Telegram structure: sAN SetAccessMode 13
Table 6: Example for LMS100: sAN SetAccessMode 13
Table 7: Telegram structure: sMN mLMPsetscancfg 16
Table 8: Example: sMN mLMPsetscancfg for LMS1xx with 1 measurement sector of 270° 17
Table 9: Example: sMN mLMPsetscancfg for LD-XXX###1 with 1 measurement sector of 360° 18
Table 10: Example: sMN mLMPsetscancfg for LD-XXX###1 with 1 measurement sector of 270° 18
Table 11: Example: sMN mLMPsetscancfg for LD-XXX###1 with 2 measurement sectors 19
Table 12: Example: sMN mLMPsetscancfg for LD-XXX###1 with 4 measurement sectors 19
Table 13: Example: sMN mLMPsetscancfg for LD-XXX###0 with 1 measurement sector of 360° 20
Table 14: Example: sMN mLMPsetscancfg for LD-XXX###0 with 1 measurement sector of 270° 20
Table 15: Example: sMN mLMPsetscancfg for LD-XXX###0 with 2 measurement sectors 21
Table 16: Example: sMN mLMPsetscancfg for LD-XXX###0 with 4 measurement sectors 21
Table 17: Telegram structure: sAN mLMPsetscancfg 23
Table 18: Example: sAN mLMPsetscancfg 23
Table 19: Telegram structure: sRN LMPscancfg 24
Table 20: Example for LMS100: sRN LMPscancfg 24
Table 21: Telegram structure: sRA LMPscancfg 26
Table 22: Example: sRA LMPscancfg 26
Table 23: Telegram structure: sMN mCLsetscancfglist 27
Table 24: Interlace mode for sMN mCLsetscancfglist 27
Table 25: Example: Set scan configuration 1: sMN mCLsetscancfglist 1 28
Table 26: Telegram structure: sAN mCLsetscancfglist 28
Table 27: Example: sAN mCLsetscancfglist Ok 28
Table 28: Telegram structure: sMN LMCstandby 29
Table 29: Example: sMN LMCstandby 29
Table 30: Telegram structure: sAN LMCstandby 29
Table 31: Example: sAN LMCstandby 29

Table 32: Telegram structure: sMN LMCstartmeas 30
Table 33: Example: sMN LMCstartmeas 30
Table 34: Telegram structure: sAN LMCstartmeas 31
Table 35: Example: sAN LMCstartmeas 31
Table 36: Telegram structure: sMN LMCstopmeas 31
Table 37: Example: sMN LMCstopmeas 32
Table 38: Telegram structure: sAN LMCstopmeas 32
Table 39: Example: sAN LMCstopmeas 32
Table 40: Telegram structure: sMN LMPautostartmeas 33
Table 41: Example: sMN LMPautostartmeas 33
Table 42: Telegram structure: sWA LMDautostartmeas 34
Table 43: Example: sWA LMPautostartmeas 34
Table 44: Telegram structure: sWN CLApplication 35
Table 45: Example: Activate the field application: sWN CLApplication 11 35
Table 46: Telegram structure: sWA CLApplication 35
Table 47: Example: sWA CLApplication correct and accepted 36
Table 48: Telegram structure: sMN mSCloadfacdef 36
Table 49: Example: sMN mSCloadfacdef 36
Table 50: Telegram structure: sAN mSCloadfacdef 37
Table 51: Example: sAN mSCloadfacdef 37
Table 52: Telegram structure: sMN mSCloadappdef 37
Table 53: Example: sMN mSCloadappdef 38
Table 54: Telegram structure: sAN mSCloadappdef 38
Table 55: Example: sAN mSCloadappdef 38
Table 56: Telegram structure: sMN SetPassword 39
Table 57: Example: sMN SetPassword 39
Table 58: Telegram structure: sAN SetPassword 40
Table 59: Example: sAN SetPassword 40
Table 60: Telegram structure: sMN CheckPassword 41
Table 61: Example: sMN CheckPassword 41
Table 62: Telegram structure: sAN CheckPassword 41
Table 63: Example: sAN CheckPassword 42
Table 64: Telegram structure: sMN mSCreboot 42
Table 65: Example: sMN mSCreboot 42
Table 66: Telegram structure: sAN mSCreboot 43
Table 67: Example: sAN mSCreboot 43
Table 68: Telegram structure: sWN LCMcfg 44
Table 69: Example: sWN LCMcfg 44
Table 70: Telegram structure: sWA LCMcfg 45

Table 71: Example: sWA LCMcfg 45
Table 72: Telegram structure: sRN LCMcfg 45
Table 73: Example: sRN LCMcfg 45
Table 74: Telegram structure: sRA LCMcfg 46
Table 75: Example: sRA LCMcfg 46
Table 76: Telegram structure: sRN CMContLvlM 47
Table 77: Example: sRN CMContLvlM 47
Table 78: Telegram structure: sRA CMContLvlM 47
Table 79: Example for LMS5xx: sRA CMContLvlM 48
Table 80: Telegram structure: sMN mEEwriteall 48
Table 81: Example: sMN mEEwriteall 48
Table 82: Telegram structure: sAN mEEwriteall 49
Table 83: Example: sAN mEEwriteall 49
Table 84: Telegram structure: sMN Run 49
Table 85: Example: sMN Run 50
Table 86: Telegram structure: sAN Run 50
Table 87: Example: sAN Run 50
Table 88: Telegram structure: sWN LMDscandatacfg 52
Table 89: Example 1: sWN LMDscandatacfg 52
Table 90: Example 2: sWN LMDscandatacfg 52
Table 91: Example3: sWN LMDscandatacfg 53
Table 92: Telegram structure: sWA LMDscandatacfg 53
Table 93: Example: sWA LMDscandatacfg 53
Table 94: Telegram structure: sWN LMPoutputRange 54
Table 95: Example: sWN LMPoutputRange 0,50° resolution, 0°-90° 55
Table 96: Telegram structure: sWA LMPoutputRange 55
Table 97: Example: sWA LMPoutputRange 55
Table 98: Telegram structure: sRN LMPoutputRange 56
Table 99: Example: sRN LMPoutputRange 56
Table 100: Telegram structure: sRA LMPoutputRange 57
Table 101: Example: sRA LMPoutputRange 57
Table 102: Telegram structure: sRN LMDscandata 58
Table 103: Example: sRN LMDscandata 58
Table 104: Telegram structure: sRA LMDscandata 58
Table 105: Example: sRA LMDscandata 59
Table 106: Telegram structure: sEN LMDscandata 59
Table 107: Example: sEN LMDscandata 59
Table 108: Telegram structure: sEA LMDscandata 60
Table 109: Example: Confirmation of sEA LMDscandata 60

Table 110: Telegram structure: Datastream of sRA LMDscandata/sSN LMDscandata 68
Table 111: Example of one telegram stream 74
Table 112: Telegram structure: sMN LSPsetdatetime 75
Table 113: Example 1: sMN LSPsetdatetime 76
Table 114: Example 2: sMN LSPsetdatetime 76
Table 115: Telegram structure: sAN LSPsetdatetime 76
Table 116: Example 1, 2: sAN LSPsetdatetime 76
Table 117: Telegram structure: sRN STIms 77
Table 118: Example: sRN STIms 77
Table 119: Telegram structure: sRA STIms 78
Table 120: Example: sRA STIms 78
Table 121: Telegram structure: sRN DeviceTime 79
Table 122: Example: sRN DeviceTime 79
Table 123: Telegram structure: sRA DeviceTime 79
Table 124: Example: sRA DeviceTime 0 80
Table 125: Telegram structure: sWN TSCRole 80
Table 126: Example: sWN TSCRole 80
Table 127: Telegram structure: sWA TSCRole 81
Table 128: Example: sWA TSCRole 81
Table 129: Telegram structure: sWN TSCTCInterface 81
Table 130: Example: sWN TSCTCInterface 81
Table 131: Telegram structure: sWA TSCTCInterface 82
Table 132: Example: sWA TSCTCInterface 82
Table 133: Telegram structure: sWN TSCTCSrvAddr 82
Table 134: Example: sWN TSCTCSrvAddr 192.168.0.11 83
Table 135: Telegram structure: sWA TSCTCSrvAddr 83
Table 136: Example: sWA TSCTCSrvAddr 83
Table 137: Telegram structure: sWN TSCTCtimezone 83
Table 138: Example: sWN TSCTCtimezone GMT + 1 hour 84
Table 139: Telegram structure: sWA TSCTCtimezone 84
Table 140: Example: sWA TSCTCtimezone 84
Table 141: Telegram structure: sWN TSCTCupdatetime 85
Table 142: Example: sWN TSCTCupdatetime 600 s 85
Table 143: Telegram structure: sWA TSCTCupdatetime 85
Table 144: Example: sWA TSCTCupdatetime 86
Table 145: Telegram structure: sRN TSCTCmaxoffset 86
Table 146: Example: sRN TSCTCmaxoffset 86
Table 147: Telegram structure: sRA TSCTCmaxoffset 87

Table 148: Example: sRA TSCTCmaxoffset 18000 s 87
Table 149: Telegram structure: sRN TSCTCdelay 87
Table 150: Example: sRN TSCTCdelay 88
Table 151: Telegram structure: sRA TSCTCdelay 88
Table 152: Example: sRA TSCTCdelay 0.003 s 88
Table 153: Telegram structure: sMN mResetMaxOff 89
Table 154: Example: sMN mResetMaxOff 89
Table 155: Telegram structure: sAN mResetMaxOff 89
Table 156: Example: sAN mResetMaxOff 90
Table 157: Telegram structure: sWN LFPparticle 91
Table 158: Example: sWN LFPparticle 91
Table 159: Telegram structure: sWA LFPparticle 91
Table 160: Example: sWA LFPparticle 92
Table 161: Telegram structure: sWN LFPmeanfilter 92
Table 162: Example: sWN LFPmeanfilter 92
Table 163: Telegram structure: sWA LFPmeanfilter 93
Table 164: Example: sWA LFPmeanfilter 93
Table 165: Telegram structure: sWN LFPnto1filter 93
Table 166: Example: sWN LFPnto1filter 94
Table 167: Telegram structure: sWA LFPnto1filter 94
Table 168: Example: sWA LFPnto1filter 94
Table 169: Telegram structure: sWN FREchoFilter 95
Table 170: Example: sWN FREchoFilter 95
Table 171: Telegram structure: sWA FREchoFilter 95
Table 172: Example: sWa FREchoFilter 95
Table 173: Telegram structure: sWN MSsuppmode 96
Table 174: Example: sWN MSsuppmode 96
Table 175: Telegram structure: sWA MSsuppmode 96
Table 176: Example: sWA MSsuppmode 97
Table 177: Telegram structure: sWN CLFogFilterEn 97
Table 178: Example: sWN CLFogFilterEn 97
Table 179: Telegram structure: sWA CLFogFilterEn 98
Table 180: Example: sWA CLFogFilterEn 98
Table 181: Telegram structure: sRN CLFogFilterEn 98
Table 182: Example: sRN CLFogFilterEn 98
Table 183: Telegram structure: sRA CLFogFilterEn 99
Table 184: Example: sRA CLFogFilterEn 99
Table 185: Telegram structure: sWN MCSenseLevel 99
Table 186: Example: sWN MCSenseLevel 100

Table 187: Telegram structure: sWA MCSenseLevel 100
Table 188: Example: sWA MCSenseLevel 100
Table 189: Telegram structure: sWN CLNFDigFilterEn 101
Table 190: Example: sWN CLNFDigFilterEn 101
Table 191: Telegram structure: sWA CLNFDigFilterEn 101
Table 192: Example: sWA CLNFDigFilterEn 102
Table 193: Telegram structure: sWN CLHWFilterSectEn 102
Table 194: Example: sWN CLHWFilterSectEn 1 0 0 0 102
Table 195: Telegram structure: sWA CLHWFilterSectEn 103
Table 196: Example: sWA CLHWFilterSectEn 103
Table 197: Telegram structure: sWN LICsrc 104
Table 198: Example: sWN LICsrc 104
Table 199: Telegram structure: sWA LICsrc 104
Table 200: Example: sWA LICsrc 105
Table 201: Telegram structure: sWN LICencset 105
Table 202: Example: sWN LICencset 105
Table 203: Telegram structure: sWA LICencset 106
Table 204: Example: sWA LICencset 106
Table 205: Telegram structure: sWN LICencres 106
Table 206: Example: sWN LICencres 107
Table 207: Telegram structure: sWA LICencres 107
Table 208: Example: sWA LICencres 107
Table 209: Telegram structure: sWN LICFixVel 108
Table 210: Example: sWN LICFixVel 108
Table 211: Telegram structure: sWA LICFixVel 108
Table 212: Example: sWA LICFixVel 109
Table 213: Telegram structure: sRN LICSpTh 109
Table 214: Example: sRN LICSpTh 109
Table 215: Telegram structure: sRA LICSpTh 109
Table 216: Example: sRA LICSpTh 110
Table 217: Telegram structure: sRN LICencsp 110
Table 218: Example: sRN LICencsp 110
Table 219: Telegram structure: sRA LICencsp 111
Table 220: Example: sRA LICencsp 111
Table 221: Telegram structure: sRN LIDoutputstate 112
Table 222: Example: sRN LIDoutputstate 112
Table 223: Telegram structure: sRA LIDoutputstate 112
Table 224: Telegram structure: sEN LIDoutputstate 113
Table 225: Example: sEN LIDoutputstate 113

Table 226: Telegram structure: sRA/sSN LIDoutputstate 115
Table 227: Example: sRA LIDoutputstate 115
Table 228: Telegram structure: sMN mDOSetOutput 116
Table 229: Example: sMN mDOSetOutput 116
Table 230: Telegram structure: sAN mDOSetOutput 117
Table 231: Example: sAN mDOSetOutput 118
Table 232: Telegram structure PRO: sWN DO6Fnc/Lite: sWN DO3Fnc 118
Table 233: Example: sWN DO6Fnc ➜ Out6 to master sync 118
Table 234: Telegram structure: PRO: sWN DO6Fnc/Lite: sWN DO3Fnc 119
Table 235: Example: sWA DO6Fnc 119
Table 236: Telegram structure: sWN DO1Fnc 119
Table 237: Example: sWN DO1Fnc ➜ Out1 to device ready 120
Table 238: Telegram structure: sWA DO1Fnc 120
Table 239: Example: sWA DO1Fnc 120
Table 240: Telegram structure: sWN DO1Logic 121
Table 241: Example: sWN DO1Logic ➜ Active_Low 121
Table 242: Telegram structure: sWA DO1Logic 121
Table 243: Example: sWA DO1Logic 121
Table 244: Telegram structure: sWN DO2Fnc 122
Table 245: Example: sWN DO2Fnc ➜ Out2 to device ready 122
Table 246: Telegram structure: sWA DO2Fnc 122
Table 247: Example: sWA DO2Fnc 123
Table 248: Telegram structure: sWN DO2Logic 123
Table 249: Example: sWN DO2Logic ➜ Active_High 123
Table 250: Telegram structure: sWA DO2Logic 124
Table 251: Example: sWA DO2Logic 124
Table 252: Telegram structure: sWN SYMode 124
Table 253: Example: sWN SYMode 125
Table 254: Telegram structure: sWA SYMode 125
Table 255: Example: sWA SYMode 125
Table 256: Telegram structure: sWN SYPhase 126
Table 257: Example: sWN SYPhase +90 126
Table 258: Telegram structure: sWA SYPhase 126
Table 259: Example: sWA SYPhase 126
Table 260: Telegram structure: sWN DO3And4Fnc 127
Table 261: Example: sWN In4 ➜ In3+4 to slave sync 127
Table 262: Telegram structure: sWA DO3And4Fnc 127
Table 263: Example: sWA DO3And4Fnc 128
Table 264: Telegram structure: sWN DI3DebTim 128

Table 265: Example: sWN DI3DebTim 128
Table 266: Telegram structure: sWA DI3DebTim 129
Table 267: Example: sWA DI3DebTim 129
Table 268: Telegram structure: sRN SYextmon 129
Table 269: Example: sRN SYextmon 129
Table 270: Telegram structure: sRA SYextmon 130
Table 271: Example: sRA SYextmon 130
Table 272: Telegram structure: sRN LCMstate 131
Table 273: Example: sRN LCMstate 131
Table 274: Telegram structure: sRA LCMstate 131
Table 275: Example for LMS100: sRA LCMstate 132
Table 276: Telegram structure: sRN DeviceIdent 132
Table 277: Example: sRN DeviceIdent 132
Table 278: Telegram structure: sRA DeviceIdent 133
Table 279: Example: sRA DeviceIdent 133
Table 280: Telegram structure: sRN SCdevicestate 133
Table 281: Example: sRN SCdevicestate 134
Table 282: Telegram structure: sRA SCdevicestate 134
Table 283: Example: sRA SCdevicestate 134
Table 284: Telegram structure: sRN LMCmeasstate 136
Table 285: Example: sRN LMCmeasstate 136
Table 286: Telegram structure: sRA LMCmeasstate 136
Table 287: Example: sRA LMCmeasstate is Measure 2D 137
Table 288: Telegram structure: sRN EMCustomerInfo 137
Table 289: Example: sRN EMCustomerInfo 137
Table 290: Telegram structure: sRA EMCustomerInfo 138
Table 291: Example: sRA EMCustomerInfo = Device OK 138
Table 292: Telegram structure: sRN LDMSenStat 139
Table 293: Example: sRN LDMSenStat 139
Table 294: Telegram structure: sRA LDMSenStat 140
Table 295: Example: sRA LDMSenStat is in error mode, motor has stopped or coder error 140
Table 296: Telegram structure: sRN DIornr 141
Table 297: Example: sRN DIornr 141
Table 298: Telegram structure: sRA DIornr 142
Table 299: Example for LMS511-20100: sRA DIornr 142
Table 300: Example for TiM561-2050101: sRA DIornr 142
Table 301: Telegram structure: sRN DItype 142
Table 302: Example: sRN DItype 143

Table 303: Telegram structure: sRA DItype 143
Table 304: Example for LMS511-20100: sRA DItype 143
Table 305: Example for TiM561-2050101: sRA DItype 143
Table 306: Telegram structure: sRN ODoprh 144
Table 307: Example: sRN ODoprh 144
Table 308: Telegram structure: sRA ODoprh 144
Table 309: Example: sRA ODoprh 145
Table 310: Telegram structure: sRN ODpwrc 145
Table 311: Example: sRN ODpwrc 145
Table 312: Telegram structure: sRA ODpwrc 146
Table 313: Example: sRA ODpwrc 146
Table 314: Telegram structure: sRN OPcurtmpdev 146
Table 315: Example: sRN OPcurtmpdev 147
Table 316: Telegram structure: sRA OPcurtmpdev 147
Table 317: Example: sRA OPcurtmpdev 147
Table 318: Telegram structure: sWN LocationName 148
Table 319: Example: sWN LocationName +13 OutdoorDevice 148
Table 320: Telegram structure: sWA LocationName 149
Table 321: Example: sWA LocationName 149
Table 322: Telegram structure: sRN LocationName 149
Table 323: Example: sRN LocationName 149
Table 324: Telegram structure: sRA LocationName 150
Table 325: Example: sRA LocationName 150
Table 326: Telegram structure: sRN MCAngleCompSin 150
Table 327: Example: sRN MCAngleCompSin 151
Table 328: Telegram structure: sRA MCAngleCompSin 151
Table 329: Example: sRA MCAngleCompSin 152
Table 330: Telegram structure: sMN LIDrstoutpcnt 152
Table 331: Example: sMN LIDrstoutpcnt 153
Table 332: Telegram structure: sAN LIDrstoutpcnt 153
Table 333: Example: sAN LIDrstoutpcnt 153
Table 334: Telegram structure: sWN EIIpAddr 154
Table 335: Example: sWN EIIpAddr 192.168.0.2 154
Table 336: Telegram structure: sWA EIIpAddr 154
Table 337: Example: sWA EIIpAddr 155
Table 338: Telegram structure: sRN EIIpAddr 155
Table 339: Example: srN EIIpAddr 155
Table 340: Telegram structure: sRA EIIpAddr 155
Table 341: Example: sRA EIIpAddr 192.168.0.2 156

Table 342: Telegram structure: sWN EIgate 156
Table 343: Example: sWN EIgate 192.168.0.1 156
Table 344: Telegram structure: sWA EIgate 157
Table 345: Example: sWA EIgate 157
Table 346: Telegram structure: sRN EIgate 157
Table 347: Example: sRN EIgate 157
Table 348: Telegram structure: sRA EIgate 158
Table 349: Example: sRA EIgate 192.168.0.1 158
Table 350: Telegram structure: sWN EImask 158
Table 351: Example: sWN EImask 255.255.254.0 159
Table 352: Telegram structure: sWA EImask 159
Table 353: Example: sWA EImask 159
Table 354: Telegram structure: sRN EImask 160
Table 355: Example: sRN EImask 160
Table 356: Telegram structure: sRA EImask 160
Table 357: Example: sRA EImask 255.255.254.0 161
Table 358: Telegram structure: sWN SIHstBaud 161
Table 359: Example: sWN SIHstBaud 161
Table 360: Telegram structure: sWA SIHstBaud 162
Table 361: Example: sWA SIHstBaud 162
Table 362: Telegram structure: sRN SIHstBaud 162
Table 363: Example: sRN SIHstBaud 162
Table 364: Telegram structure: sRA SIHstBaud 163
Table 365: Example: sRA SIHstBaud 163
Table 366: Telegram structure: sWN SIHstHw 164
Table 367: Example: sWN SIHstHw 164
Table 368: Telegram structure: sWA SIHstHw 164
Table 369: Example: sWA SIHstHw 165
Table 370: Telegram structure: sRN SIHstHw 165
Table 371: Example: sRN SIHstHw 165
Table 372: Telegram structure: sRA SIHstHw 166
Table 373: Example: sRA SIHstHw 166
Table 374: Telegram structure: sWN LMLfpFcn 167
Table 375: Example: sWN LMLfpFcn 167
Table 376: Telegram structure: sWA LMLfpFcn 168
Table 377: Example: sWA LMLfpFcn 168
Table 378: Telegram structure: sMN mLMLSetLed 168
Table 379: Example: sMN mLMLSetLed 1 1 (Stop LED) 169
Table 380: Telegram structure: sAN mLMLSetLed 169

Table 381: Example: sAN mLMLSetLed 169
Table 382: Telegram structure: sWN HMIfpFcn_Y1 170
Table 383: Example: sWN HMIfpFcn_Y1 = Command 170
Table 384: Telegram structure: sWA HMIfpFcn_Y1 170
Table 385: Example: sWA HMIfpFcn_Y1 171
Table 386: Telegram structure: sWN HMIfpFcn_Y2 171
Table 387: Example: sWN HMIfpFcn_Y2 = Command 171
Table 388: Telegram structure: sWA HMIfpFcn_Y2 172
Table 389: Example: sWA HMIfpFcn_Y2 172
Table 390: Telegram structure: sMN mHMISetLed 172
Table 391: Example: sMN mHMISetLed 1 = On 173
Table 392: Telegram structure: sAN mHMISetLed 173
Table 393: Example: sAN mHMISetLed 01 173
Table 394: SOPAS error codes 175
Table 395: Example: sFA ErrorCode Wrong userlevel 175

8014631/ZBR2/2016-12-20 · BU84 · A4 4c int46

Australia
Phone +61 3 9457 0600
1800 334 802 – tollfree
E-Mail sales@sick.com.au

Austria
Phone +43 22 36 62 28 8-0
E-Mail office@sick.at

Belgium/Luxembourg
Phone +32 2 466 55 66
E-Mail info@sick.be

Brazil
Phone +55 11 3215-4900
E-Mail marketing@sick.com.br

Canada
Phone +1 905 771 14 44
E-Mail information@sick.com

Czech Republic
Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

Chile
Phone +56 2 2274 7430
E-Mail info@schadler.com

China
Phone +86 20 2882 3600
E-Mail info.china@sick.net.cn

Denmark
Phone +45 45 82 64 00
E-Mail sick@sick.dk

Finland
Phone +358-9-2515 800
E-Mail sick@sick.fi

France
Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Germany
Phone +49 211 5301-301
E-Mail info@sick.de

Hong Kong
Phone +852 2153 6300
E-Mail ghk@sick.com.hk

Hungary
Phone +36 1 371 2680
E-Mail office@sick.hu

India
Phone +91 22 4033 8333
E-Mail info@sick-india.com

Israel
Phone +972 4 6881000
E-Mail info@sick-sensors.com

Italy
Phone +39 02 274341
E-Mail info@sick.it

Japan
Phone +81 3 5309 2112
E-Mail support@sick.jp

Malaysia
Phone +6 03 8080 7425
E-Mail enquiry.my@sick.com

Mexico
Phone +52 472 748 9451
E-Mail mario.garcia@sick.com

Netherlands
Phone +31 30 2044 000
E-Mail info@sick.nl

New Zealand
Phone +64 9 415 0459
0800 222 278 – tollfree
E-Mail sales@sick.co.nz

Norway
Phone +47 67 81 50 00
E-Mail sick@sick.no

Poland
Phone +48 22 539 41 00
E-Mail info@sick.pl

Romania
Phone +40 356 171 120
E-Mail office@sick.ro

Russia
Phone +7 495 775 05 30
E-Mail info@sick.ru

Singapore
Phone +65 6744 3732
E-Mail sales.gsg@sick.com

Slovakia
Phone +421 482 901201
E-Mail mail@sick-sk.sk

Slovenia
Phone +386 591 788 49
E-Mail office@sick.si

South Africa
Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea
Phone +82 2 786 6321
E-Mail info@sickkorea.net

Spain
Phone +34 93 480 31 00
E-Mail info@sick.es

Sweden
Phone +46 10 110 10 00
E-Mail info@sick.se

Switzerland
Phone +41 41 619 29 39
E-Mail contact@sick.ch

Taiwan
Phone +886 2 2375-6288
E-Mail sales@sick.com.tw

Thailand
Phone +66 2645 0009
E-Mail Ronnie.Lim@sick.com

Turkey
Phone +90 216 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates
Phone +971 4 88 65 878
E-Mail info@sick.ae

United Kingdom
Phone +44 1727 831121
E-Mail info@sick.co.uk

USA
Phone +1 800 325 7425
E-Mail info@sick.com

Vietnam
Phone +84 945452999
E-Mail Ngo.Duy.Linh@sick.com

Further locations at **www.sick.com**

SICK
Sensor Intelligence.