

Power Supply Analog 24V Series

V2.3



Characteristics

- Stepless light intensity control
- External trigger input for strobe lighting
- Mains powered
- Built in over-current protection
- DIN-rail or bottom screw mounting options




Analog controlled Power Supply for controlling and adjusting the power of your 24V industrial machine vision light.

Technical specifications

	VA-PS2-A4-60W	VA-PS2-A2-200W	VA-PS2-A4-200W
Lighting method	Continuous / Triggered		
Drive method	Constant voltage		
Light control method	Variable voltage		
Output voltage	24 VDC		
No channels	4	2	4
Output power in total	60W	200W	200W
Maximum current/power for each channel	1.5A / 36W	4A / 96W	2.6A / 64W
Trigger function	Yes		
Trigger input voltage	5 – 24 VDC		
Trigger delay	< 50μs		
Light Connector	JST-SMR-03V-B (FCB-3)		
Input voltage	100 – 240 VAC 50/60Hz		
Power Connector	IEC C13		
Operating environment	Temperature -10 ~ 50 °C		
	Humidity 20 ~ 85 %		
Cooling	Passive air cooled		
Housing material	Painted steel		
Weight	780 gram		
Dimension	107x105x126mm		

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substituted for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation, and testing of the products with respect to the relevant specific application or use thereof. Neither GeT Cameras nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein or incorrect information in this document.

Technical drawing

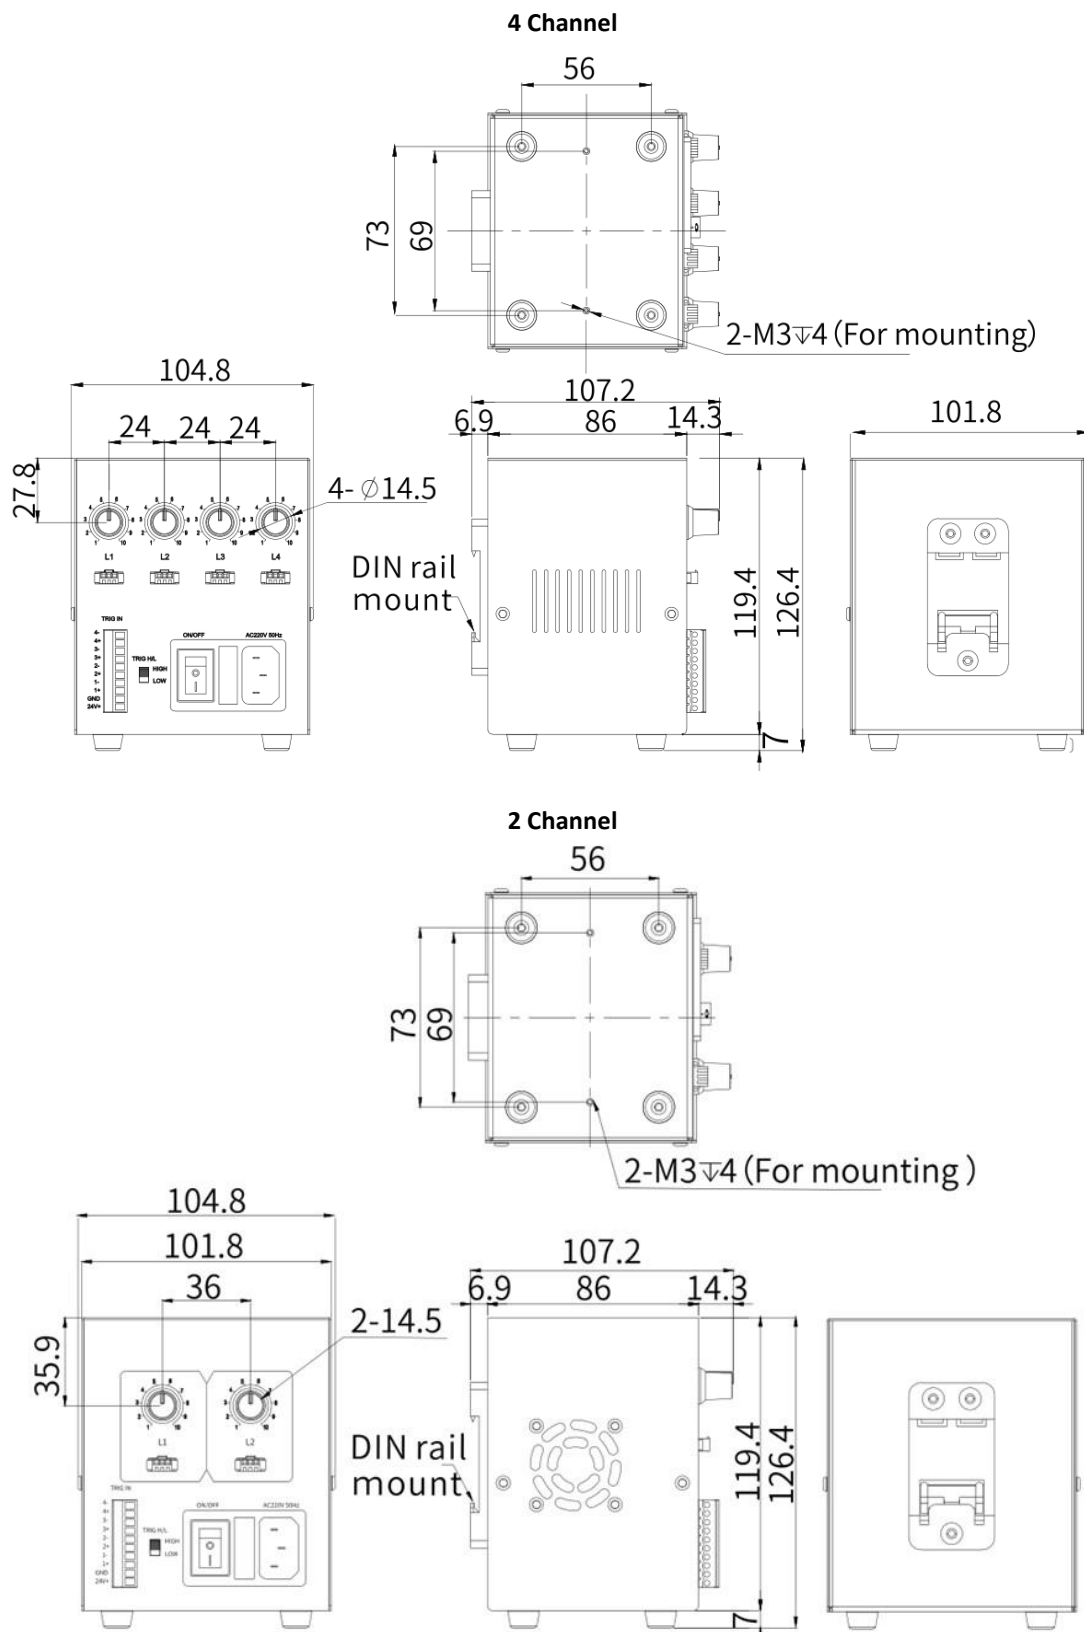


The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.

This documentation is not intended as a substituted for and is not to be used for determining suitability or reliability of these products for specific user applications.


It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation, and testing of the products with respect to the relevant specific application or use thereof. Neither GeT Cameras nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein or incorrect information in this document.

Trigger circuit




NO		Signal
24V+	Power output	Anode
GND	350mA/24V	Cathode
1+	Channel 1	Anode
1-		Cathode
2+	Channel 2	Anode
2-		Cathode
3+	Channel 3	Anode
3-		Cathode
4+	Channel 4	Anode
4-		Cathode

Trig H

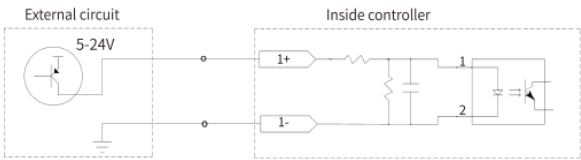

Trig L

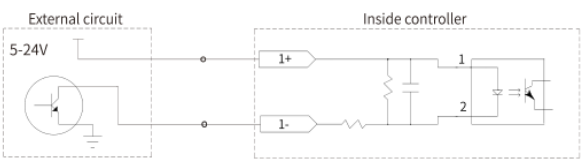

Product number

VA– PS2 - **Channels** - **Power** - **Voltage**
 Ax xxxW 24V