

Power & Shelf Lighting

Plug-and-play upgrade to the walnut sofa surround · for approval & install

WHAT THIS ADDS

- ▶ **Shelf lighting**

Philips Hue strips under all 12 shelves — colour-temperature adjustable (warm↔cool), dimmable, full scene control.
- ▶ **Sconce control**


Two brass sconces on a physical push-button. Colour-matched to shelves in the Hue app — one scene sets both.
- ▶ **Power + charging**

Recessed outlet centre in each base cabinet top: 2× AC outlets + USB-A + USB-C for guests.

▶ Zero hardwiring

Everything is plug-in. No electrician. No wall opening.

THE SYSTEM · ONE TOWER

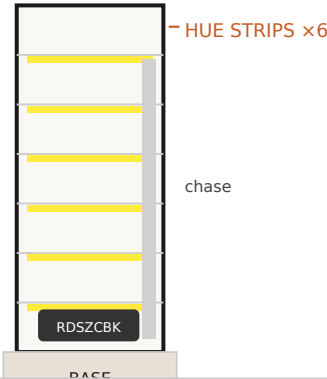

BUDGET · AMAZON, TYPICAL AUG 2026

Full system as specified	\$684 - \$889
With optional Hue Smart Plug	\$714 - \$929

Labour (routing, wiring, testing, install) is quoted on the change order, not in this document. Prices are street ranges; full links on sheet 5.

Smart gear never loses power.

OPEN — NEEDED BEFORE ORDERING

- Sconce sockets confirmed E26 (drives bulb choice)
- Wall outlet position (6 ft vs 10 ft cord model)
- Client OK on switch logic: button = sconces only

CLIENT APPROVAL

Signature

Date

Approves parts list, budget range & switch logic.


Legrand RDSZCBK · one per base cabinet top · no visible screws

TOOLS REQUIRED

Paper template (included with unit) · Pencil · Drill + 1/4" bit · Jigsaw with fine wood blade · Phillips screwdriver · Multimeter (optional)
Clamp range of unit: 3/8" - 1 1/4" · Panel is 0.72" — comfortably inside range. Always test-fit before final bezel snap.

STEP 1 · CUT THE OPENING

BASE CABINET TOP — VIEW FROM ABOVE (close-up)

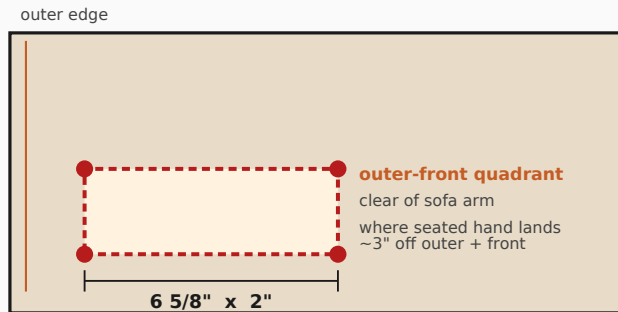

PROCEDURE

1. Mark with the paper template packed with the unit. Align to the outer-front position shown.
2. Drill a 1/4" starter hole at each of the four corners (stay inside the line).
3. Jigsaw between the holes. Keep the blade vertical and inside the marked line.
4. Test-fit the power centre body. Panel is 0.72" — well inside the 3/8"-1 1/4" clamp range.
5. Only after clean fit, proceed to mounting. Do not force the bezel.

CRITICAL

Cut while the top is still accessible.
After the surround is assembled this opening is no longer reachable cleanly.

PANEL THICKNESS & CLAMP RANGE — VERIFIED


Walnut top panel = 0.72" (18.3 mm). Legrand RDSZCBK clamps accept 3/8" (9.5 mm) to 1 1/4" (32 mm).

Plenty of margin. Insert from above → tighten the two clamps from inside the cabinet → snap the screwless bezel.

QTY: one unit per base cabinet — 2 total. Both sides receive outlets + USB per client request.

STEP 2 · MOUNT & CONNECT

CROSS-SECTION — POWER CENTRE IN BASE TOP (close-up)

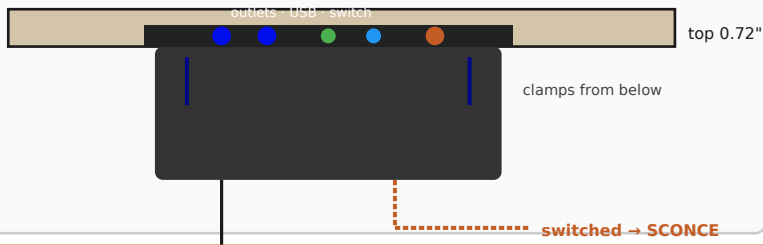

CONNECTION RULES

- Insert body from above.
- Tighten both clamps from inside.
- Snap the screwless bezel last.
- Sconce lead down the chase, through the 1" hole in base top, plugs into SWITCHED receptacle. Label the plug "SCONCE".
- Hue PSU into ALWAYS-HOT pass-through only. Never the switched outlet.

6 ft c

WHY THE BUTTON = SCONCES ONLY

The face button switches a dedicated rear receptacle that is meant for a lamp — that is exactly the sconce circuit. Tap the button: sconces toggle on/off. Shelf lighting is completely untouched (Hue stays powered on the always-hot).

Hue app setup (critical for colour-match):


Set both sconce bulbs' "Power-on behaviour" to "Last state". Then the physical button restores the exact colour-matched scene that was active when the sconces were last turned off. One scene in the app controls shelves + sconces together.

Result: guests get a simple physical switch; you keep full smart-scene control when the button is left on.

QUICK REFERENCE — LABELS ON SITE

Label the switched plug "SCONCE". Label the always-hot pass-through "HUE PSU". This prevents the most common install error.

Never plug the Hue PSU into the switched receptacle. If you do, every button press will kill the shelf lighting and break scenes.

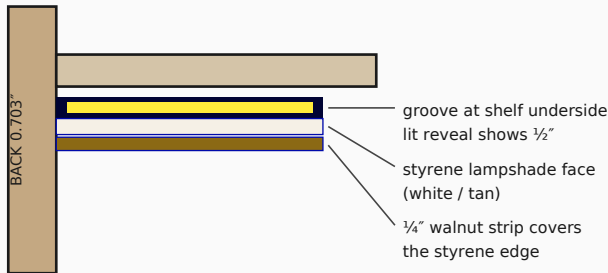12 segments · routed grooves in the back panel · tested lit before the backs close**STEP 3 · CUT & SEAT THE STRIPS****CROSS-SECTION AT SHELF LINE (close-up)****ROUTING RULES**

- Rout every groove while the panel is still flat and OFF the surround. This is the only clean window.
- Groove top edge must align with each shelf underside so the lit reveal is a clean ½" strip of light.
- Each shelf line takes one 20 1/16" segment. Cut ONLY at the printed scissor marks on the Hue strip.
- Seat the styrene diffuser over the groove first; the ¼" walnut cover strip then retains its front edge and hides the joint.
- Join segments with Litcessory MICRO V4 6-pin jumpers. Route jumpers down the rear chase. Leave 6-8" slack at each joint.

THE LENGTH CALC · SHOWN SO YOU CAN AUDIT IT

12 shelves × 20 1/16" = 20.1 ft needed total

Per tower: 6 × 20 1/16" = 10.03 ft → buy: base kit 6.6 ft + 2 × 1 m extension = 13.2 ft

Both towers: 26.4 ft bought vs 20.1 ft needed → 6.3 ft spare (covers cut waste + any mistakes)

Spare is intentional. Never stretch or splice mid-segment.

STEP 4 · ROUTE & TEST — ORDER MATTERS**TEST BEFORE YOU CLOSE — THE BACKS ARE THE ONLY ACCESS**

1. Seat all six strips in the first tower. Run the five Litcessory MICRO jumpers down the rear chase. Leave slack.
2. Plug that tower's Hue PSU into the always-hot pass-through of its power centre. ALL SIX LIGHT? → continue.
3. Repeat exactly for the second tower. ALL TWELVE LIT and colour-matched? → only then proceed.
4. Set the back panels into their rabbets and pin. A joint you cannot reach is the joint that will fail later.

Do not pin any back until both towers have been powered and verified. There is no second chance without disassembly.

Every quantity computed from the drawing-set geometry · ranges, not quotes

ITEM	QTY	LOW	HIGH	LINK / NOTES
Legrand RDSZCBK power centre 2 outlets + USB-A/C + lighting switch, black, 6 ft	2	\$220	\$260	Amazon →
Hue Lightstrip Plus base kit 2 m controller + PSU · one per tower · Bluetooth V4	2	\$180	\$220	Amazon →
Hue Lightstrip Plus extension 1 m confirm “V4” on the listing before buying	4	\$100	\$140	Amazon →
Litcessory 6-pin jumper V4 MICRO 3.3 ft 2-pack · joins cut segments · buy 3 packs	3	\$54	\$84	Amazon →
Hue Dimmer V2 + 2 White Ambiance A19 one buy: sconce bulbs AND the physical remote	1	\$60	\$80	Amazon →
Hue Bridge required for scenes, remote, colour matching	1	\$50	\$70	Amazon →
Styrene lampshade diffuser sheet white w/ tan · covers the ½” lit reveal	1	\$20	\$35	Amazon →

TOTAL — FULL SYSTEM\$684\$889

OPTIONAL · Hue Smart Plug

Only if app control of sconces is wanted on top of the physical button. +\$30-\$40 → with optional: \$714 – [\\$929](#) [Amazon →](#)

ORDERING NOTES

- Prefer “Ships from and sold by Amazon”. Prices are typical street ranges for August 2026 — they move daily.
- Buy Litcessory in V4 MICRO 6-pin only. V3 standard 6-pin does not fit current Lightstrip Plus connectors.
- True dual-toggle power centres (Legrand AD3-AAPPR) are distributor-only (Gordon Electric / Ferguson) and are not needed with this scheme.
- Confirm sconce sockets are E26 before ordering the White Ambiance A19 bulbs.
- After install: group both towers + both sconces into one Hue “Room”. Create a single scene that sets shelves + sconces together.