










TECHNICAL SPECIFICATIONS

Concrete Tiles - NORDICA ®







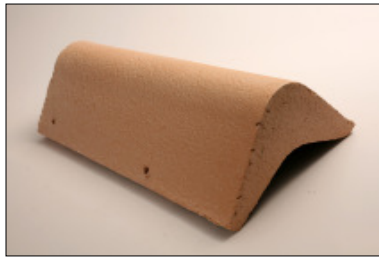

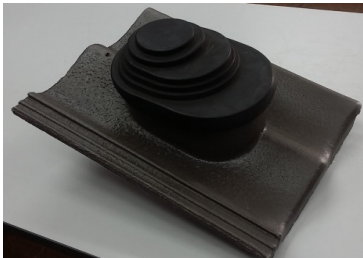
Last Updated on 2019.08.09

| No. | Image | Details |
|-----|---|---|
| 1 |  <p>* Batten Spacing has to be determined based on actual rafter length.</p> | <p>Name : MONIER Nordica ®</p> <p>Length (L) : 420 mm</p> <p>Horizontal Width (W) : 330 mm (300 + 30mm)</p> <p>Headlap : 75 mm - 100 mm</p> <p>Batten Spacing : 320 mm - 345 mm</p> <p>Weight : 4.40 kg/pcs (approximately)</p> <p>Minimum Pitch : 17.5 °</p> <p>Coverage : 9.7 pcs/m² (based on 75 mm headlap)</p> <p>Laying Pattern : Straight Bond / Cross Bond</p> |
| 2 |  | <p>Name : Ridge & Hip Tile</p> <p>Length (L) : 330 mm</p> <p>Horizontal Width (W) : 250 mm</p> <p>Weight : 3.30 kg/pcs (approximately)</p> <p>Coverage : 3.40 pcs/m</p>  |
| 3 |  | <p>Name : 2-Way Ridge</p> <p>Length (L) : 330 mm</p> <p>Horizontal Width (W) : 250 mm</p> <p>Weight : 3.50 kg/pcs (approximately)</p>  |
| 4 |  | <p>Name : Ridge End</p> <p>Length (L) : 265 mm</p> <p>Horizontal Width (W) : 210 mm</p> <p>Weight : 3.20 kg/pcs (approximately)</p>  |
| 5 |  | <p>Name : Hip End</p> <p>Length (L) : 360 mm</p> <p>Horizontal Width (W) : 210 mm</p> <p>Weight : 3.20 kg/pcs (approximately)</p>  |

TECHNICAL SPECIFICATIONS

Concrete Tiles - NORDICA ®

Last Updated on 2019.08.09


| No. | Image | Details |
|-----|---|---|
| 6 |  | <p>Name : 3 Way Apex</p> <p>Horizontal Width (W) : 220 mm</p> <p>Spread Angle (θ) : 135° from main ridge line to hip line</p> <p>Weight : 5.50 kg/pcs (approximately)</p>  |
| 7 |  | <p>Name : 4 Way Apex</p> <p>Horizontal Width (W) : 220 mm</p> <p>Spread Angle (θ) : 90°</p> <p>Weight : 7.00 kg/pcs (approximately)</p>  |
| 8 |  | <p>Name : Universal Verge Tile</p> <p>Length (L) : 420 mm</p> <p>Horizontal Width (W) : 180 ~ 245mm</p> <p>Internal Angle (θ) : 74°</p> <p>Weight : 4.70 kg/pcs (approximately)</p> <p>Coverage : 2.90 - 3.40 pcs/m</p>  |
| 9 |  | <p>Name : Universal Verge End</p> <p>Length (L) : 420 mm</p> <p>Horizontal Width (W) : 216 ~ 245mm</p> <p>Internal Angle (θ) : 74°</p> <p>Weight : 4.90 kg/pcs (approximately)</p>  |
| 10 |  | <p>Name : V-Pipe Tile</p> <p>Length x Width : 420 (L) mm x 330 (W) mm</p> <p>Opening Dimension : 180 (L) mm x 120 (W) mm</p> <p>uPVC Pipe Diameter : 110mm Max. (Outer Diameter)</p> <p>Pitch (θ) : 17.5° - 45°</p> <p>Elastomer Material : Ethylene Propylene Diene Monomer (EDPM)</p> <p>Weight : 5.50 kg/pcs (approximately)</p> |



TECHNICAL SPECIFICATIONS

Concrete Tiles - NORDICA ®

Last Updated on 2019.08.09

| No. | Image | Details |
|-----|---|--|
| 11 |  | <p>Name : MONIER Top Light (Profile: Nordica ®)</p> <p>Length (L) : 420 mm</p> <p>Horizontal Width (W) : 330 mm (300 + 30mm)</p> <p>Headlap : 75 mm - 100 mm</p> <p>Batten Spacing : 320 mm - 345 mm</p> <p>Weight : 0.70 kg/pcs (approximately)</p> <p>Minimum Pitch : 17.5 °</p> <p>Securing Method : U-Clip & Screws (Provided)</p> |