










TECHNICAL SPECIFICATIONS

Concrete Tiles - ADVANCED CONTOUR ®










Last Updated on 2019.08.09

No.	Image	Details
1	 <p>* Batten Spacing has to be determined based on actual rafter length.</p>	<p>Name : MONIER Advanced Contour ®</p> <p>Length (L) : 420 mm</p> <p>Horizontal Width (W) : 330 mm (300 + 30mm)</p> <p>Headlap : 75 mm - 100 mm</p> <p>Batten Spacing : 320 mm - 345 mm</p> <p>Weight : 4.30 kg/pcs (approximately)</p> <p>Minimum Pitch : 17.5 °</p> <p>Coverage : 9.7 pcs/m² (based on 75 mm headlap)</p> <p>Laying Pattern : Straight Bond / Cross Bond</p>
2		<p>Name : Ridge & Hip Tile</p> <p>Length (L) : 330 mm</p> <p>Horizontal Width (W) : 250 mm</p> <p>Weight : 3.30 kg/pcs (approximately)</p> <p>Coverage : 3.40 pcs/m</p> 
3		<p>Name : 2-Way Ridge</p> <p>Length (L) : 330 mm</p> <p>Horizontal Width (W) : 250 mm</p> <p>Weight : 3.50 kg/pcs (approximately)</p> 
4		<p>Name : Ridge End</p> <p>Length (L) : 265 mm</p> <p>Horizontal Width (W) : 210 mm</p> <p>Weight : 3.20 kg/pcs (approximately)</p> 
5		<p>Name : Hip End</p> <p>Length (L) : 360 mm</p> <p>Horizontal Width (W) : 210 mm</p> <p>Weight : 3.20 kg/pcs (approximately)</p> 

TECHNICAL SPECIFICATIONS

Concrete Tiles - ADVANCED CONTOUR ®


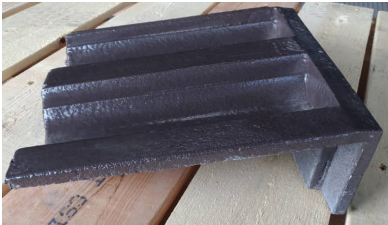
Last Updated on 2019.08.09

No.	Image	Details
6		<p>Name : 3 Way Apex</p> <p>Horizontal Width (W) : 220 mm</p> <p>Spread Angle (θ) : 135° from main ridge line to hip line</p> <p>Weight : 5.50 kg/pcs (approximately)</p> 
7		<p>Name : 4 Way Apex</p> <p>Horizontal Width (W) : 220 mm</p> <p>Spread Angle (θ) : 90°</p> <p>Weight : 7.00 kg/pcs (approximately)</p> 
8		<p>Name : Universal Verge Tile</p> <p>Length (L) : 420 mm</p> <p>Horizontal Width (W) : 180 ~ 245mm</p> <p>Internal Angle (θ) : 74°</p> <p>Weight : 4.70 kg/pcs (approximately)</p> <p>Coverage : 2.90 - 3.40 pcs/m</p> 
9		<p>Name : Universal Verge End</p> <p>Length (L) : 420 mm</p> <p>Horizontal Width (W) : 216 ~ 245mm</p> <p>Internal Angle (θ) : 74°</p> <p>Weight : 4.90 kg/pcs (approximately)</p> 
10		<p>Name : V-Pipe Tile</p> <p>Length x Width : 420 (L) mm x 330 (W) mm</p> <p>Opening Dimension : 180 (L) mm x 120 (W) mm</p> <p>uPVC Pipe Diameter : 110mm Max. (Outer Diameter)</p> <p>Pitch (θ) : 17.5° - 45°</p> <p>Elastomer Material : Ethylene Propylene Diene Monomer (EDPM)</p> <p>Weight : 5.30 kg/pcs (approximately)</p>

TECHNICAL SPECIFICATIONS

Concrete Tiles - ADVANCED CONTOUR ®

Last Updated on 2019.08.09

No.	Image	Details
11		<p> Name : MONIER Top Light (Profile: Advanced Contour ®) Length (L) : 420 mm Horizontal Width (W) : 330 mm (300 + 30mm) Headlap : 75 mm - 100 mm Batten Spacing : 320 mm - 345 mm Weight : 0.60 kg/pcs (approximately) Minimum Pitch : 17.5 ° </p> <p>Securing Method : U-Clip & Screws (Provided)</p>
12		<p> Name : Mono-ridge Tile Length (L) : 300 mm Horizontal Width (W) : 330 mm (300 + 30 mm) Internal Angle (θ) : 75° Weight : 5.10 kg/pcs (approximately) </p> <p>Coverage : 3.30 pcs/m</p>