

# IoT Temp Data Logger

## RN400-T2PS User Manual



# CONTENTS

<b>About this Manual</b>	<b>04</b>
Intellectual Property Rights .....	04
Notational Conventions .....	04
<b>Introduction</b>	<b>05</b>
Key Features .....	05
Exterior .....	06
Accessories .....	07
Specifications .....	08
<b>Installation</b>	<b>09</b>
Terminal Block .....	10
Data Logger Installation .....	11
Connecting Terminal Block .....	13
<b>Operation</b>	<b>17</b>
Viewing Channel Information .....	18
Viewing Device Information .....	19
Resetting Data Logger .....	20
Memory Card for Data Logging .....	21
<b>Configuration</b>	<b>22</b>
Device Information .....	24
Server .....	25
Measurement .....	26
Wi-Fi Network .....	28
Display .....	31
Commands .....	31
Memory Card Usage Configuration .....	32
Checking Communication With Radionode365 Server .....	33

<b>Radionode365</b>	<b>34</b>
Adding Devices from Your Smartphone .....	35
Adding Devices from Your Computer .....	38
<b>Maintenance</b>	<b>41</b>
Cleaning .....	41
Batteries .....	41
Firmware Update .....	42
<b>Customer Service Information</b>	<b>43</b>
Manufacturer Contact Information .....	43
Warranty .....	43
Limit of Liability .....	43
Certifications .....	44
<b>HTTP Radionode Protocol V2</b>	<b>45</b>
Check-in .....	45
Data-in .....	48
<b>Order List</b>	<b>49</b>
Data Logger .....	49
Accessories .....	50

# About this Manual

This document contains instructions for usage and installation of the RADIONODE® RN400-T2PS. Product specifications and certain features herein may be subject to change without prior notice. Figures used in this manual are for explanatory purposes only, and may differ from your system depending on installation conditions. Software screenshots may change after software updates.

## Intellectual Property Rights

© 2021 DEKIST Co., Ltd.

All contents and figures herein are property of DEKIST Co., Ltd. Reproduction or redistribution of all or part of this document in any way is not permitted without prior consent from DEKIST.

## Notational Conventions



Failure to follow instructions marked with "Warning" may result in slight injury to the user.



Failure to follow instructions marked with "Caution" may result in equipment damage or malfunction.



Additional helpful information is marked with "Note".

# Introduction

The RADIONODE RN400-T2PS Data Logger periodically measures temperature and RH, then sends measurement data to the Radionode365 server. The RN400-T2PS has a total of 4 I/O channels.

Channel 1	External temp sensor	Channel 2	External Temp sensor
Channel 3	External RH Sensor		


## Key Features

Key features of the RN400-T2PS include:



- Data Logger can be used with additional temp sensors.
- Use Wi-Fi connection to easily configure your Data Logger.
- Built-in buzzer that activates alarm when measurement is outside the margin of error.
- Measurement data can be viewed remotely from Radionode365 website. See [Radionode365](#) on page 34.
- Measurement data can be logged on a micro SD card.

# Exterior

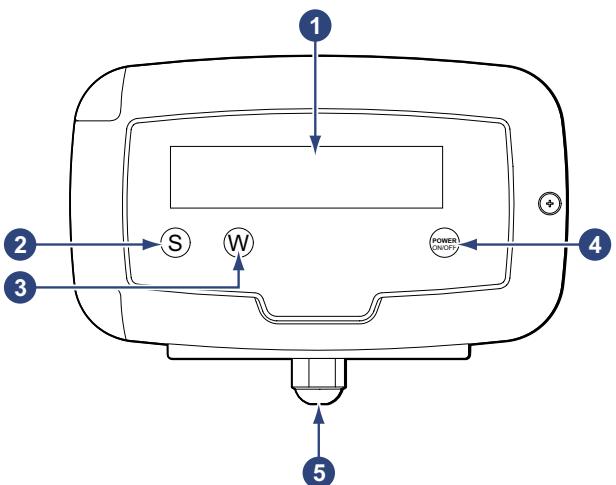


- ① Display                  ② Menu button                  ③ Display button  
④ Power button              ⑤ Cable gland

Power cables and cables of other devices, such as external sensors, are connected via cable glands to the internal terminal block.

For instructions on how to use the buttons, see [Operation](#) on page 17.

# Accessories

All accessories, except for cable glands, are sold separately.

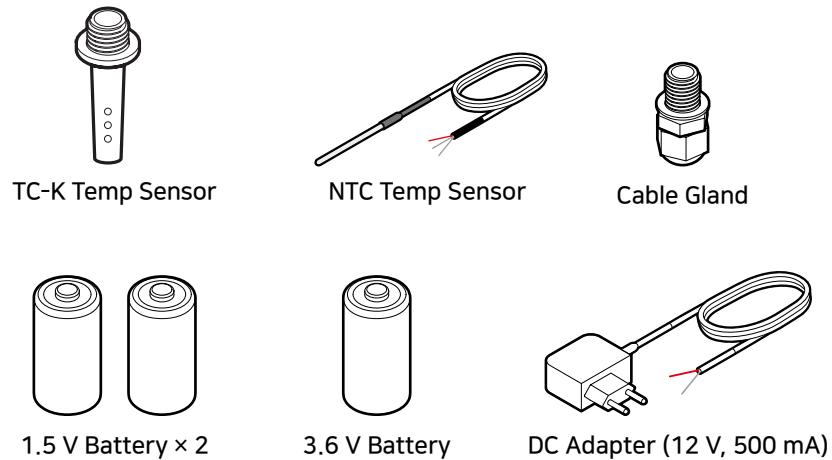


In the event of power failure, two C-type 1.5 V batteries or one 3.6 V battery must be placed in the Data Logger. RADIONODE Data Logger is designed to not operate without a battery, even when external power is connected.



Only use Energizer® batteries. The Data Logger's power consumption varies significantly depending on operation functions. Only Energizer batteries can keep performance stable despite extreme battery usage fluctuations.

# Specifications

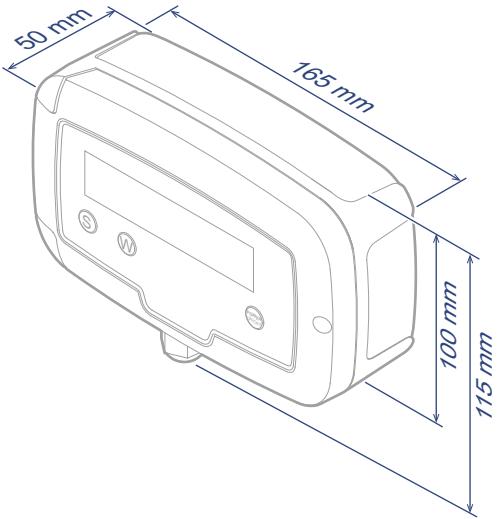

**RN400-T2PS Data Logger**

NTC Temp Sensor	Ch1 Temp: -40 ~ 50 °C (accuracy: ±0.8 °C)
RG20 Temp&RH Sensor	Ch2 Temp: -40 ~ 80 °C (accuracy: ±0.1 °C) Ch3 Humidity: 5~95% RH (accuracy: ±1.5 RH)
Wi-Fi	2.4 GHz IEEE 802.11 b/g/n, WPA2-Enterprise
Cable Gland	PG-9
Water Resistance Rating	IP65 (IP67 is optional)
External DC power	5 ~ 30 V (Built in UPS)
Size	165 × 50 × 115mm
Operating conditions	-20 ~ 60 °C, 0 ~ 95% RH (non-condensed)

**Optional acc. NTC Temp Sensor**

M. Range	-100 ~ 200 °C
Cable	3 m or 15 m
Size	60 mm, ø6.5

**Optional acc. RG20 Temp & RH Sensor**

M. Range	Temp: -40 ~ 80 °C (accuracy: ±0.1 °C) Humidity: 5~95% RH (accuracy: ±1.5 RH)
Cable	3 m or 15 m
Size	60 mm, ø4.8



Note that the performance of the external temperature sensor separately may differ from when it is connected to the Data Logger.

# Installation

The following procedure will guide you from the installation procedure to the Radionode365 registration process.


- 1.** Install sensors or connect other devices to the Data Logger as needed.
- 2.** Connect power and insert the battery.
- 3.** Use the virtual Wi-Fi router feature to configure the Data Logger. See [Configuration](#) on page 22.
- 4.** Now that the Data Logger has been installed, it must be registered to Radionode365. See [Radionode365](#) on page 34.

Depending on your installation circumstances and conditions, your installation process may vary. For example, if you are installing multiple Data Loggers, you might find it easier to:

- 1.** Insert batteries into all Data Loggers before running.
- 2.** Configure one Data Logger first.
- 3.** Use a micro SD card to set up additional Data Loggers. For this method, see [Memory Card Usage Configuration](#) on page 32.
- 4.** Register the Data Loggers onto Radionode365.
- 5.** Finally, install the Data Loggers.

# Terminal Block

Terminal Blocks can be found inside of a Data Logger, with other components arranged as follows:

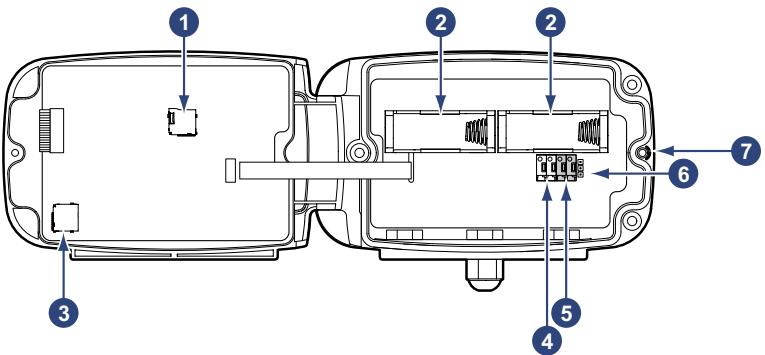

- ①** Micro SD Card Slot
- ②** Battery Holder
- ③** RG20 Sensor Terminal
- ④** NTC Sensor Terminal
- ⑤** Power Outlet
- ⑥** Battery Jumper
- ⑦** Open/Close Screw Hole

Micro SD card is used to log measurement data. See [Memory Card for Data Logging](#) on page 21.


The micro USB port is used for sensor calibration. As RN400 Series sensors are shipped after calibration, no further calibration is required. However, if the sensor malfunctions, contact DEKIST for inspection.

For more information on the terminal block, see [Connecting Terminal Block](#) on page 13.


# Data Logger Installation

The general procedure for installing a Data Logger is as follows:


1. Loosen the screw on the right side of the front panel and open the front panel.

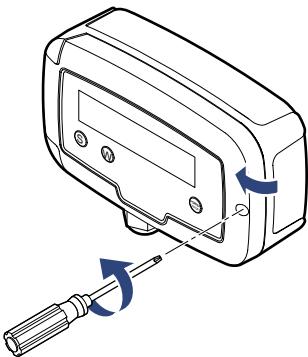


2. Loosen the cable gland.

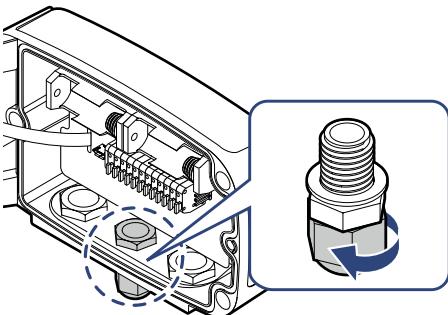


3. Route the cables of the device that will be connected through the gland and connect to the terminal block. Then, connect external DC power and insert the battery. For more information on terminal block connection, see [Connecting Terminal Block](#) on page 13.

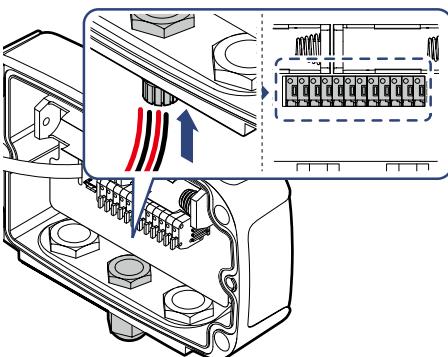


**4.** Tighten the gland firmly.

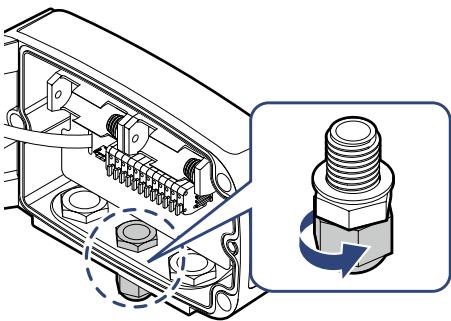


**5.** Cover the front panel and tighten the screws.

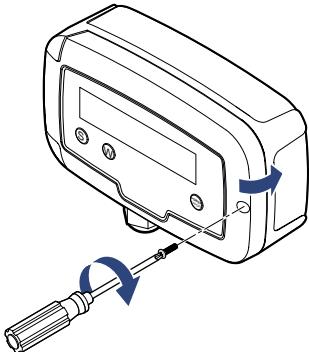


**6.** There Data Logger is equipped with a magnet at the rear. Place the Data Logger on a steel panel.



If necessary, use screws to secure. There are three screw holes on the back of the device.

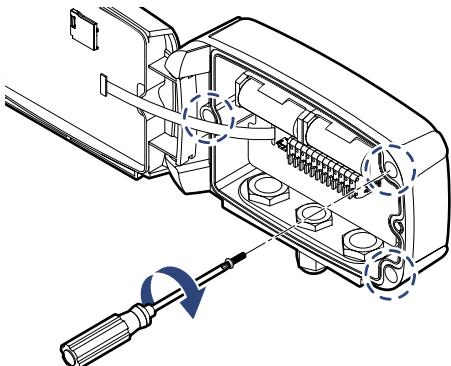


# Connecting Terminal Block

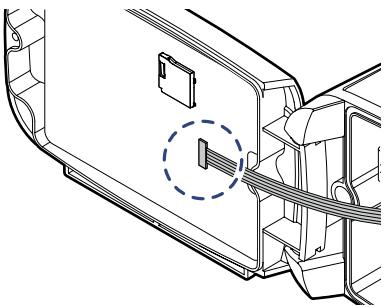


When connecting cables to the terminal block, ensure that the flat cable does not get disconnected from the front connector.

## Cable Gland


If Data Logger cable gland cannot sufficiently receive all cables, install additional cable glands. There are two more gland slots at the bottom of the Data Logger.

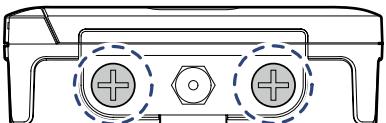

1. Loosen and remove the cap bolt from the left or right gland slot.

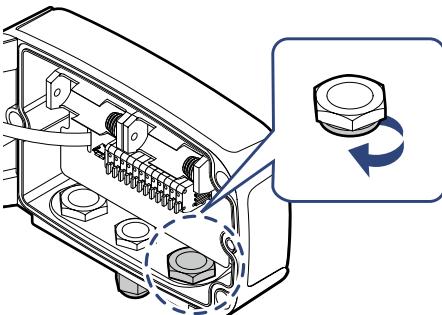


2. Insert the cable gland into the nut and tighten.

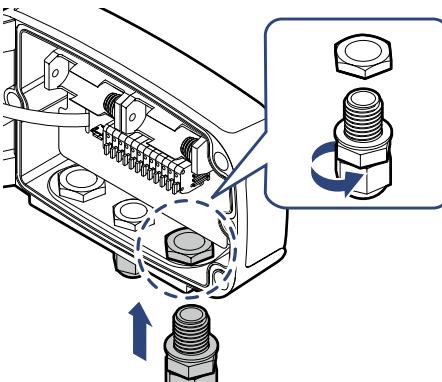


## NTC Temp Sensor

Connect NTC cable to **TEMP. CH1** terminal. Connect the red cable to the **A(+)** terminal, and the remaining cables to the **B(-)** terminal.

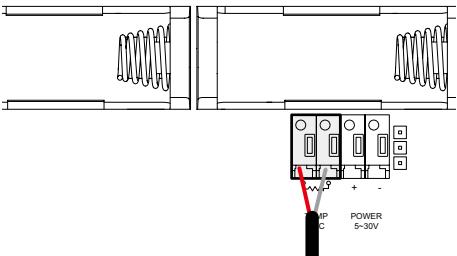


Install the external temperature sensor away from the wall and the floor. The sensor may not touch anything other than the ambient air.

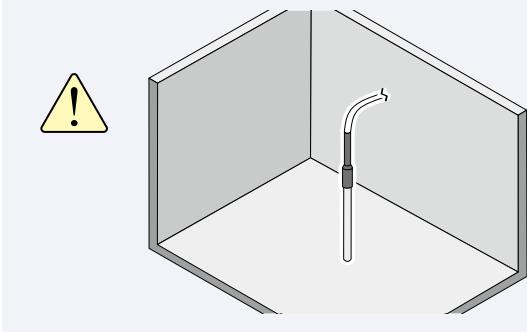


# RG20 Temp&RH Sensor

Connect the RG20 cable to RG20 sensor terminal.

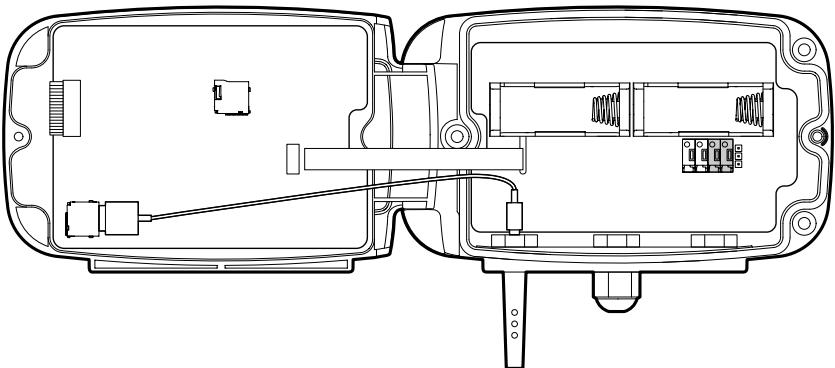


## DC Power

Connect the Power cable to the **POWER** terminal. Connect the red cable to the + terminal, and the remaining cables to the - terminal.

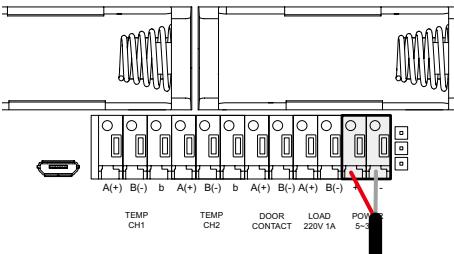


# Batteries

Insert two C-type 1.5 V batteries into the battery holder, or one 3.6 V battery into the left-hand battery holder.

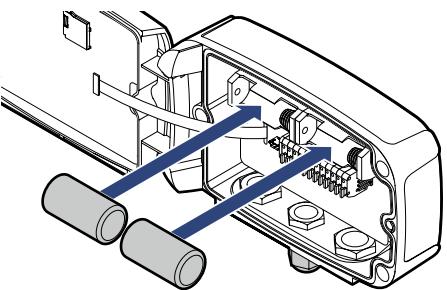

Be careful not to connect batteries with opposite polarities. Doing so may damage the device.

If you are using a 3.6 V battery, move the BAT jumper to the B position.

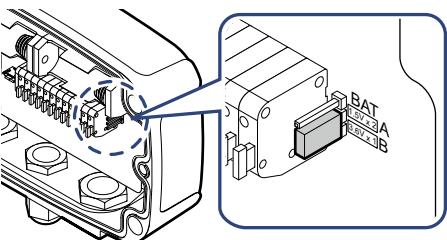

# Operation

When the data logger is turned on, the model number and other key information is displayed with the corresponding measurements. If no external power is supplied, the display will turn off shortly and the Data Logger will enter sleep mode.



- **Viewing Channel Information:** To view channel information, including measurements on sleep mode, press the **W** button. Press the **W** button repeatedly to display different status information.
- **Selecting a Menu:** Press the **W** button, then press the **S** button. Press the **S** button repeatedly to display different menu items. Press the **W** button to open the displayed menu. Press the **P** button to exit the menu.
- **Turning Data Logger Off:** Press the **W** button and hold the **P** button until PRESS 'P' ONE MORE TO POWER IT OFF appears. Hold the **P** button again.
- **Turning Data Logger On:** Press the **P** button.

# Viewing Channel Information

Press the **W** button repeatedly to display the below channel data. A sensor channel that is not connected will appear as **(none)**.

LAST SENSING IS:menu  
1: 26.2C 12: 21.6%

Measurements of Channels  
1 and 2

LAST TRANSMIT IS:menu  
5 Min Ago, 9 samp

Elapsed time since last transfer of measurement data to the server & number of datasets to transfer in the next cycle

WIFI SSID dBIS:menu  
xxxxxxx, -50dB

Wi-Fi network name and signal strength

LOCAL TIME IS:menu  
2020-11-30 17:00

Current date and time

BATTERY STAT. IS:menu  
OK. 11.5Vx212.88V

Type of battery inserted and current voltage. If the voltage is low, **LOW** will be displayed.

DATA FILTER. IS:menu  
SLOW LEVEL (1-15):1

You can select the level of the digital filter. The higher the number, the less sensitive the sensor reacts (1 level: highest sensitive, 15 level: lowest sensitive). You can choose from the settings menu.

GS CELL TEMP. IS:menu  
CELL Temp: 22 C

**[ONLY RN400-T2GS]** Displays the temperature value of the chemical cell inside the product.

# Viewing Device Information

To view device information, select 1. VIEW INFO. To view the next item, press the **S** button. To exit, press the **P** button.

```
INFO!S:next, P:exit
1.HOLDING DATA: 4
```

Number of datasets to send to the server in the next cycle.

(number of datasets to send = Transfer Interval ÷ Measurement Interval)

When measurement interval is set to 5 minutes and the transfer interval set to 20 minutes, 4 datasets are saved until the next transfer. If data transfer fails, datasets accumulate until successful.

```
INFO!S:next, P:exit
2.POWER: External DC
```

If no external power is connected or power failure occurs, Bat will appear.

```
INFO!S:next, P:exit
3.SENSING: 1 Min
```

Measurement interval

```
INFO!S:next, P:exit
4.SENDING: 5 Min
```

Measurement data transmission to server interval

```
INFO!S:next, P:exit
5.UPDATE: 1 Min Ago
```

Time elapsed since last transmission of measurement data to server

```
INFO!S:next, P:exit
6.ID: xxxxxxxx
```

Radionode365 account ID

```
INFO!S:next, P:exit
7.IP:192.168.10.13
```

Data Logger IP Address

```
INFO!S:next, P:exit
8.GW:192.168.1.1
```

Gateway IP address

INFO!S:next, P:exit 9.DN:210.220.163.82	DNS server IP address
INFO!S:next, P:exit 10.MAC:508CB16FA1B3	Data Logger MAC address
INFO!S:next, P:exit 11.SW BUILD:20200720	Firmware version
INFO!S:next, P:exit 12.MODEL:RN400T2PS	Model No.
INFO!S:next, P:exit 13.ALARM:OFF (BAT.)	Alarm relay status
INFO!S:next, P:exit 14.EX-SENSOR: TC-K	Type of external sensor installed

## Resetting Data Logger

All setting options (except for Wi-Fi network) can be reset. Select 4.FACTORY DEFAULT.

# Memory Card for Data Logging


If a memory card is installed in the Data Logger, measurement data will be written to the memory card as a CSV file as follows:

Measurement date, timestamp, Mac address, value for Channel 1, ... , value for Channel 4

	A	B	C	D	E	F	G
1	CALENDAR(GMT 9)	TIMESTAMP	MACADDR	CH1	CH2	CH3	CH4
2	2020-11-18T09:30:49Z	1605659449	508CB16FA1B3	25.36	48.93	0	0
3	2020-11-18T09:31:49Z	1605659509	508CB16FA1B3	25.38	48.9	0	0
4	2020-11-18T09:32:49Z	1605659569	508CB16FA1B3	25.39	48.89	0	0
5	2020-11-18T09:33:49Z	1605659629	508CB16FA1B3	25.36	48.93	0	0
6	2020-11-18T09:34:49Z	1605659689	508CB16FA1B3	25.39	49.11	0	0

In the temp channel (Ch. 1 or Ch. 2), "n/a" means no external temp sensor is connected. In the door channel (Ch. 3), "0" means the door contact is not connected or "closed." Similarly, in the alarm channel (Ch. 4), "0" means the alarm beacon is not connected or "normal."

Open the front of the Data Logger and insert a micro SD card into the card slot inside the front panel.

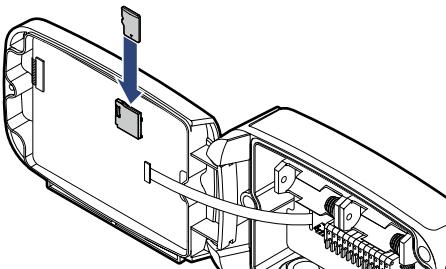

Use an SD card (up to 16 GB) formatted with the FAT32 file system. Other file systems are not supported.

# Configuration


The Data Logger is equipped with a virtual Wi-Fi router. The virtual router allows your smartphone or tablet to be linked to Data Logger for configuration.

- 1.** Select 2.CONFIG MODE (AP) to enable the virtual router.


The following will appear in the display:

```
SOFTAP: _RN400-A1B3
ACCESS: 192.168.1.1
```

- 2.** On your smartphone, find the Wi-Fi network with the same name as shown on the display and connect to the network.

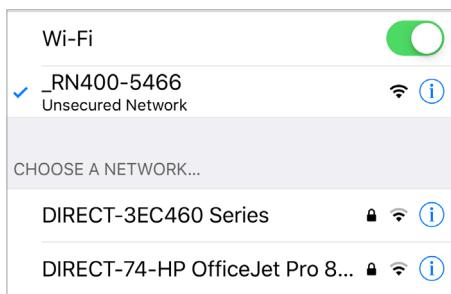


Depending on the version of your Android phone, user identification may be required, as Data Logger is not connected to the Internet.

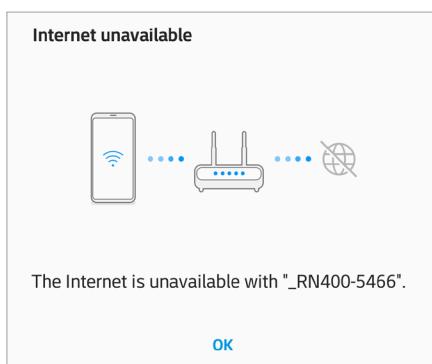

Multiple mobile devices cannot be connected to the Data Logger at the same time.

- 3.** Open your smartphone's web browser and type "192.168.1.1" in the address bar. The Settings page will appear.

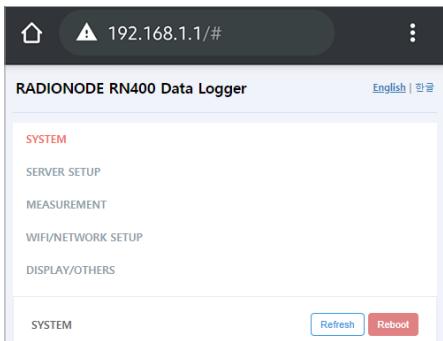

**4.** Change the settings on each page, then tap **Save**.

**5.** To finish configuration, tap **Reboot**.

# Device Information

Tap **SYSTEM** to view Data Logger device information.

SYSTEM	
	Refresh   Reboot
<b>SYSTEM INFORMATION</b>	
Tapaculo365 Owner	
yihze	
<b>MAC Address</b>	
50:8C:B1:8FA1:83	
<b>Model Name</b>	
RN400H2EX	
<b>Firmware Version</b>	
20200720	
<b>OTA Release Version</b>	
Ver03	
<b>SDCARD Inserted</b>	
Inserted	
<b>WIFI SSID</b>	
easymanual	
<b>IP Address</b>	
192.168.0.15	
<b>Gateway Address</b>	
192.168.0.1	
<b>DNS</b>	
8.8.8	

<b>Radionode365 Owner</b>	Radionode365 account ID
<b>Mac ADDRESS</b>	Data Logger MAC address
<b>Model Name</b>	Data Logger model number
<b>Firmware version</b>	Firmware version
<b>OTA Release Version</b>	OTA Release Version
<b>SDCARD Inserted</b>	If a memory card is not inserted, No SDCard will appear.
<b>WIFI SSID</b>	The Wi-Fi network used by the Data Logger
<b>IP Address</b>	Data Logger IP Address
<b>Gateway Address</b>	The gateway IP address to which the Data Logger is connected
<b>DNS</b>	DNS server IP address

# Server

Tap **SERVER SETUP** to configure server receipt of measurement data.




<b>Destination</b>	<ul style="list-style-type: none"> <li>Select <b>Radionode365</b> to send measurement data to the Radionode365 server.</li> <li>Select <b>User HTTP Server</b> to send to a customer or third-party server, and configure the below items accordingly.</li> <li>Select <b>SDCard Logger</b> to operate Data Logger independently without a server.</li> </ul>
<b>Host</b>	Server IP address
<b>Port</b>	Server port number
<b>Checkin URL</b>	URL of the server program that processes check-in requests
<b>Datain URL</b>	URL of the server program that processes data-in requests.



For check-in and data-in request formats, see [HTTP Radionode Protocol V2](#) on page 45.


This item will appear if **Destination** is set to **SDCard Logger**.

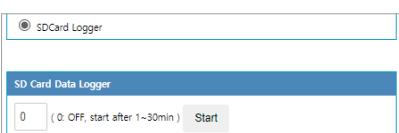

<b>SD Card Data Logger</b>	If set to "0", measurement data will begin to be written to the memory card as soon as booting completes. If set to "10", data will be written 10 minutes after booting completes. For more information, see <a href="#">Memory Card for Data Logging</a> on page 21.
----------------------------	---


# Measurement

Tap MEASUREMENT to configure sensor operation.

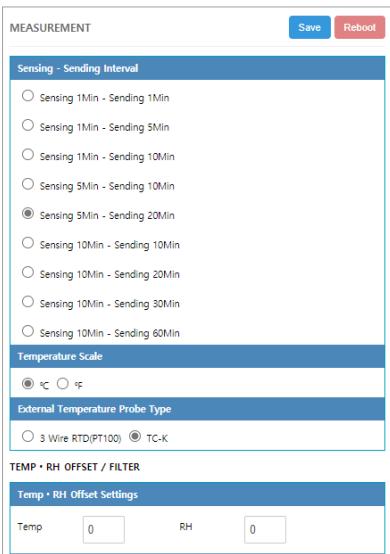

Sensing - Sending Interval	Select the interval between sensor measurement and data transmission. For instance, if <b>Sensing 1Min - Sending 5Min</b> is selected, sensor measures every 1 minute, and measurement data is sent to the server every 5 minutes, or written on a memory card.
Temperature Scale	Select the unit of measurement to use when measuring temperature.
External Temperature Probe Type	Select the type of external temperature sensor installed.
Temp	Enter the calibration value to add to the temperature.
RH	Enter the calibration value to add to the RH.

On the SERVER SETUP page, set the Destination to User HTTP Server to add seconds to the list of selectable options.




The screenshot shows the configuration interface for a door contact sensor. At the top, there's a field for 'AVG Filter(1[fast]-15[slow])' with the value '1'. Below it is a 'SENSORS' section with 'CH info (Channel Count: 1)' and '\_SL\_G\_CIF: undefined'. Under 'DOOR CONTACT', there are two radio buttons: 'Enable' (unchecked) and 'Disable' (checked). In the 'DRY CONTACT (RELAY AND BUZZER SETTING)' section, there's a dropdown for 'Target Channel' with 'CH1(Temp)' selected. Below it, 'Normal Range' is set to '20 ~ 25'. Under 'Relay and Buzzer', there are two checkboxes: 'RELAY ON (MAX: 300V - 1A)' (unchecked) and 'BUZZER SOUND ON' (unchecked).

<b>AVG Filter</b>	Adjusts the sensor sensitivity. The margin of error ranges from 1 to 15, and the higher the value, the lower the sensitivity.
<b>CH info</b>	Displays a list of I/O channels.
<b>Target Channel</b>	Select the input channel that will trigger the alarm relay and specify the normal range. For example, if you select <b>CH1 (Temp)</b> and the normal range is set to "20 - 25", the alarm relay will turn on when the temperature measured by Channel 1's temp sensor is lower than 20 degrees or higher than 25 degrees.
<b>Buzzer</b>	When <b>BUZZER SOUND ON</b> is selected, the built-in buzzer will sound when an alarm goes off.


# Wi-Fi Network

Tap **WIFI/NETWORK SETUP** to configure the Wi-Fi network that will be used by the Data Logger.

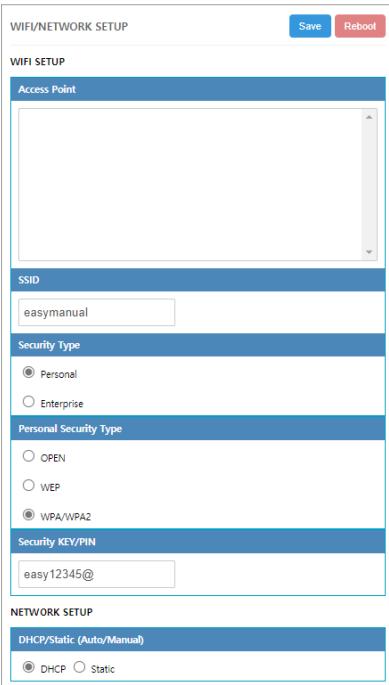

<b>Access Point</b>	Select a network to use from the list of searched Wi-Fi networks. The closer the signal strength is to 0 dBm, the stronger the connection. If possible, use a Wi-Fi network with a signal strength of -70 dBm or higher.
<b>SSID</b>	The selected SSD will appear.
<b>Security Type</b>	Select the type of security that your Wi-Fi network uses.
<b>Personal Security Type</b>	If <b>Security Type</b> is set to <b>Personal</b> , select the current security type.
<b>Security KEY/PIN</b>	Enter your Wi-Fi password.
<b>DHCP/Static (Auto/Manual)</b>	If <b>DHCP</b> is selected, the router will randomly assign an IP Address. If a static IP address is needed, select <b>Static</b> and configure additional settings.

If a static IP address is needed, select **Static** and configure additional settings as follows:

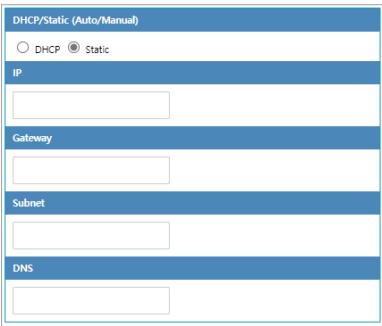

<b>IP</b>	Data Logger IP Address
<b>Gateway</b>	Gateway IP address
<b>Subnet</b>	Subnet mask
<b>DNS</b>	DNS server IP address

# Enterprise Security (WPA Enterprise)

When connecting to a Wi-Fi network that uses enterprise security, the certificate is passed from Data Logger to the RADIUS server along with the RADIUS server account. Once user's access is authorized by the RADIUS server, access to the network is granted.

To connect to a network that uses enterprise security, adhere to the following procedure:

1. Copy the RADIUS server certificate to a micro SD card with the following path and filename:

`/cert/ca.pem`



Ask your network administrator for a certificate in a PEM format. Certificates in other formats are not supported.

2. On the WIFI/NETWORK SETUP page, set the **Security Type** option to **Enterprise** and configure the following additional settings:

Personal Security Type	Security type
RADIUS UserID	RADIUS server account ID
RADIUS Password	RADIUS ID password

# Display

Tap DISPLAY/OTHERS to configure display and other options.

The screenshot shows the 'DISPLAY/OTHERS' configuration page. At the top are 'Save' and 'Reboot' buttons. Below is a section titled 'DISPLAY SCHEDULER ( ONLY BATTERY )' with dropdown menus for 'Display Timer OP Mode' and 'Display Timer Start Time'. Under 'TIMEZONE CONFIG' is a dropdown for 'TimeZone'. In the 'BACKUP' section, there's a 'Copy to SD Card' button with a 'Copy Now' sub-option. The final section is 'OTHERS', which contains a 'Debug Code' input field with a value of '0' and an 'Execute' button.

<b>Display Timer OP Mode</b>	This setting can be configured with other settings to set the display operation interval during sleep mode. Select how long the display will stay on in minutes. Select <b>Always</b> to disable sleep mode.
<b>Display Timer Start Time</b>	Select what time the display will turn on.
<b>Timezone</b>	Select which timezone to use.
<b>Copy Now</b>	See <a href="#">Memory Card Usage Configuration</a> on page 32.
<b>Debug Code</b>	Enter a command to perform a specific function. See the following section for a detailed explanation.

# Commands

On the DISPLAY/OTHERS page, the following commands can be entered in **Debug Code**. Enter a command in uppercase, then tap **Execute**.


<b>ATVMAC xxxx0000xxxx</b>	Enter the address that will be used as the virtual MAC address.
<b>ATCLF</b>	The virtual MAC address is replaced by the original address.
<b>ATNODNS 1</b>	DNS settings are ignored.
<b>ATNODNS 0</b>	DNS settings become valid again.
<b>ATLOG 1</b>	Event logs are saved on the memory card.
<b>ATLOG 0</b>	No event logs are created.

# Memory Card Usage Configuration

Memory cards facilitate the configuration of multiple Data Loggers at once.

1. Back up the setup data on a memory card in the configured Data Logger.

- a) Insert a micro SD card into the Data Logger.

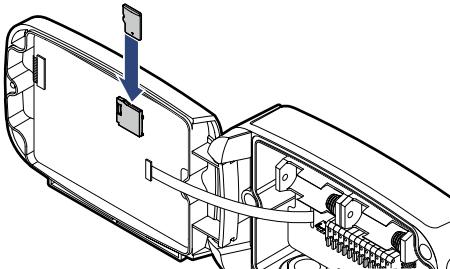

- b) On the DISPLAY/OTHERS page, tap Copy to SD Card > Copy Now.




- c) Remove the SD card.

2. Copy the setup data from the SD card to another Data Logger.

- a) Insert the SD card into the Data Logger.

- b) Use the **P** button to turn the Data Logger off.

- c) Press both the **S** and **W** buttons simultaneously and hold the **P** button to turn the Data Logger on.



If NEW CONFIG FILE IS LOADED appears, the setup data has been copied successfully.




Use an SD card (up to 16 GB) formatted with the FAT32 file system. Other file systems are not supported.

# Checking Communication With Radionode365 Server

From the Data Logger, select 6. CHECK SYSTEM to ensure that data are successfully updated when adding I/O channels in Radionode. Measurements are displayed every 3 seconds and sent to the Radionode365 server. On the web page, verify that the displayed values match the ones shown. Press the **P** button to finish.

# Radionode 365

Radionode365 is a cloud-based sensor monitoring web application operated by DEKIST, a radionode manufacturer. We offer data storage for all sensor-measured data, and provide various features such as emergency alarms, reports, and real-time status based on stored data.

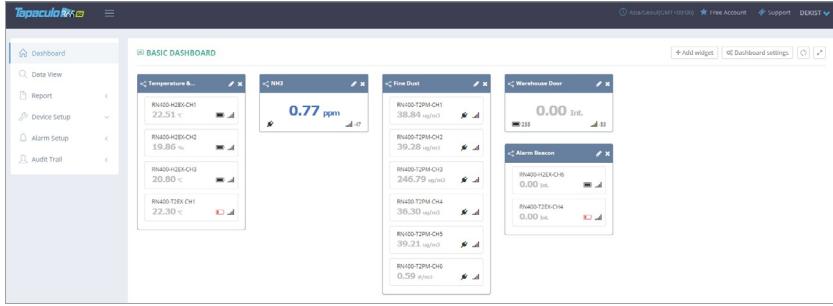

This chapter outlines how to add new devices and channels to Radionode365. For more information on Radionode365, see the information provided on the web page below:

<https://help.radionode365.com/article-categories/tp365-manual>

Key features of Radionode365 include:

- Measurement data displayed in real-time;
- View measurement data records via charts;
- Create and email periodic reports;
- Alarms notifications sent via e-mail, text, or voice message in the event of an alarm.

Create a user account at the address below to access Radionode365.

<https://s2.Radionode365.com/html/memberjoin.html>

# Adding Devices from Your Smartphone

At the **New Device** page, you will find a unique QR code for your account. The QR code allows you to easily add devices and channels to your smartphone.

The screenshot shows the 'Register a New Device' page of the Tapaculo365 web interface. At the top, there's a header with the title and a sub-instruction: 'In order to use the service, it is necessary to register the device. The devices necessarily need to be turned on first, and LAN or WiFi has to be well connected.' Below this is a list of frequently asked questions (FAQs) with answers:


- What do you mean by "Device"? (Answer: RADIONODE(RN200), RN171, RN172, RN400 are devices. Each device has its IP address, and it can actively transmit data.)
- What's wrong if no device is registered? (Answer: If no device is registered, you cannot access Tapaculo365 services through the internet.)
- How can I check if a device is connected to the Internet? (Answer: If a device is connected to the Internet, it's not in the same IP range.)
- How can I check if the device is connected to the Internet and registered in Tapaculo365? (Answer: RN171/RN172: Check the LED on the front; if the green light and red light alternately flicker after you connect the LAN, it means the Internet is working, but the device isn't registered. RN400: If the CLOUD-CHIN LED on the front flashes every 10 seconds, it means the Internet is working, but the device isn't registered.)
- Clicking the **Add Device** button will complete the registration of the device after entering the simple information.

On the right side of the page, there's a QR code with the URL <https://2.tapaculo365.com/> below it. At the bottom, there's a search bar and a table showing a single device entry:

ID(MAC)	Device Model	Public IP	Private IP	RF Power	RF Channel	Network ID	Firmware	Sending Interval	Sampling Interval	Last Update	Last Update time	Add Device
049162E32C93	RN171	61.101.112.152	192.168.0.42	-	-	-	Sep 4 2020	1 sec	1 sec	2021-01-19 11:31:01	<b>Add Device</b>	

Scan the QR code with your smartphone. Alternatively, copy the link address from the QR code image and send it to your smartphone.


1. Your smartphone's default web browser will open with your user information. Tap Add Device.

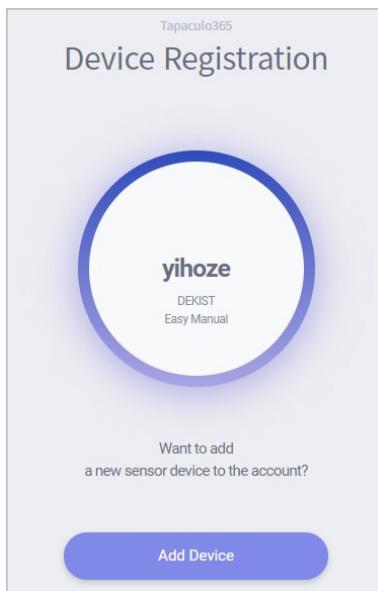

When the RN400 Series Data Logger first connects to Radionode365, its identification code (i-code) is displayed as follows:

Enter iCode on TP365  
iCode: 2024


- 2.** Enter the i-code on the device display. If you do not see an i-code on the display, tap **Search by MAC address** and enter your MAC address.

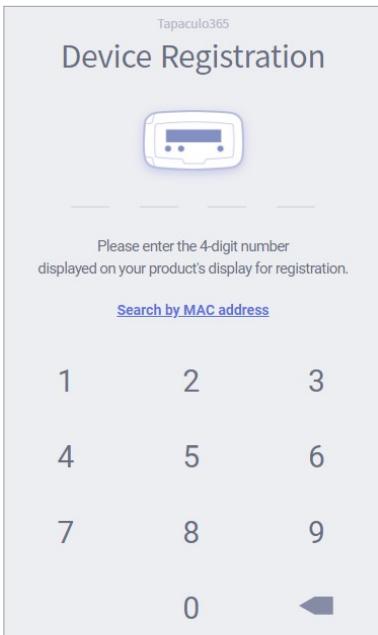

- 3.** If the i-code or MAC address is correct, the device information will appear as below. Tap **Next**.



- 4.** Enter your device name, check the box of the channel that will be used, then enter the channel name and unit that will be used. Tap **Next** to finish.

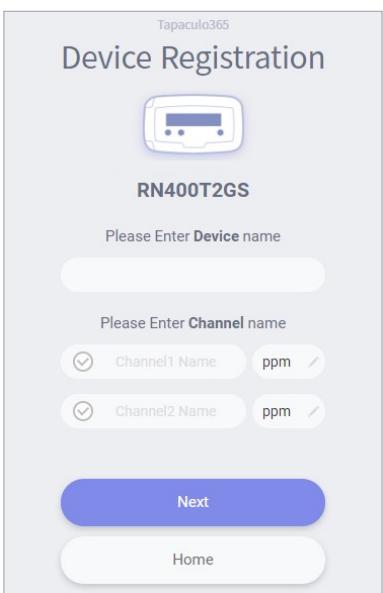

# Adding Devices from Your Computer

## Adding Devices

The **New Device** page will appear if there is no added device on login. To add a device that was added later, click **Device Setup > New Device**.


ID/MAO	Device Model	Public IP	Private IP	RF Power	RF Channel	Network ID	Firmware	Sending Interval	Sampling Interval	Last Update	Last Update time	Add Device
E415F64F43FA	RN4007205	61.101.112.152	192.168.0.10	-	-	-	20200616	100 sec.	100 sec.	④ Envia rego	2021-01-19 11:05:34	
049162E320F3	RN171	61.101.112.152	192.168.0.42	-	-	-	Sep 4 2020	100 sec.	100 sec.	④ Envia rego	2021-01-19 11:05:34	
E415F64F5466	RN40072PM	61.101.112.152	192.168.0.45	-	-	-	20200730	100 sec.	100 sec.	④ Envia rego	2021-01-19 11:05:34	
508C319F41B3	RN400HCEK	61.101.112.152	192.168.0.40	-	-	-	20200720	100 sec.	100 sec.	④ Envia rego	2021-01-19 11:05:34	
D43639AC39B7	RN400T2EK	61.101.112.152	192.168.0.39	-	-	-	20200720	100 sec.	100 sec.	④ Envia rego	2021-01-19 11:05:34	

Devices found in the same IP band are listed here. If you do not see your device in the list, you can add it using its i-code. When RN400 Series first connects to Radionode365, its i-code is displayed as follows:

Enter iCode on TP365  
iCode: 2024

Enter the i-code above the device list and click **Search**. Devices can also be searched via MAC address instead of their i-code. The device will be then be added to the list.

To add your device, click the **Add Device** button in the last column.

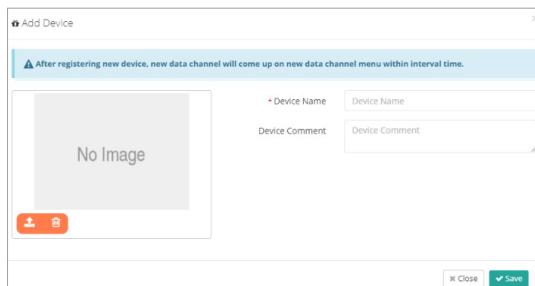

Enter your device name in the window that appears, upload a picture of the installed device, then click **Save**.



# Adding Widgets

A widget contains one or several channels. You can add a widget to the dashboard by clicking **Dashboard**, then **Add widget**.

Channel Name	Device Name	Last Value	Unit	Sending Interval	Last Upd
RN400-T2GS-CH1	RN400-T2GS	0.68	ppm	100 sec	14min
RN400-T2PM-CH1	RN400-T2PM	5.05	ug/m3	100 sec	14min
RN400-T2PM-CH2	RN400-T2PM	5.44	ug/m3	100 sec	14min
RN400-T2PM-CH3	RN400-T2PM	29.06	ug/m3	100 sec	14min
RN400-T2PM-CH4	RN400-T2PM	4.39	ug/m3	100 sec	14min

Enter the widget name in the window, select channels, then click **Save**.

# Maintenance

## Cleaning

Use a dry cloth to clean the Data Logger. Do not use solvents or abrasives. Not only do these substances damage the surface of the Data Logger, but they may also affect sensor performance.

## Batteries

Replace the battery when the battery status on the Radionode365 web page is **Bad**, or if it appears as follows:

**WARNING! IS:menu  
Low Battery!**



When the measurement interval and transfer interval are set to the lowest frequency, the battery is expected to last up to 1 year without external power.


# Firmware Update

The Data Logger can be updated with new firmware to correct errors or enhance features. Latest firmware is distributed optionally depending on your circumstances.

1. Copy the firmware file to a micro SD card to the following path and insert it into Data Logger. The file name is the same as the model number.

```
/img/T2PS.bin
```

2. Insert a micro SD card into the Data Logger.
3. Use the **P** button to turn the Data Logger off.
4. Press both the **S** and **W** buttons simultaneously and hold the **P** button to turn the Data Logger on.



If NEW IMAGE FILE IS LOADED appears, the firmware will be updated successfully.



Use an SD card (up to 16 GB) formatted with the FAT32 file system. Other file systems are not supported.

# Customer Service Information

## Manufacturer Contact Information

DEKIST Co., Ltd. provides repair service and replacement parts for RADIONODE products. To request customer service, contact us via one of the following methods.

- Tel: +(82) 1566-4359
- Fax: (+82) 31-8039-4400
- E-mail: master@dekist.com

## Warranty

Repairs are provided free of charge for product failure under normal operating conditions within one year of the product installation date.

## Limit of Liability

Warranty repairs are not provided in the event of:

- Failure caused by unapproved installation methods;
- Failure caused by user negligence;
- Failure caused after alteration, disassembly, or repair of the product by a person unauthorized by DEKIST;
- Failure caused by corrosion, falling, submersion, or other improper storage methods;
- Failure caused by natural disaster or other unforeseen circumstances, such as storms, floods, earthquakes, lightning, or abnormal voltage;
- Service requested for actions that the user can take, such as replacing consumables;
- Alteration of the software through decompilation or the like

# Certifications

## FCC Class A Digital Device

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.



Changes or modifications not expressly approved by the manufacturer responsible for compliance could void the user's authority to operate the equipment.

---

## KC

This equipment has passed conformity testing for use in work environments, and is likely to cause interference when used in a household environment.

# HTTP Radionode Protocol V2

Radionode users can build their own servers that receive measurement data from radionode devices, such as the RN400 Series data loggers or RN17x Series data transmitters, instead of the Radionode365. This chapter describes the POST-method HTTP request format used by radionode devices for customer server developers.

Customer servers must process the following two requests:

- The radionode device requests transmission of device information from the server at the start of operation and every one hour thereafter. This request is called check-in.
- The device requests transmission of measurement data from the server at the set time. This request is called data-in.

## Check-in

Check-in requests are in the following format:

```
POST / HTTP/1.1
Host: 192.168.10.1/checkin
Content-Type: application/x-www-form-urlencoded
Content-Length: 589

mac=0000xxxx0000&
ver=20201031&
model=RN171&
ip=192.168.100.11&
splrate=60&
interval=300&
tags=xxx|xxx|xxx
```

In 192.168.10.1/checkin, checkin is the server program name that processes check-in requests, which can be either `checkin.php`, `checkin.asp` or `checkin.js`.

- `mac`: MAC address of the device
- `ver`: Firmware version
- `model`: Model No.
- `ip`: IP Address
- `splrate`: Measurement interval
- `interval`: Data transfer interval
- `tags`: CH info

This parameter is separated by vertical lines (|) and indicates the nature of each channel.

```
tags=TEMP|RH|NTC_TEMP|NULL|NULL|NULL
```

In this example, there are a total of six channels with Channel 1 indicating temperature, Channel 2 indicating RH, and Channel 3 indicating the temperature measured by NTC external temperature sensor. The remaining channels are not associated sensors or devices.

The server must reply to a check-in request in the following XML format:

```
<xml>
<root>
<ack>ok</ack>
<timestamp>1501912142</timestamp>
<offset-ch1>0.6</offset-ch1>
<offset-ch2>1.3</offset-ch2>
<sample-mode>3</sample-mode>
</root>
</xml>
```

The first two of the five tags are mandatory, whereas the remaining three tags are options, subject to change according to the server's reply.

- **ack:** Processing outcome (**ok** or **error**)
- **timestamp:** Current time of the server in UNIX timestamp format
- **offset-ch1:** Calibration Value of Channel 1
- **offset-ch2:** Calibration Value of Channel 2
- **sample-mode:** Measurement and Transfer Intervals.

If this tag's value is "3," the measurement interval changes to 5 minutes and the transfer interval to 20 minutes. See the following table:

	1	2	3	4	5	6	7	8	9	10	11	12	13
Measurement interval	1 m	1 m	5 m	5 m	10 m	10 m	10 m	10 m	20 m	30 m	10 s	10 s	10 s
Transfer Interval	10 m	5 m	20 m	10 m	10 m	30 m	20 m	60 m	40 m	60 m	10 s	30 s	60 s

**sample-mode** Note that when setting a tag to a value greater than 10, setting measurement and transfer intervals in seconds may cause rapid battery depletion.



**sample-mode** Note that when setting a tag to a value greater than 10, setting measurement and transfer intervals in seconds may cause rapid battery depletion.

## Data-in

Data-in requests are in the following format:

```
POST / HTTP/1.1
Host: 192.168.10.1/datain
Content-Type: application/x-www-form-urlencoded
Content-Length: 589

mac=0000xxxx0000&
sig=40&
bat=255&
volt=1|3.12&
SMODEL=RN400H2EX&
C000=1505912142|23.22|12.44|122.11|123&
P000=1505911542|23.19|12.40|121.96|123&
P001=1505910942|23.18|12.52|122.04|123&
```

- **mac**: MAC address of the device
- **sig**: Strength of wireless signal
- **bat**: Battery status.

The value ranges from 0 to 255. The battery must be replaced when the value is "5" or less. "-1" is displayed when DC power is connected.

- **volt**: Battery type and current voltage.  
"0" indicates two 1.5 V batteries are inserted and "1", one 3.6 V.
- **SMODEL**: Model number of the device
- **Cxxxx**: Current measurement of each channel.

This parameter is separated by vertical lines (|) and indicates the values of the timestamp and each channel.

```
C000=Timestamp|Ch. 1|Ch. 2|Ch. 3|Ch. 4
```

- **Pxxxx**: Past channel measurements

The server must reply to a data-in request with a process outcome in the following format:

```
<xml>
<root>
<ack>ok</ack>
</root>
</xml>
```

# Order List

## Data Logger

Type	Model No.	Compatible External Sensors
Temp, RH	RN400-H2PS	PR-P1-3, PR-P1-15, PR-K1-3, PR-K1-15
Temp, RH, Door	RN400-H2EX	PR-P1-3, PR-P1-15, PR-K1-3, PR-K1-15 AP-D1, AP-W1
Temp	RN400-T2PS	PR-N1-20, PR-N1-150, RG20
Temp, Door	RN400-T2EX	PR-P1-3, PR-P1-15, PR-K1-3, PR-K1-15 PR-T1-3, PR-T1-15, AP-D1, AP-W1
Temp	RN400-T2TS	PR-K1-3, PR-K1-15 PR-T1-3, PR-T1-15
4-20mA	RN400-T2CS	
Gas	RN400-T2GS	RG10-NH3, RG10-H2S
PM2.5 Particulate matter	RN400-T2PM	

# Accessories

## Temp Sensor

Type	Model No.	Cable
PT100	PR-P1-3	3 m
-200~200°C	PR-P1-15	15 m
Type K Thermocouple (TC-K)	PR-K1-3	3 m
-50~200°C	PR-K1-15	15 m
Type T Thermocouple (TC-T)	PR-T1-3	3 m
-200~200°C	PR-T1-15	15 m
NTC	PR-N1-20	20 cm
-100~200°C	PR-N1-150	150 cm
Temp & RH	RG20	

## Gas Sensor

Type	Model No.	Cable
Ammonia	RG10-NH3	
Hydrogen Sulfide	RG10-H2S	

## Misc.

Type	Model No.	Cable
Door Contact	AP-D1	1 m
Alarm Beacon	AP-W1	25 cm
DC Adapter (EMC Core sold separately)	AP-P1	3 m



© 2021 DEKIST Co., Ltd.

**Telephone** 1566-4359

**Fax** (+82) 31-8039-4400

**Email** master@dekish.com

#A1801, 13, Heungdeok 1-ro, Giheung-gu, Yongin-si, Gyeonggi-do, Korea 16954