
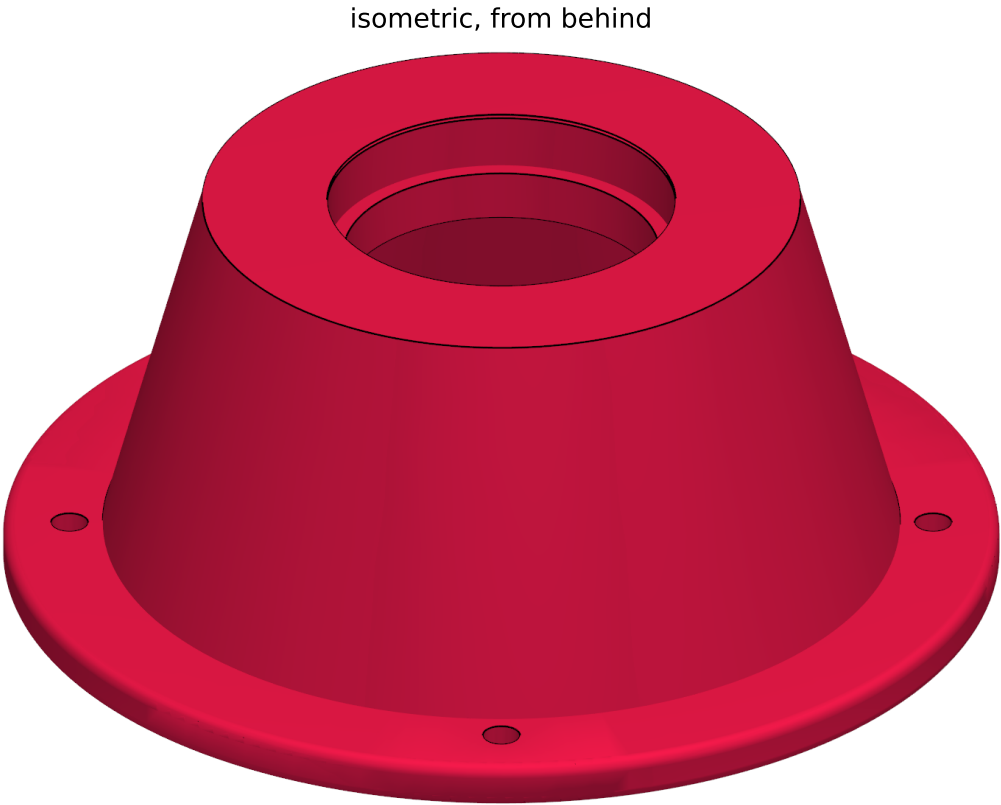



Part 1 of 27: base (print 1) 120 x 120 x 50 mm

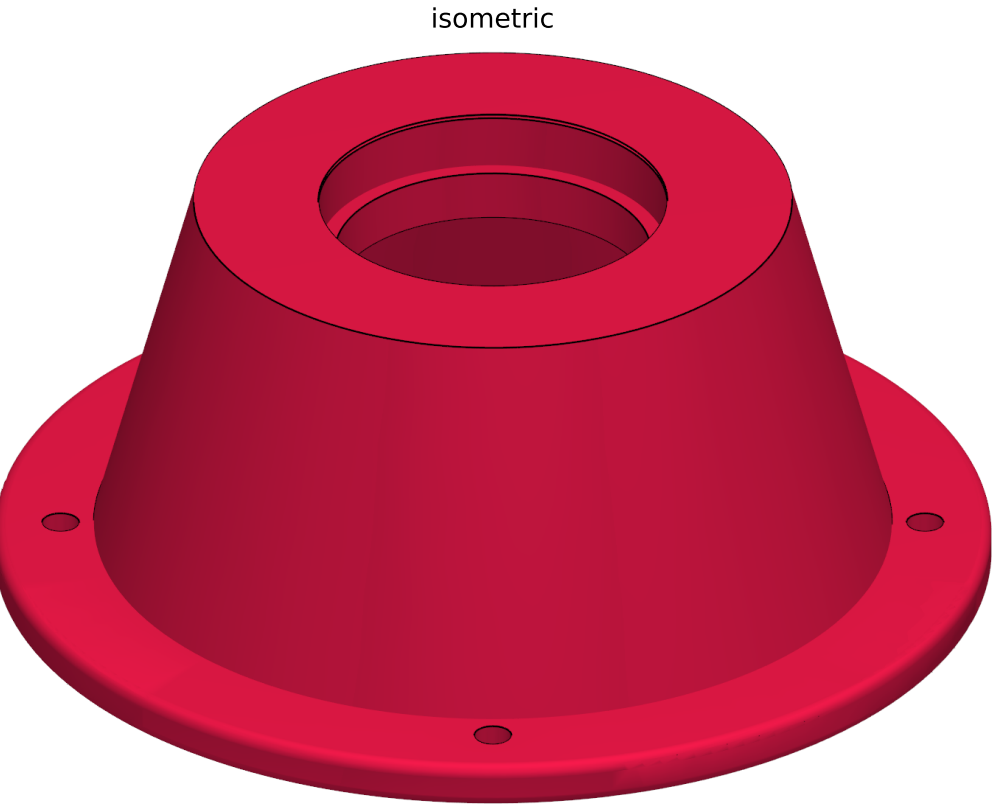




rev I: lower 6806 pocket opens from underneath

features found on its own faces
(cylindrical holes, measured):

1 x 6806 bearing pocket	0 42.02	depth 2.5
2 x 6806 bearing pocket	0 42.00	depth 6.5
2 x 6806 outer-race recess	0 38.00	depth 4.0
4 x M4 clearance	0 4.50	depth 5.5

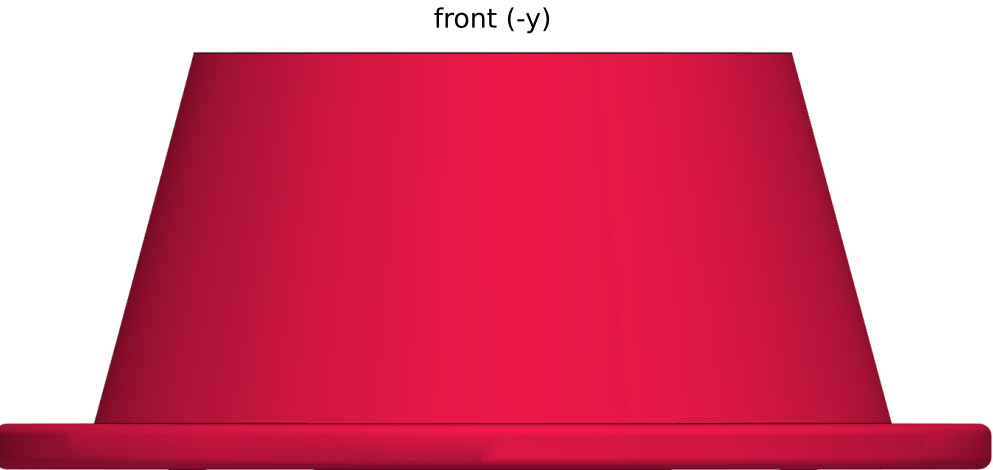

base -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

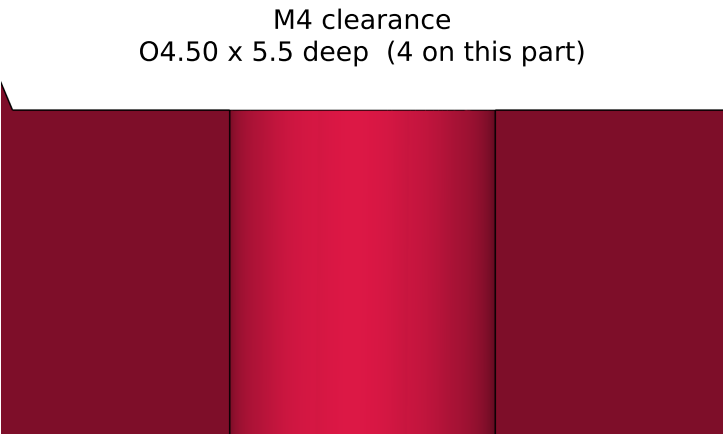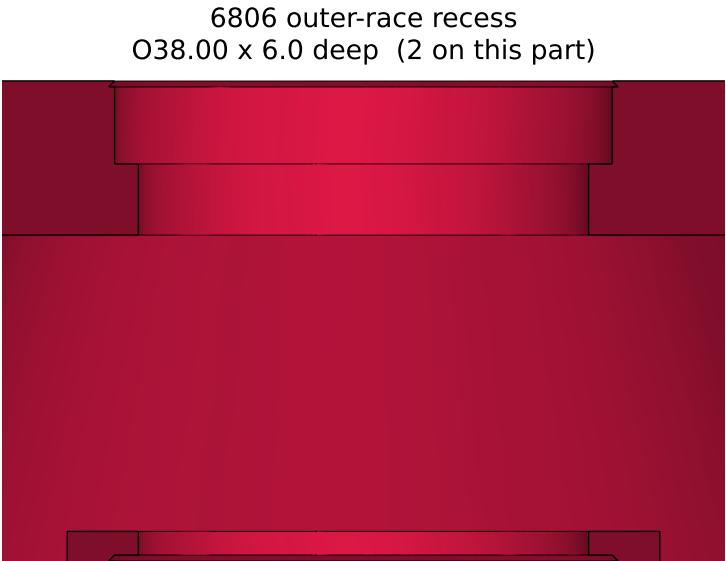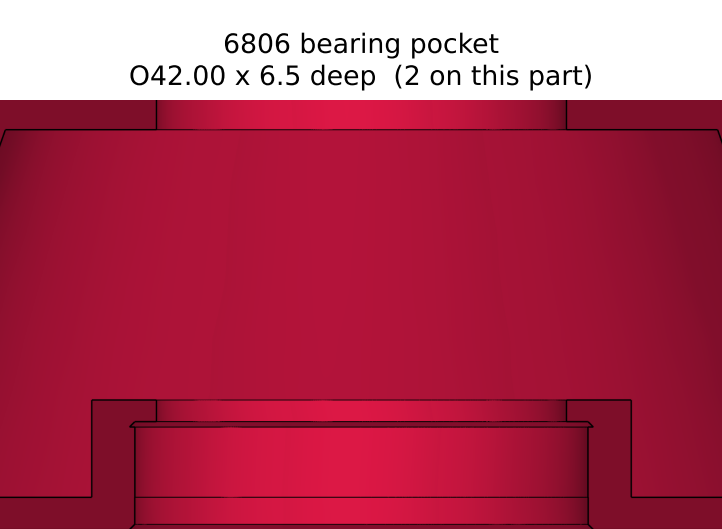


Part 2 of 27: spigot_collar (print 1) 46 x 46 x 12 mm

split clamp + J1 collet closer, slot 2.0, 1 x M3 pinch bolt


features found on its own faces
(cylindrical holes, measured):

1 x collar bore	0	30.15	depth 12.0
1 x M3 head counterbore	0	6.20	depth 6.0
1 x M3 insert pocket	0	4.10	depth 7.0
2 x M3 clearance	0	3.40	depth 7.3

isometric

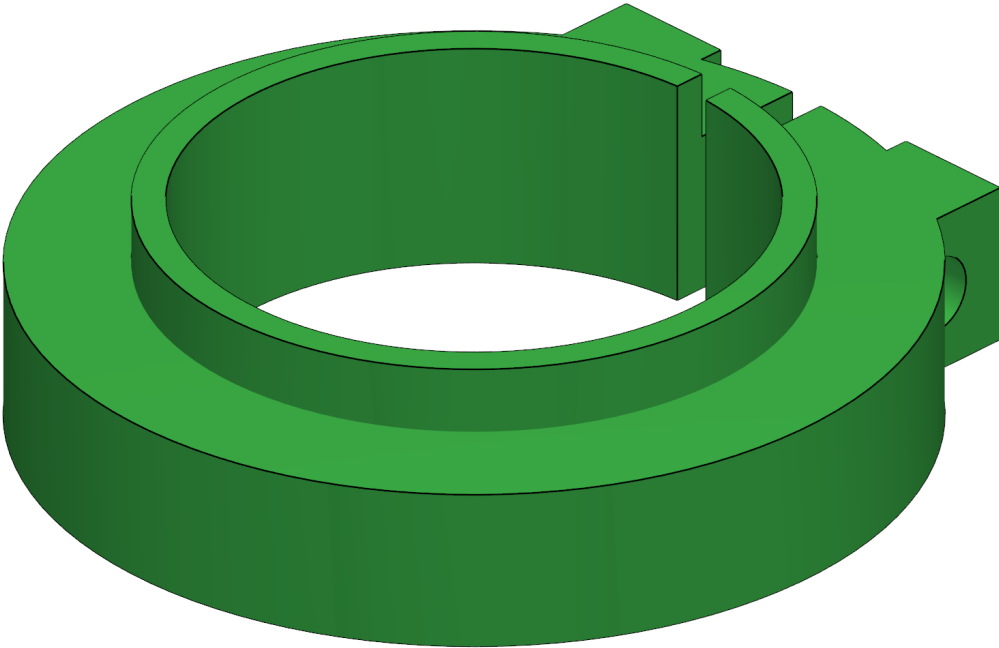

isometric, from behind

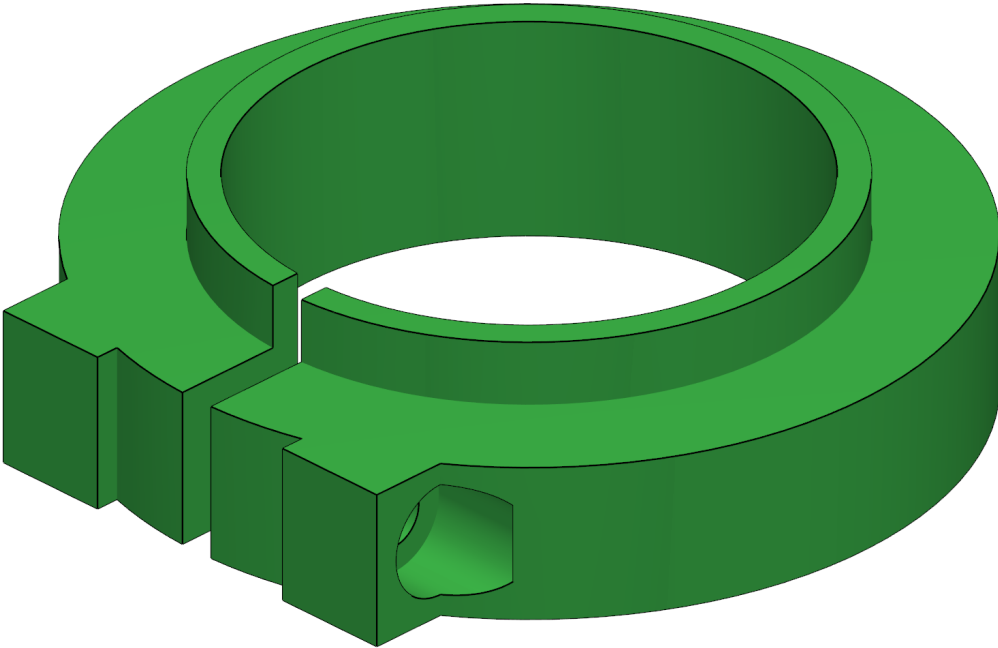


front (-y)



side (+x)




spigot_collar -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

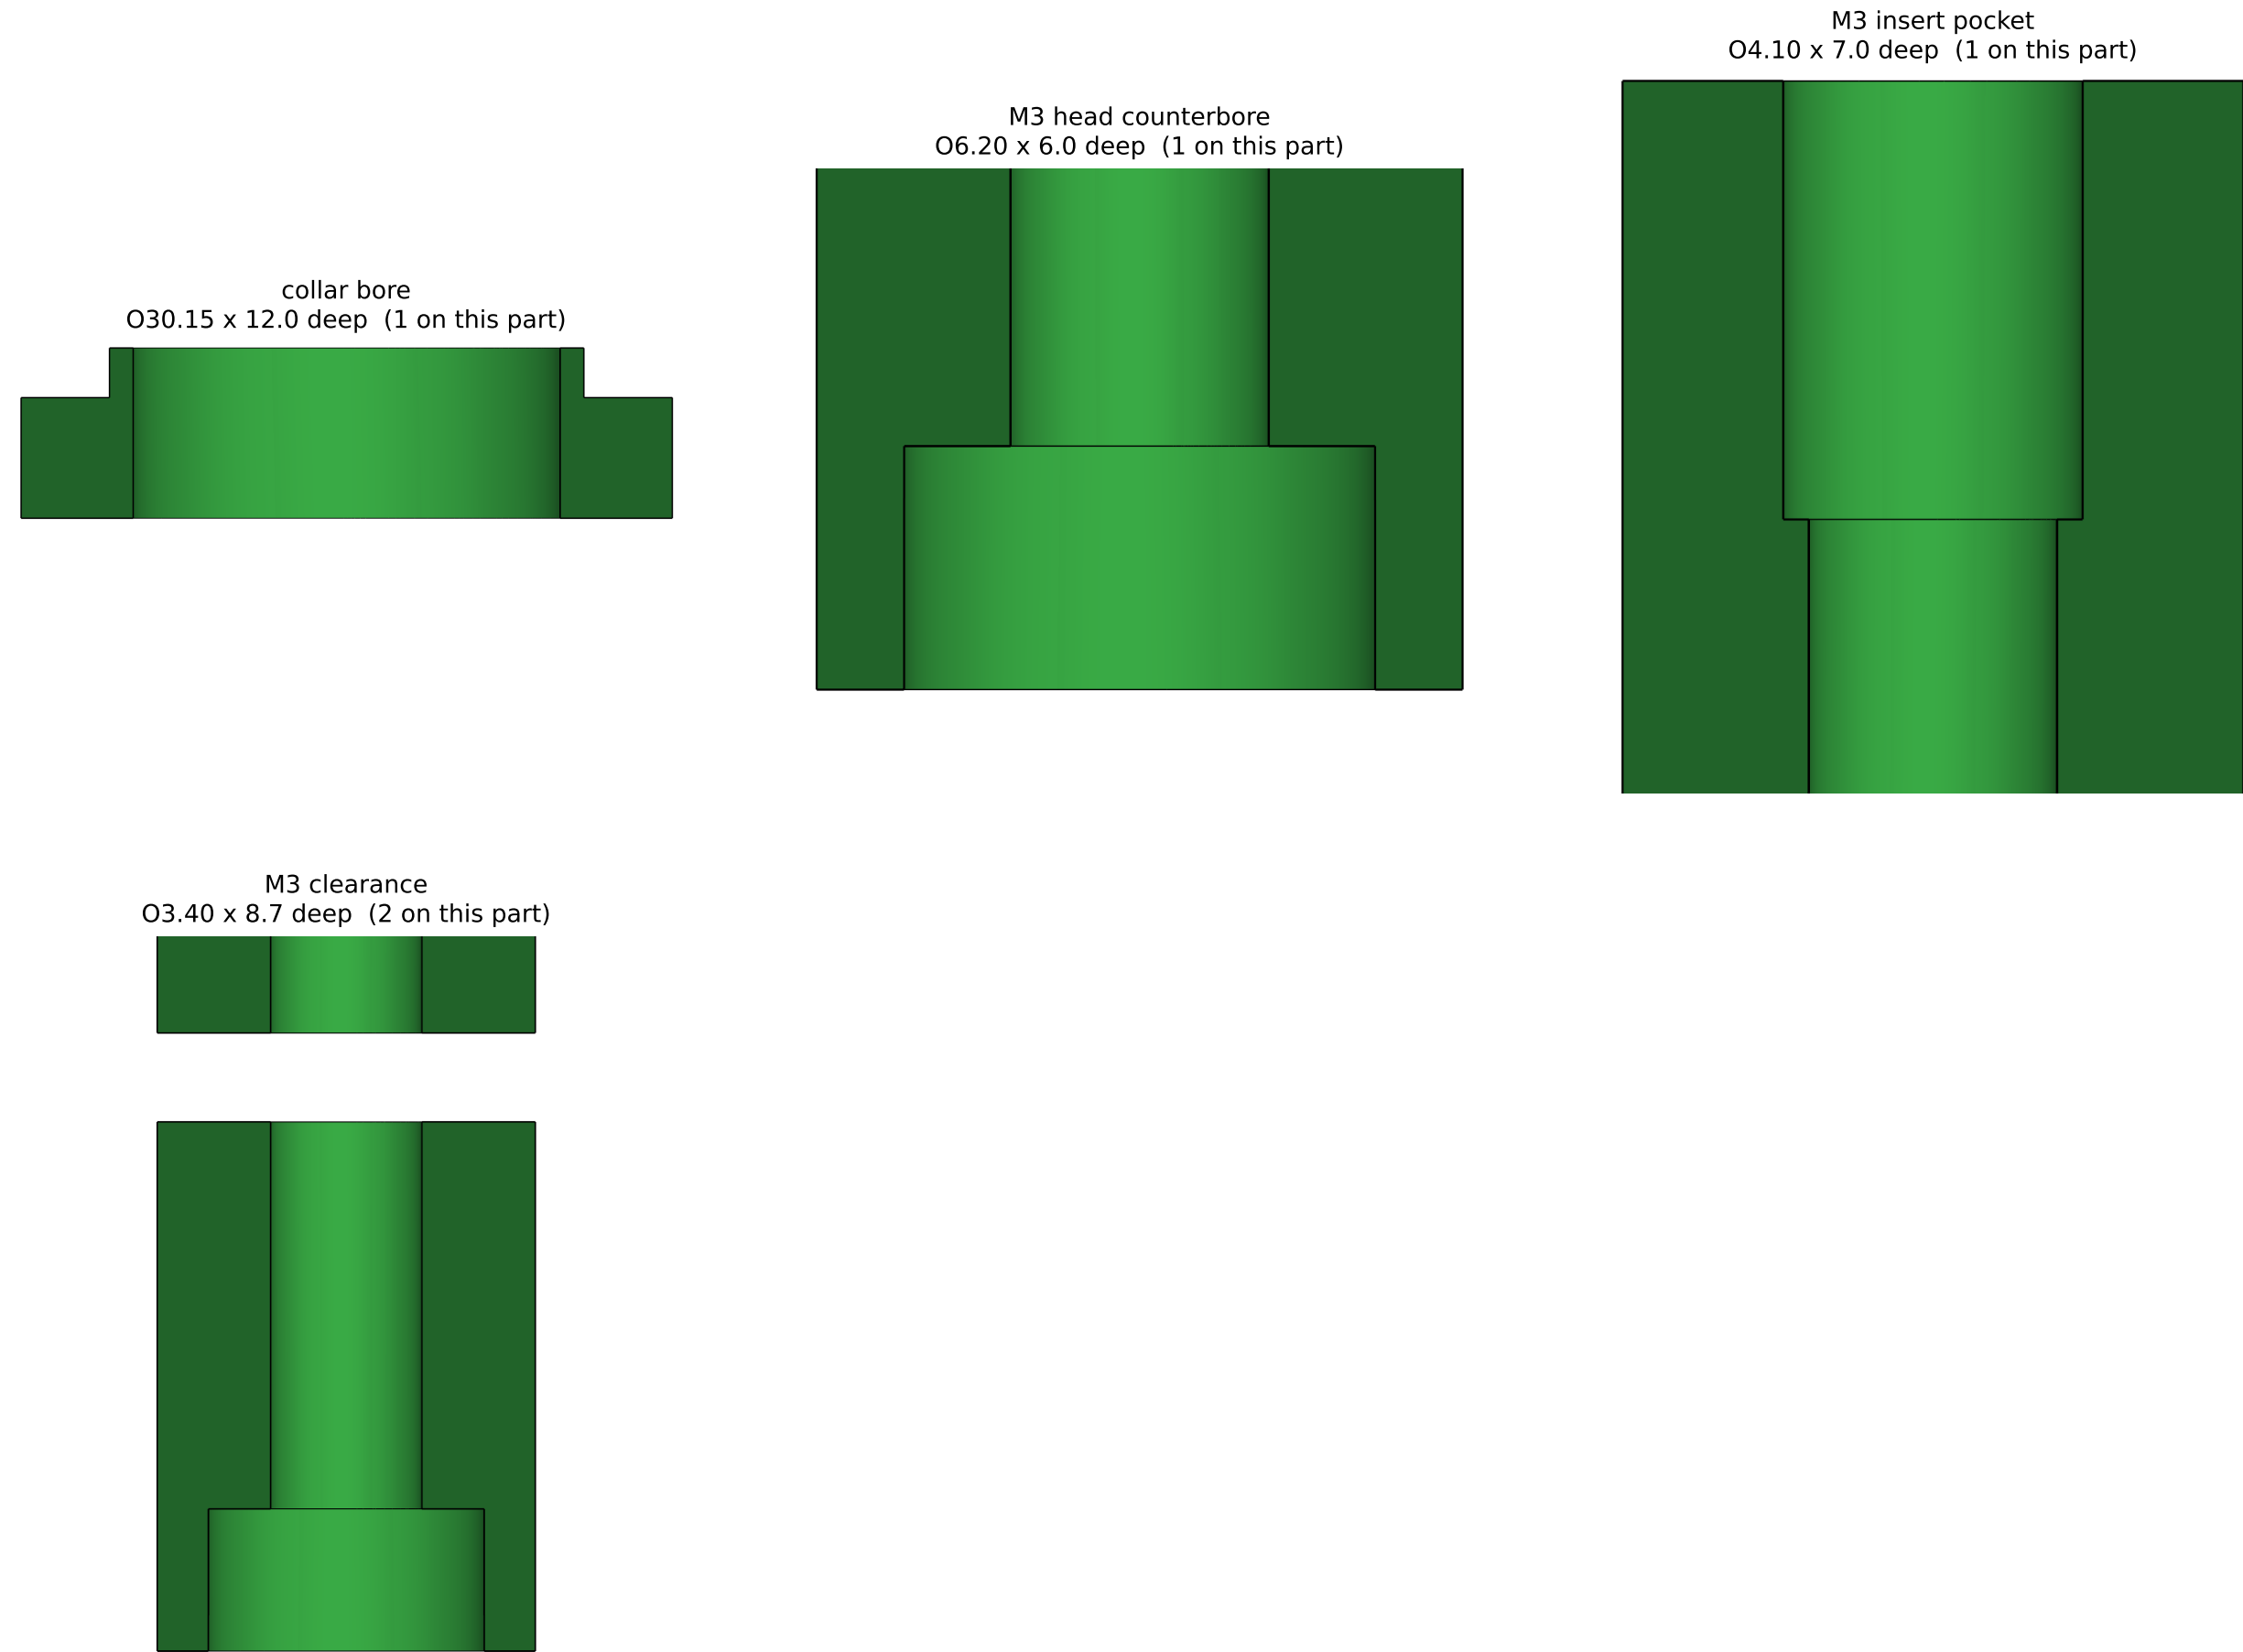


Part 3 of 27: j1_mount (print 1) 128 x 128 x 70 mm

isometric

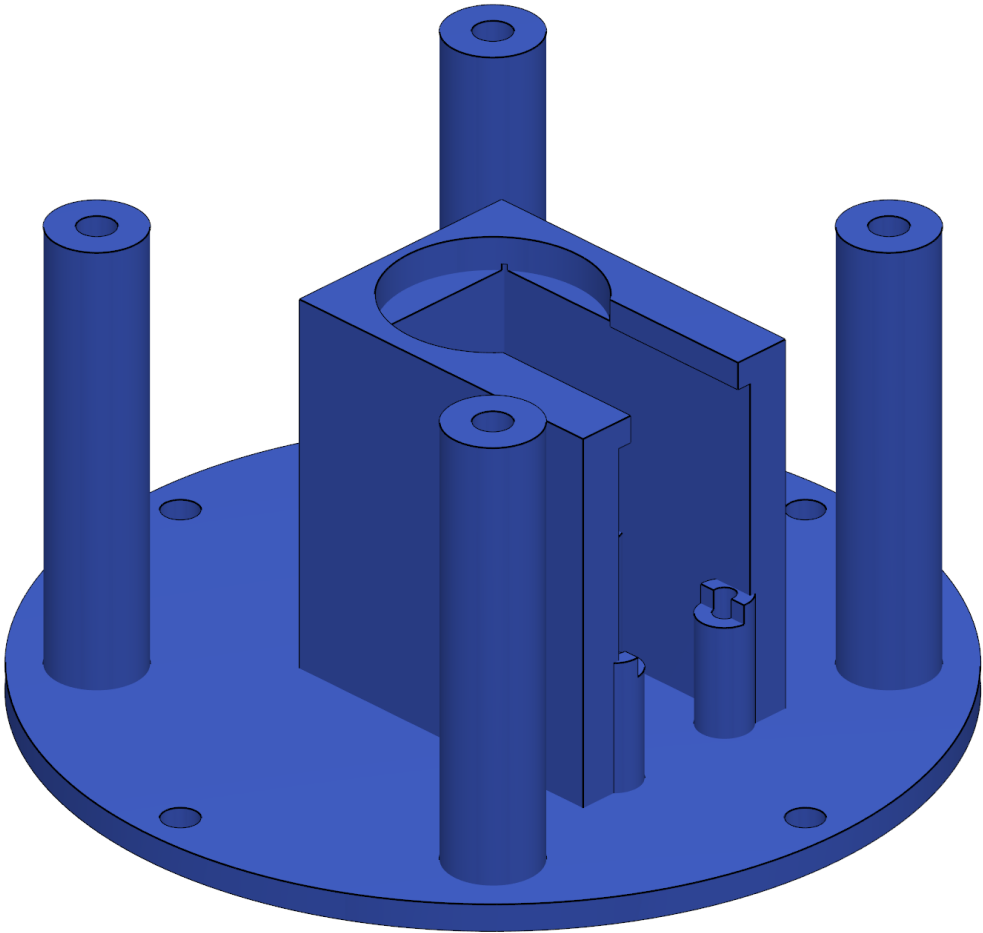

isometric, from behind

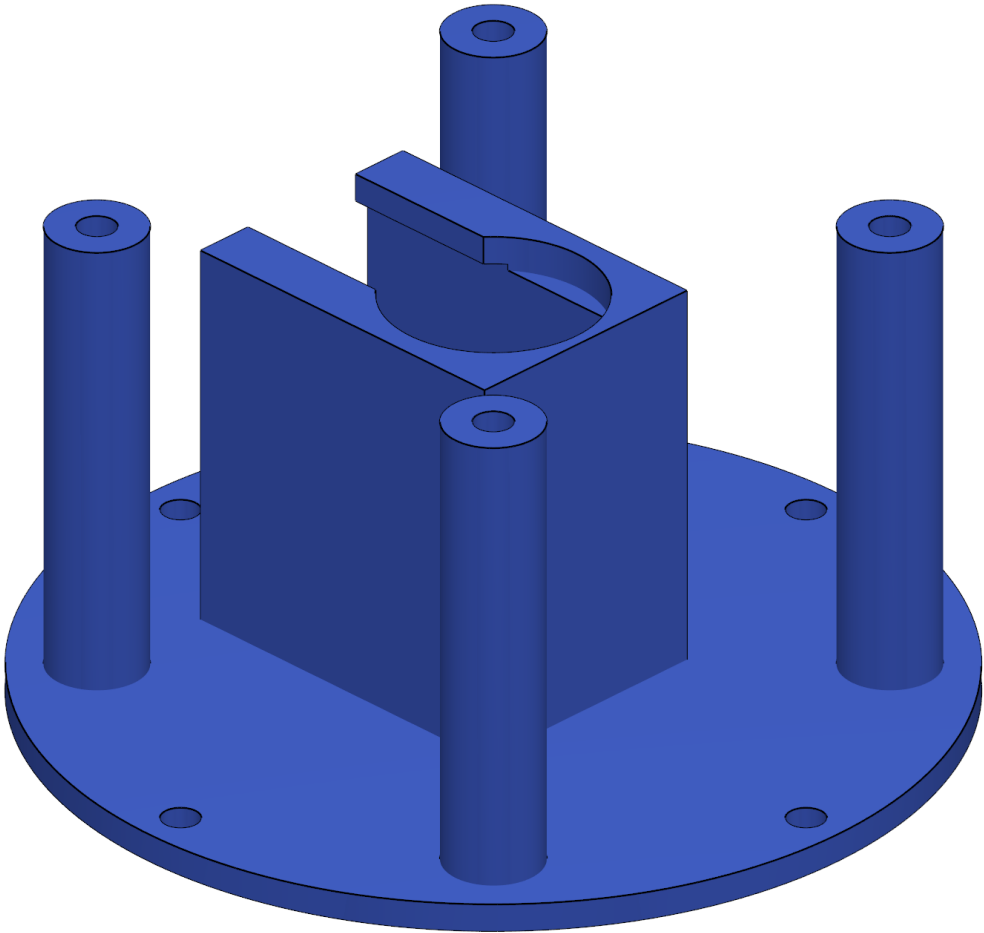


J1 servo mount + the arm's foot


features found on its own faces
(cylindrical holes, measured):

1 x shaft clearance bore	0	31.00	depth 5.0
1 x hole 020.40	0	20.40	depth 4.4
8 x M4 insert pocket	0	5.60	depth 13.1
4 x hole 05.50	0	5.50	depth 4.0
4 x M3 clearance	0	3.40	depth 5.4






front (-y)

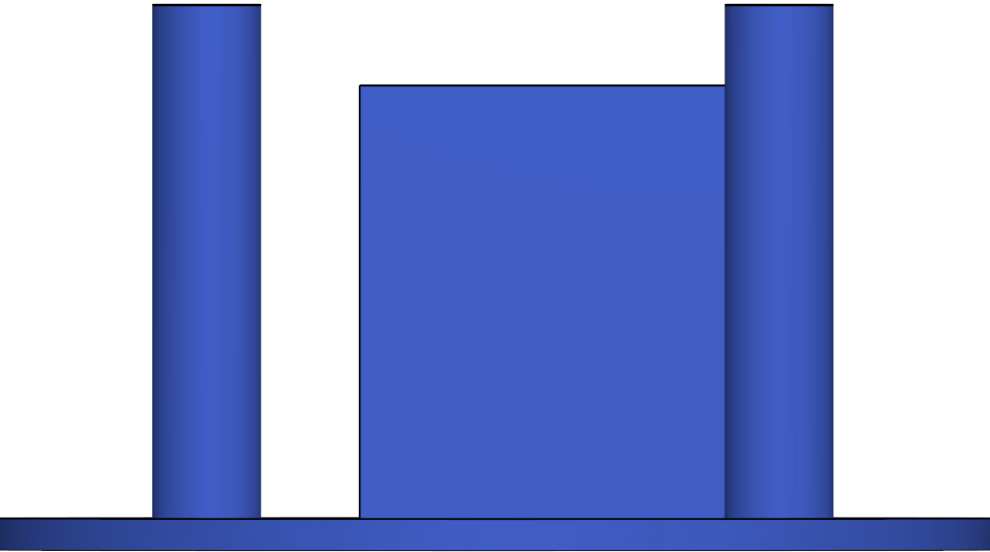

side (+x)

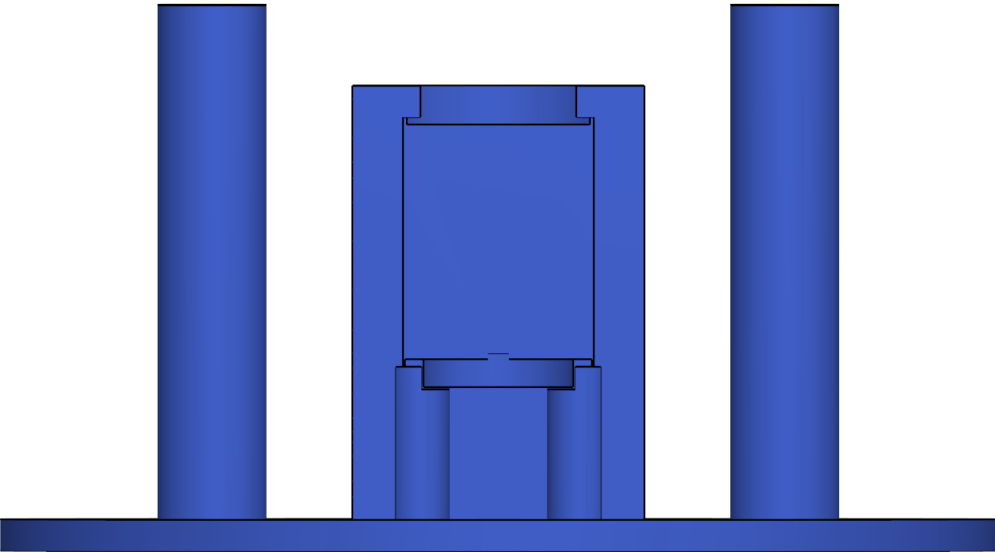


j1_mount -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

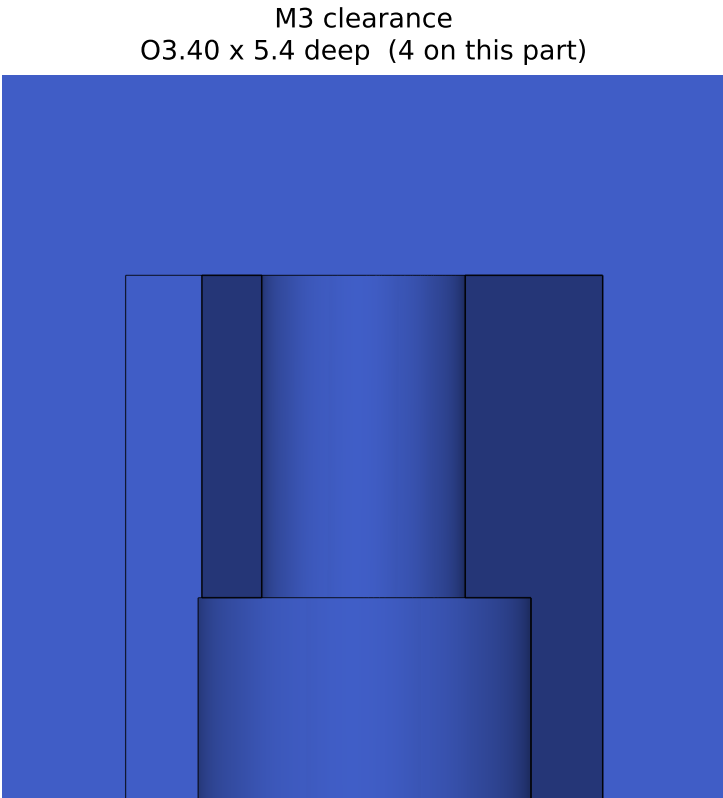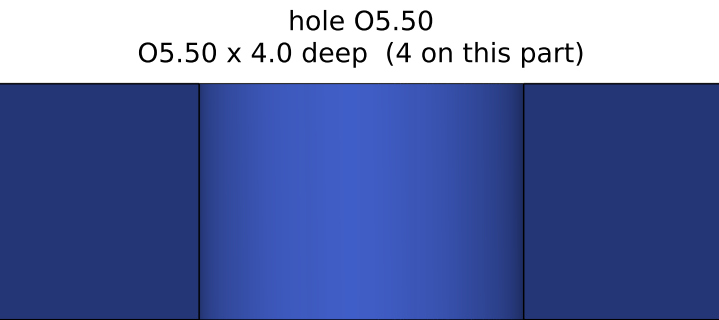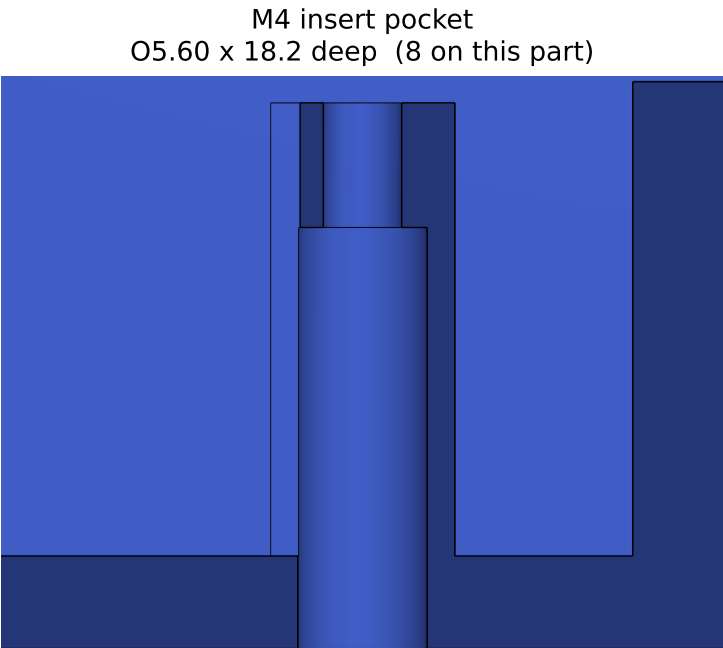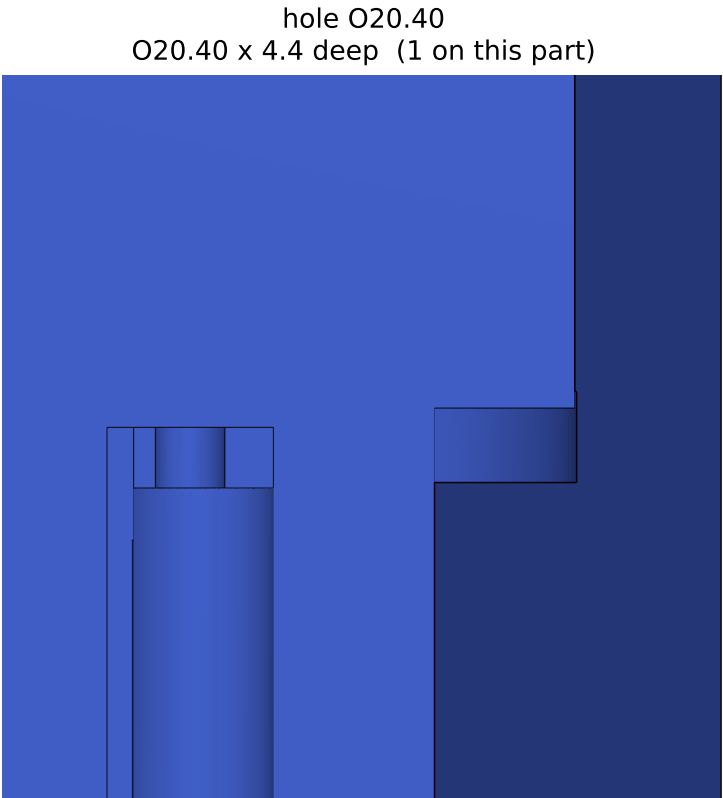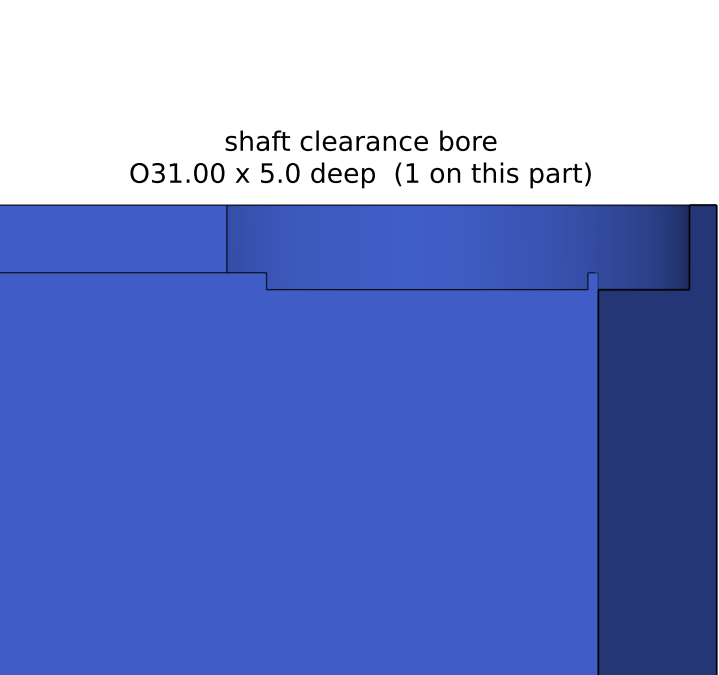


Part 4 of 27: j1_hub (print 1) 29 x 29 x 17 mm

isometric

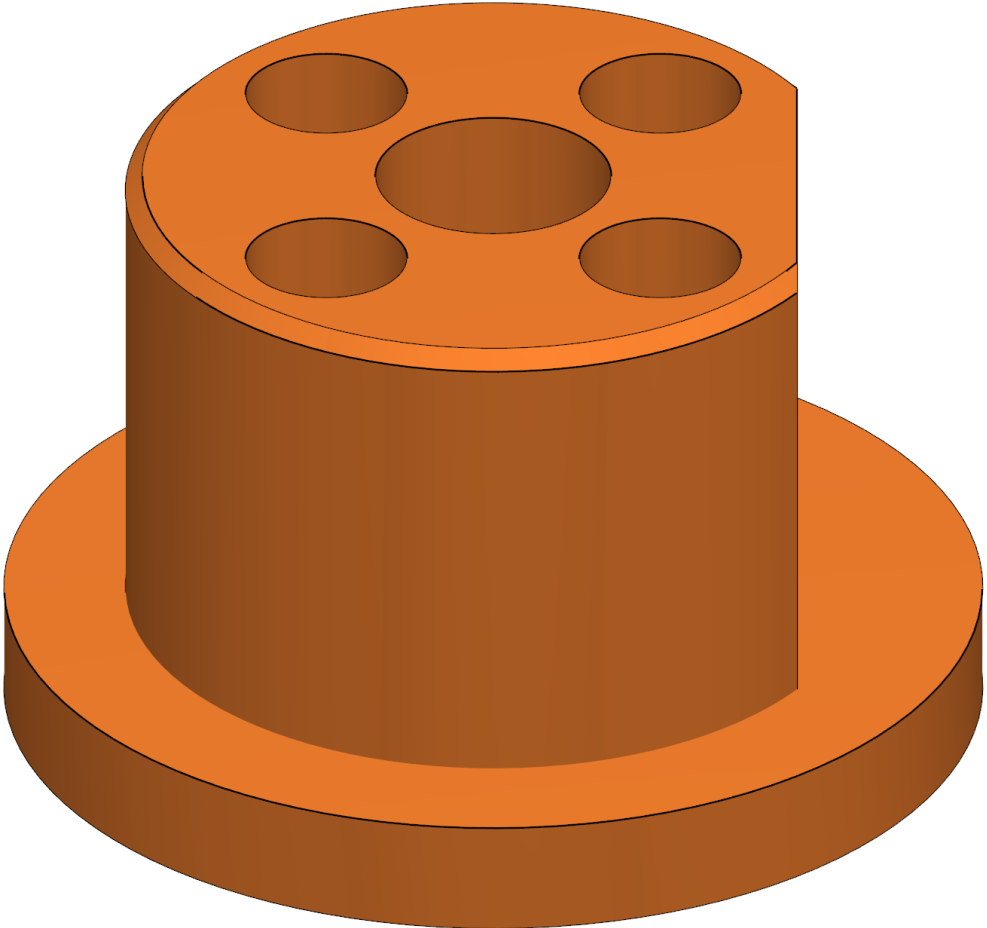

isometric, from behind

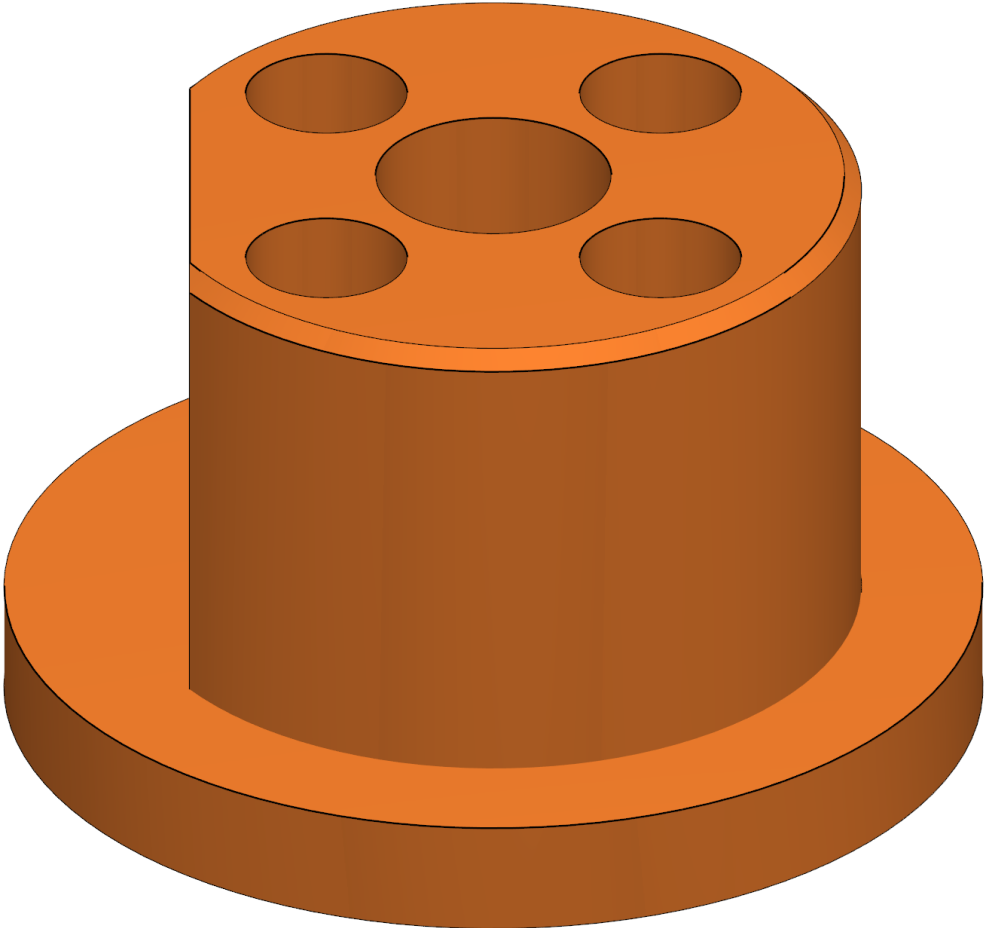


J1 horn coupler, D-keys the turret


features found on its own faces
(cylindrical holes, measured):

1 x hole	Ø19.60	0 19.60	depth 1.6
1 x hole	Ø7.00	0 7.00	depth 15.8
4 x horn-screw counterbore		0 4.80	depth 12.8
4 x horn-screw hole		0 2.52	depth 3.0





front (-y)

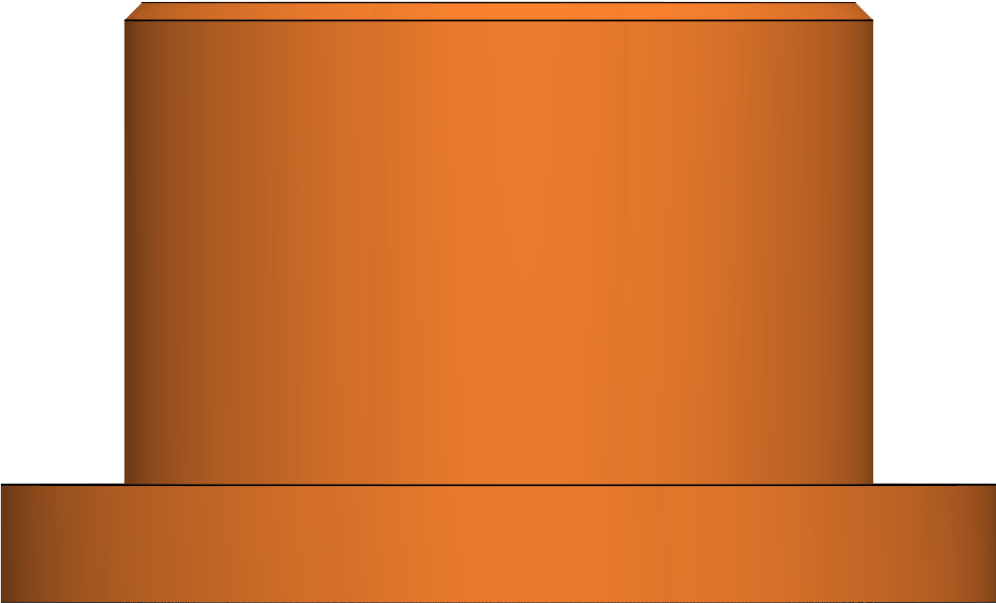

side (+x)

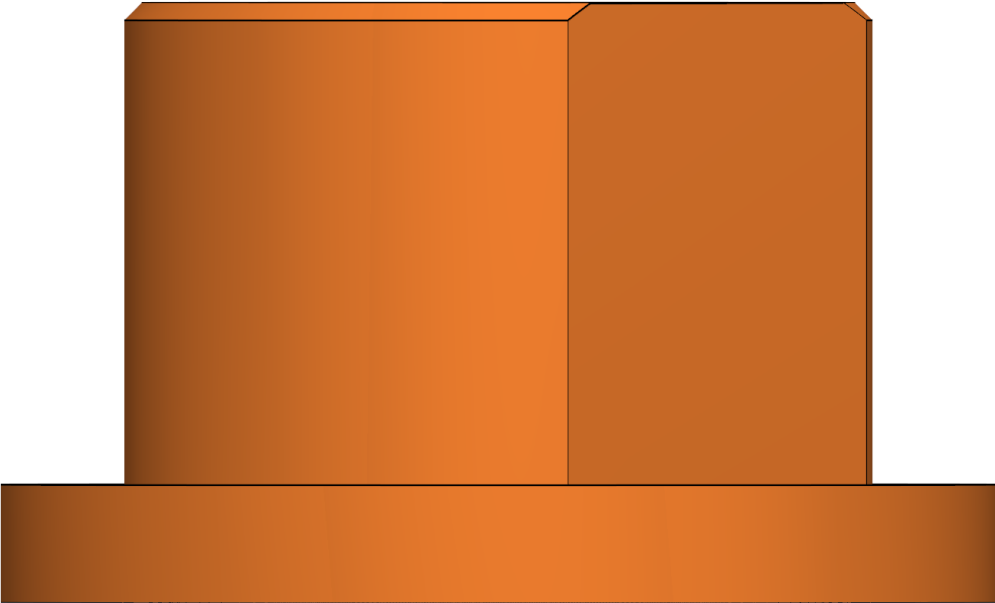


j1_hub -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

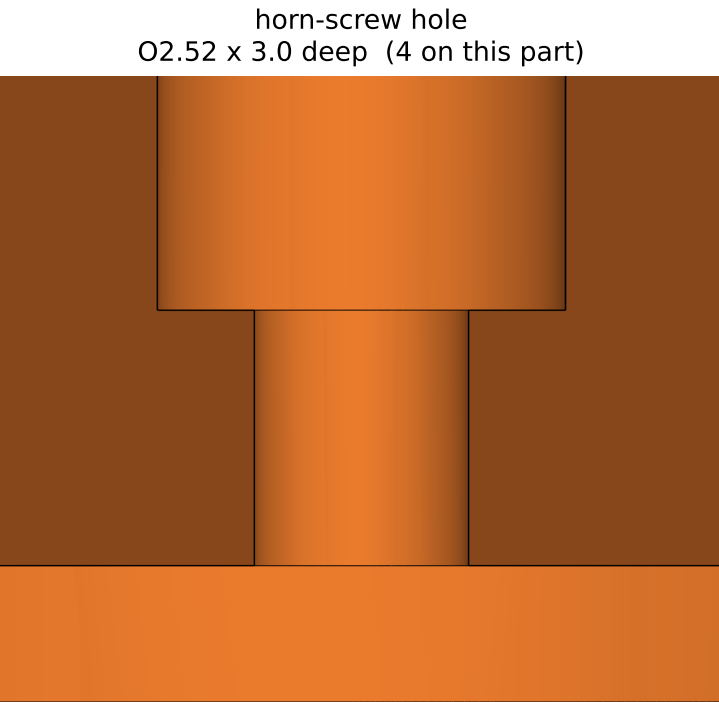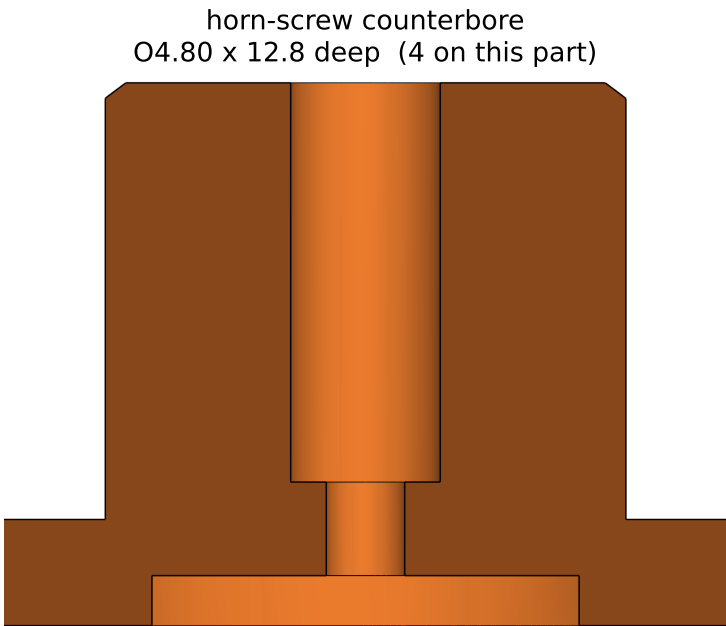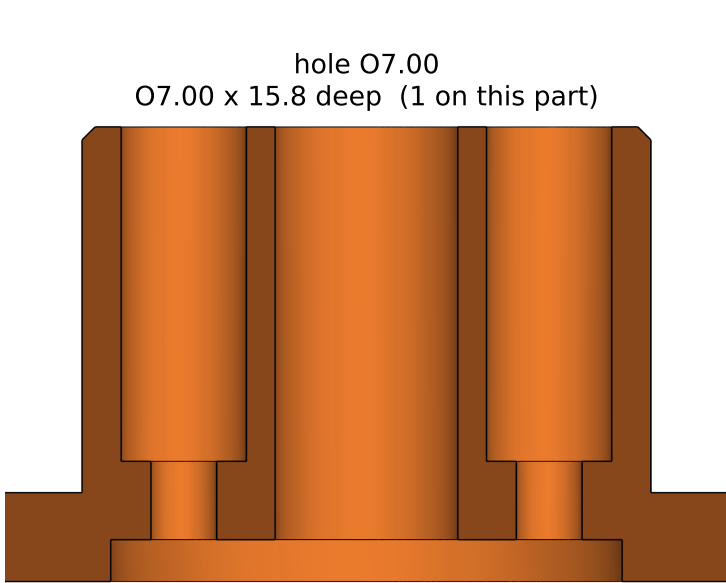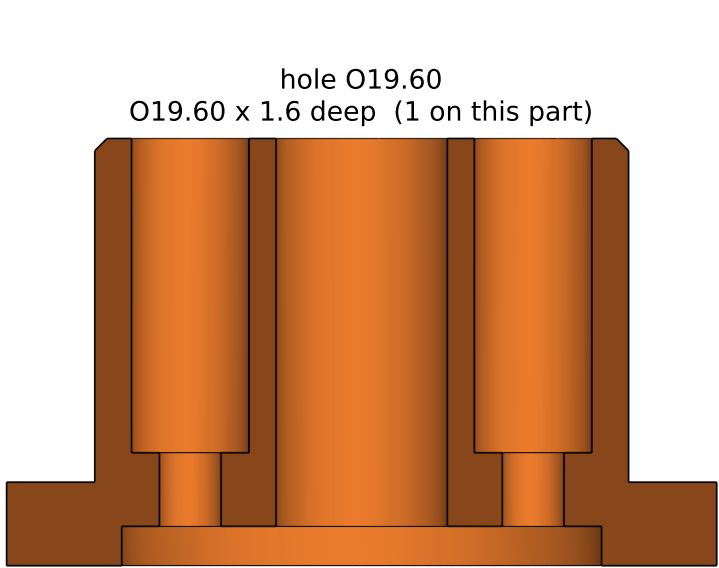


Part 5 of 27: J2_turret_p1 (print 1) 84 x 70 x 138 mm

isometric

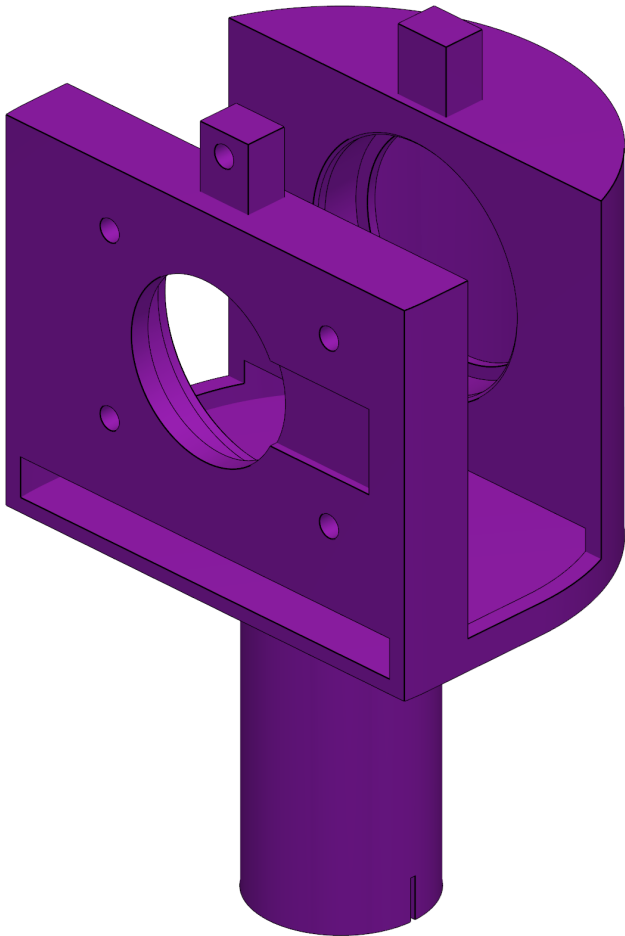

isometric, from behind

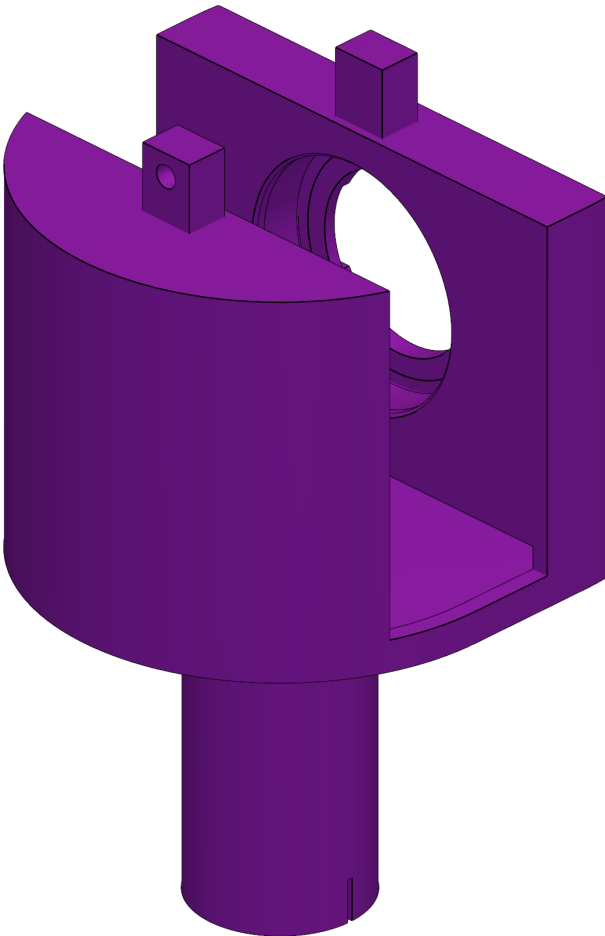


turret; spigot end slit as a collet (J1 zero play); land on the 6806 inner ring


features found on its own faces
(cylindrical holes, measured):

2 x 6806 bearing pocket	0 42.02	depth 1.5
2 x 6806 bearing pocket	0 42.00	depth 6.7
2 x 6806 outer-race recess	0 38.00	depth 0.8
1 x shaft clearance bore	0 31.00	depth 3.4
1 x spigot / shaft bore	0 22.00	depth 62.0
6 x M3 insert pocket	0 4.10	depth 8.1






front (-y)

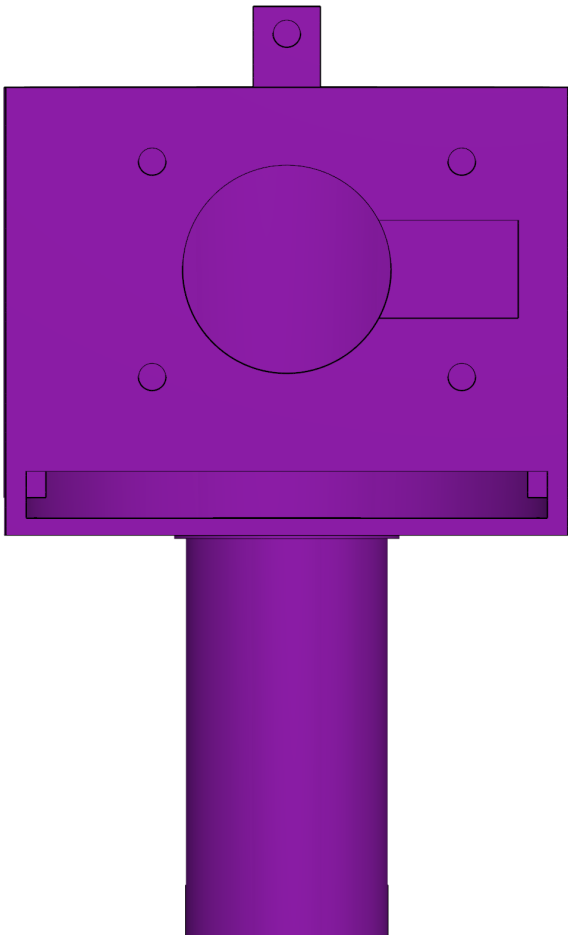

side (+x)

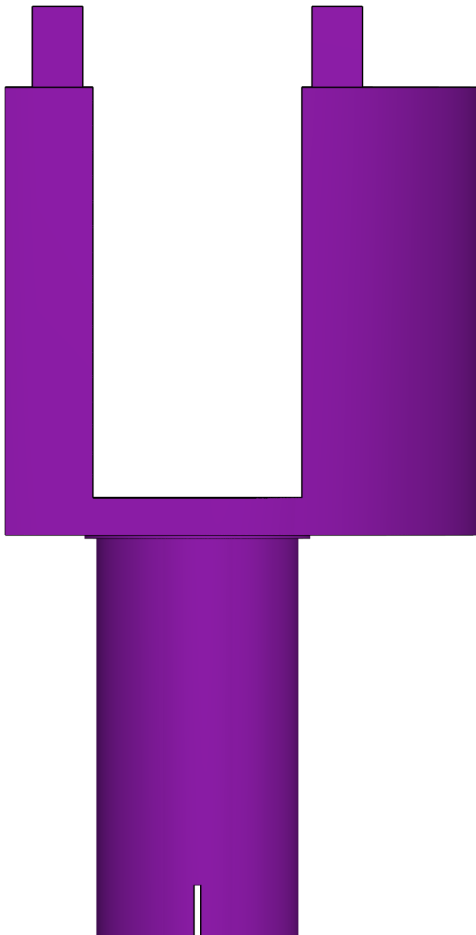


J2_turret_p1 -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

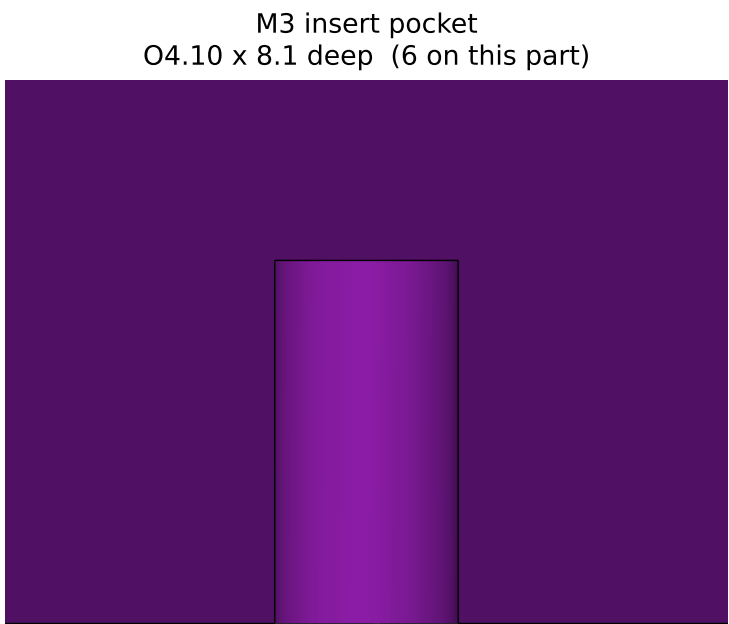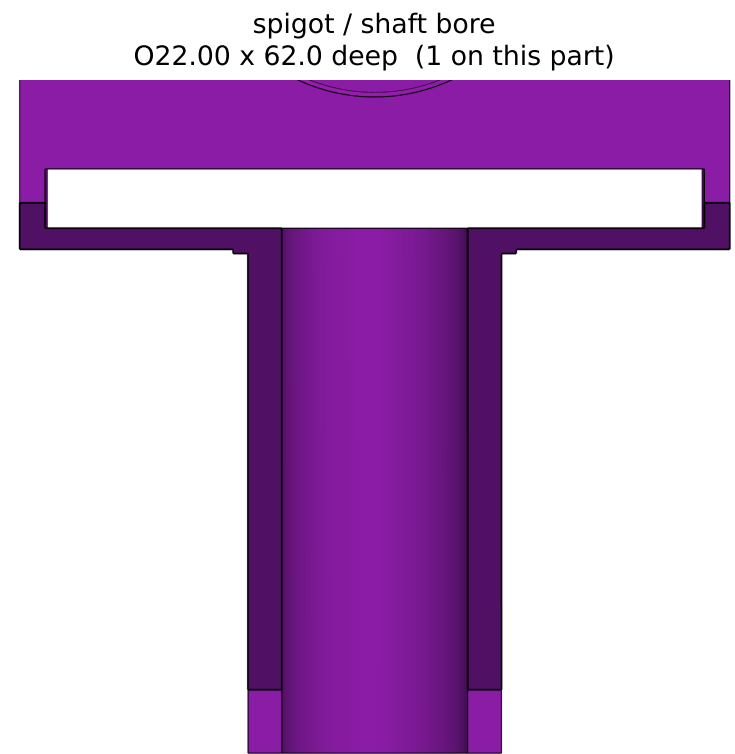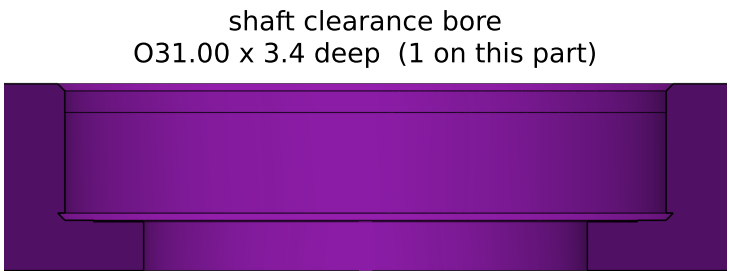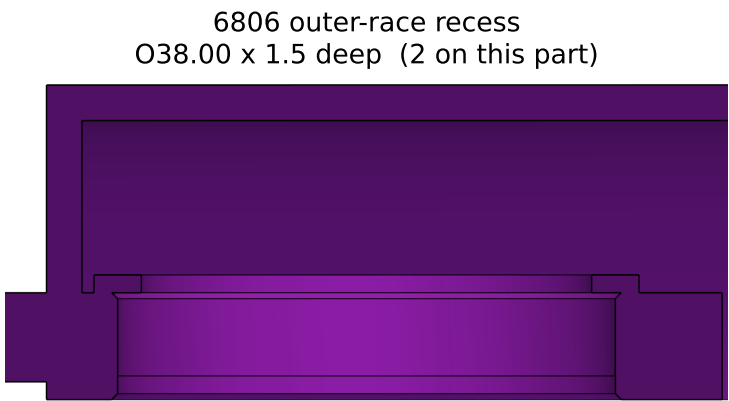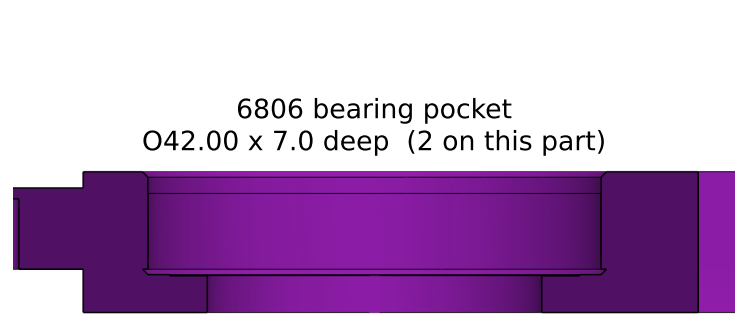


Part 6 of 27: J2_turret_p2 (print 1) 83 x 37 x 66 mm

isometric

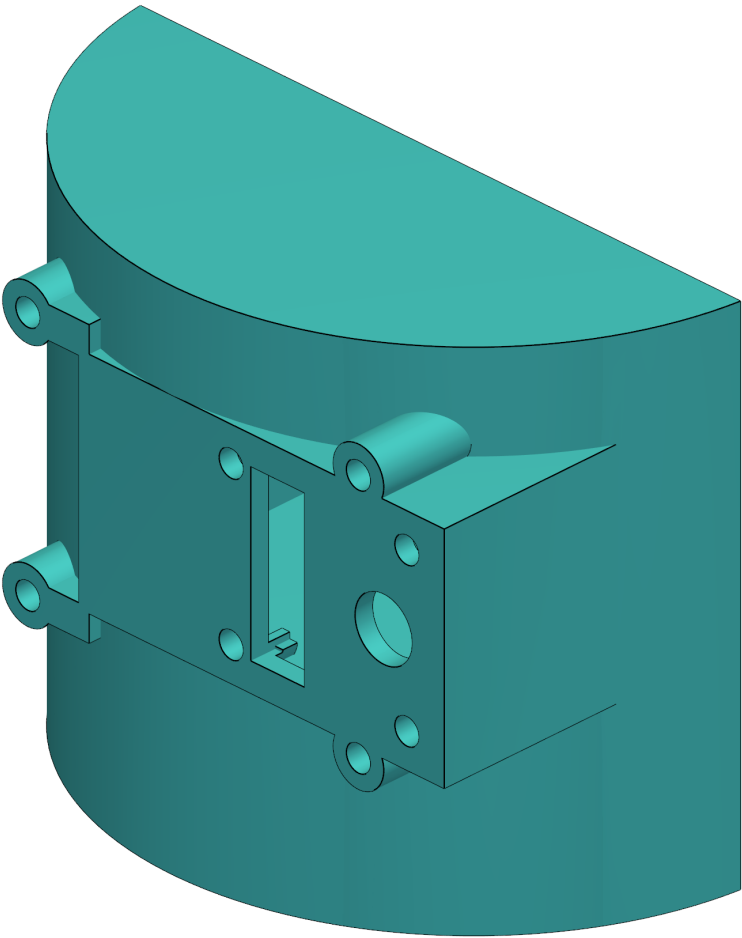

isometric, from behind

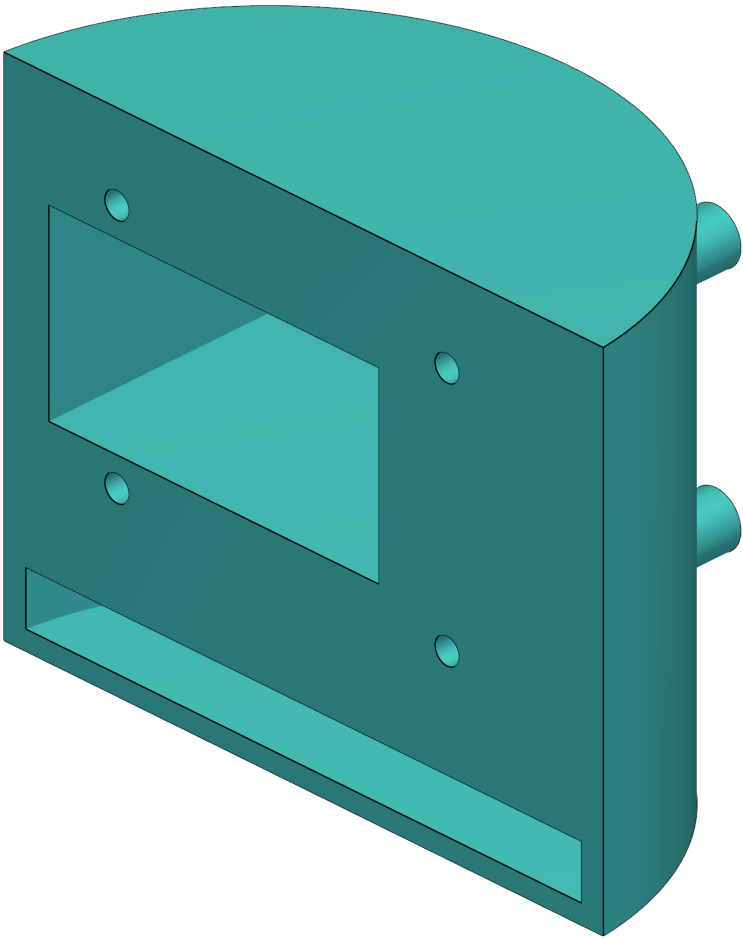


J2 servo pod (2.4 shell round the whole servo), 4 x M3x45 split bolts


features found on its own faces
(cylindrical holes, measured):

1 x cable exit	0	8.00	depth 2.4
8 x M3 clearance	0	3.40	depth 21.4



front (-y)

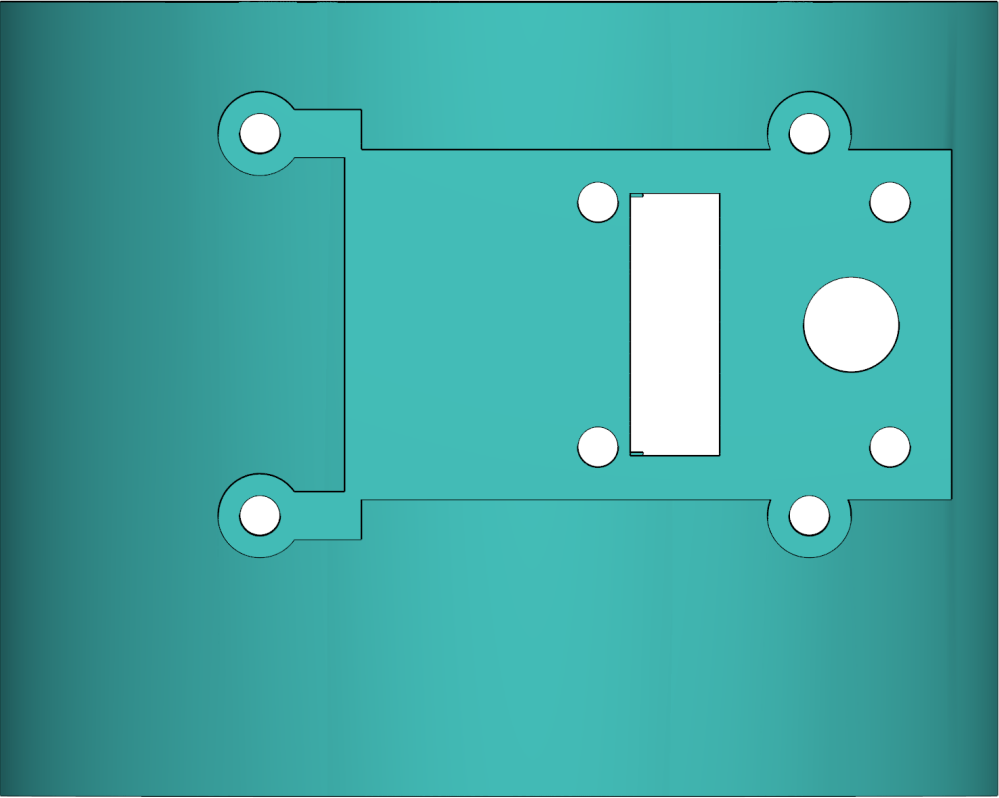

side (+x)

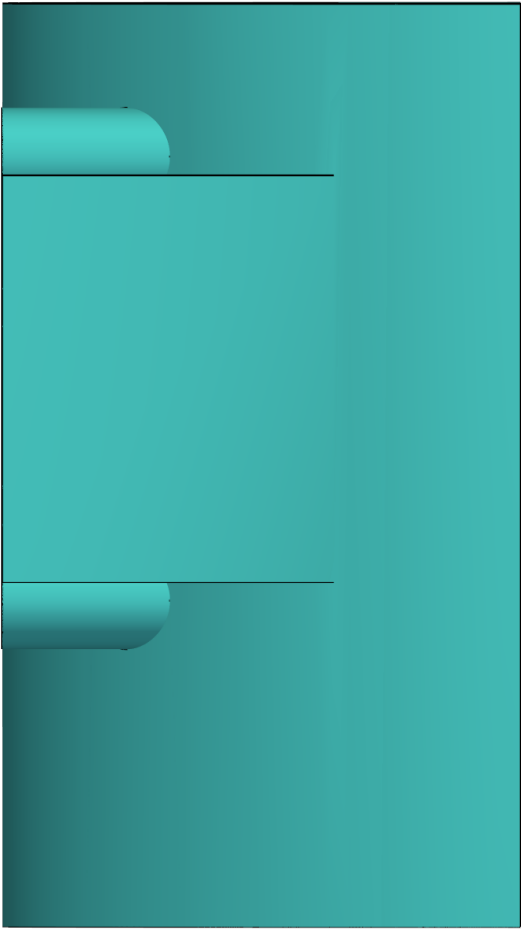


J2_turret_p2 -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

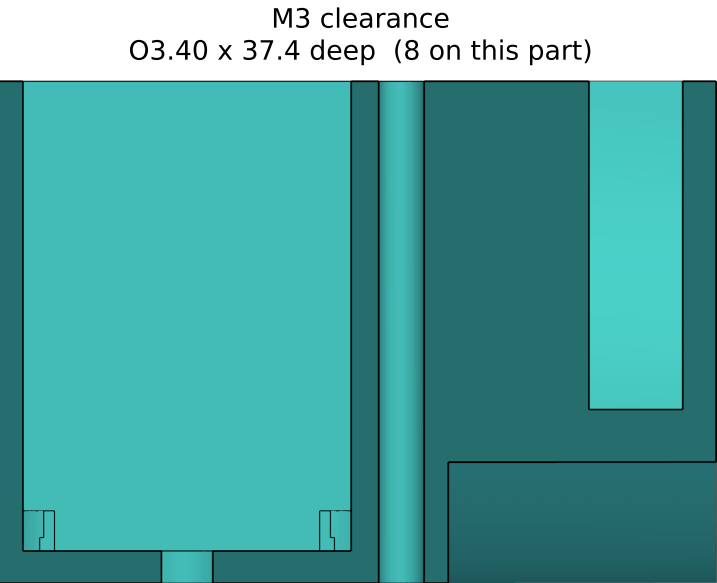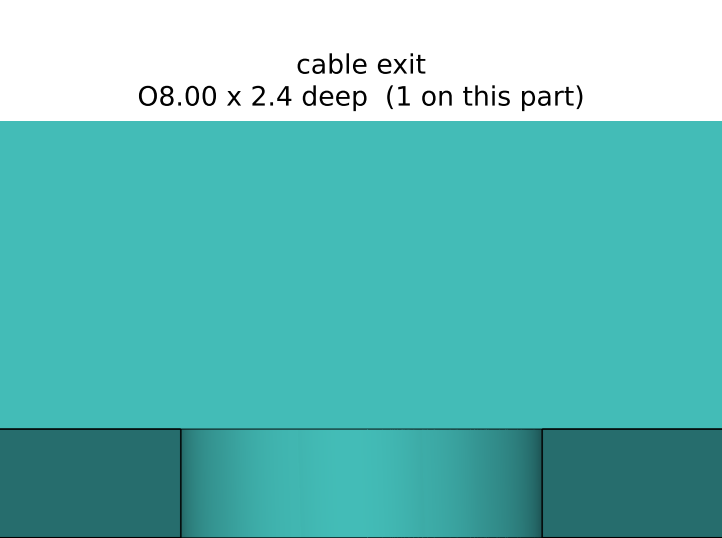


Part 7 of 27: J2_shaft (print 1) 30 x 50 x 30 mm

isometric

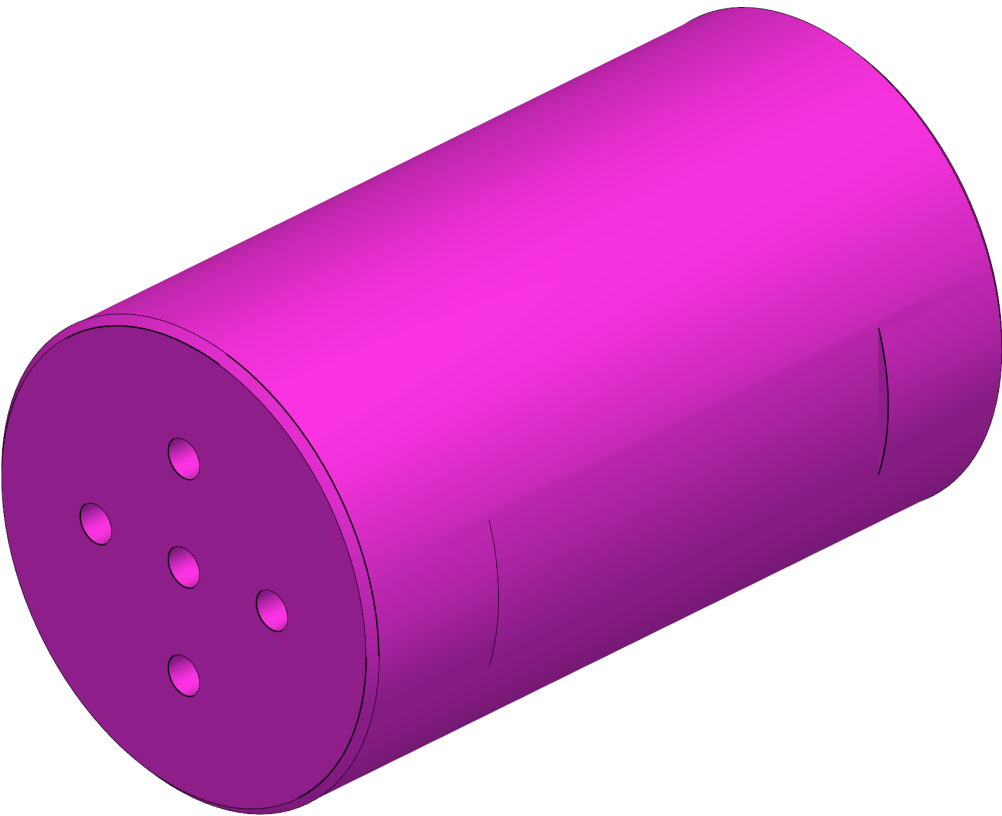

isometric, from behind

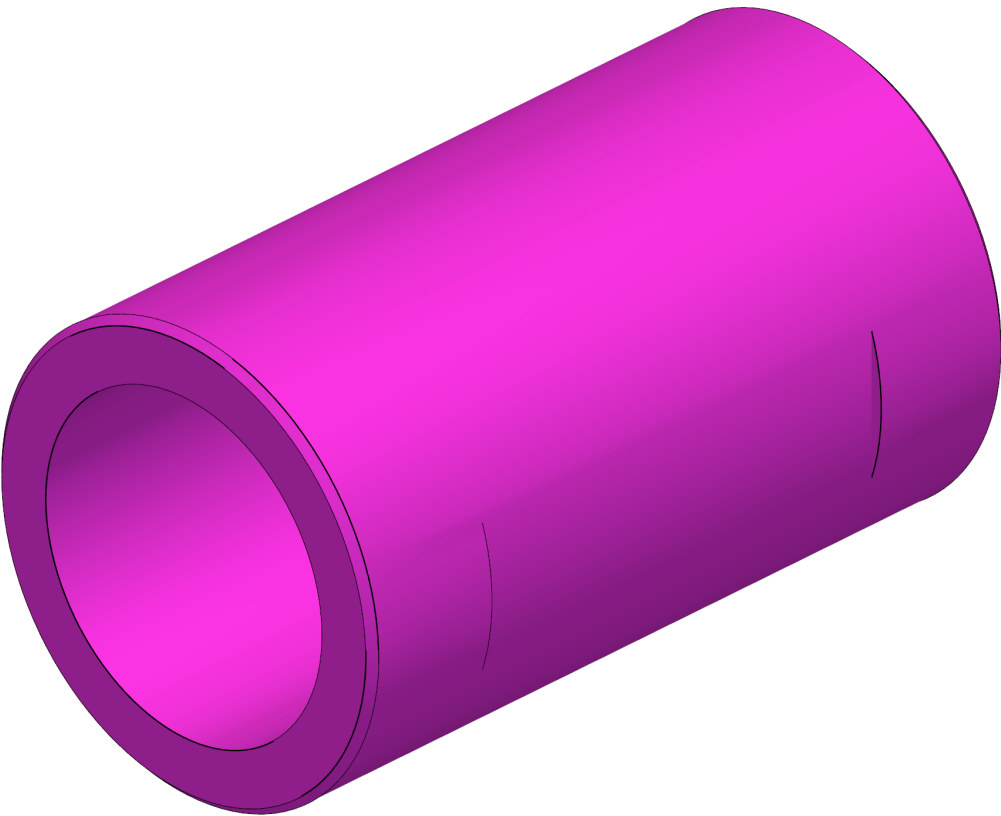


printed J2 shaft, bolts to the horn; double-D flats for the M5 set screws


features found on its own faces
(cylindrical holes, measured):

1 x spigot / shaft bore	0	22.00	depth 47.0
5 x horn-screw hole	0	2.52	depth 3.5


front (-y)

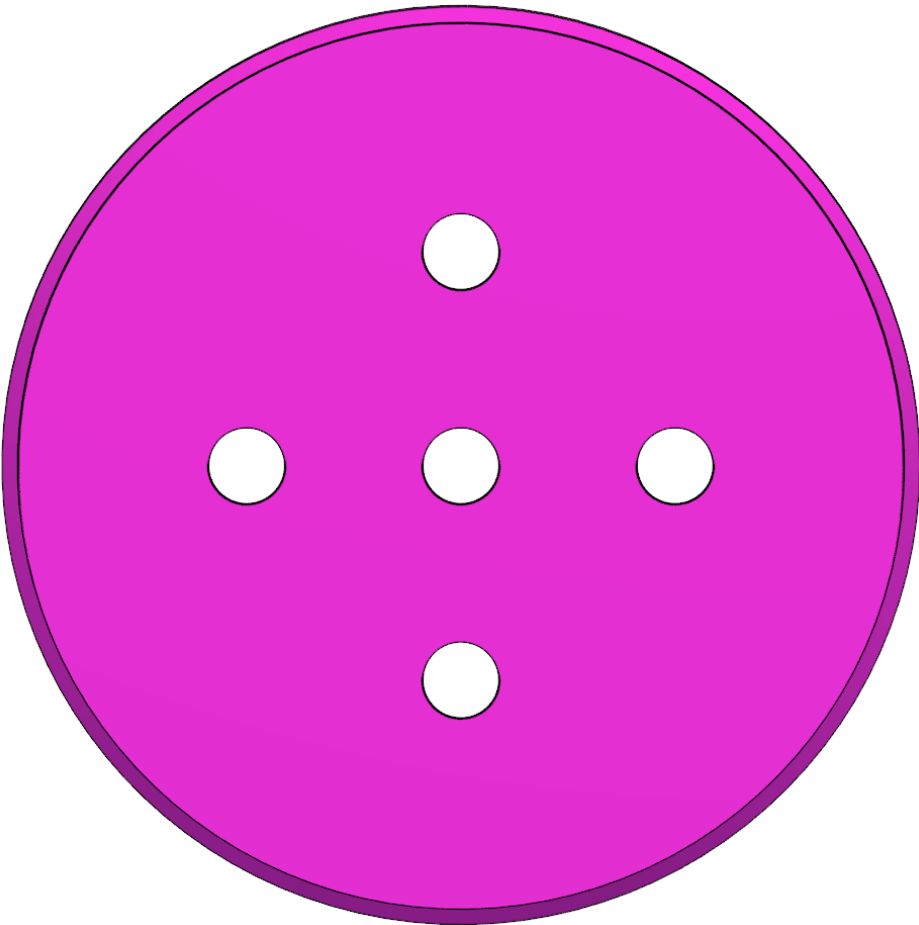



side (+x)

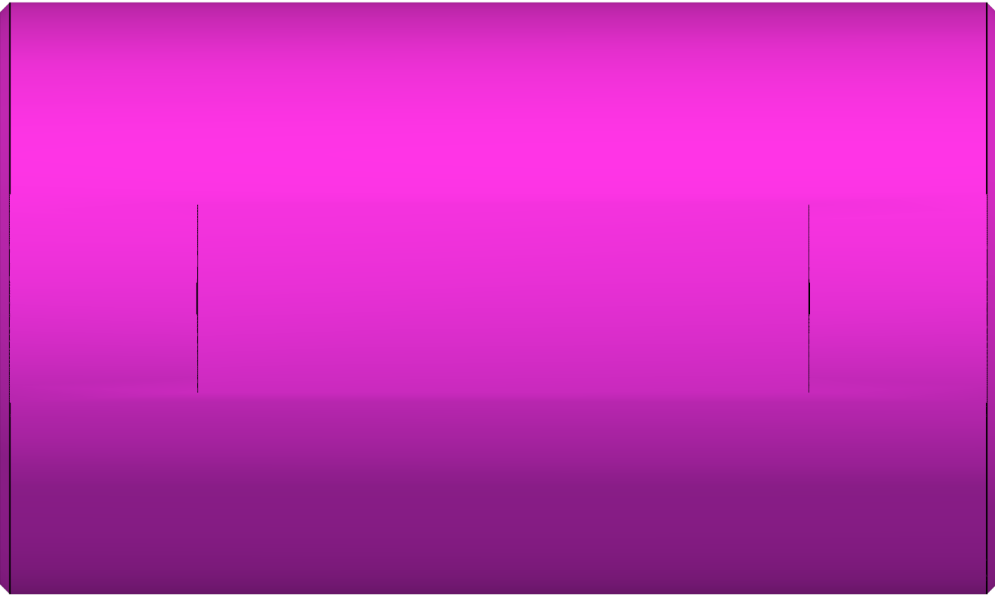

J2_shaft -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

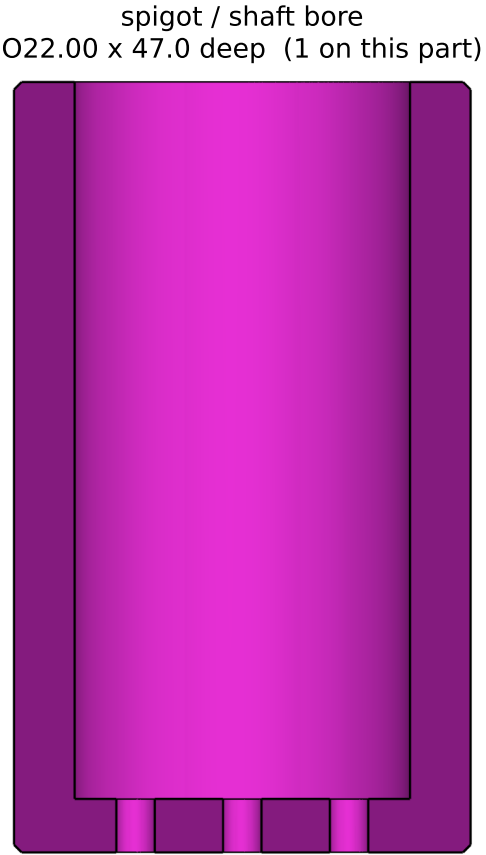



Part 8 of 27: shaft_clamp (print 4) 37 x 38 x 14 mm

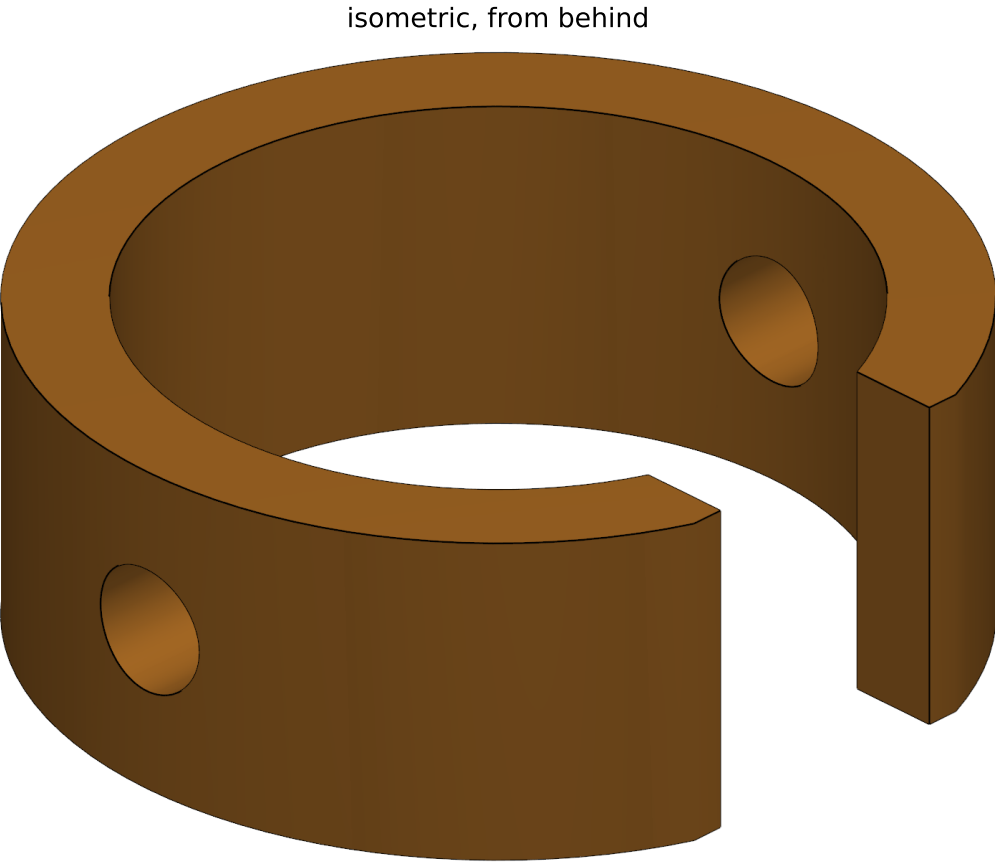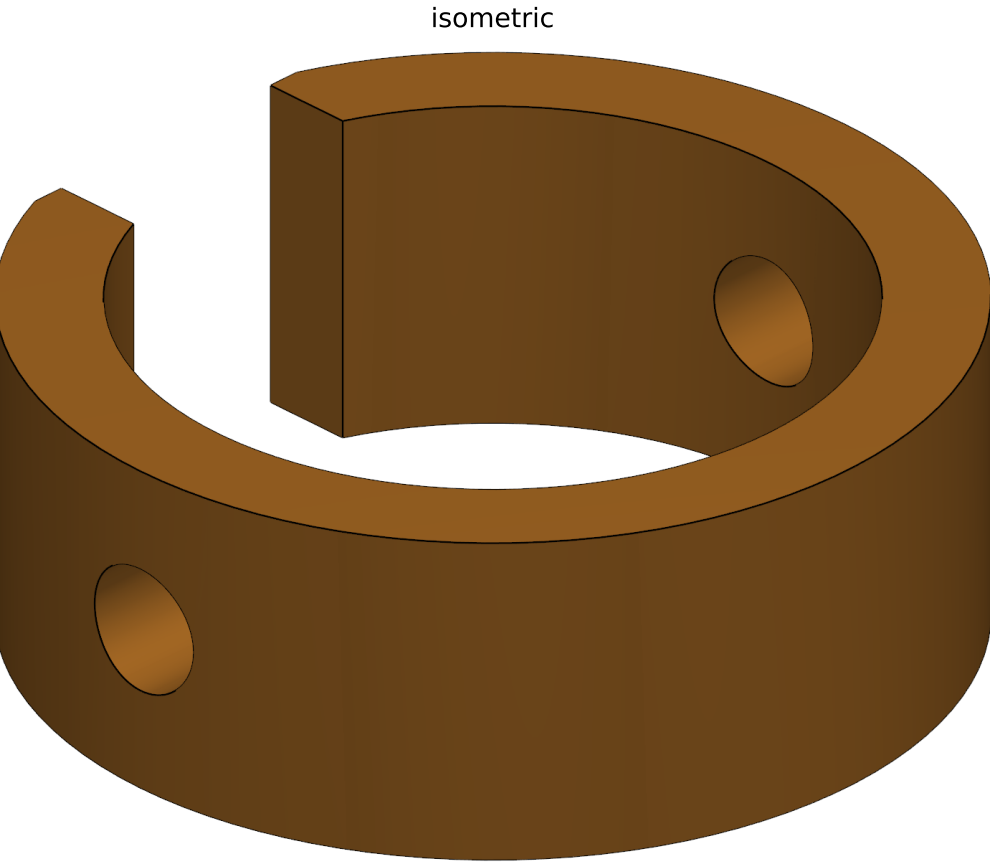



link centring ring (0.025 fits); links locked by 2 x M5 set screws each

features found on its own faces
(cylindrical holes, measured):



1 x shaft / race bore	0	30.00	depth	14.0
2 x M5 set-screw clearance	0	5.40	depth	4.2

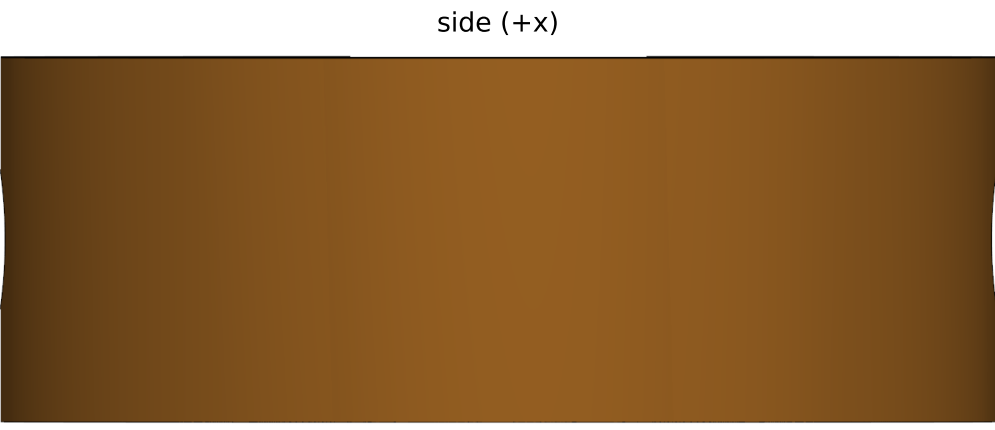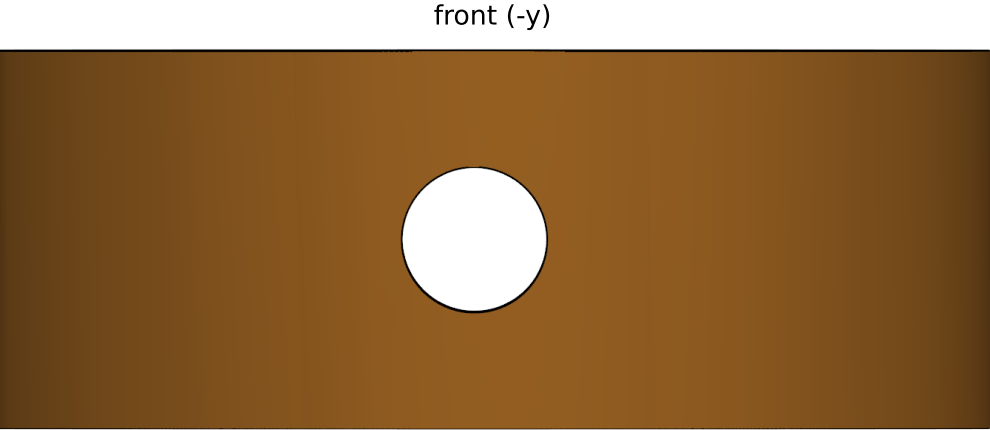

shaft_clamp -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

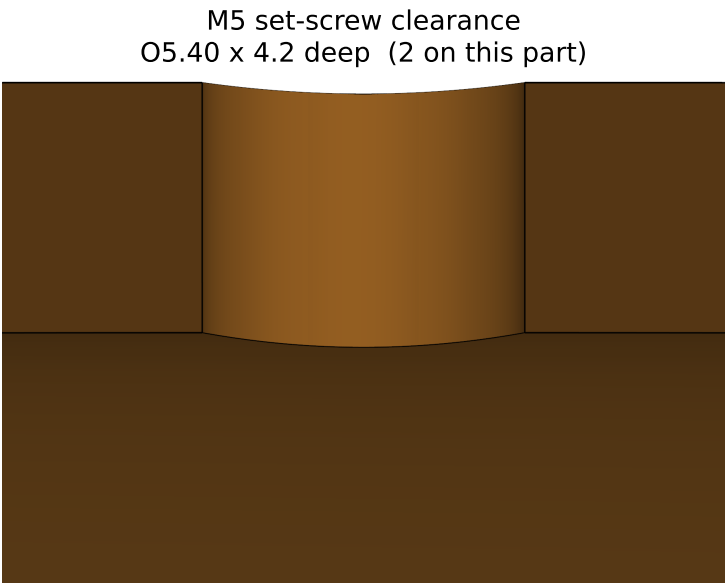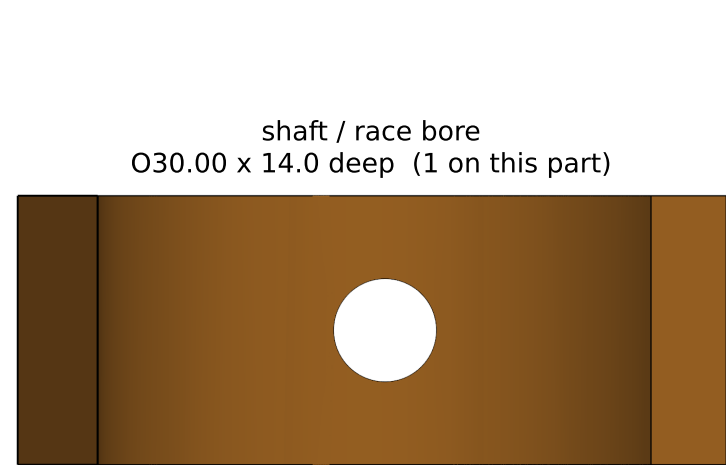



Part 9 of 27: link_upper_groove (print 1) 110 x 50 x 14 mm

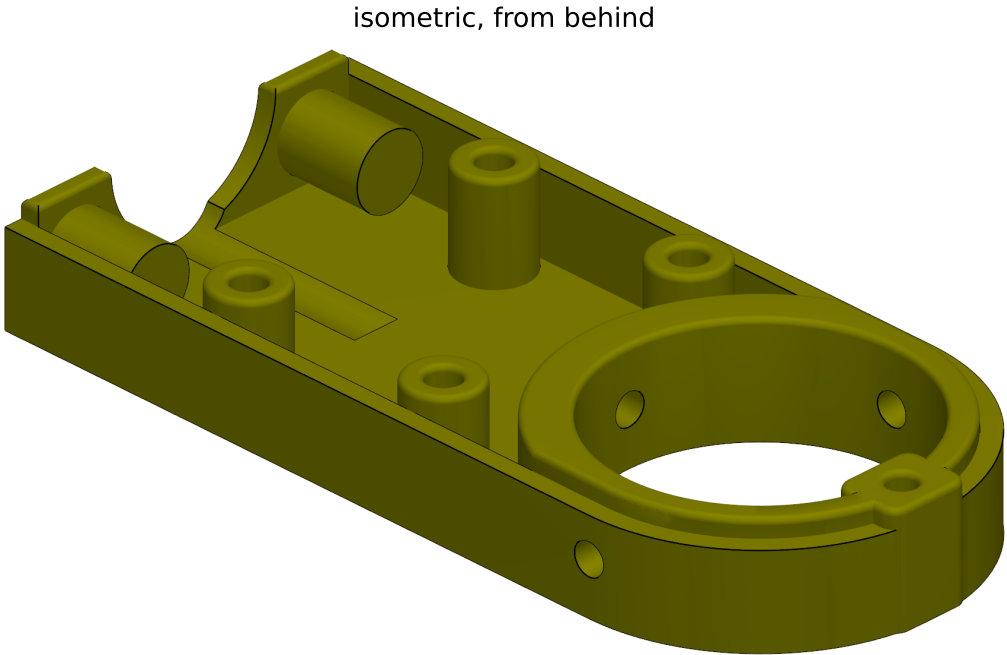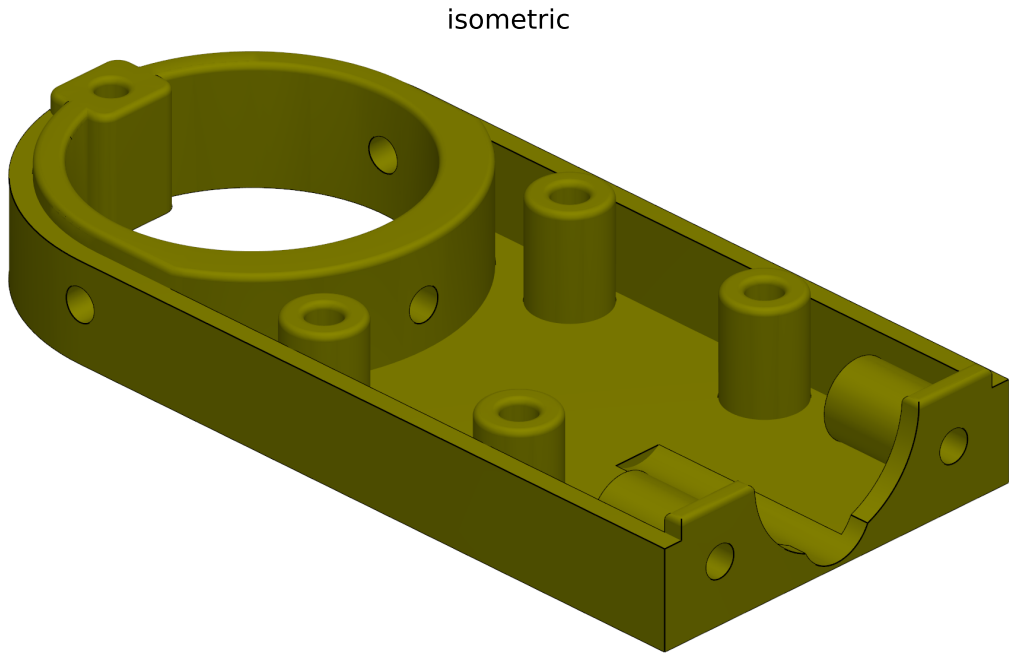







released, unchanged (reuse your printed one)

features found on its own faces
(cylindrical holes, measured):

1 x link clamp bore	0 38.40	depth 13.7
1 x horn clearance / socket	0 24.00	depth 2.4
1 x hole Ø10.00	0 10.00	depth 29.0
3 x M5 self-tap pilot / relief	0 4.20	depth 5.9
6 x M3 insert pocket	0 4.10	depth 6.7
1 x M2.5 insert pocket	0 3.50	depth 4.2
4 x M3 clearance	0 3.40	depth 7.0

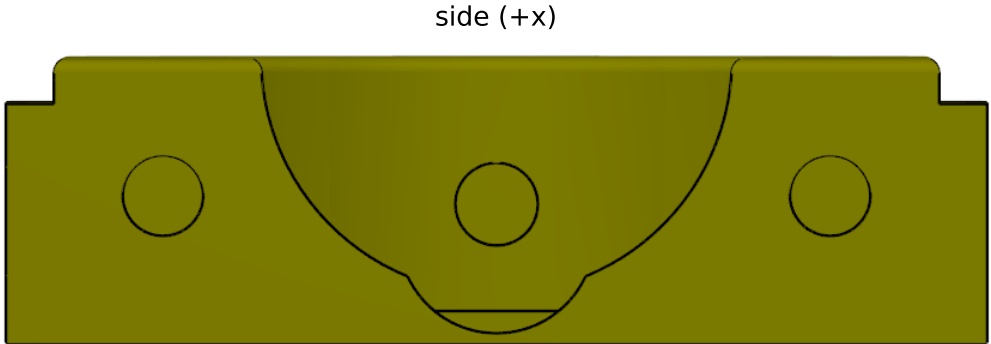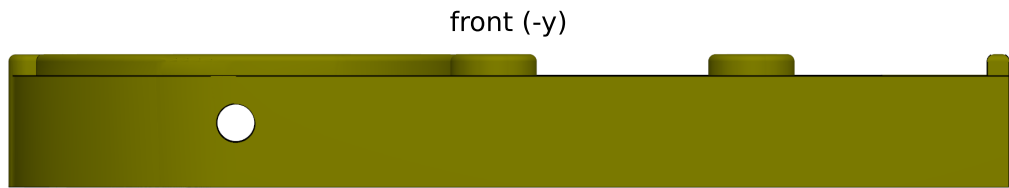

link_upper_groove -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

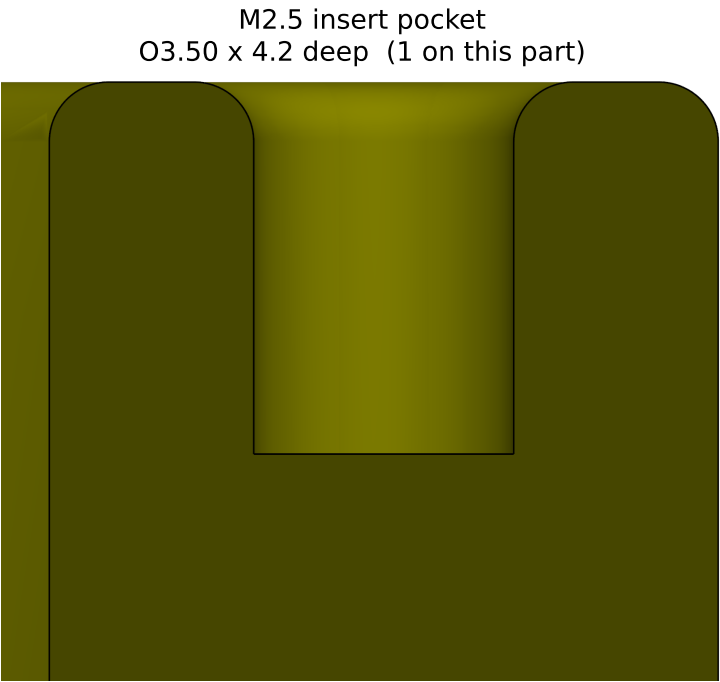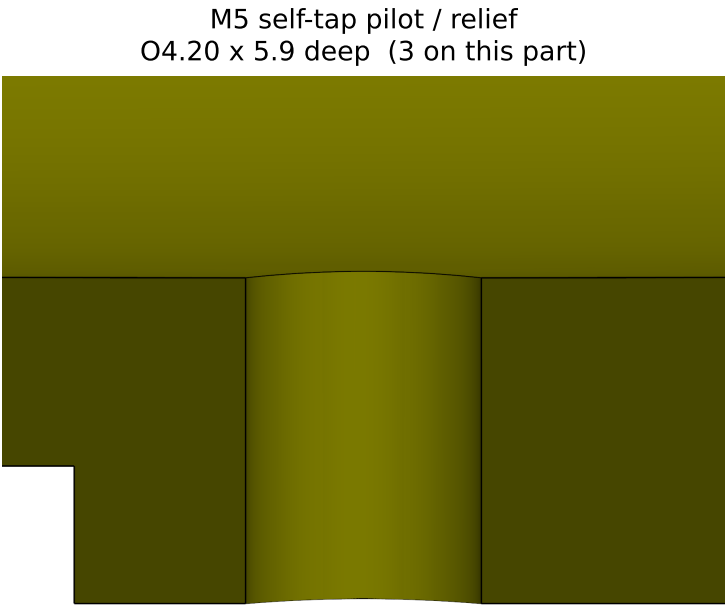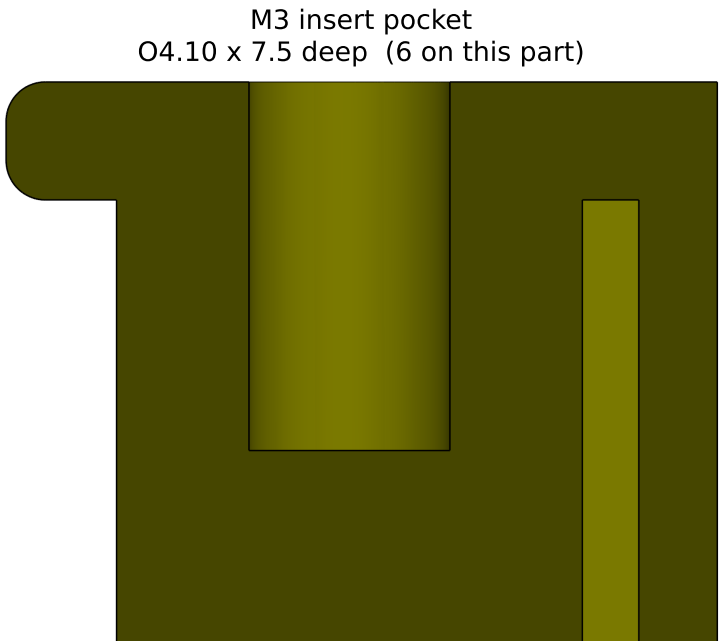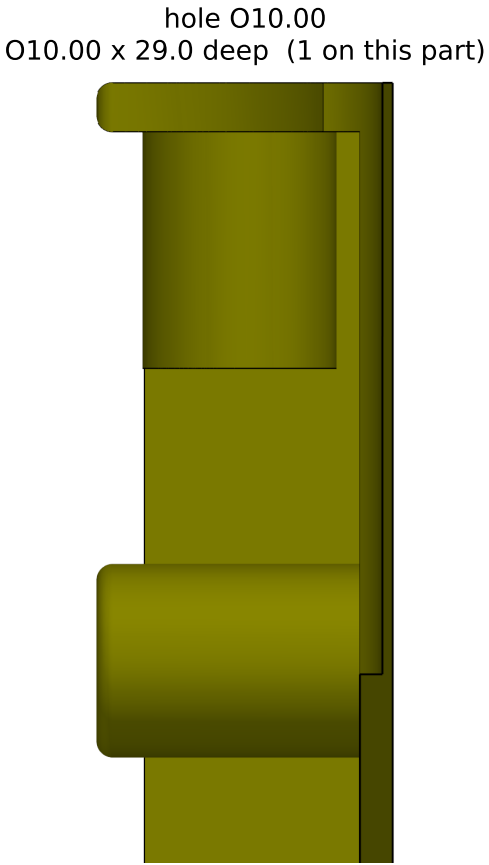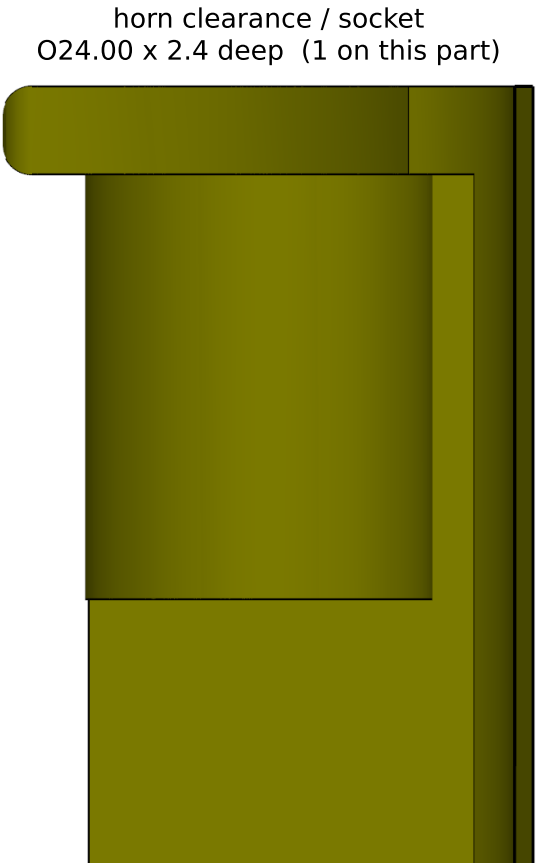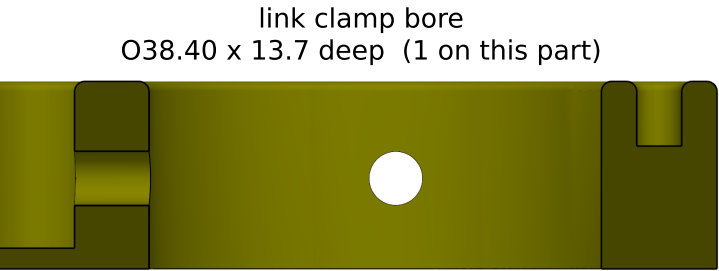


Part 10 of 27: link_upper_tongue (print 1) 110 x 50 x 16 mm

rev I: released + head counterbores (or drill yours: 06.0x3.2 seam, 05.0x2.7 ea


features found on its own faces
(cylindrical holes, measured):

1 x link clamp bore	0 38.40	depth 14.5
1 x horn clearance / socket	0 24.00	depth 2.4
1 x hole 010.00	0 10.00	depth 29.0
4 x M3 head counterbore	0 6.00	depth 3.2
1 x M2.5 head counterbore	0 5.00	depth 2.7
3 x M5 self-tap pilot / relief	0 4.20	depth 5.9
2 x M3 insert pocket	0 4.10	depth 7.5
4 x M3 clearance	0 3.40	depth 11.3
1 x M2.5 clearance	0 2.70	depth 11.8


isometric

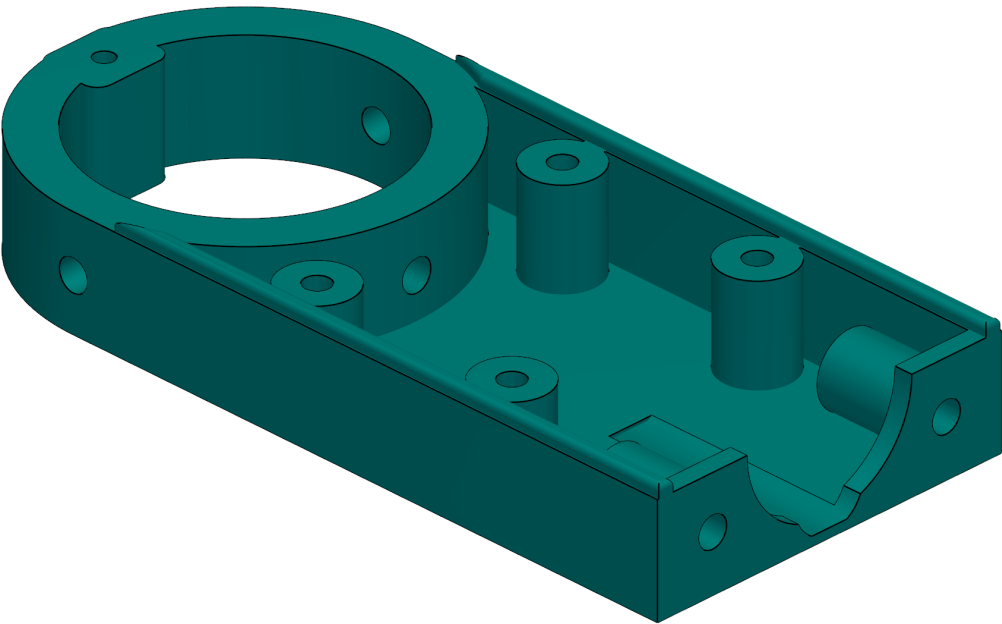


isometric, from behind

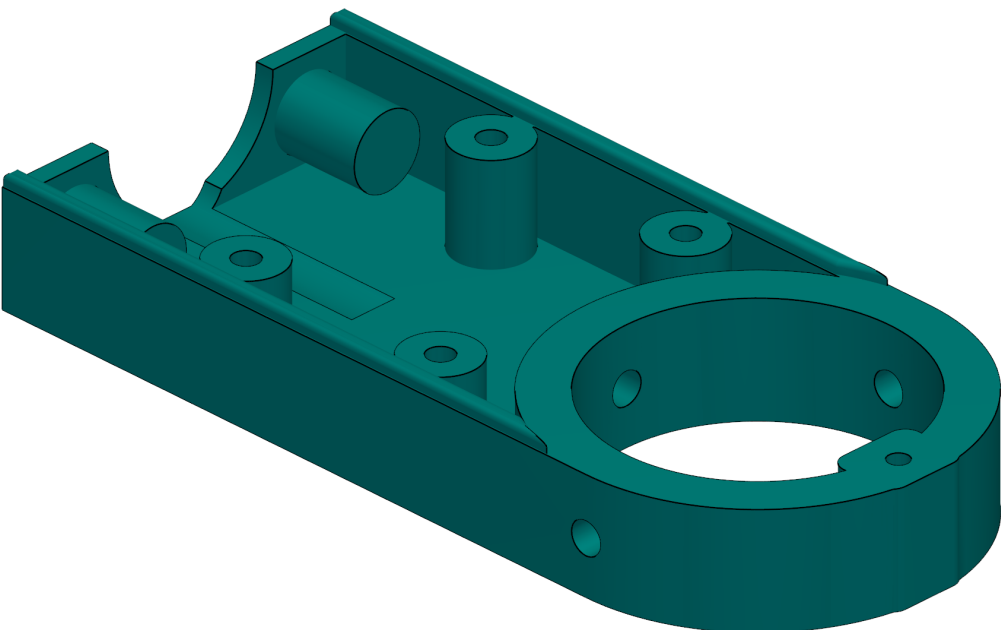







front (-y)

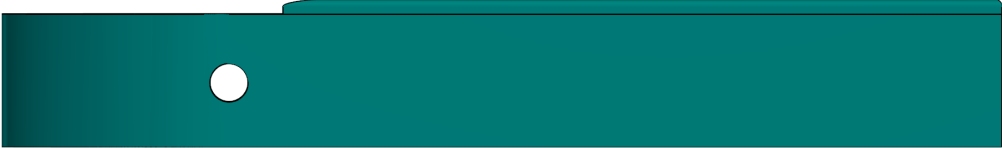

side (+x)

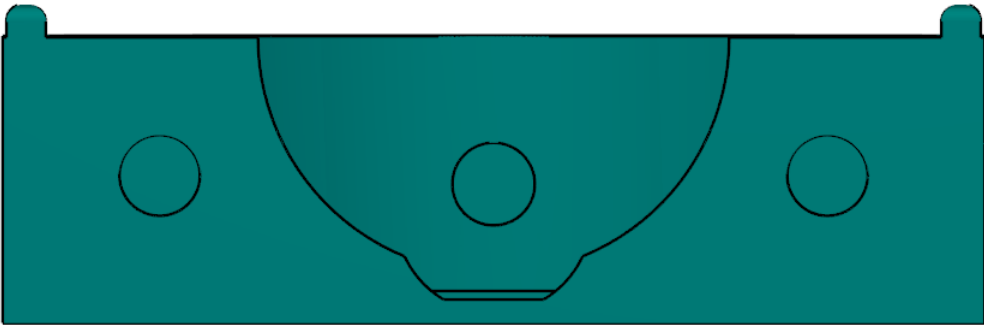

link_upper_tongue -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

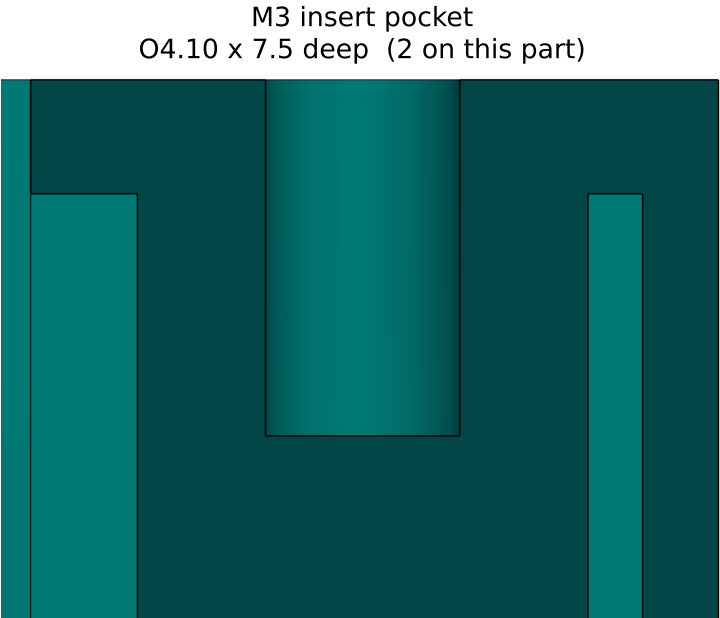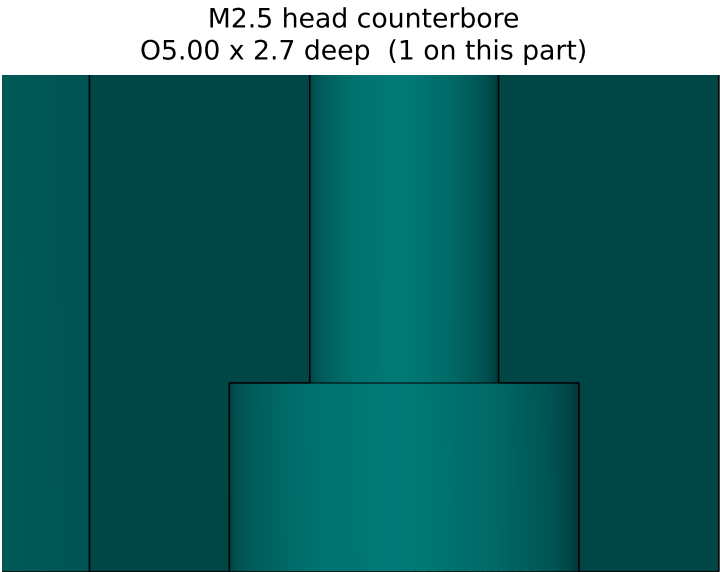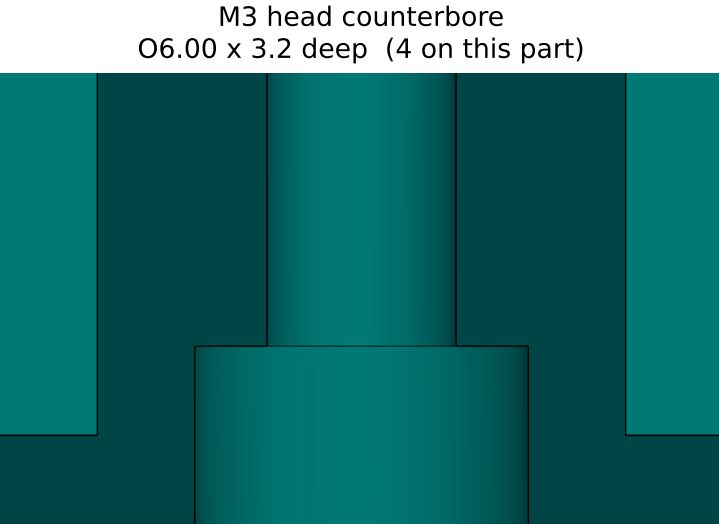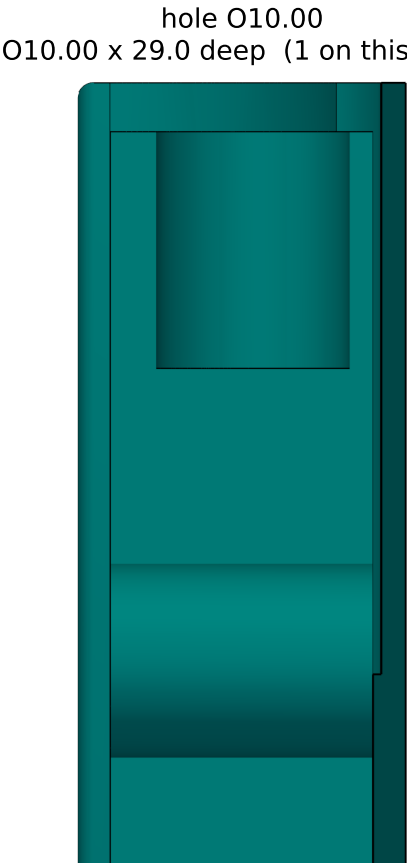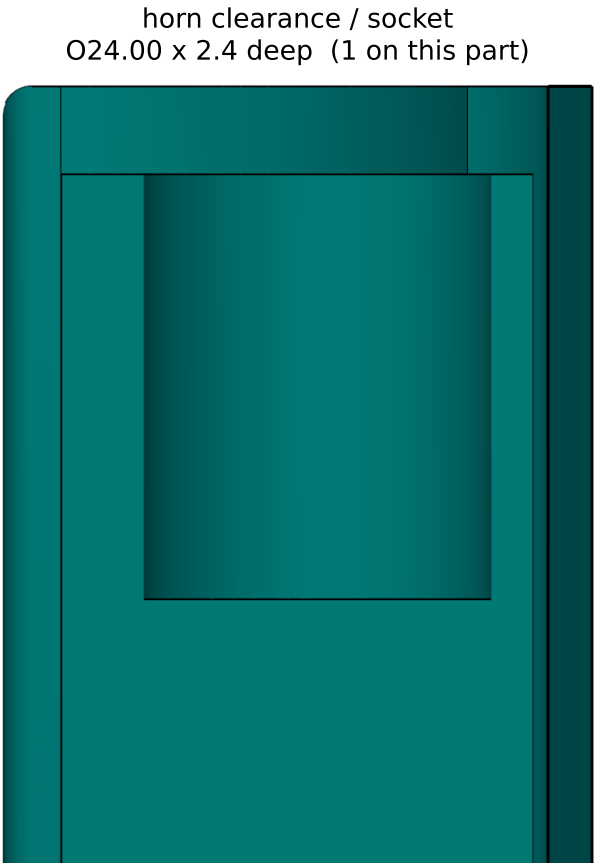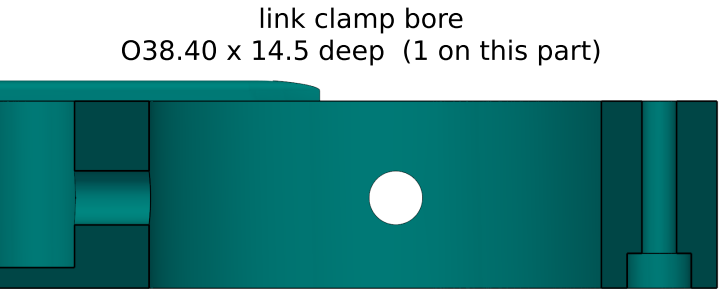


Part 11 of 27: collar_upper (print 2) 64 x 24 x 10 mm

J2 spring collar, print 2 (same part)


features found on its own faces
(cylindrical holes, measured):

1 x M3 insert pocket	0	4.10	depth 5.8
2 x M3 clearance	0	3.40	depth 18.4

isometric

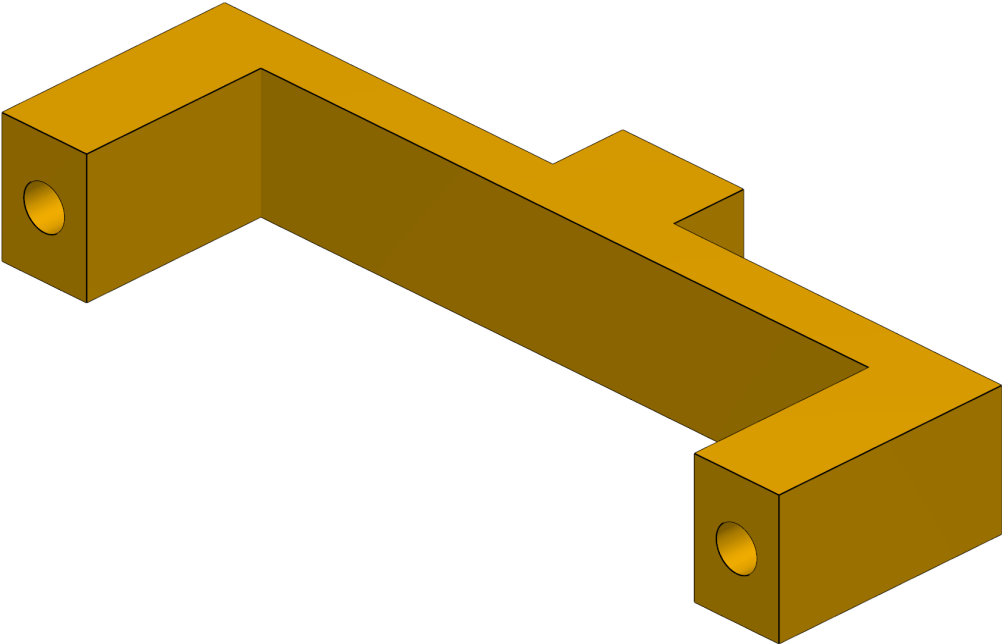

isometric, from behind

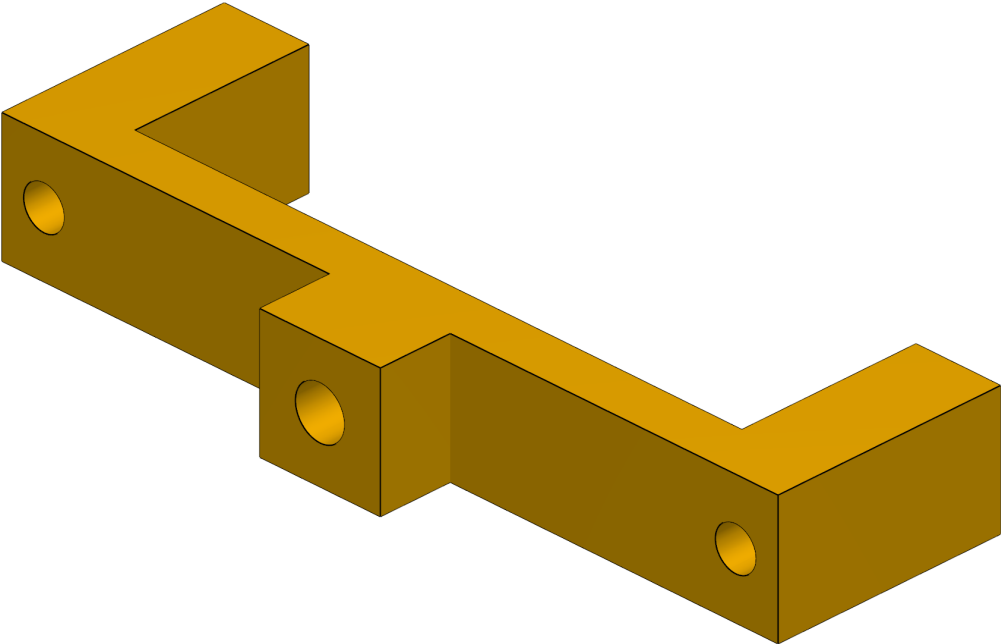



front (-y)



side (+x)




collar_upper -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

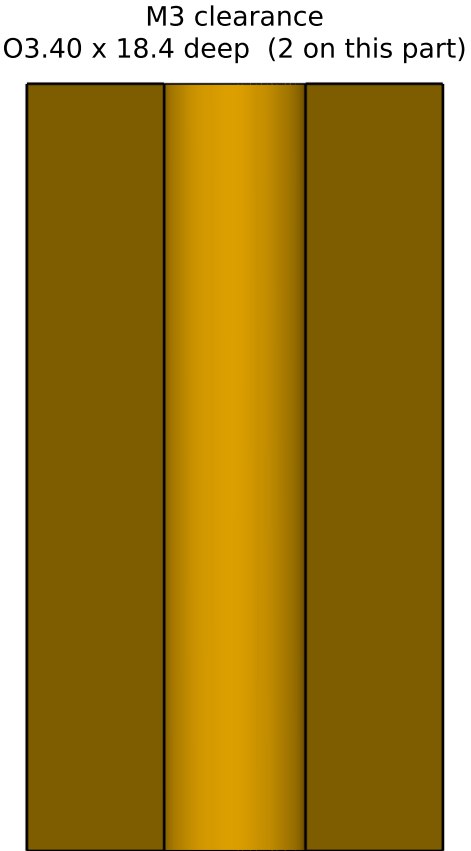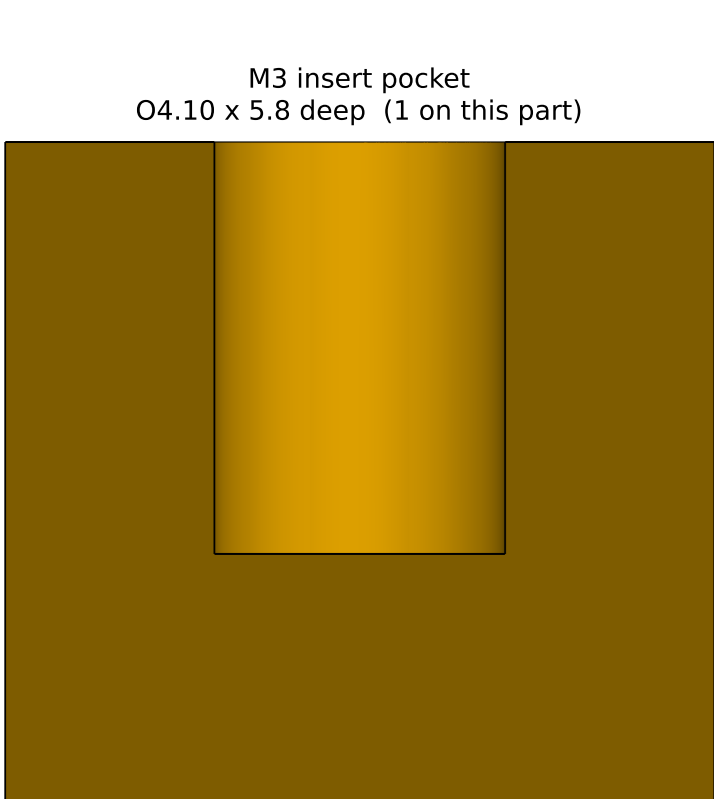


Part 12 of 27: J3_p1 (print 1) 98 x 50 x 53 mm

isometric

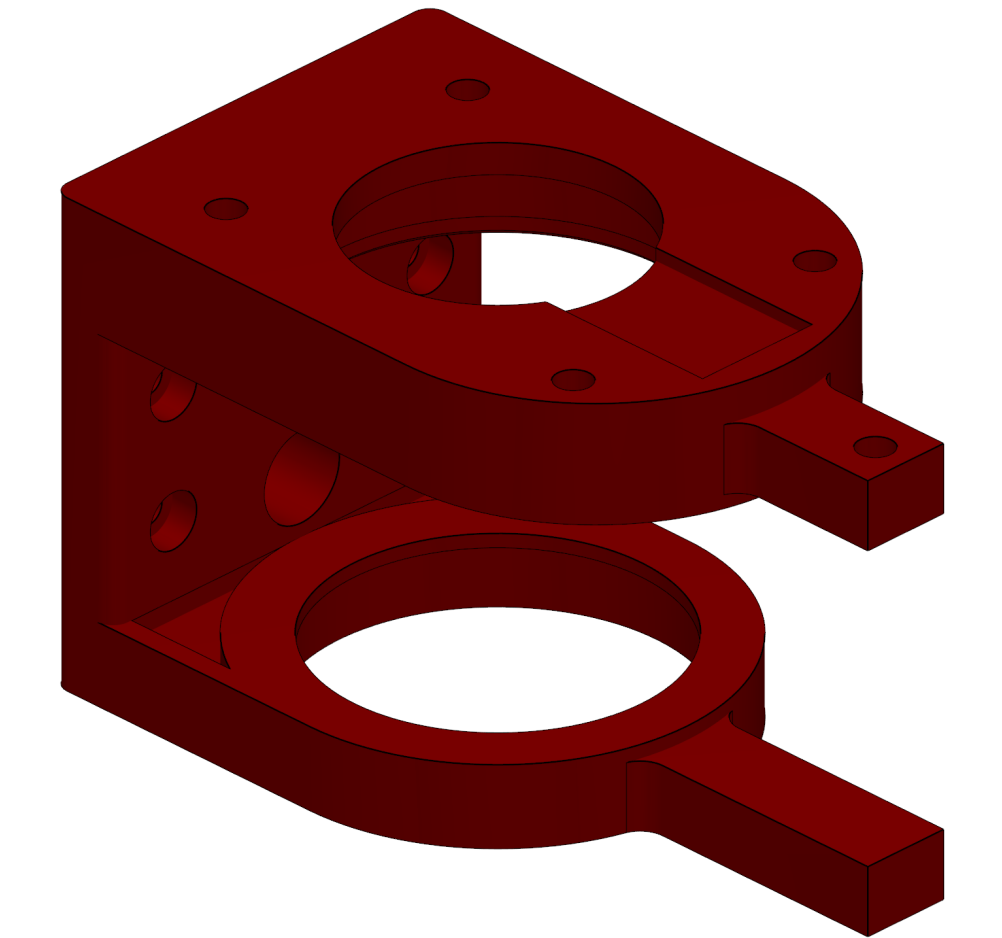

isometric, from behind

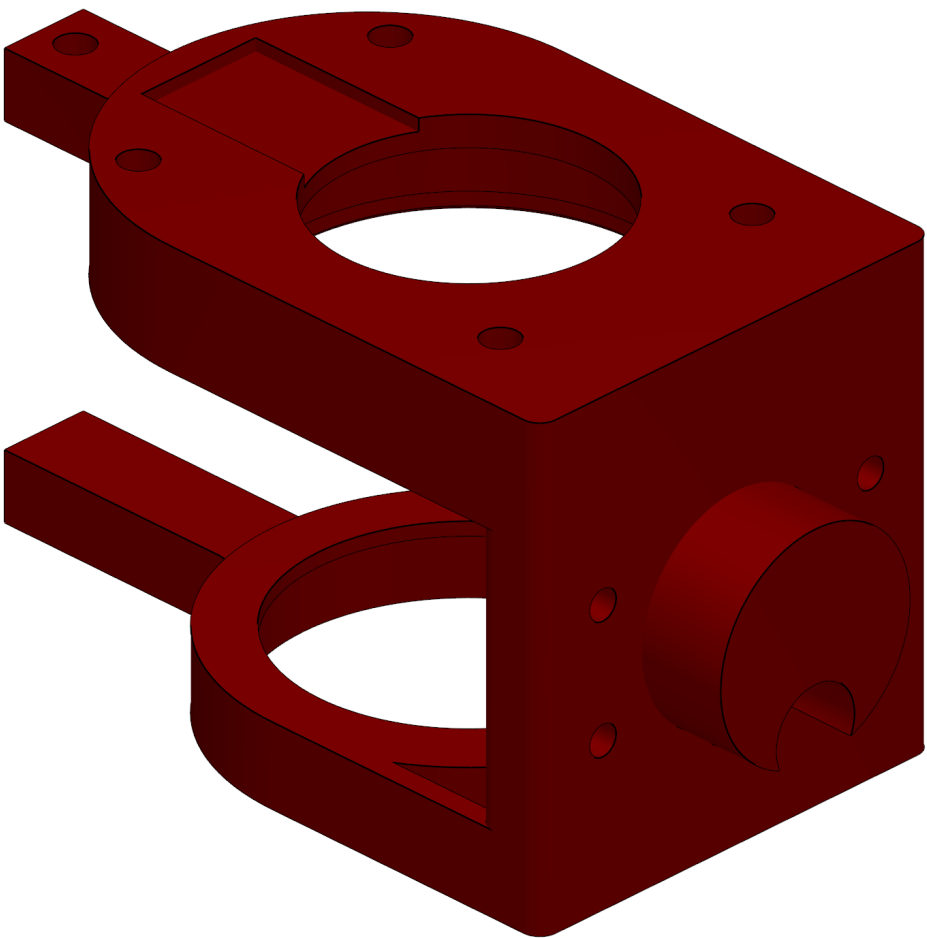

J3 fork; J3 spring lugs (both pockets)


features found on its own faces
(cylindrical holes, measured):

1 x hole 045.20	0 45.20	depth 6.6
1 x 6806 bearing pocket	0 42.02	depth 1.5
2 x 6806 bearing pocket	0 42.00	depth 7.2
2 x 6806 outer-race recess	0 38.00	depth 0.8
1 x shaft clearance bore	0 31.00	depth 3.4
1 x hole 010.00	0 10.00	depth 18.0
4 x M3 head counterbore	0 6.20	depth 3.2
4 x M3 head counterbore	0 6.00	depth 7.5
6 x M3 insert pocket	0 4.10	depth 8.1
4 x M3 clearance	0 3.40	depth 4.8






front (-y)



side (+x)

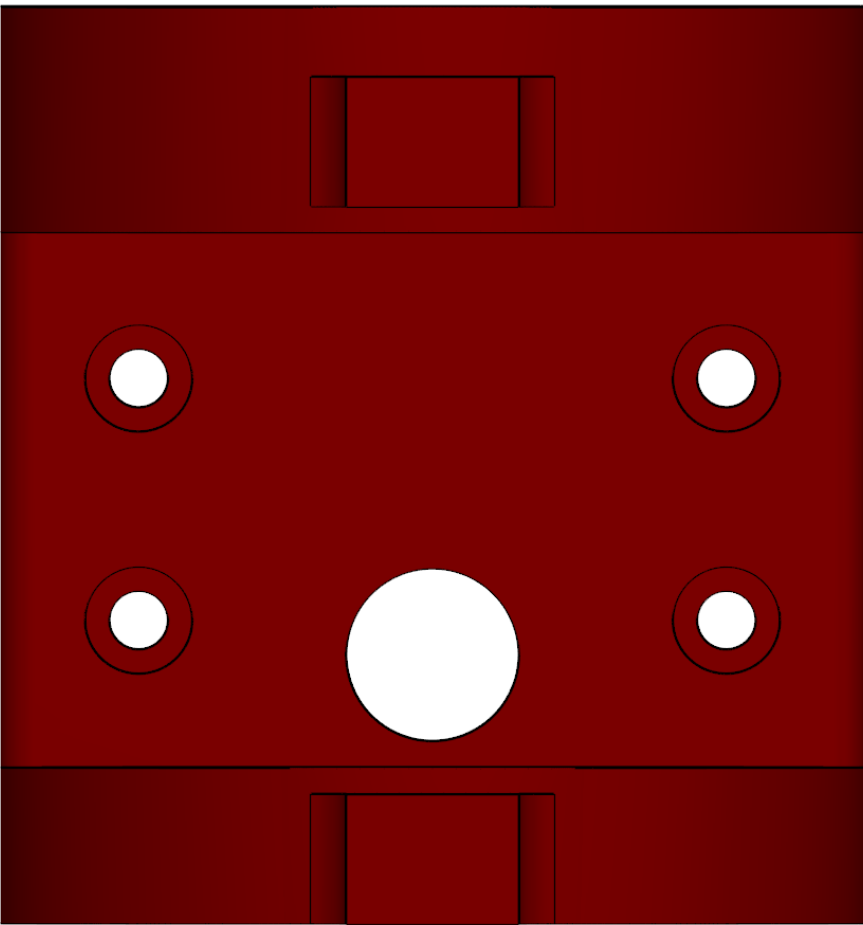


J3_p1 -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

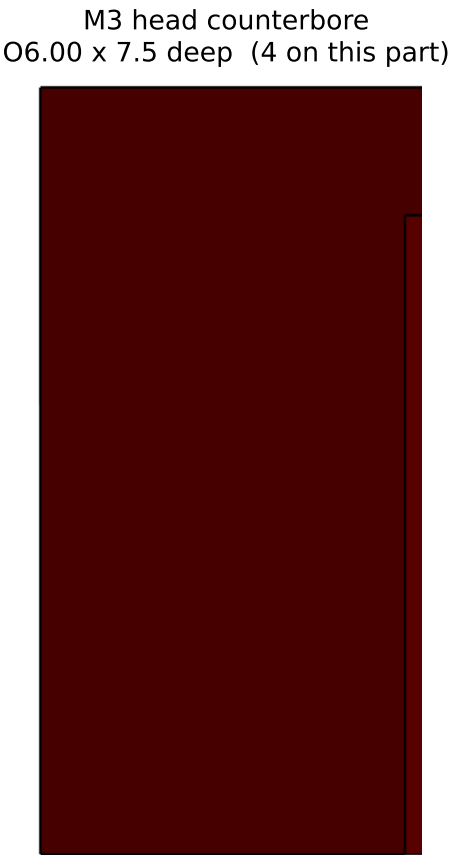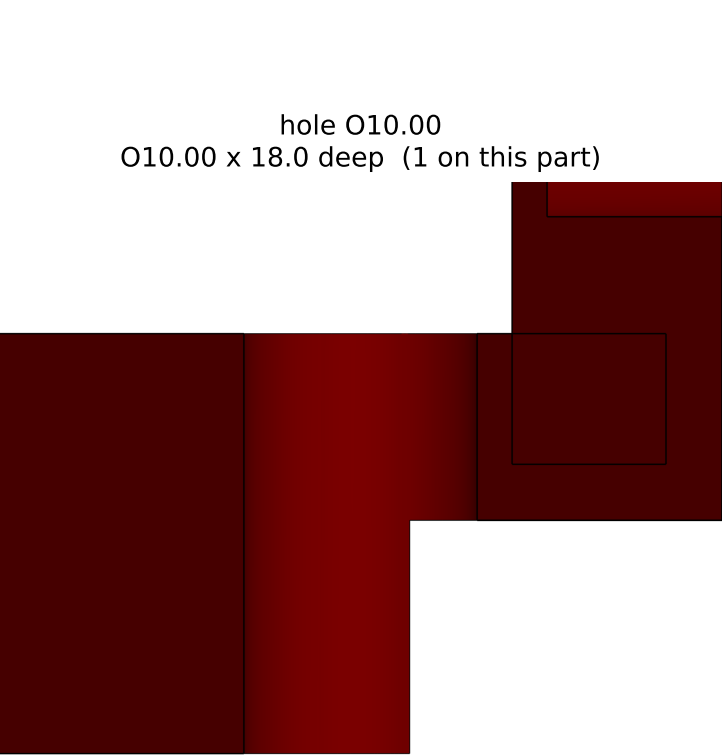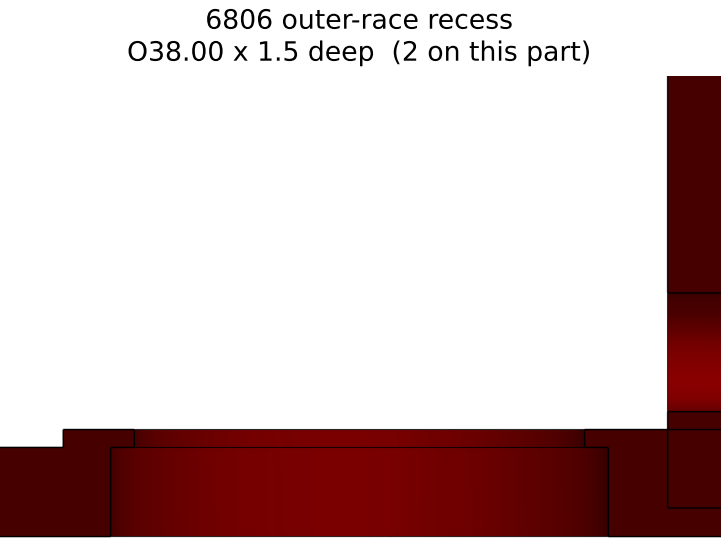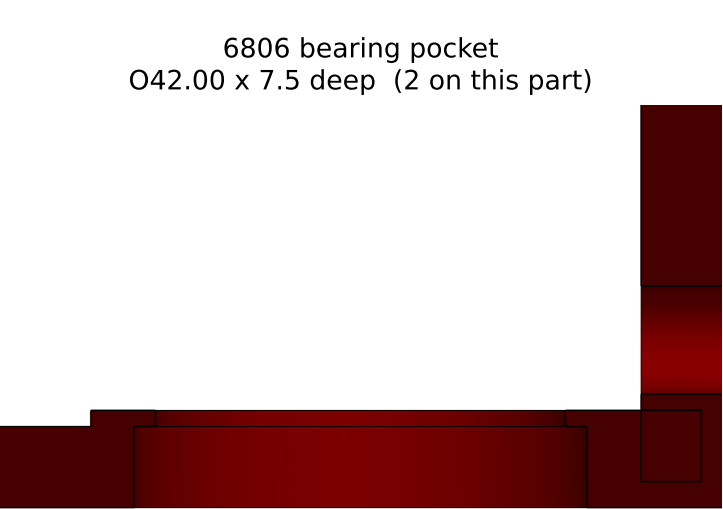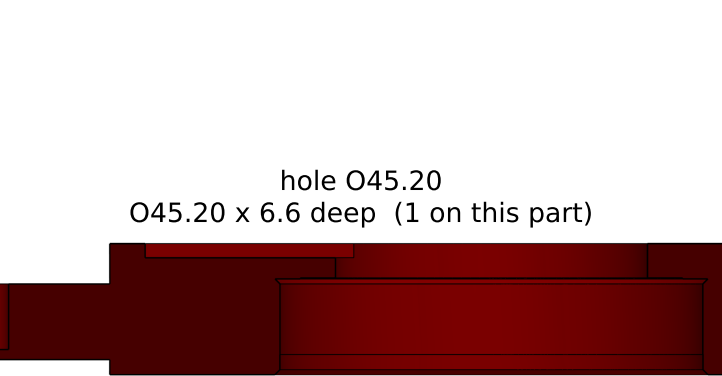


Part 13 of 27: J3_p2 (print 1) 72 x 50 x 37 mm

isometric

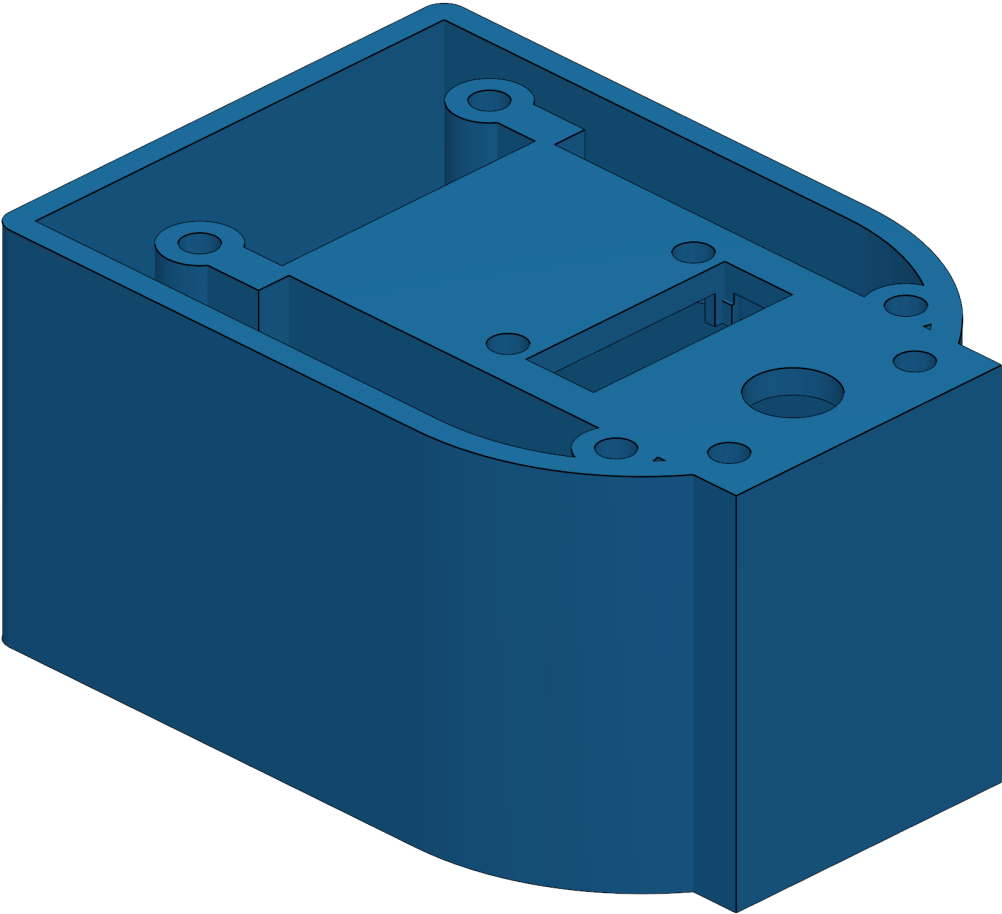

isometric, from behind

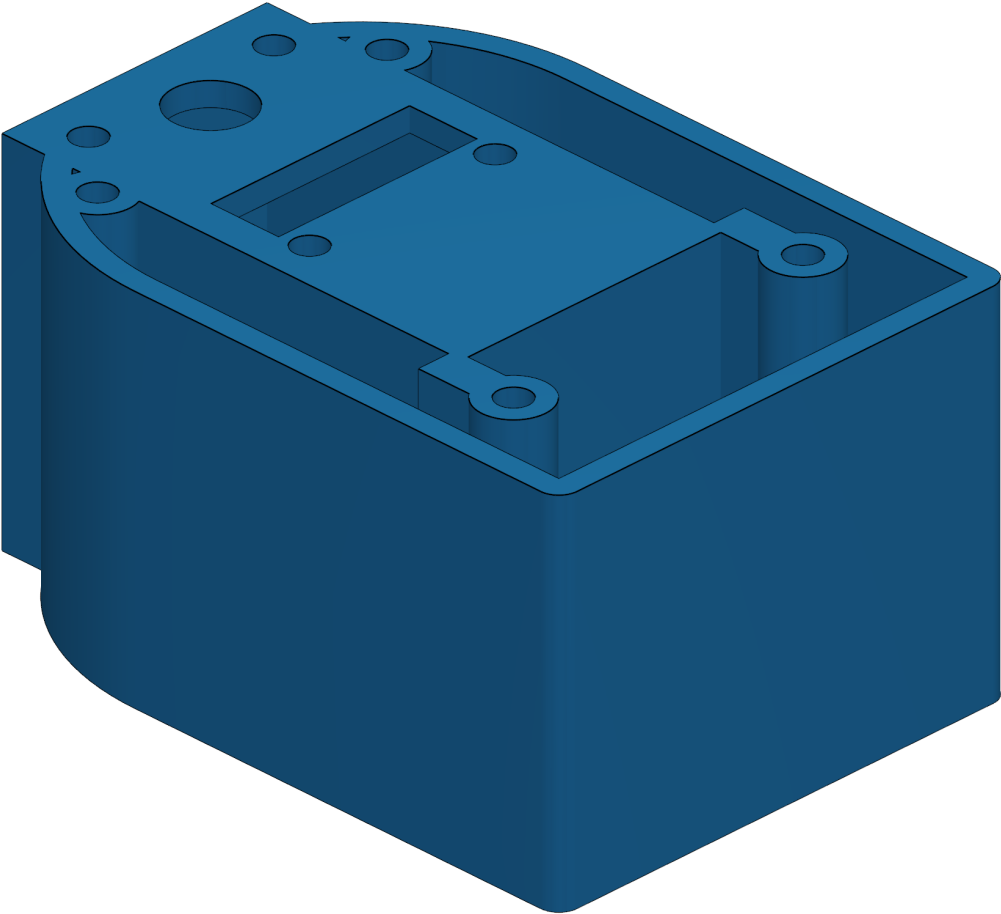

J3 servo cradle, bay 34.99 deep, 2.4 back wall


features found on its own faces
(cylindrical holes, measured):

1 x hole 045.20	0 45.20	depth 37.4
1 x cable exit	0 8.00	depth 2.4
8 x M3 clearance	0 3.40	depth 21.4




front (-y)



side (+x)

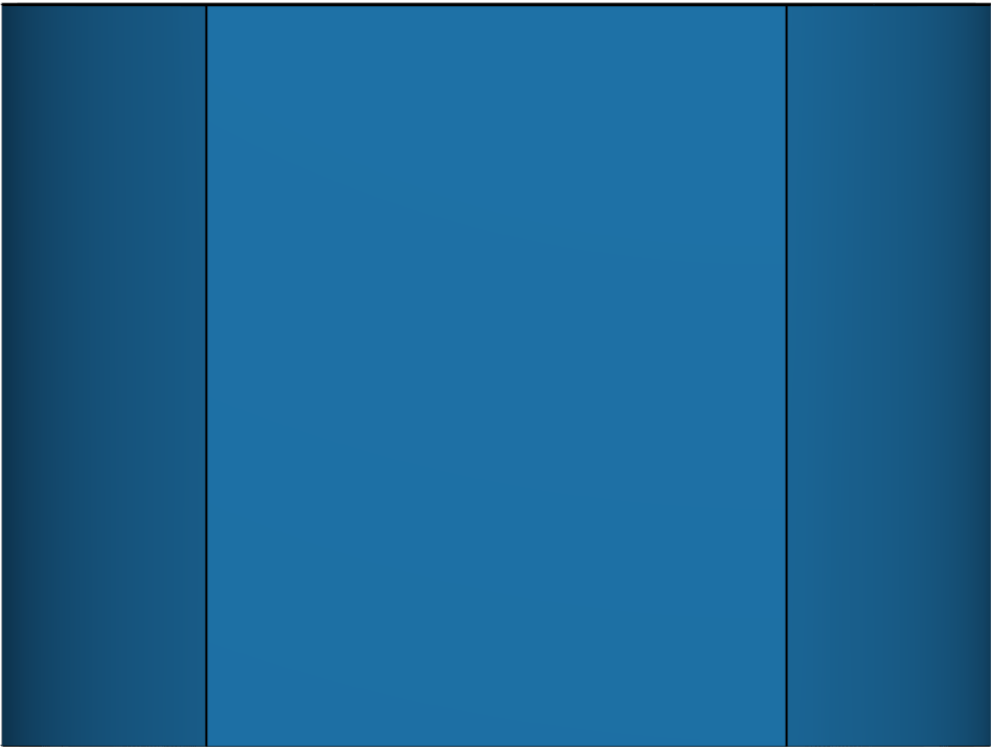

J3_p2 -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

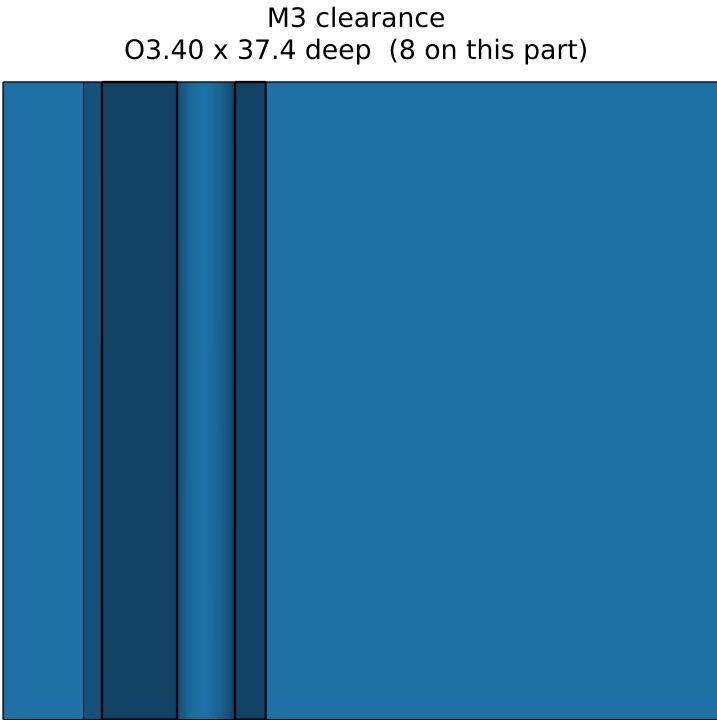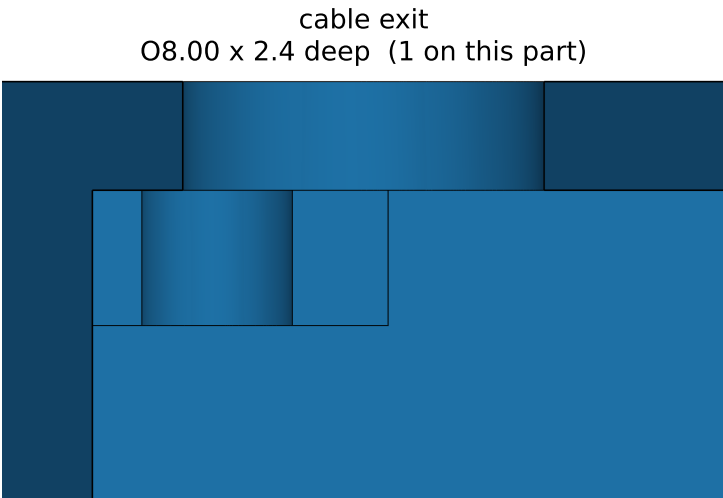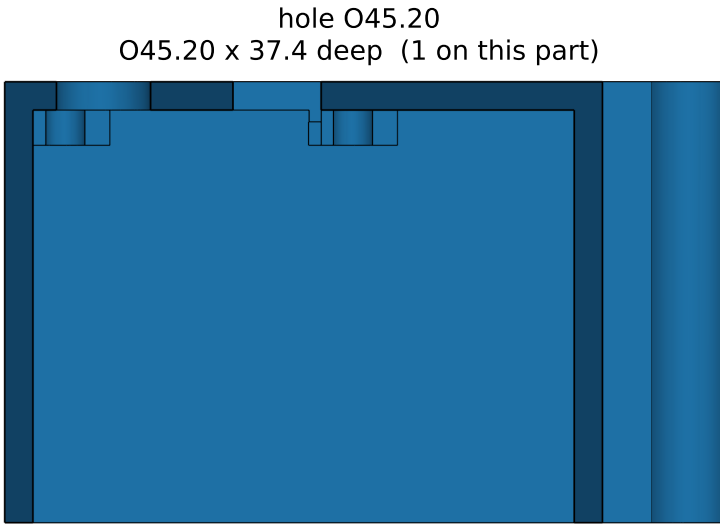


Part 14 of 27: J3_shaft (print 1) 30 x 30 x 50 mm

isometric



isometric, from behind

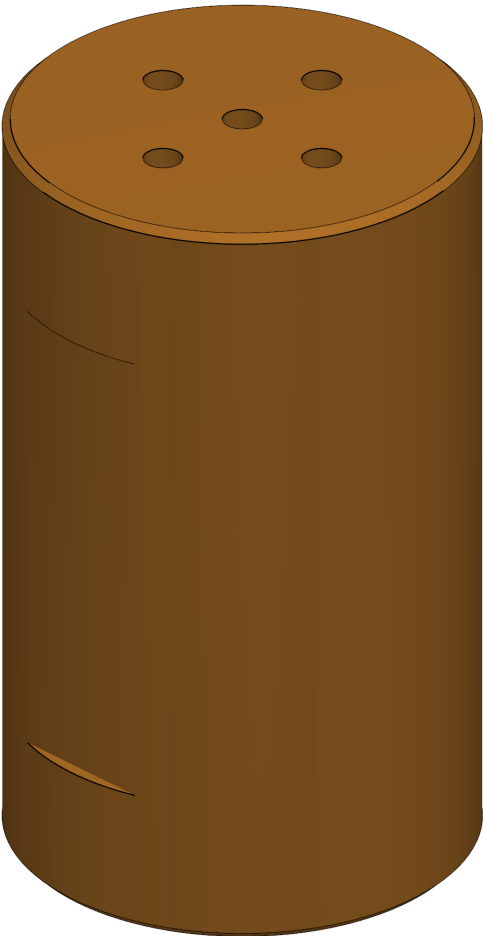

printed J3 shaft, double-D flats for the M5 set screws

features found on its own faces
(cylindrical holes, measured):

1 x spigot / shaft bore	0	22.00	depth 47.0
5 x horn-screw hole	0	2.52	depth 3.5



front (-y)





side (+x)



J3_shaft -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

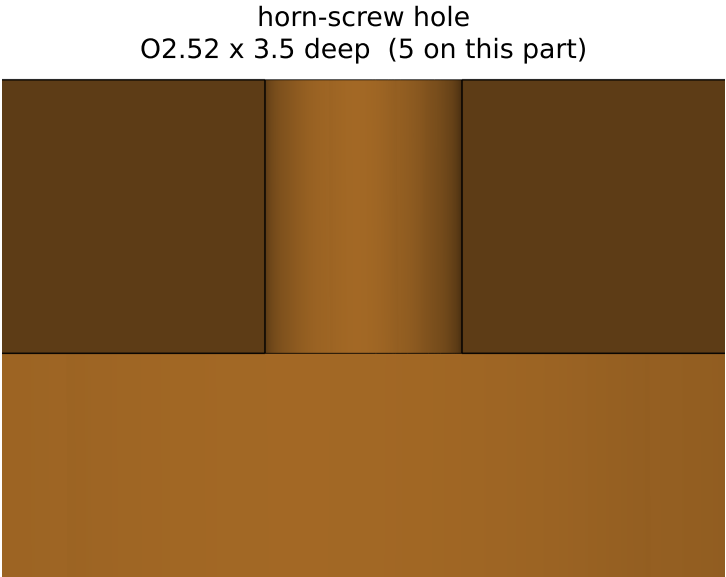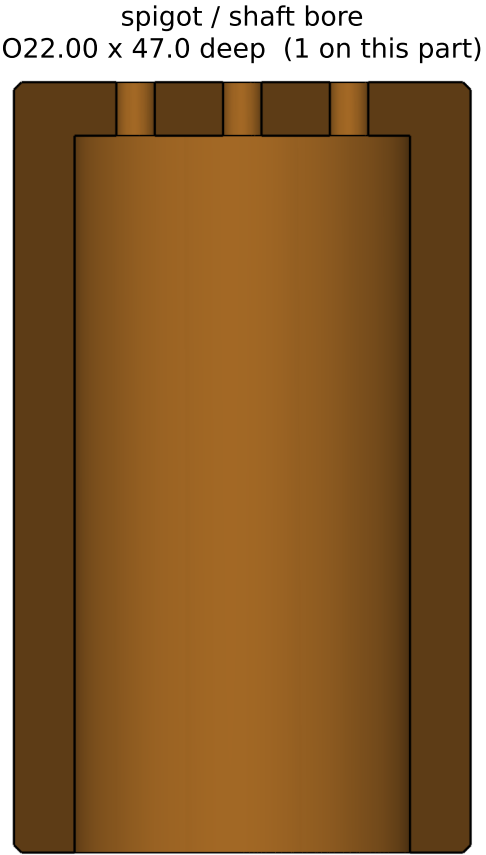



Part 15 of 27: link_fore_tongue (print 1) 144 x 50 x 16 mm

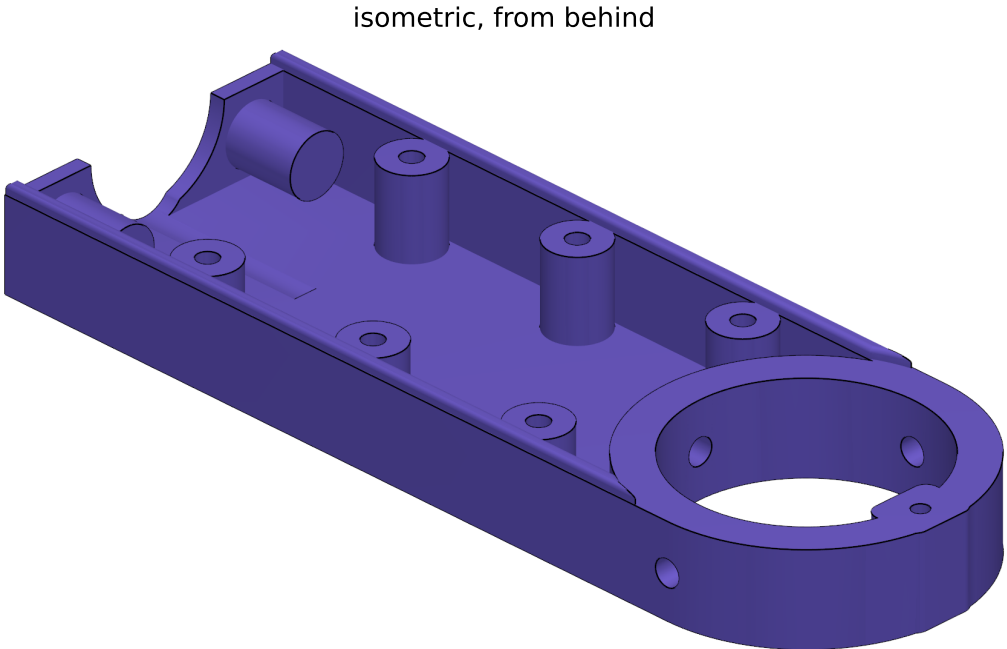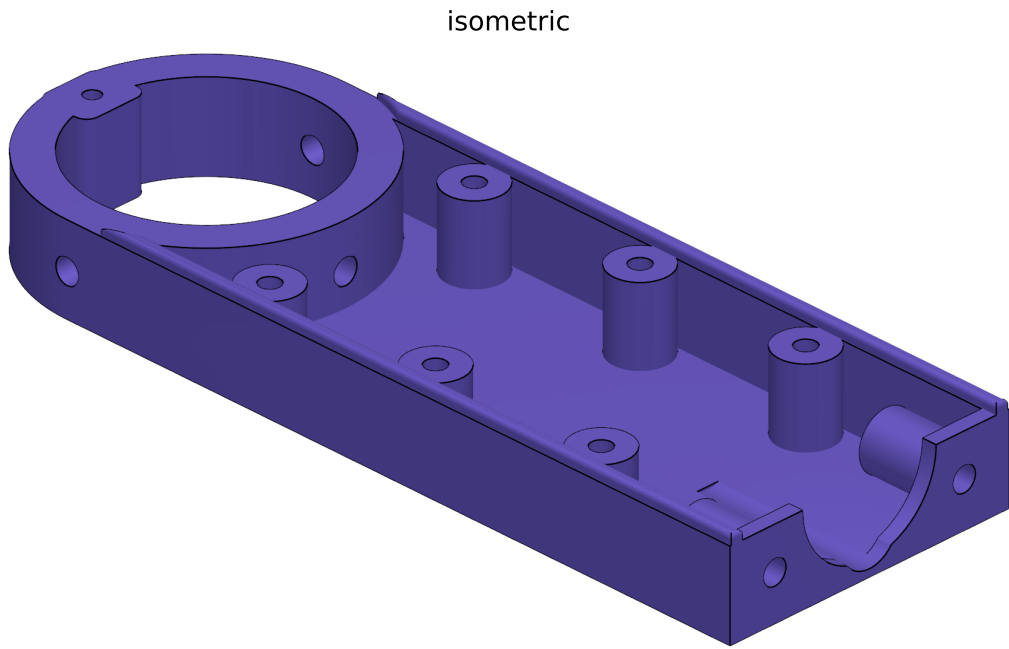







rev I forearm: socket end, valid solid, flush seam-screw heads

features found on its own faces
(cylindrical holes, measured):



1 x link clamp bore	0 38.40	depth 14.5
1 x horn clearance / socket	0 24.00	depth 2.4
1 x hole 010.00	0 10.00	depth 29.0
6 x M3 head counterbore	0 6.00	depth 3.2
1 x M2.5 head counterbore	0 5.00	depth 2.7
3 x M5 self-tap pilot / relief	0 4.20	depth 5.9
2 x M3 insert pocket	0 4.10	depth 7.5
6 x M3 clearance	0 3.40	depth 11.3
1 x M2.5 clearance	0 2.70	depth 11.8

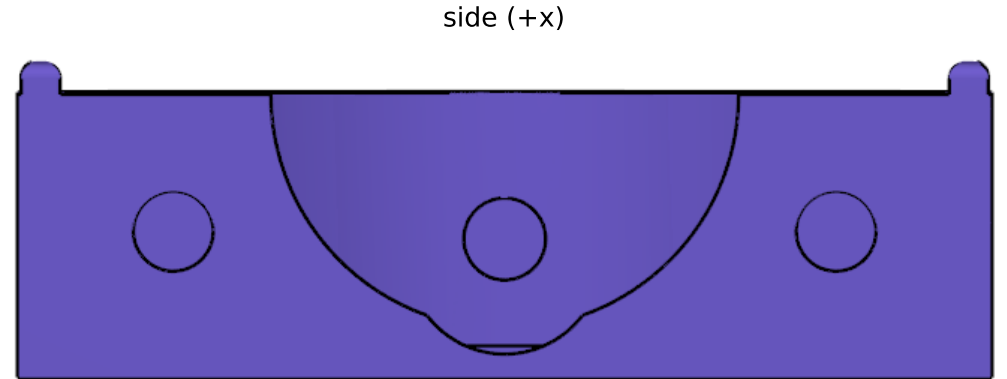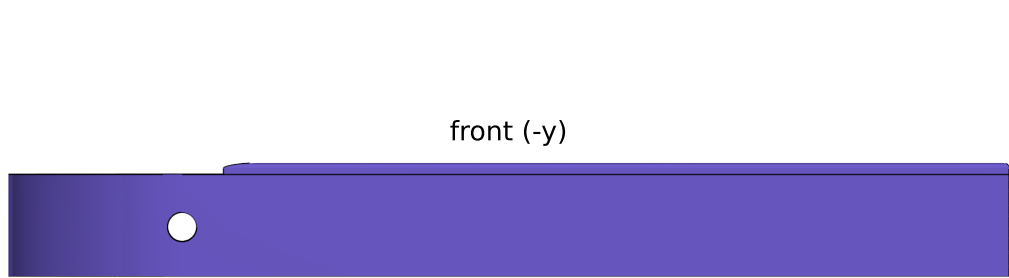

link_fore_tongue -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

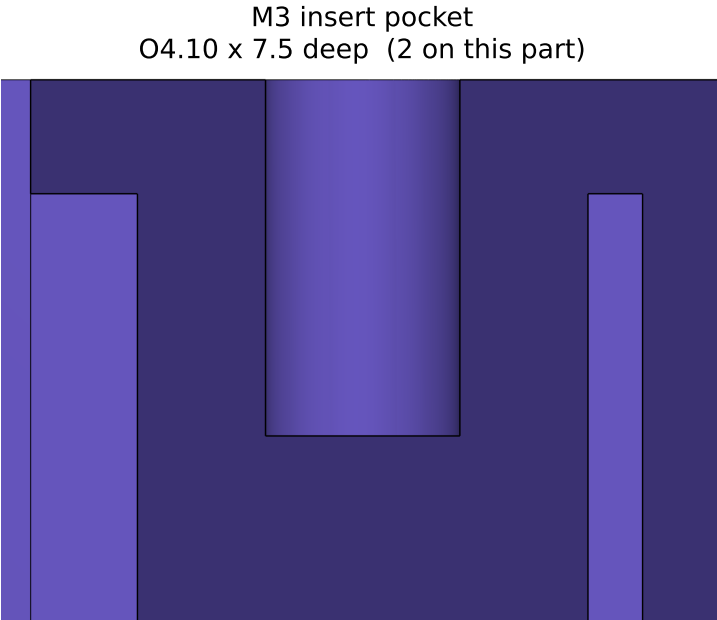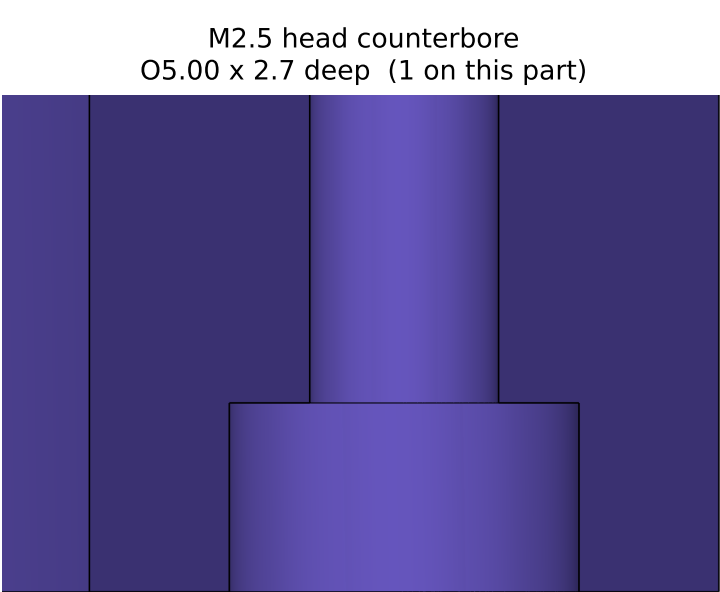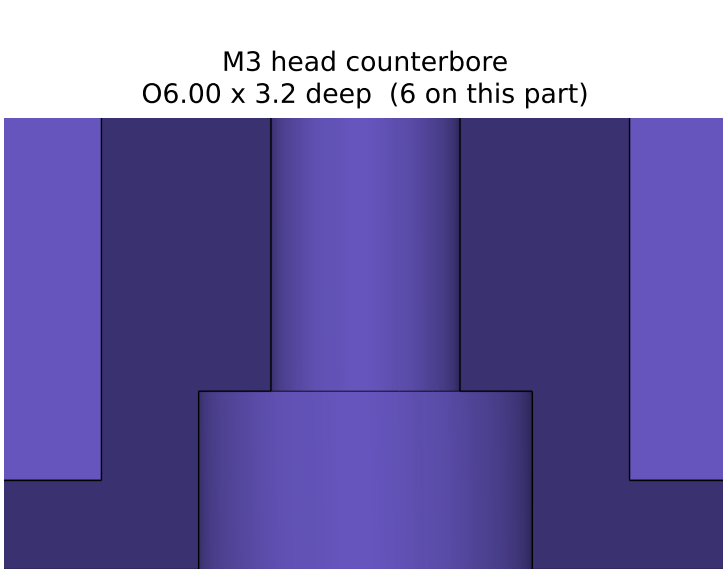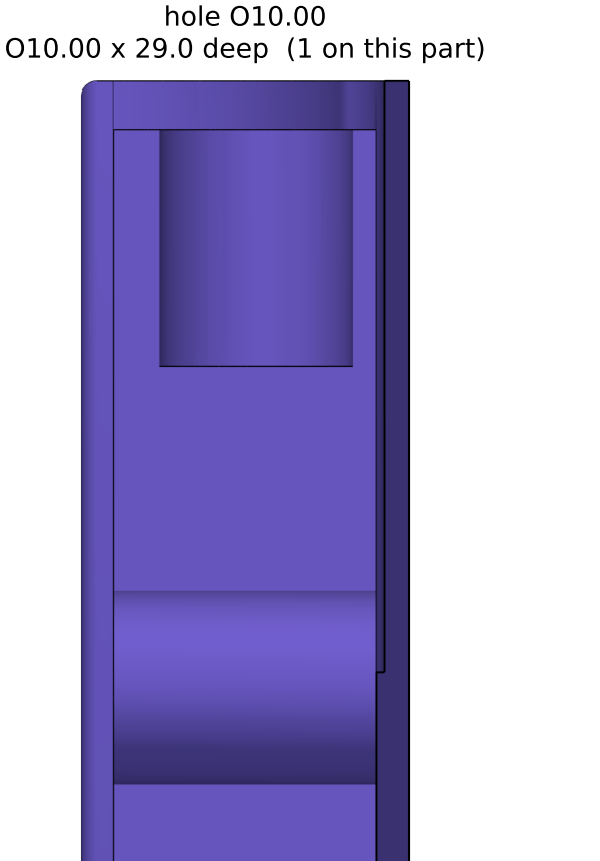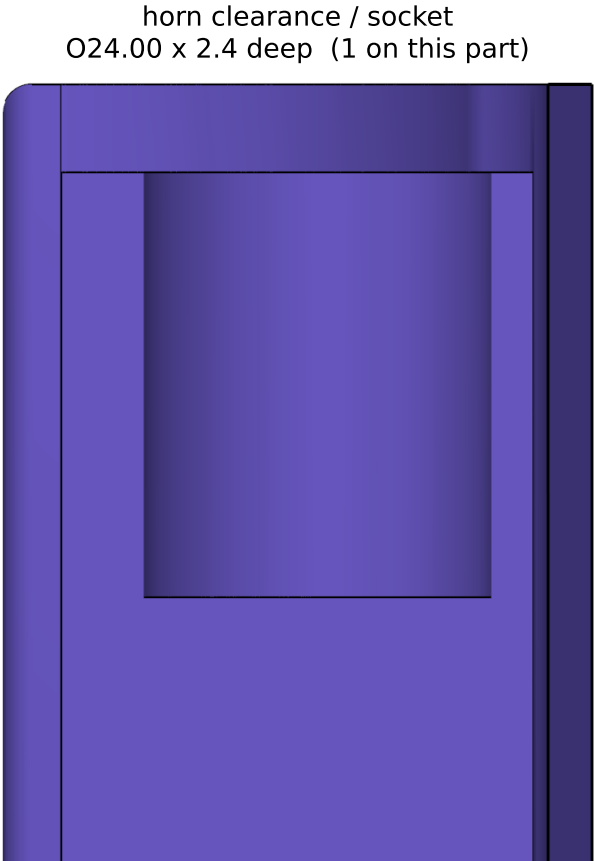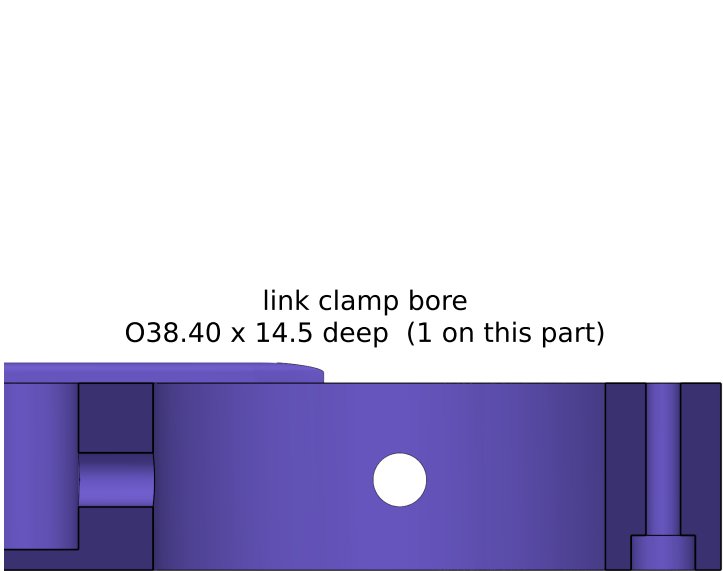



Part 16 of 27: link_fore_groove (print 1) 144 x 50 x 14 mm

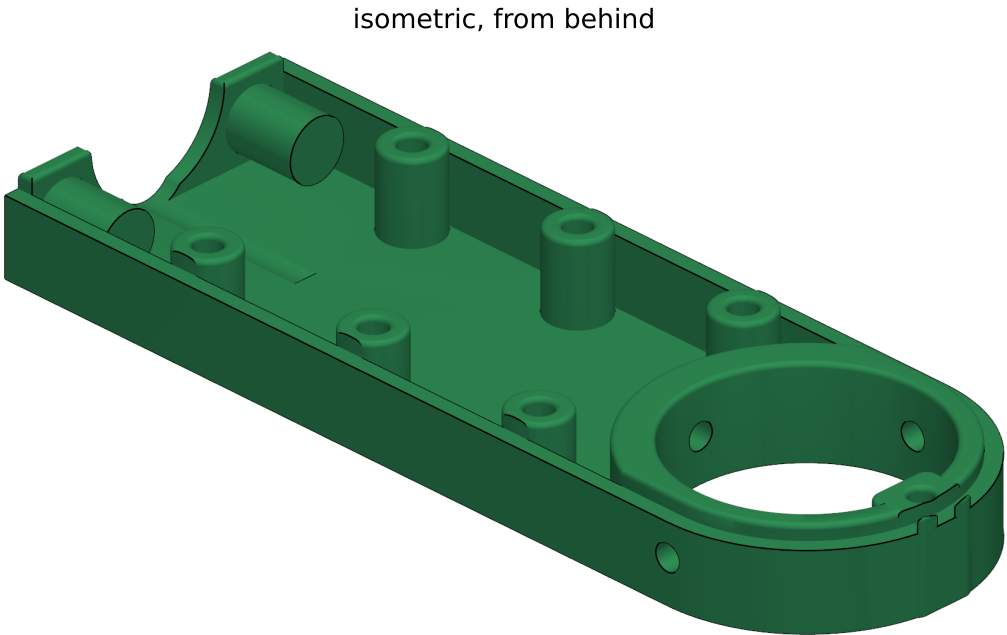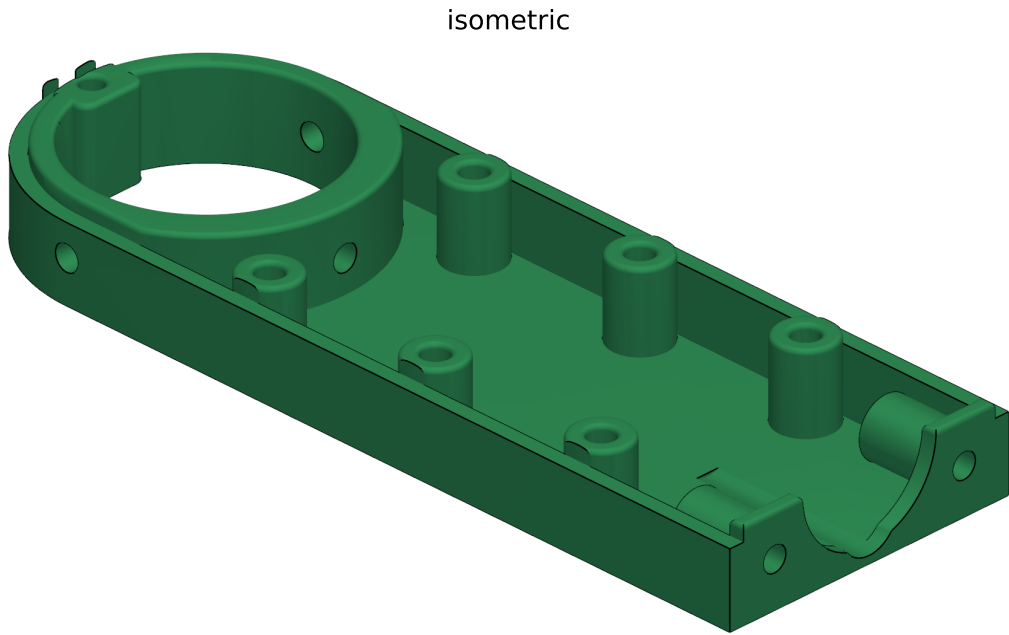







rev I forearm: socket end, valid solid

features found on its own faces
(cylindrical holes, measured):

1 x link clamp bore	0 38.40	depth 13.7
1 x horn clearance / socket	0 24.00	depth 2.4
1 x hole 010.00	0 10.00	depth 29.0
3 x M5 self-tap pilot / relief	0 4.20	depth 5.9
8 x M3 insert pocket	0 4.10	depth 6.7
1 x M2.5 insert pocket	0 3.50	depth 4.2
6 x M3 clearance	0 3.40	depth 7.0

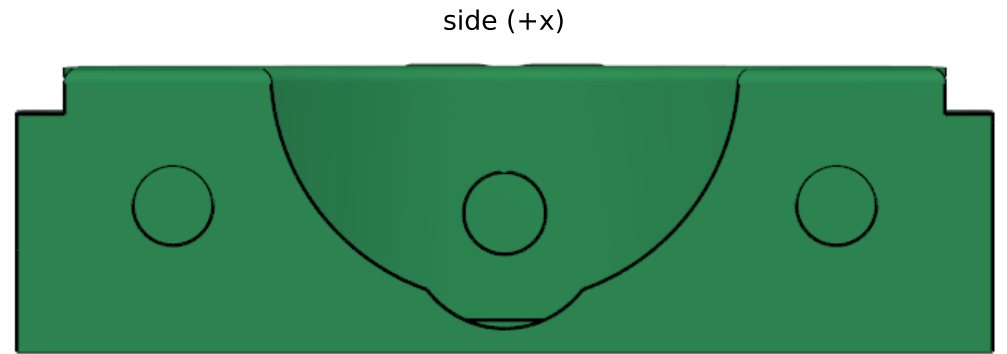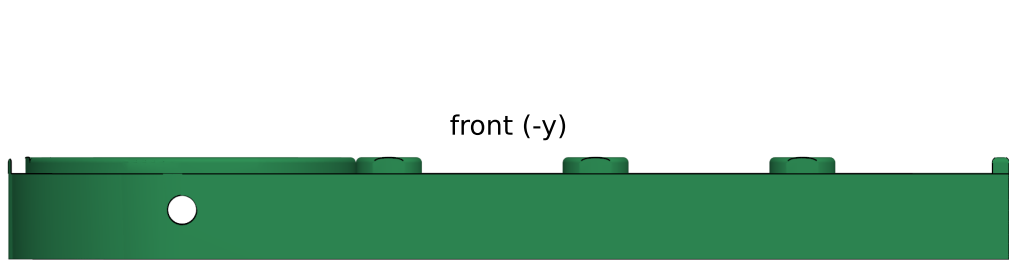

link_fore_groove -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

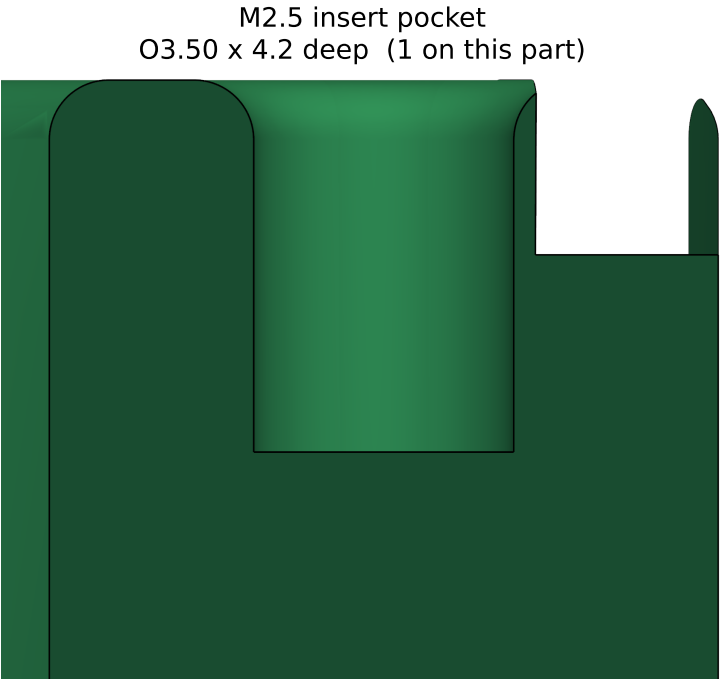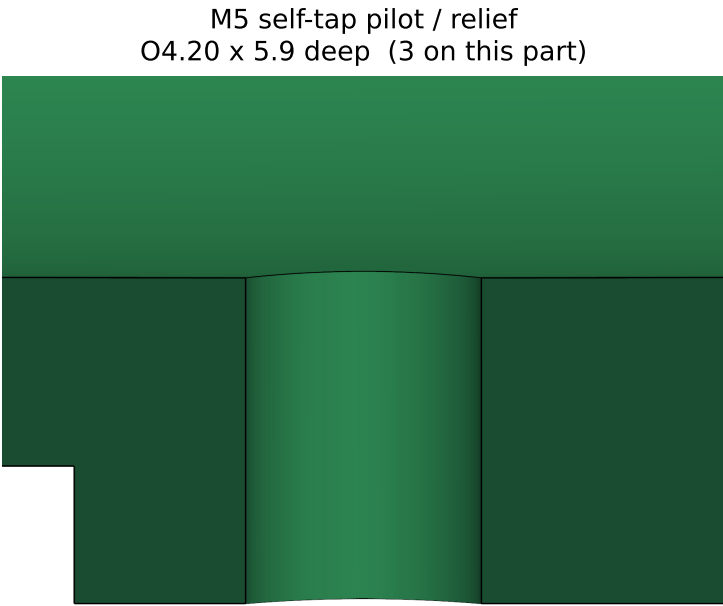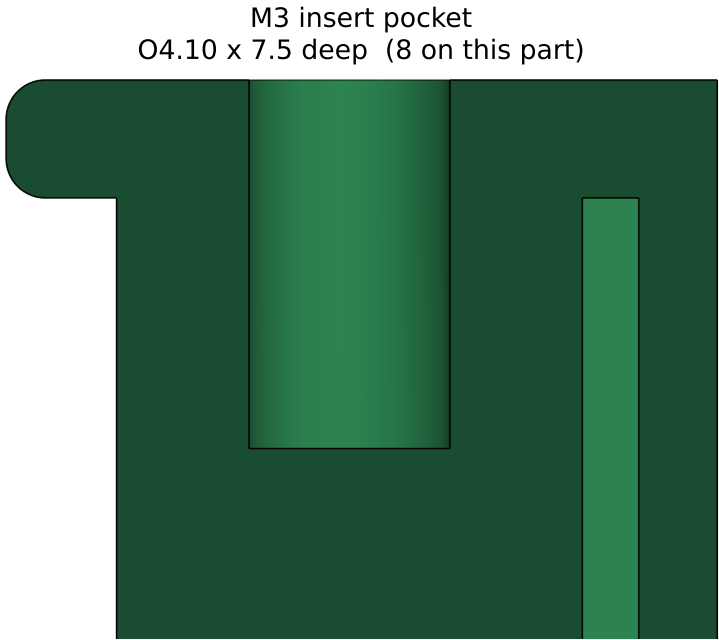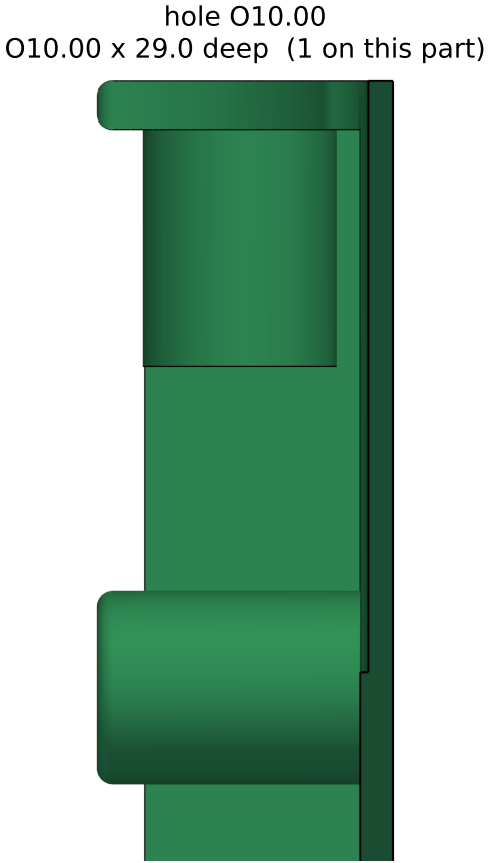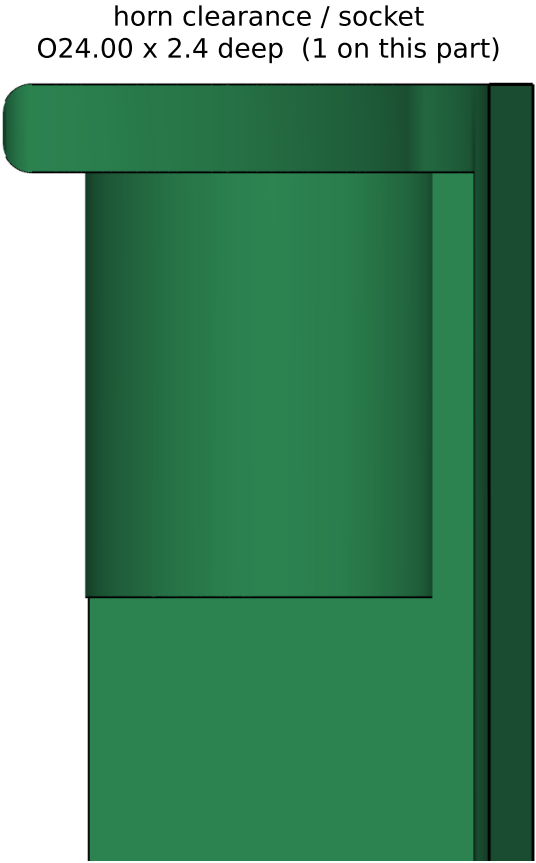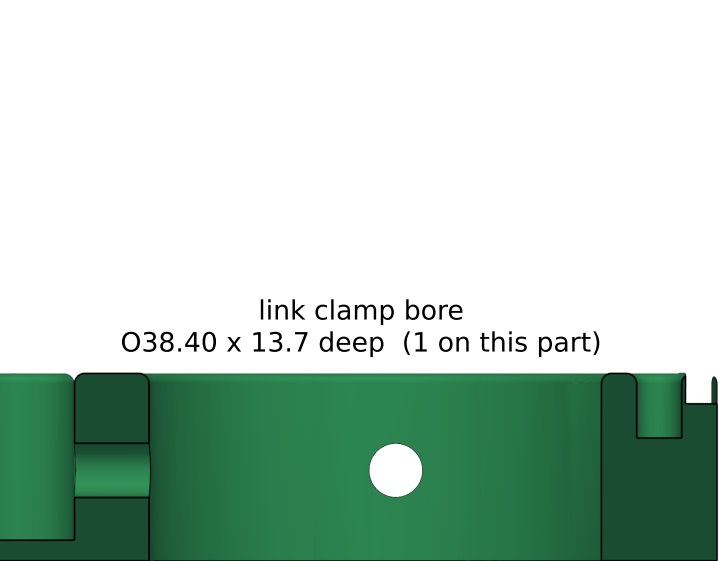


Part 17 of 27: collar_fore (print 2) 64 x 24 x 10 mm

J3 spring collar, print 2 (same part)


features found on its own faces
(cylindrical holes, measured):

1 x M3 insert pocket	0	4.10	depth 5.8
2 x M3 clearance	0	3.40	depth 18.4

isometric

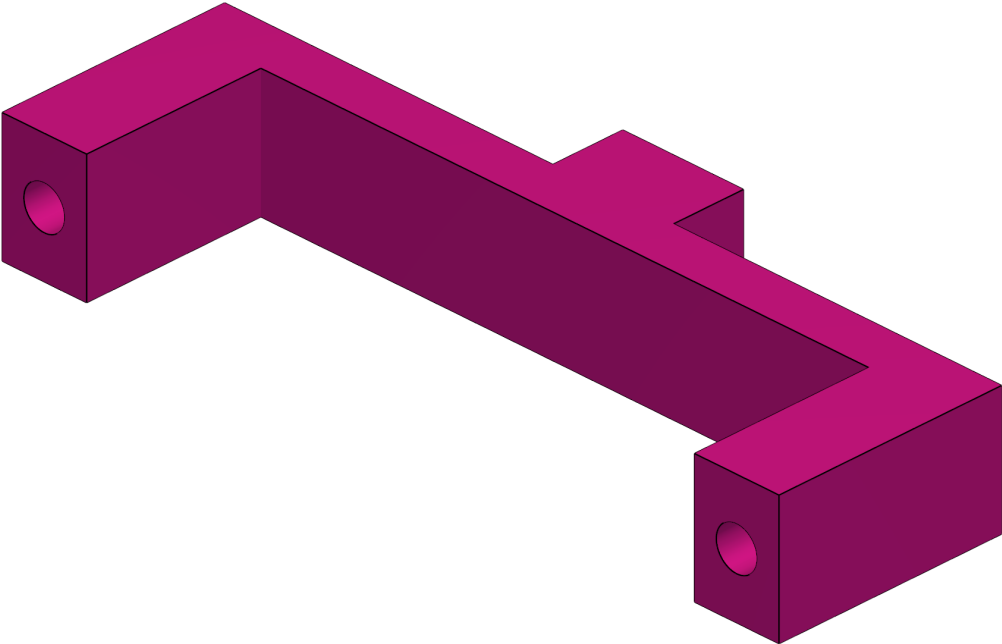

isometric, from behind

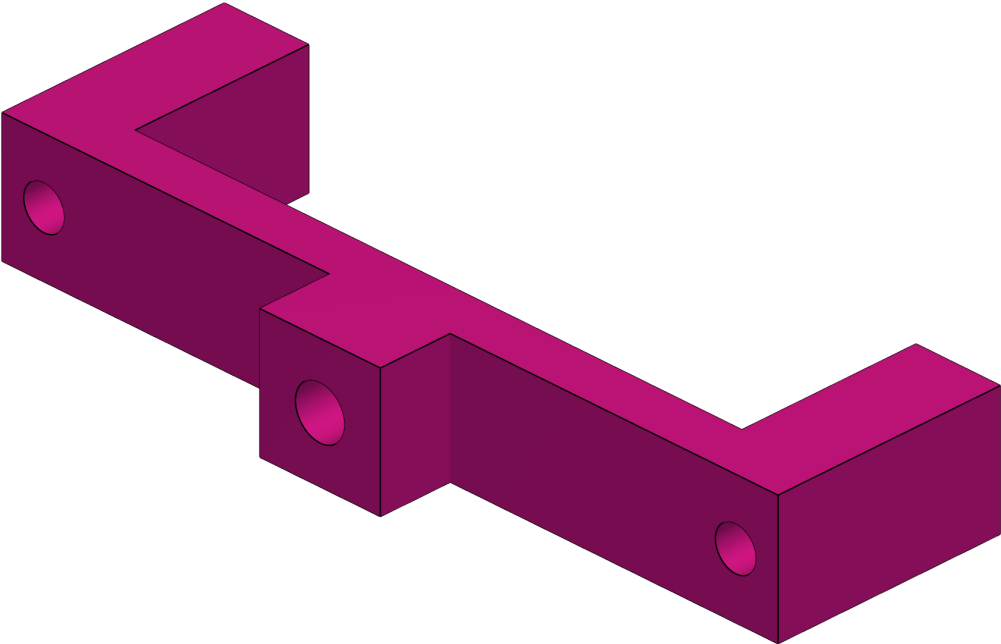



front (-y)



side (+x)




collar_fore -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

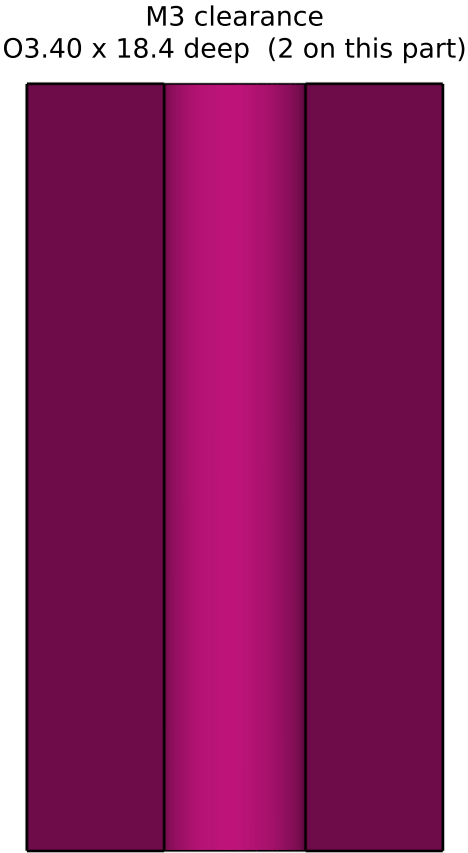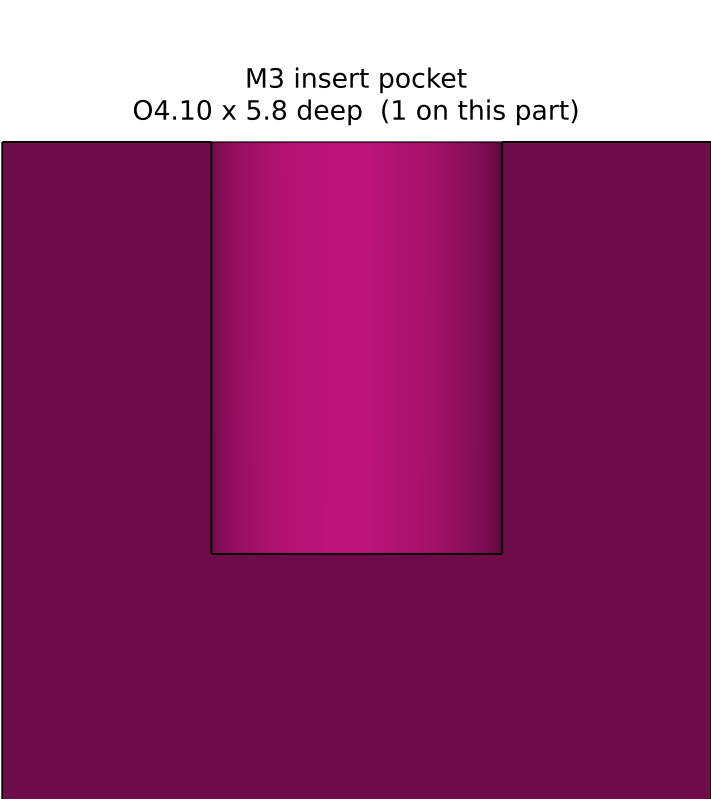


Part 18 of 27: j4_base (print 1) 57 x 38 x 65 mm

isometric

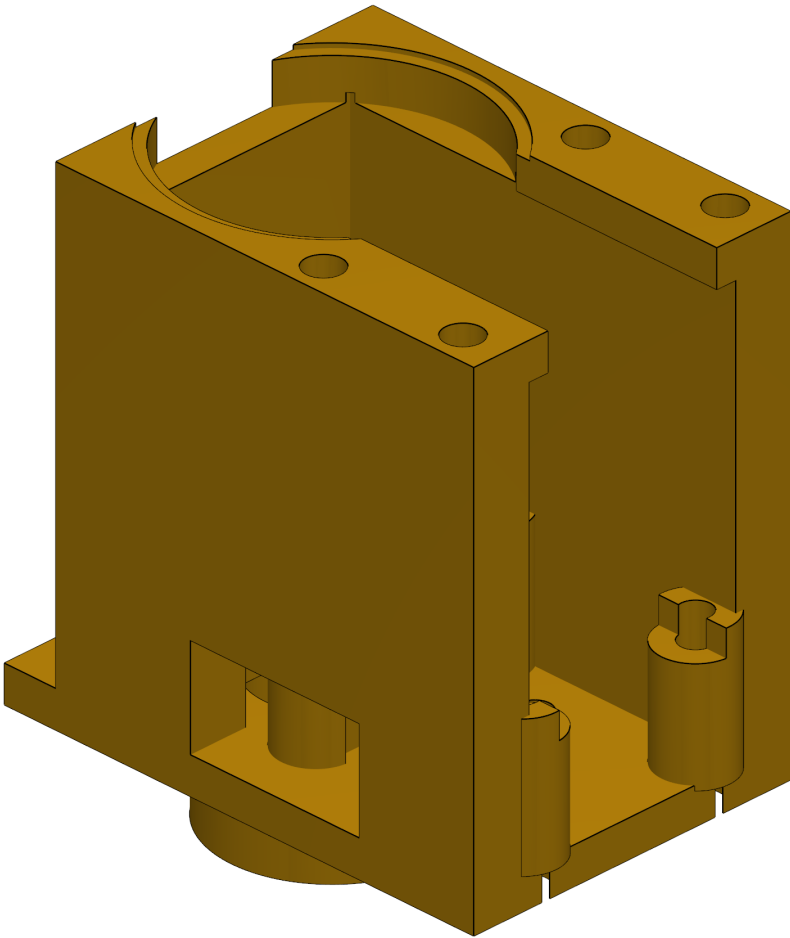

isometric, from behind

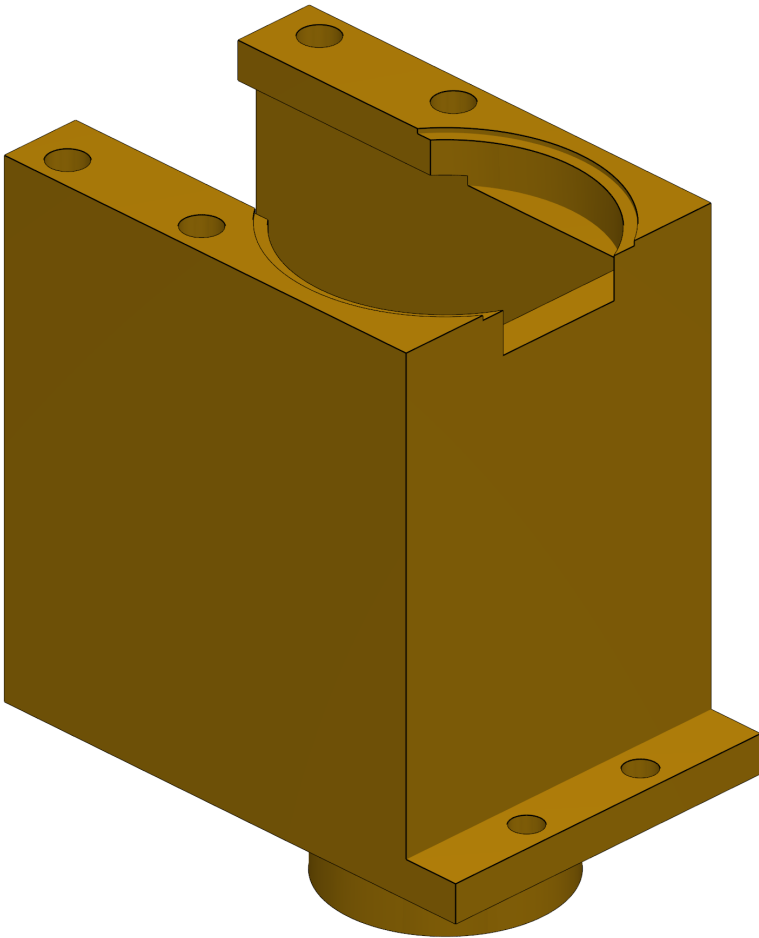


J4 servo base; lip tops relieved off the 6706 inner ring


features found on its own faces
(cylindrical holes, measured):

1 x 6706 inner-ring relief	0	33.50	depth 0.5
1 x shaft clearance bore	0	31.00	depth 4.5
1 x hole 020.40	0	20.40	depth 4.3
1 x hole 016.00	0	16.00	depth 14.0
2 x M4 insert pocket	0	5.60	depth 13.2
4 x M3 insert pocket	0	4.10	depth 7.5
6 x M3 clearance	0	3.40	depth 4.0







front (-y)

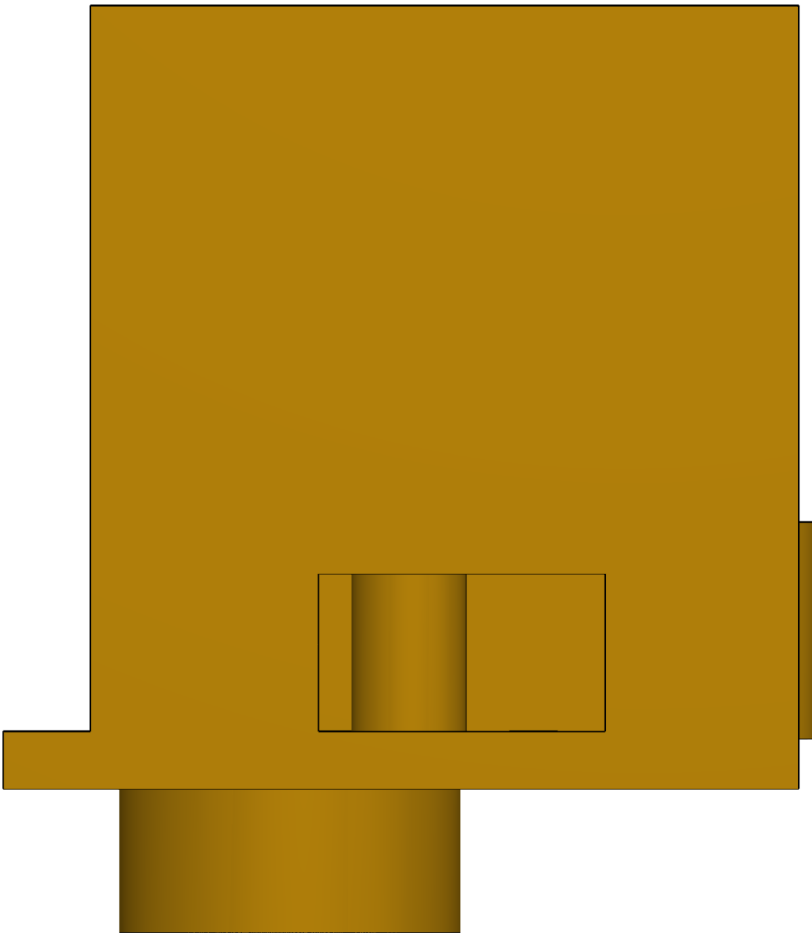



side (+x)

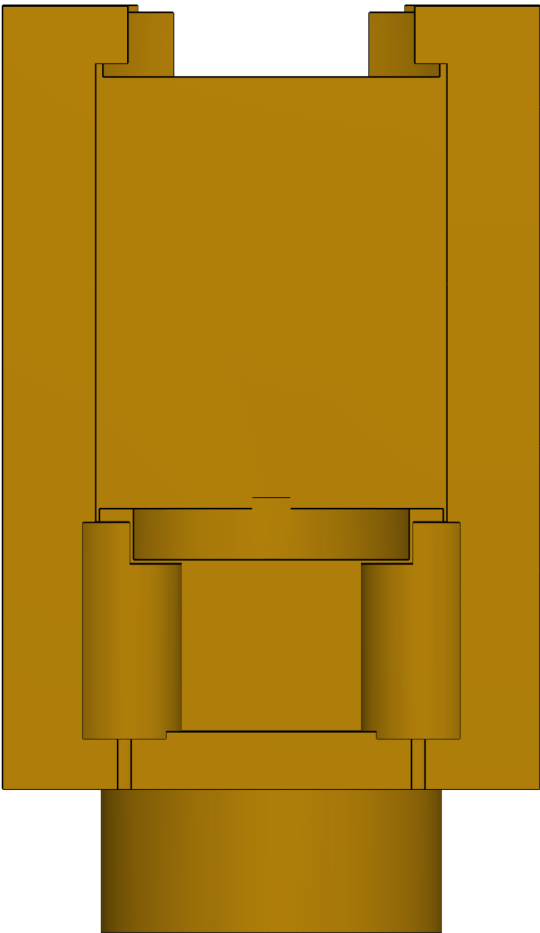

j4_base -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

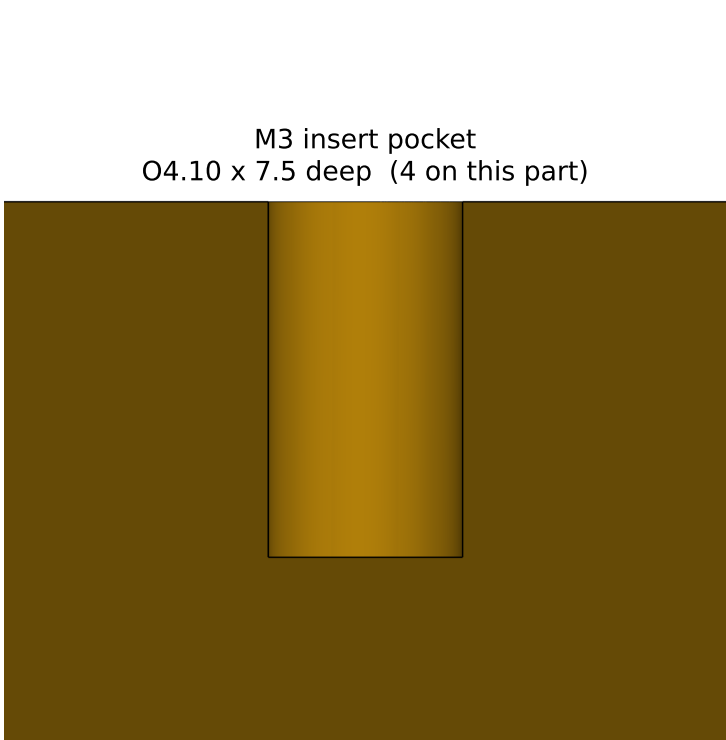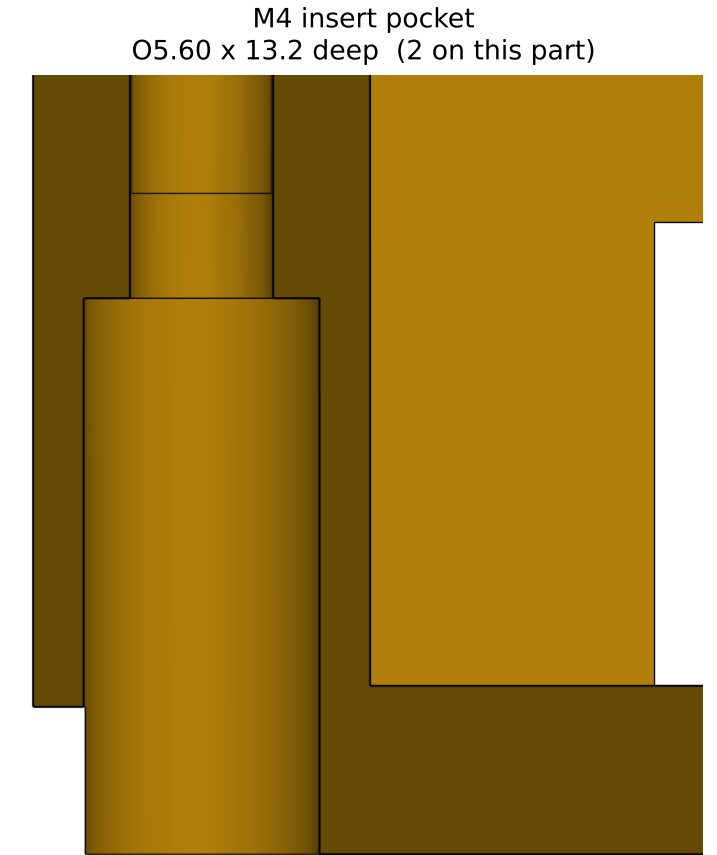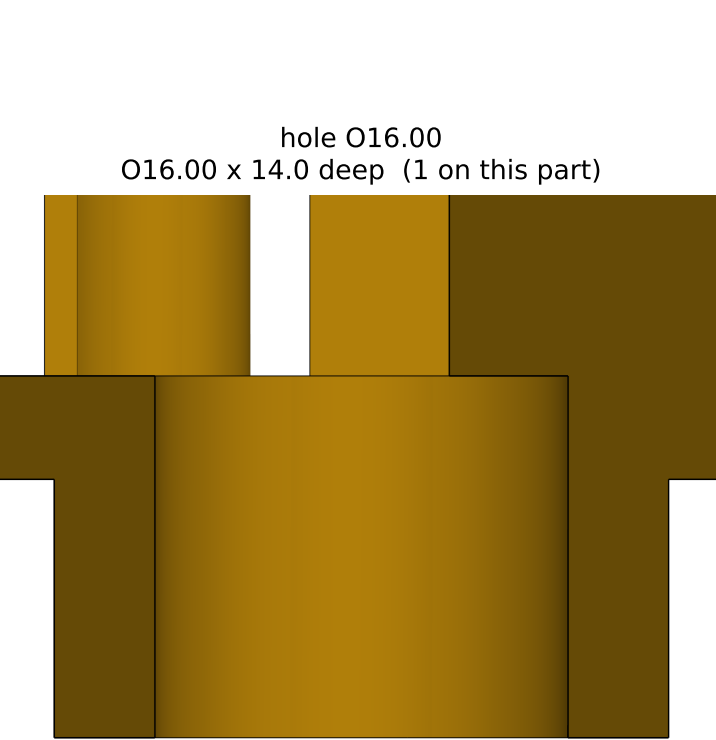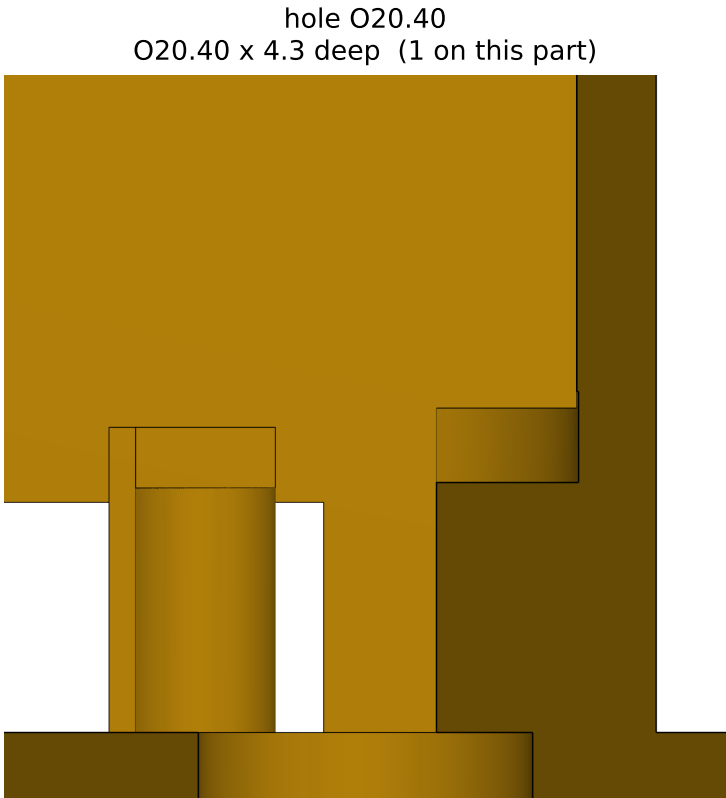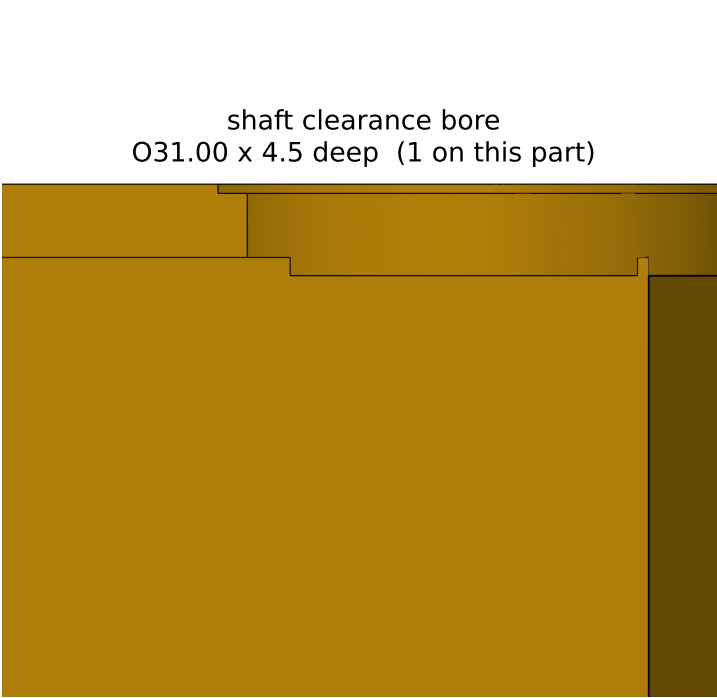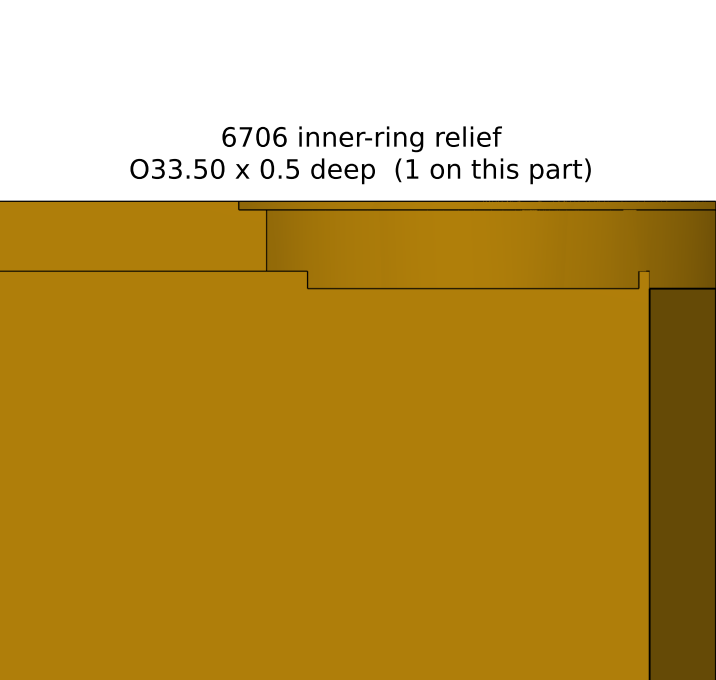



Part 19 of 27: j4_cap (print 1) 58 x 45 x 10 mm

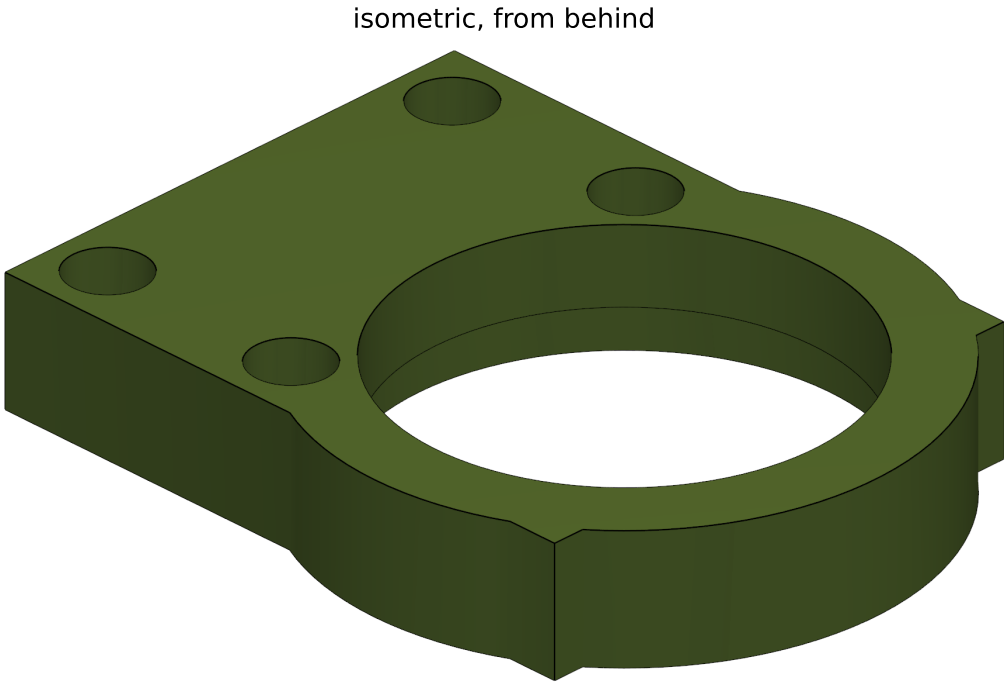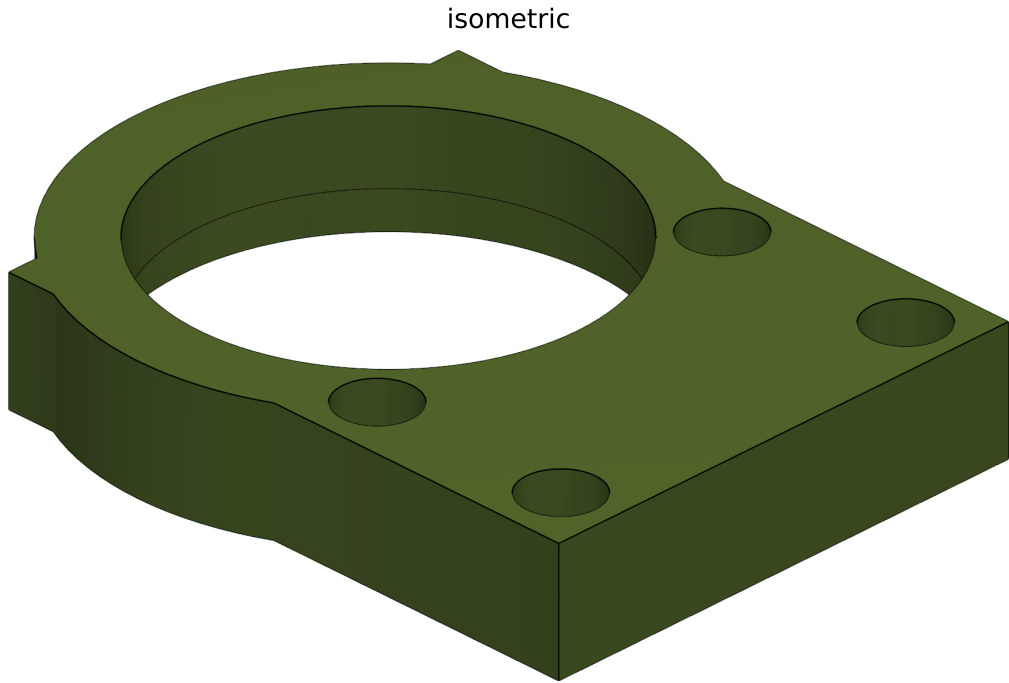





J4 cap, holds the 6706



features found on its own faces
(cylindrical holes, measured):

1 x 6706 bearing pocket	0	37.02	depth 4.0
1 x 6706 outer-race shoulder bore	0	34.00	depth 6.0
4 x M3 head counterbore	0	6.20	depth 3.8
4 x M3 clearance	0	3.40	depth 6.2

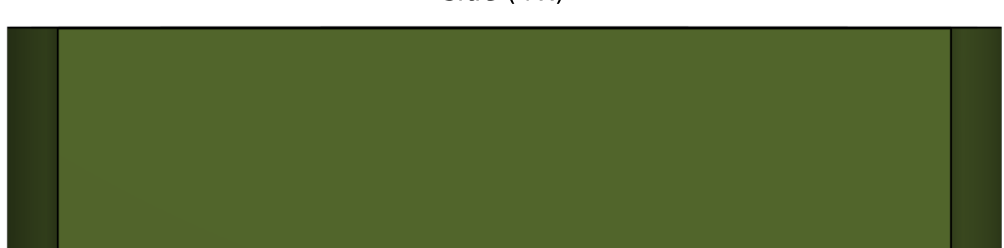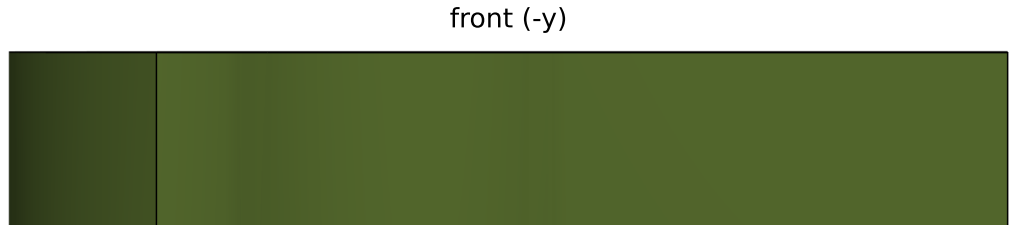

j4_cap -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

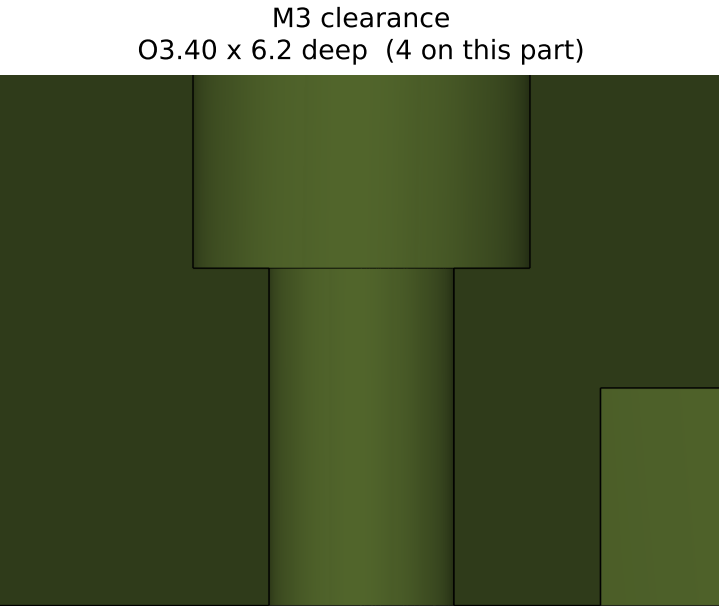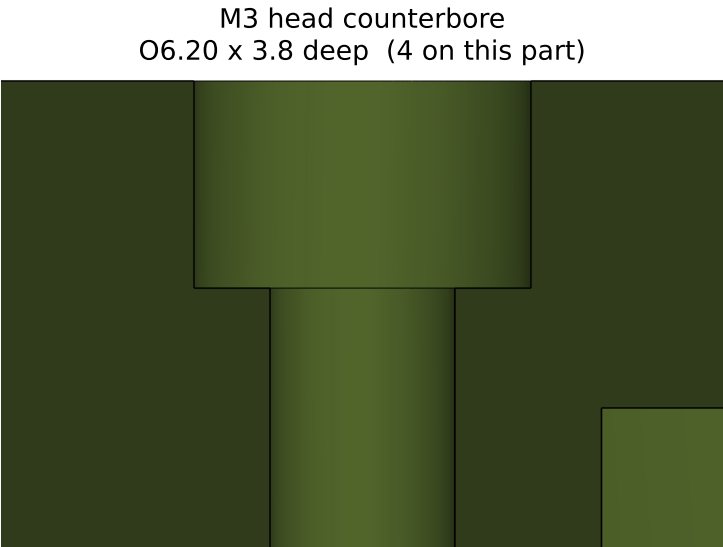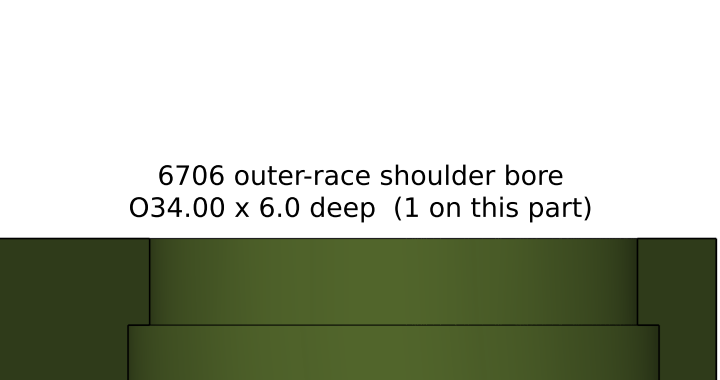
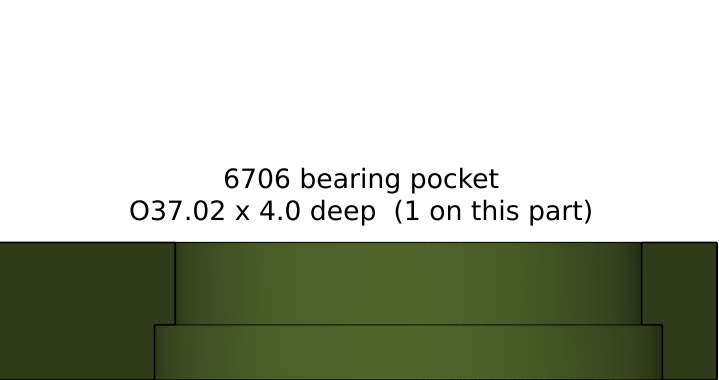


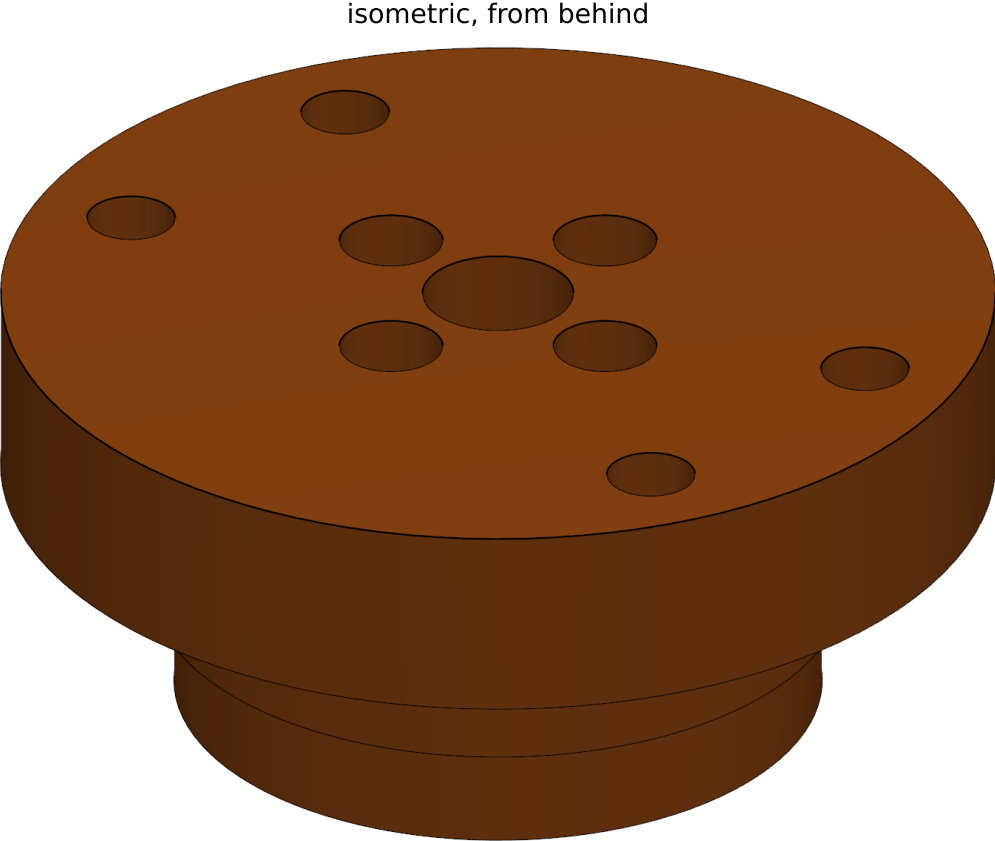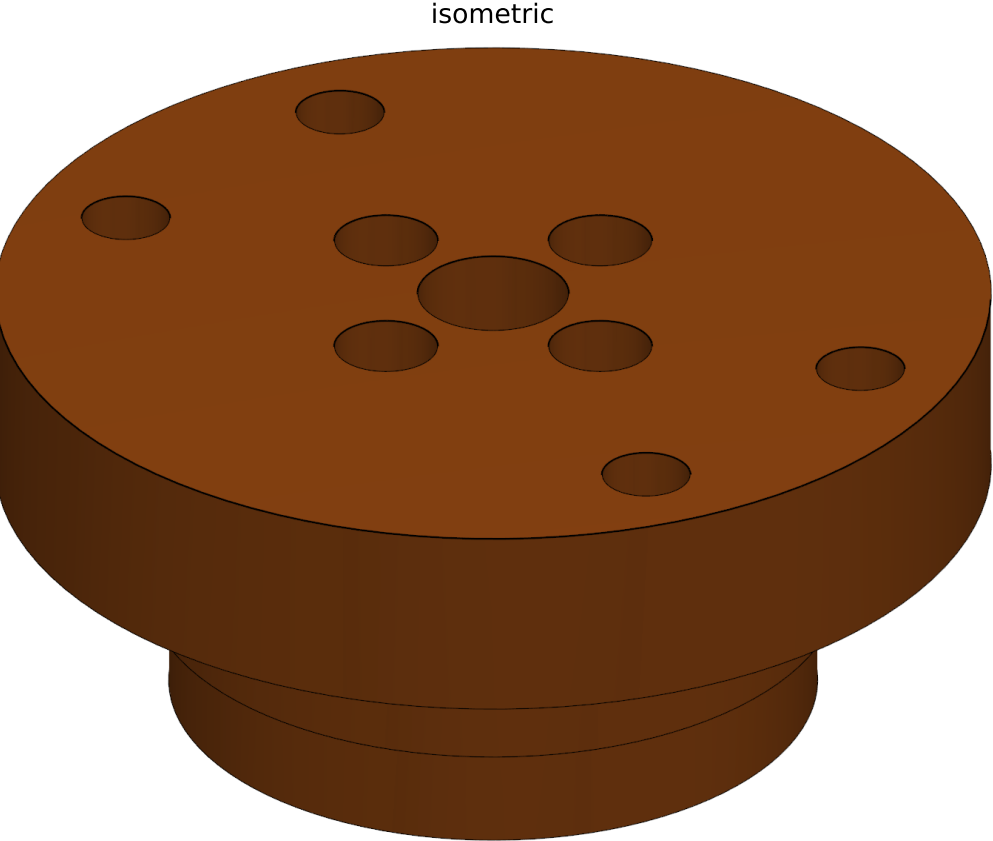





J4 hub, carries the J5 fork

features found on its own faces
(cylindrical holes, measured):

1 x hole 07.00	0	7.00	depth 20.5
4 x horn-screw counterbore	0	4.80	depth 17.5
4 x M3 insert pocket	0	4.10	depth 7.5
4 x horn-screw hole	0	2.52	depth 3.0

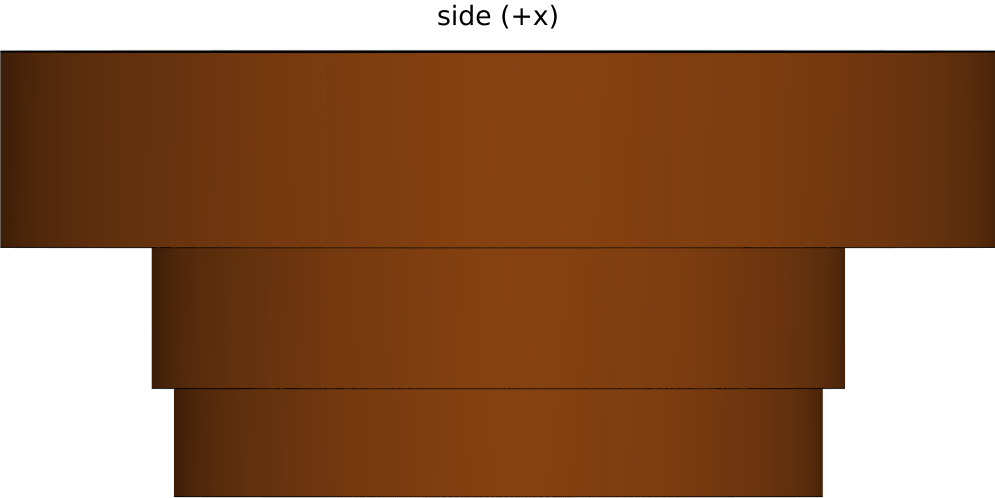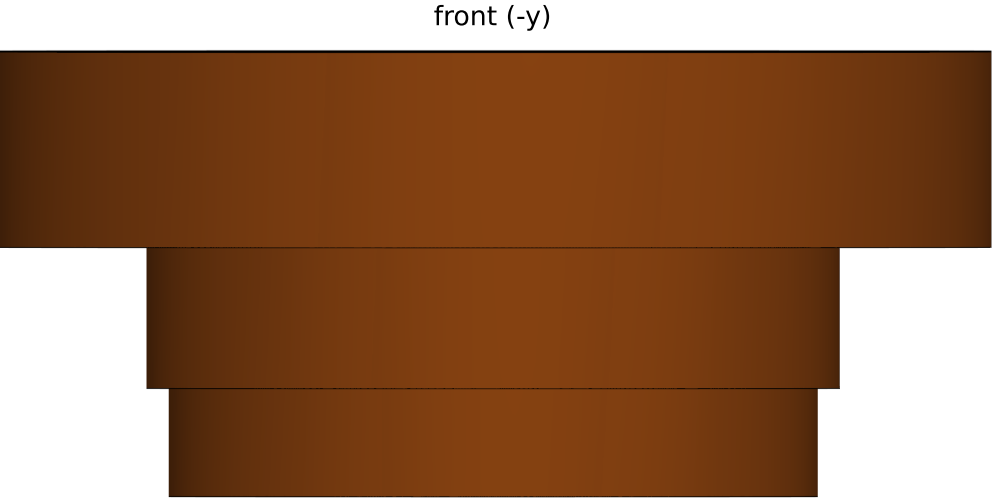


j4_hub -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

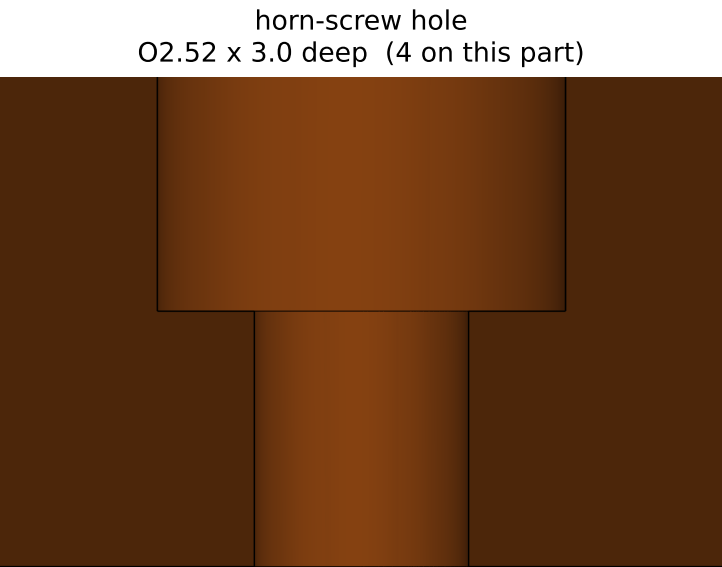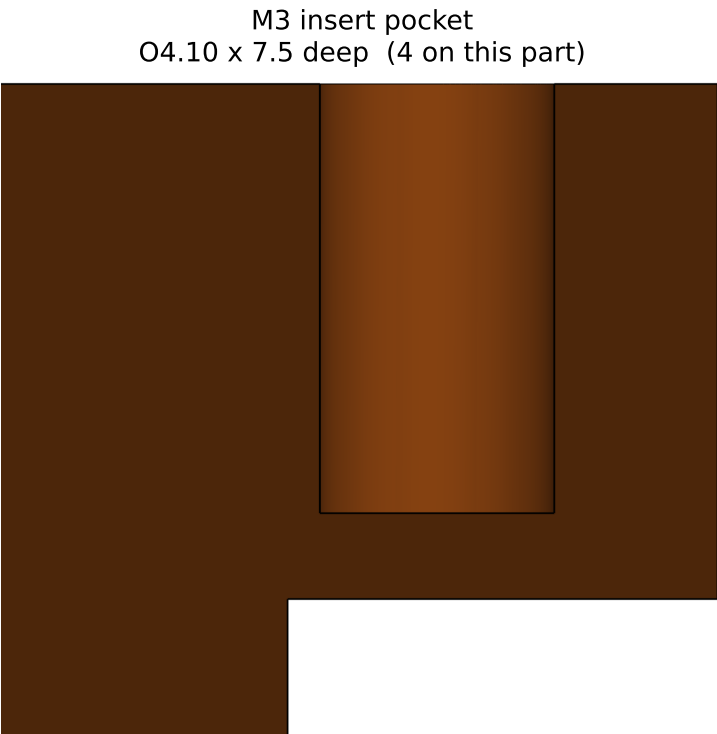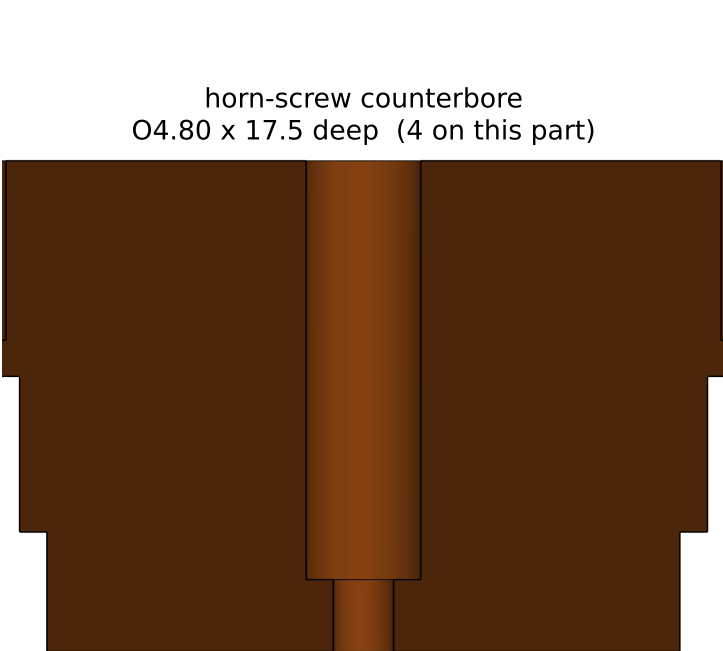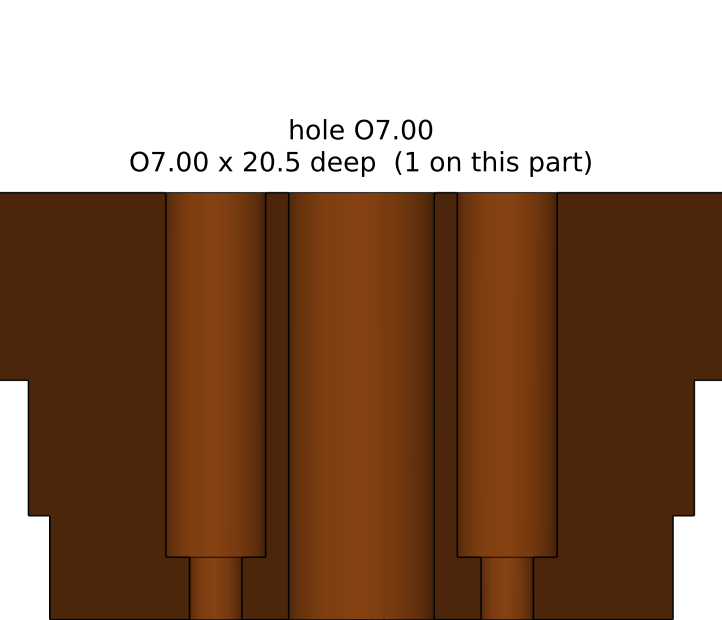


Part 21 of 27: J5_p1 (print 1) 66 x 50 x 48 mm

isometric

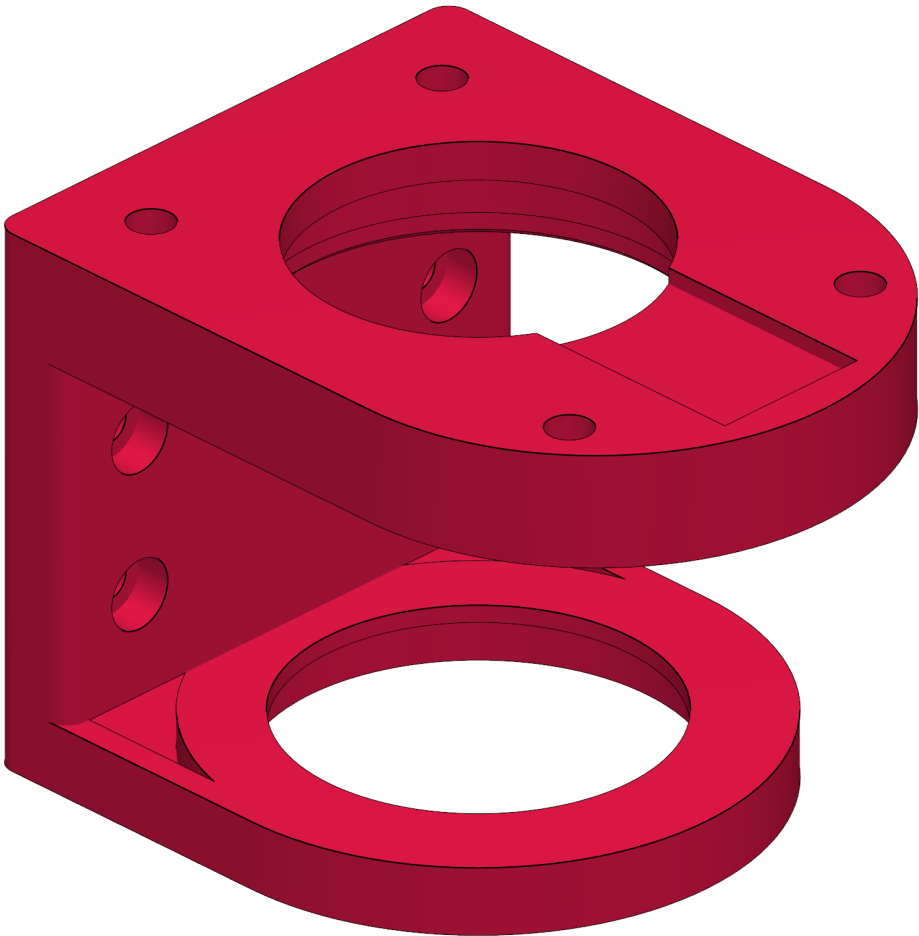

isometric, from behind

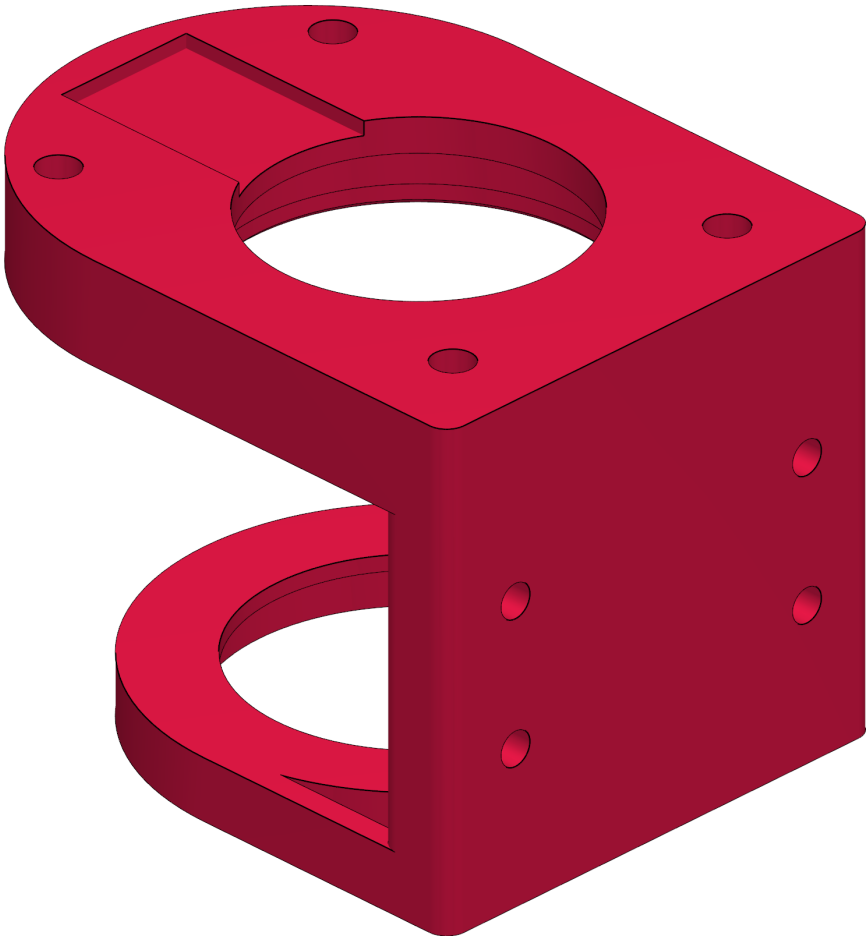

J5 fork


features found on its own faces
(cylindrical holes, measured):

1 x hole 045.20	0 45.20	depth 3.6
1 x 6706 bearing pocket	0 37.02	depth 1.5
2 x 6706 bearing pocket	0 37.00	depth 4.2
1 x 6706 outer-race shoulder bore	0 34.00	depth 0.1
1 x hole 033.00	0 33.00	depth 1.5
1 x shaft clearance bore	0 31.00	depth 3.4
4 x M3 head counterbore	0 6.20	depth 3.2
4 x M3 insert pocket	0 4.10	depth 8.1
4 x M3 clearance	0 3.40	depth 4.8







front (-y)



side (+x)

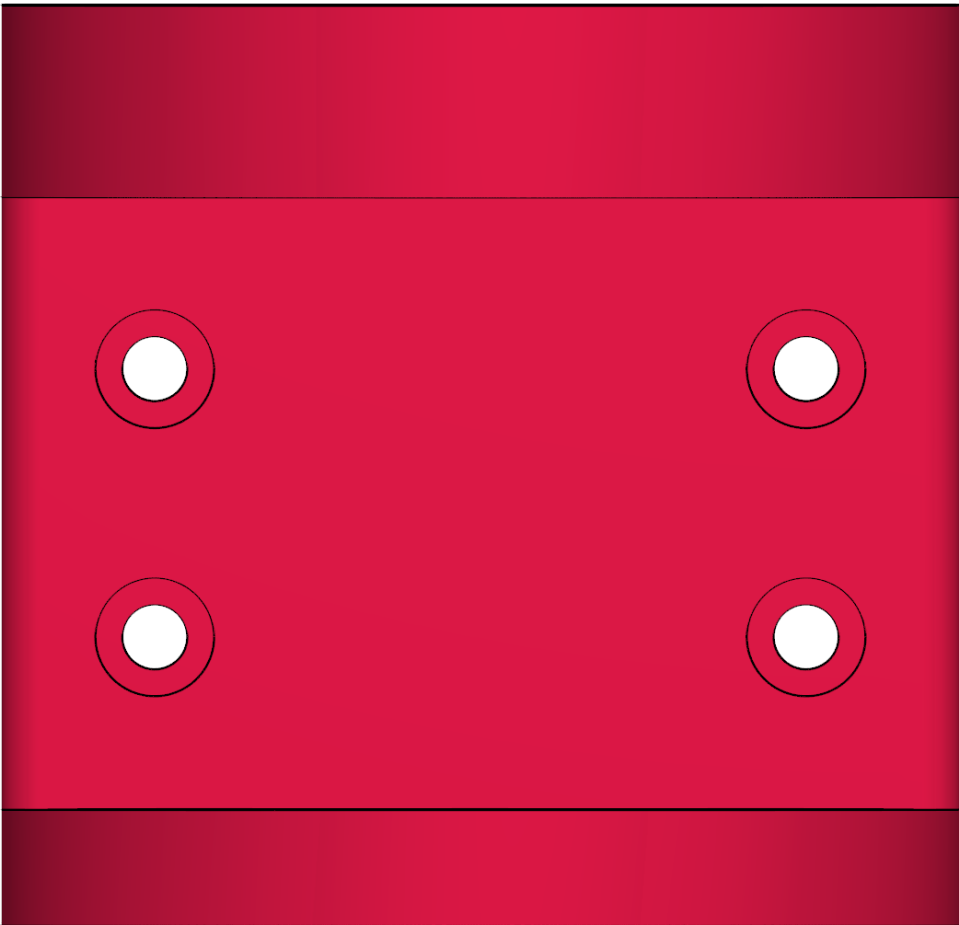


J5_p1 -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

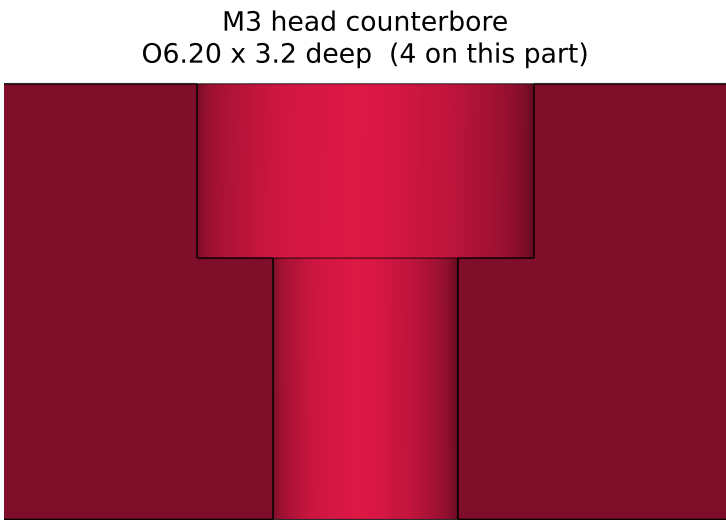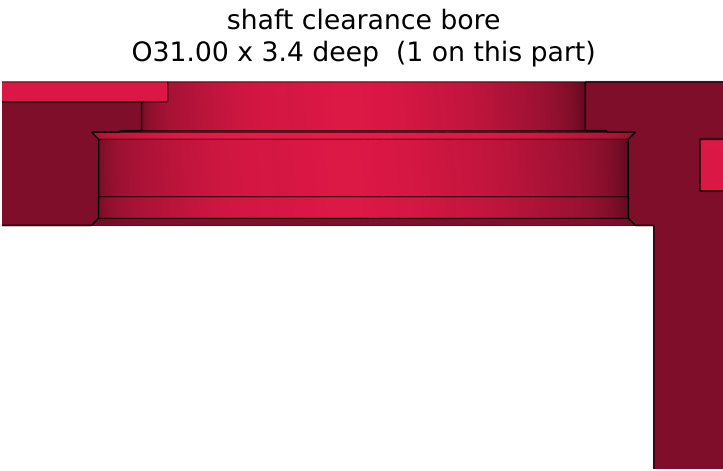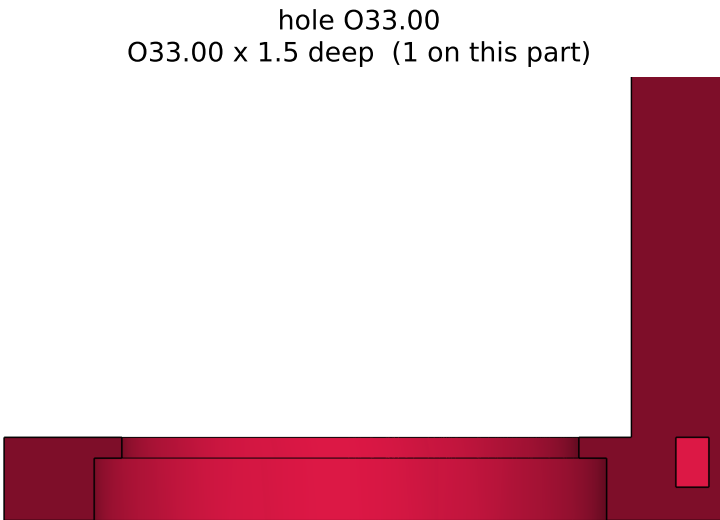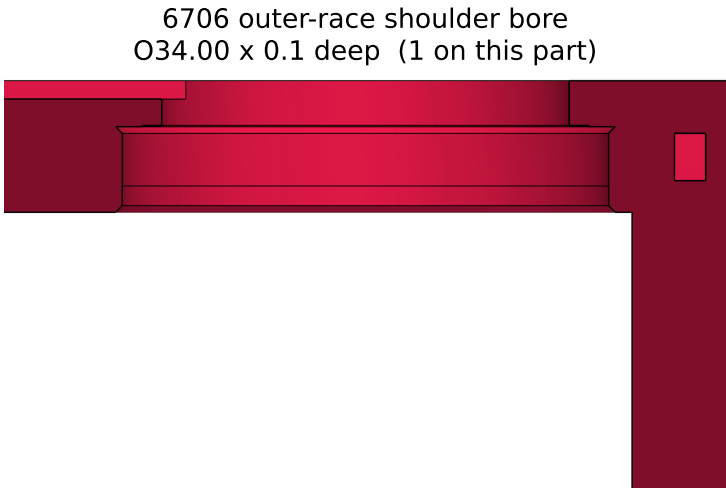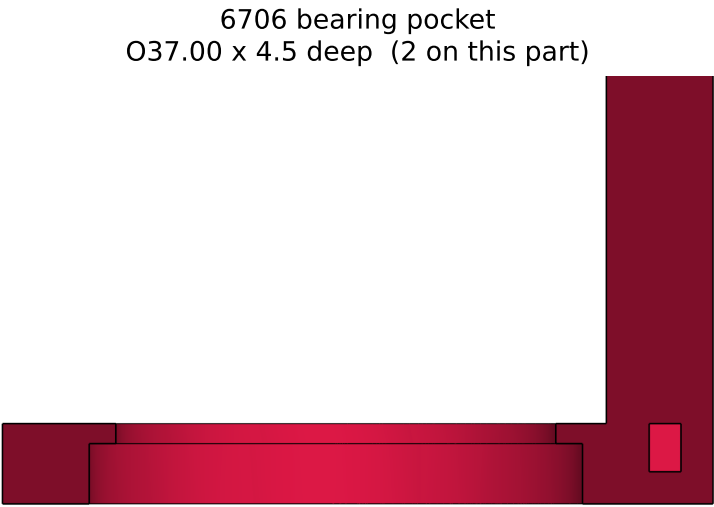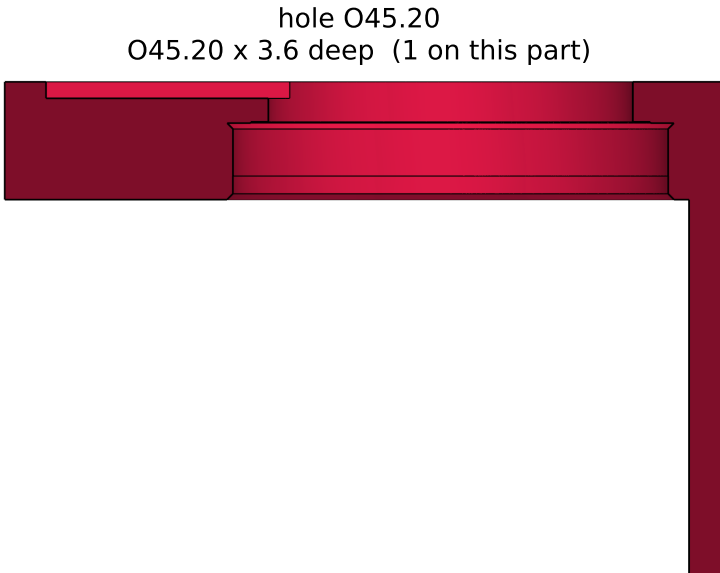


Part 22 of 27: J5_p2 (print 1) 66 x 50 x 37 mm

isometric

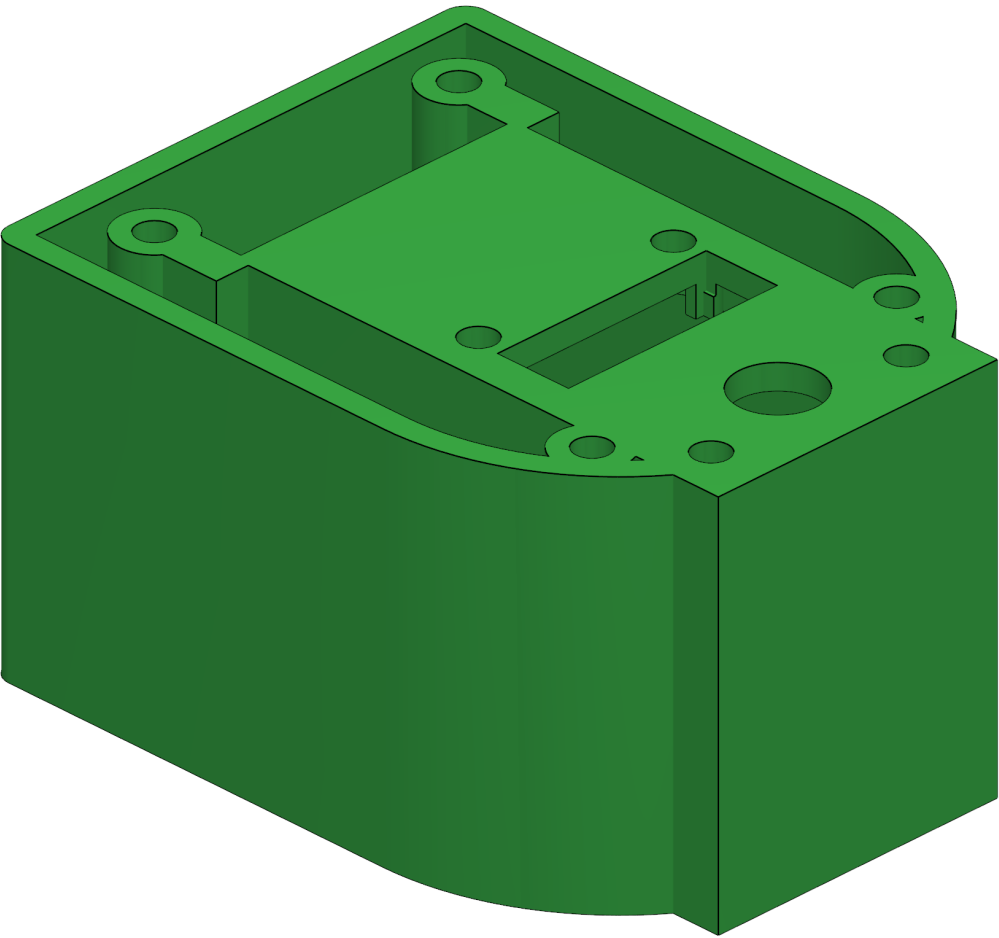

isometric, from behind

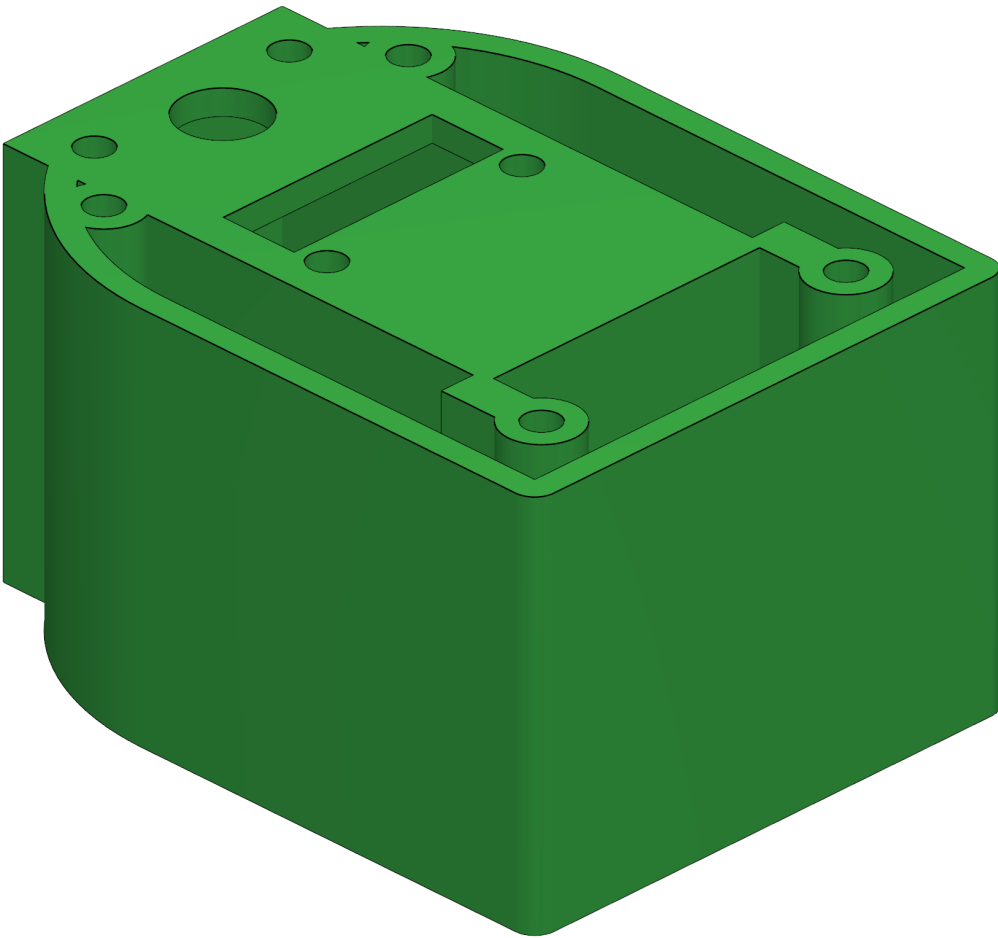

J5 servo cradle, bay 34.99 deep, 2.4 back wall


features found on its own faces
(cylindrical holes, measured):

1 x hole 045.20	0 45.20	depth 37.4
1 x cable exit	0 8.00	depth 2.4
8 x M3 clearance	0 3.40	depth 21.4




front (-y)



side (+x)

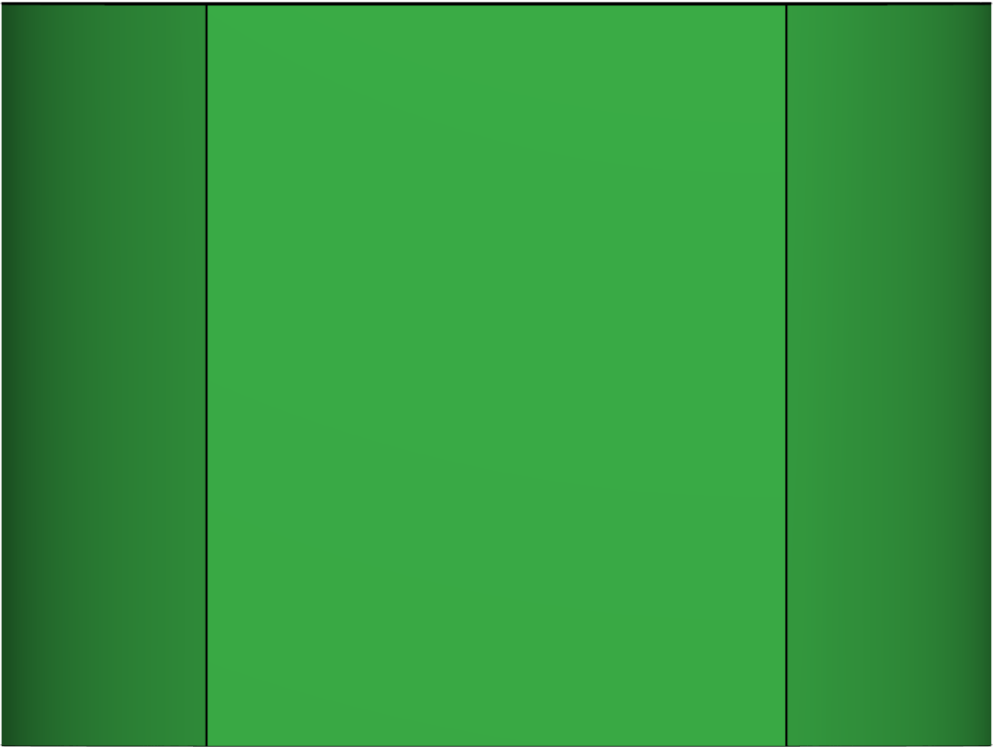

J5_p2 -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

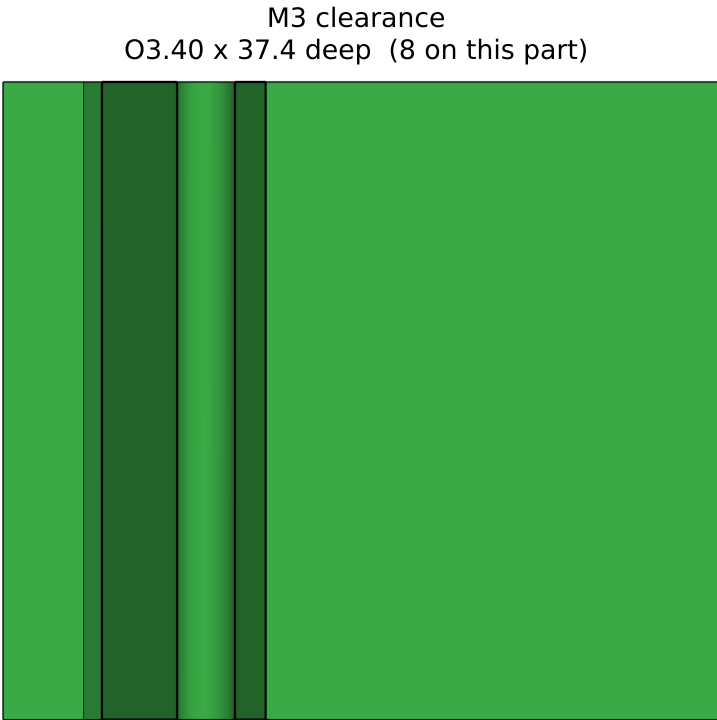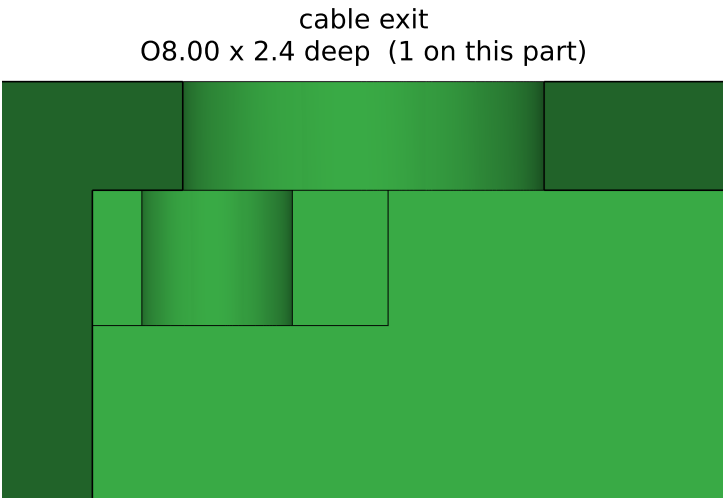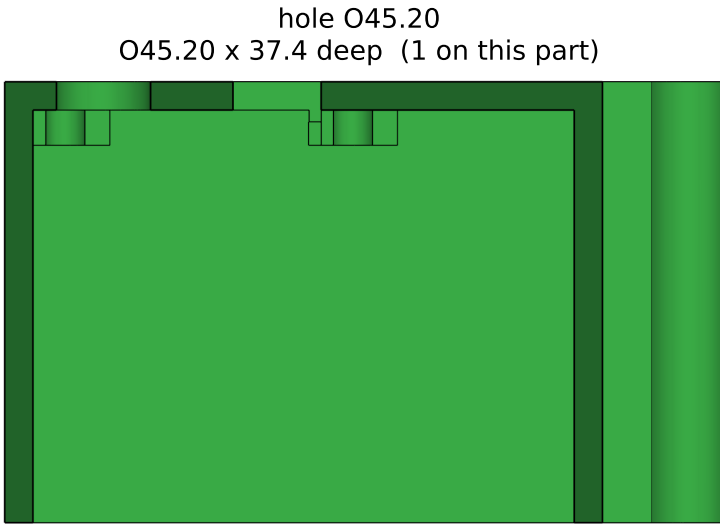

Part 23 of 27: J5_shaft (print 1) 30 x 30 x 45 mm

isometric



isometric, from behind



printed J5 axle

features found on its own faces
(cylindrical holes, measured):

1 x spigot / shaft bore	0	22.00	depth 42.0
5 x horn-screw hole	0	2.52	depth 3.5



front (-y)



side (+x)



J5_shaft -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

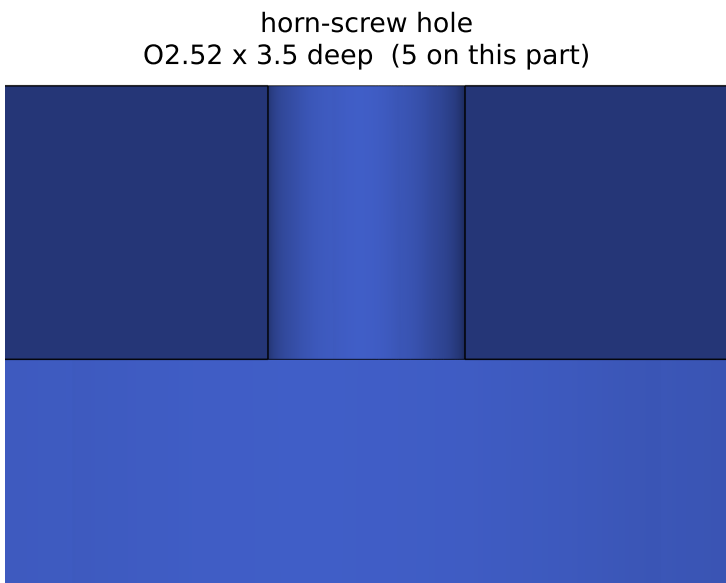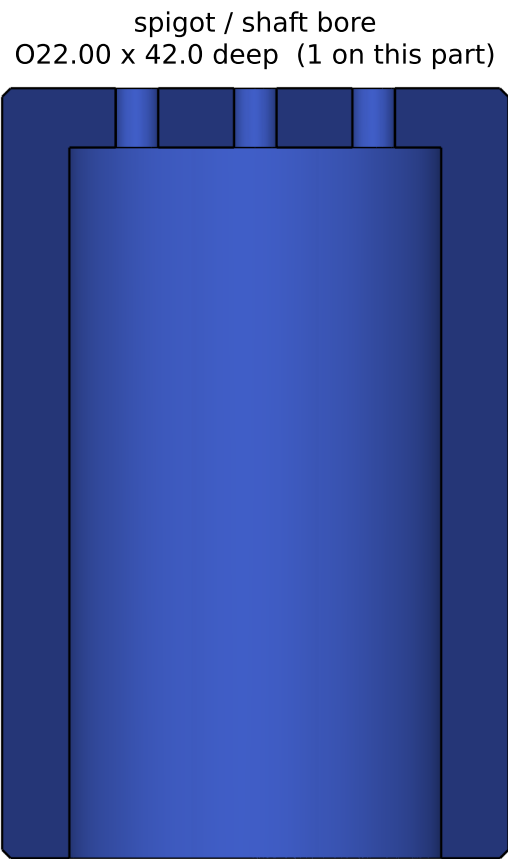


Part 24 of 27: J5_spacer (print 2) 32 x 32 x 3 mm

blade spacers, exactly 3.0 (close the J5 stack), print 2


features found on its own faces
(cylindrical holes, measured):

1 x collar bore 0 30.20 depth 3.0

isometric

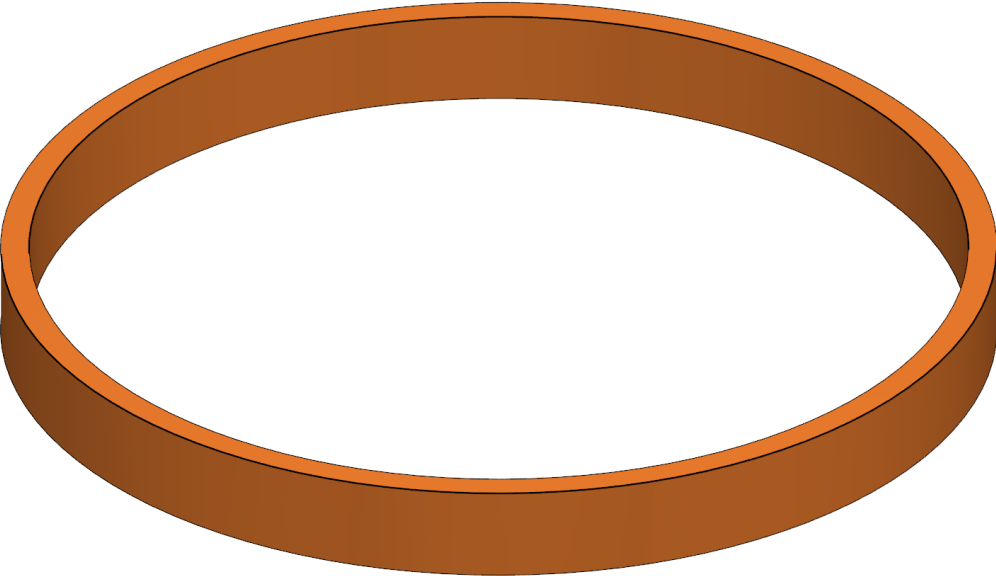

isometric, from behind

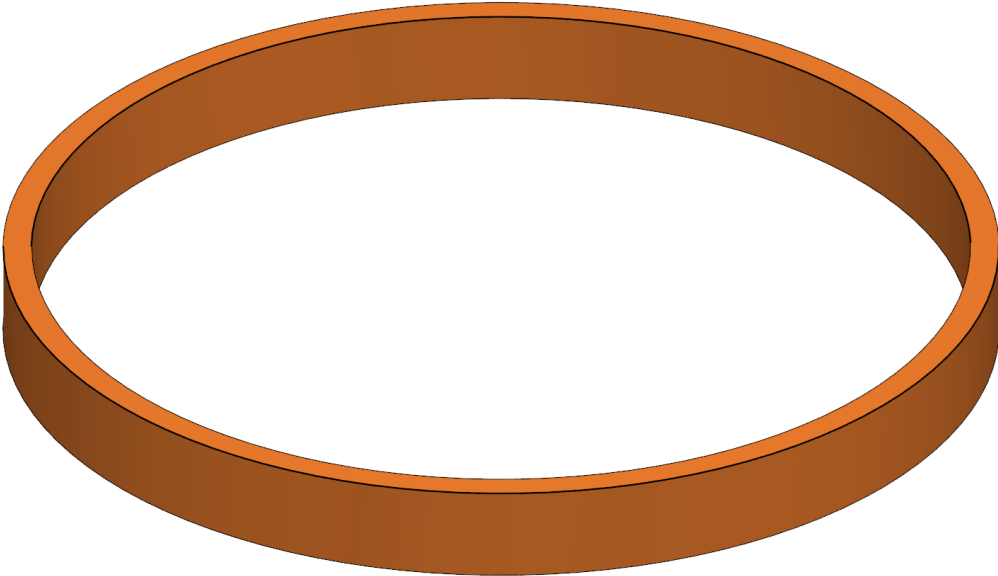


front (-y)




side (+x)



J5_spacer -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

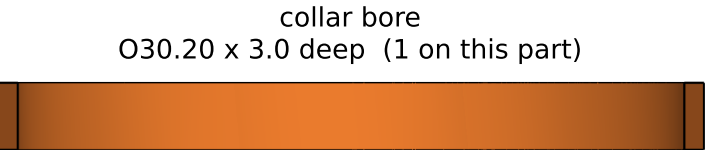


Part 25 of 27: j6_body (print 1) 87 x 54 x 43 mm

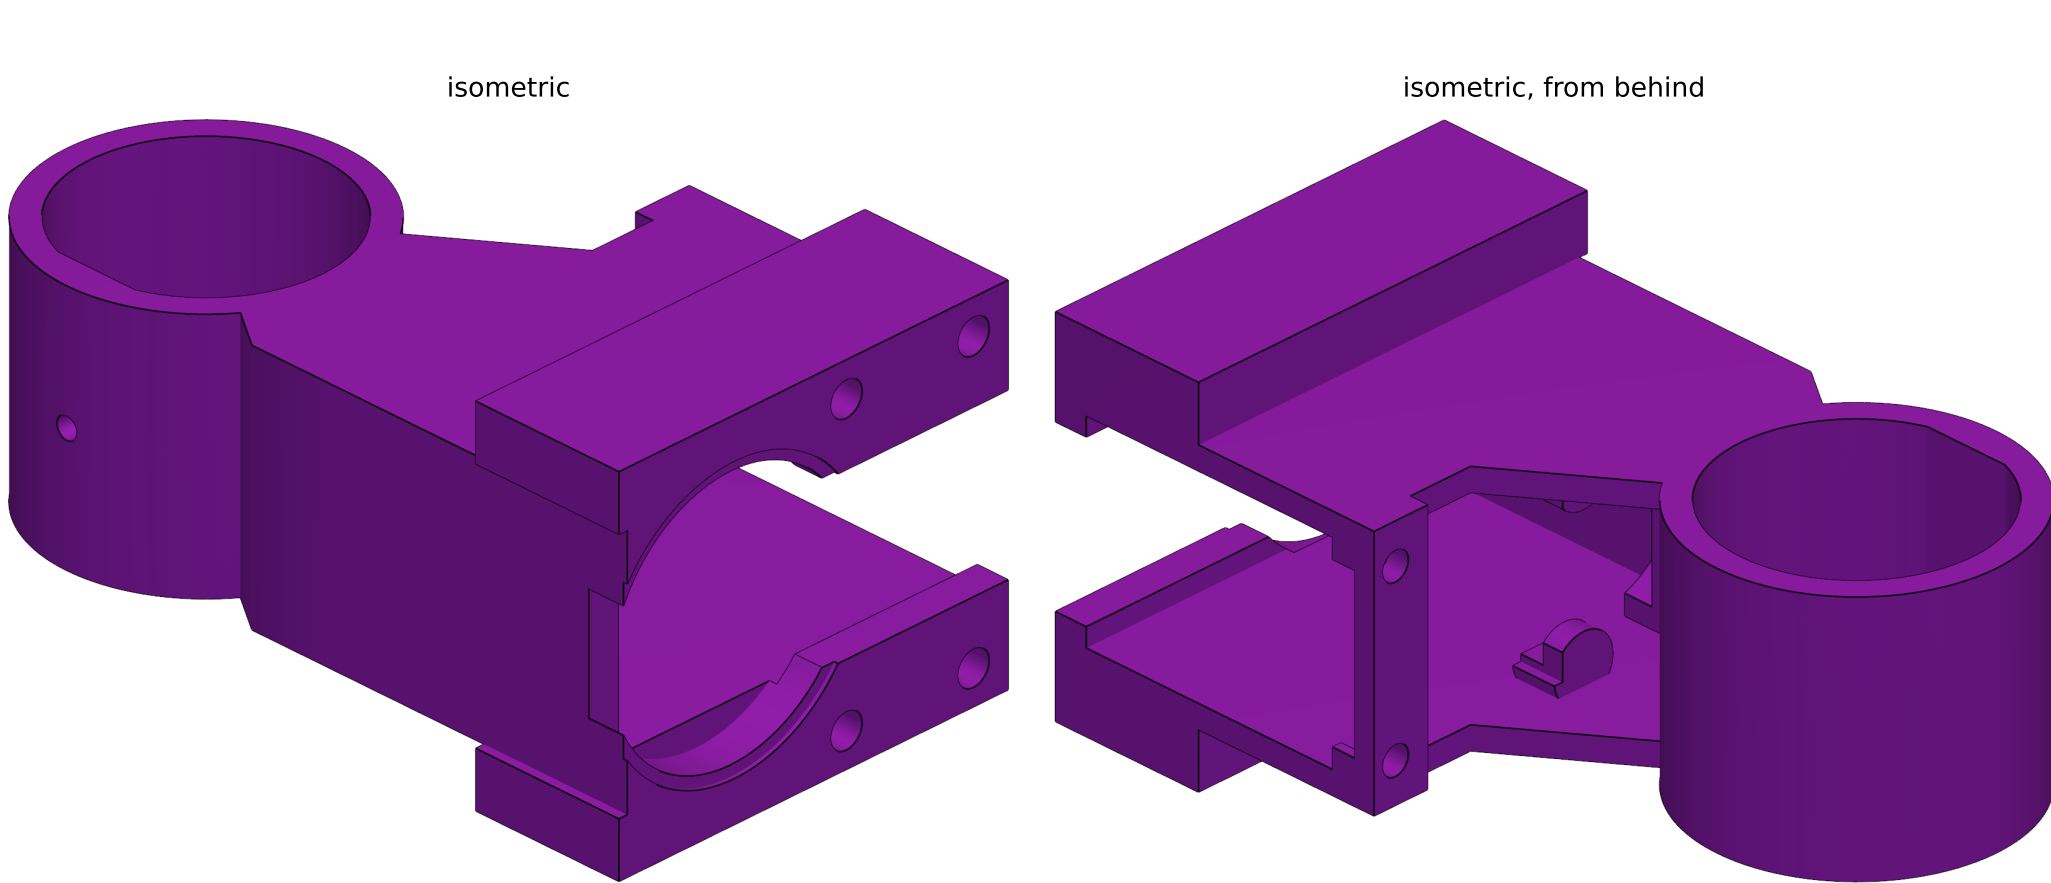






J5 blade + J6 servo housing

features found on its own faces
(cylindrical holes, measured):

1 x 6706 inner-ring relief	0	33.50	depth 0.5
1 x shaft clearance bore	0	31.00	depth 4.5
1 x collar bore	0	30.20	depth 30.0
1 x hole 020.40	0	20.40	depth 4.4
4 x M3 insert pocket	0	4.10	depth 7.5
2 x M3 clearance	0	3.40	depth 5.4
1 x M3 grub pilot	0	2.60	depth 3.9

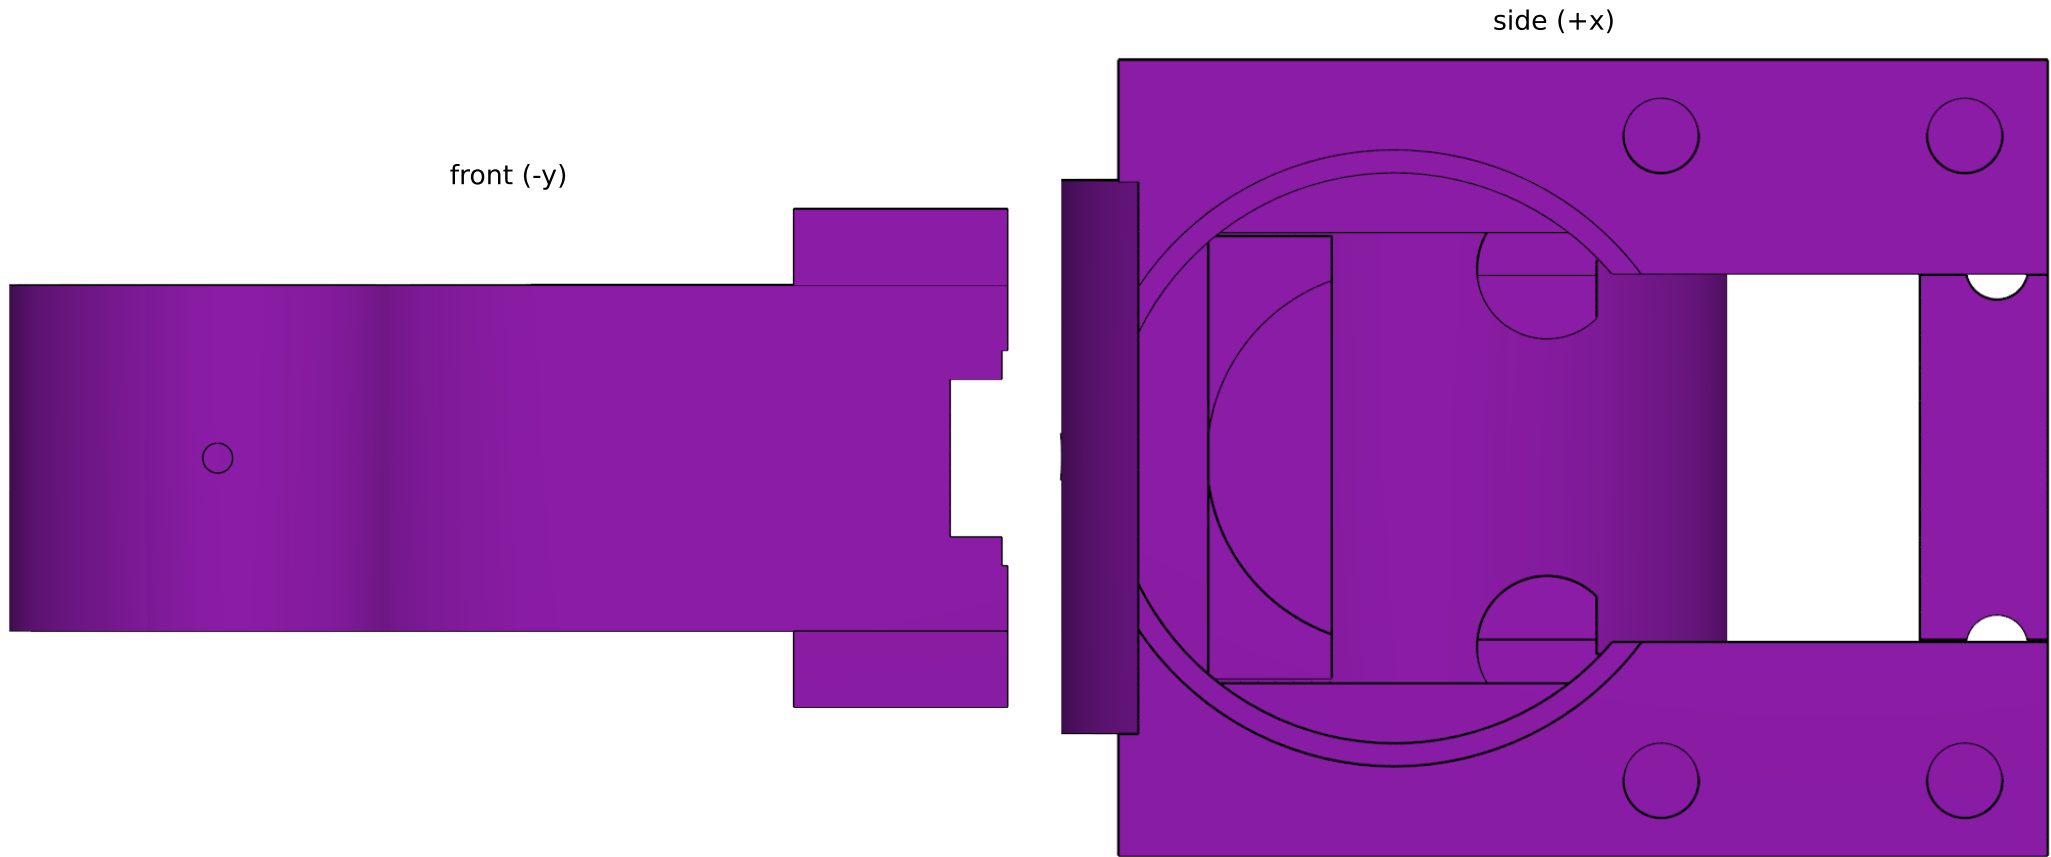


j6_body -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

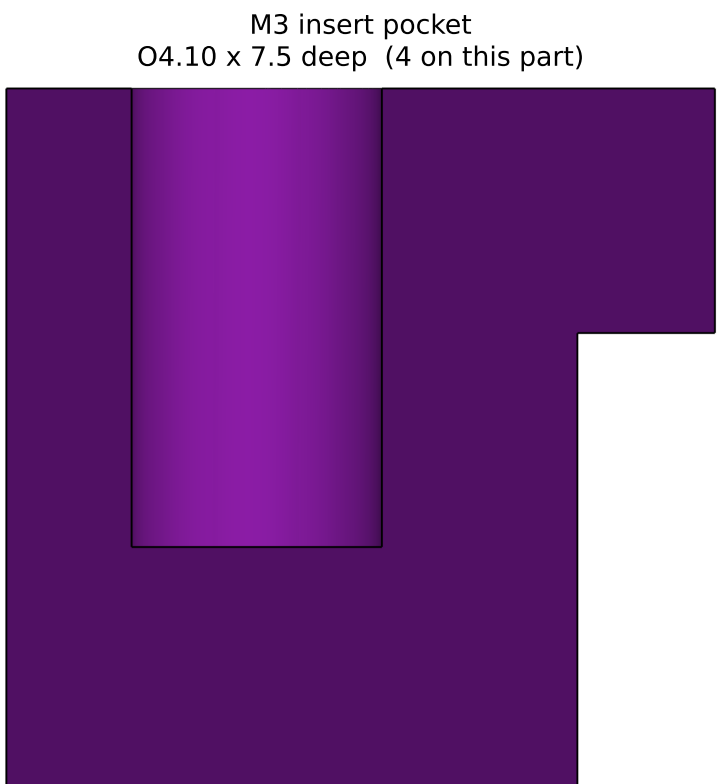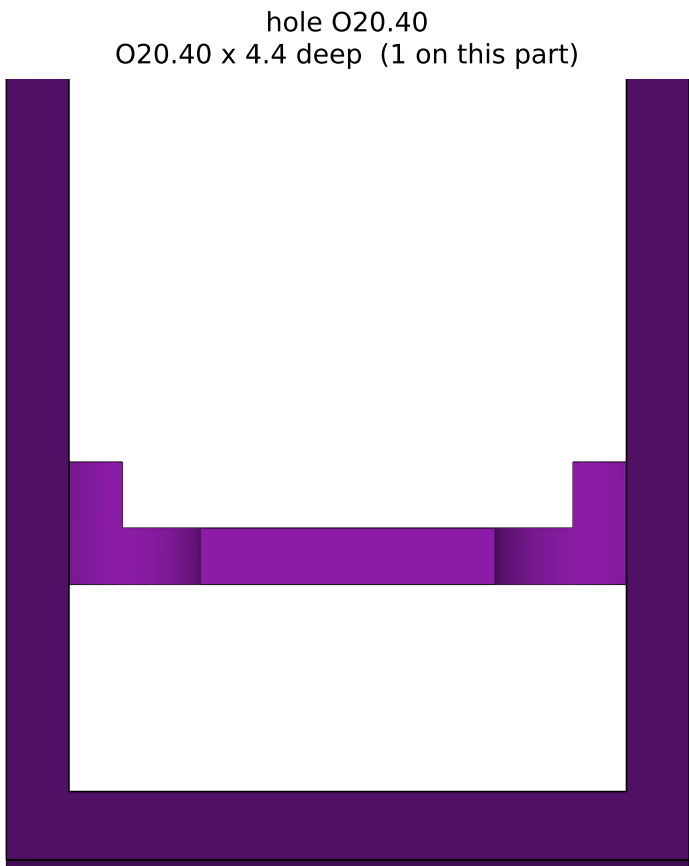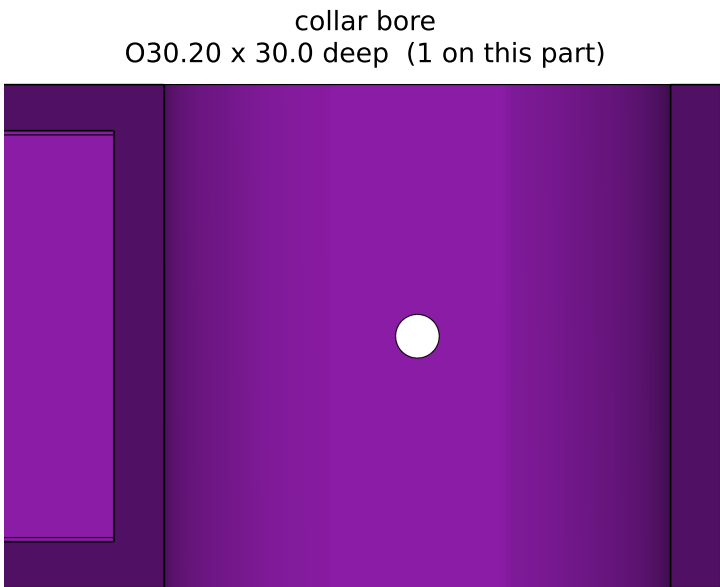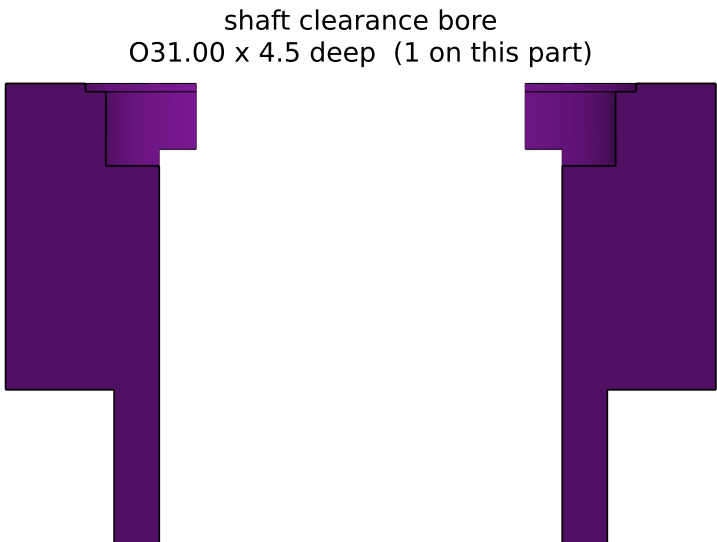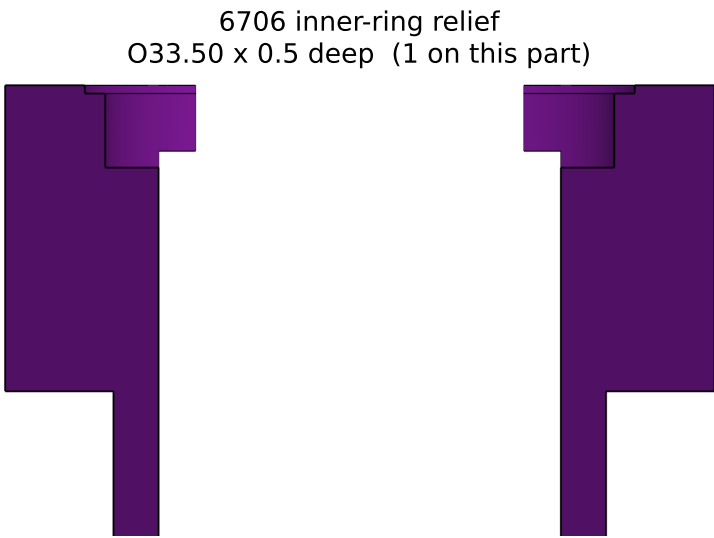


Part 26 of 27: j6_cap (print 1) 10 x 58 x 45 mm

isometric

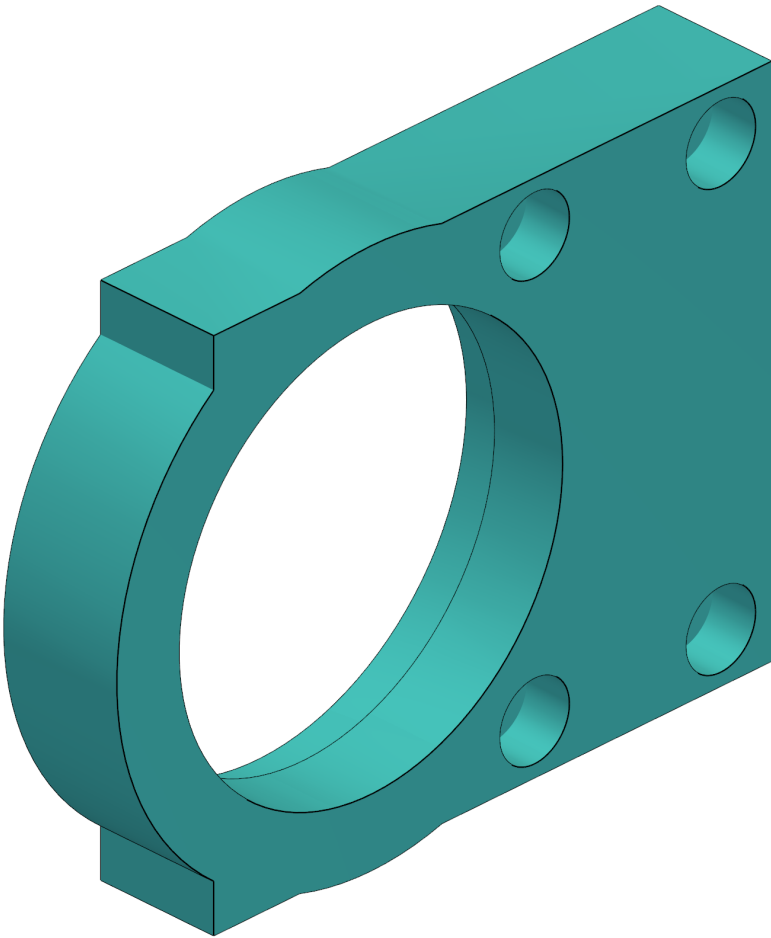

isometric, from behind

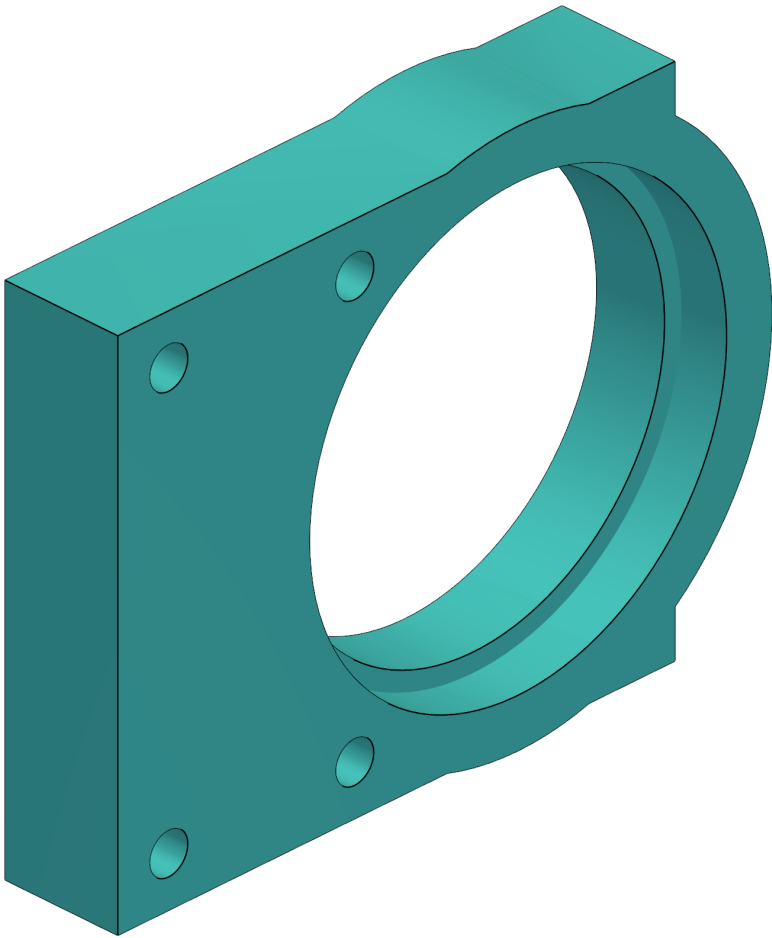


J6 cap, holds the 6706


features found on its own faces
(cylindrical holes, measured):

1 x 6706 bearing pocket	0	37.02	depth 4.0
1 x 6706 outer-race shoulder bore	0	34.00	depth 6.0
4 x M3 head counterbore	0	6.20	depth 3.8
4 x M3 clearance	0	3.40	depth 6.2





front (-y)

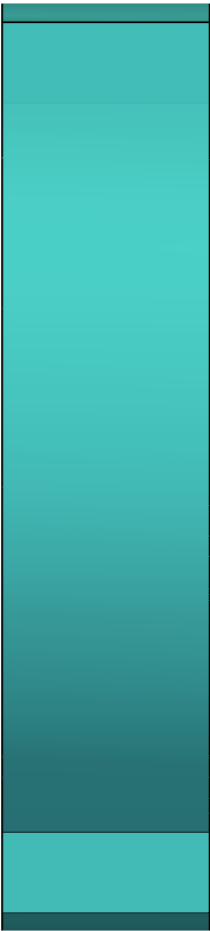

side (+x)

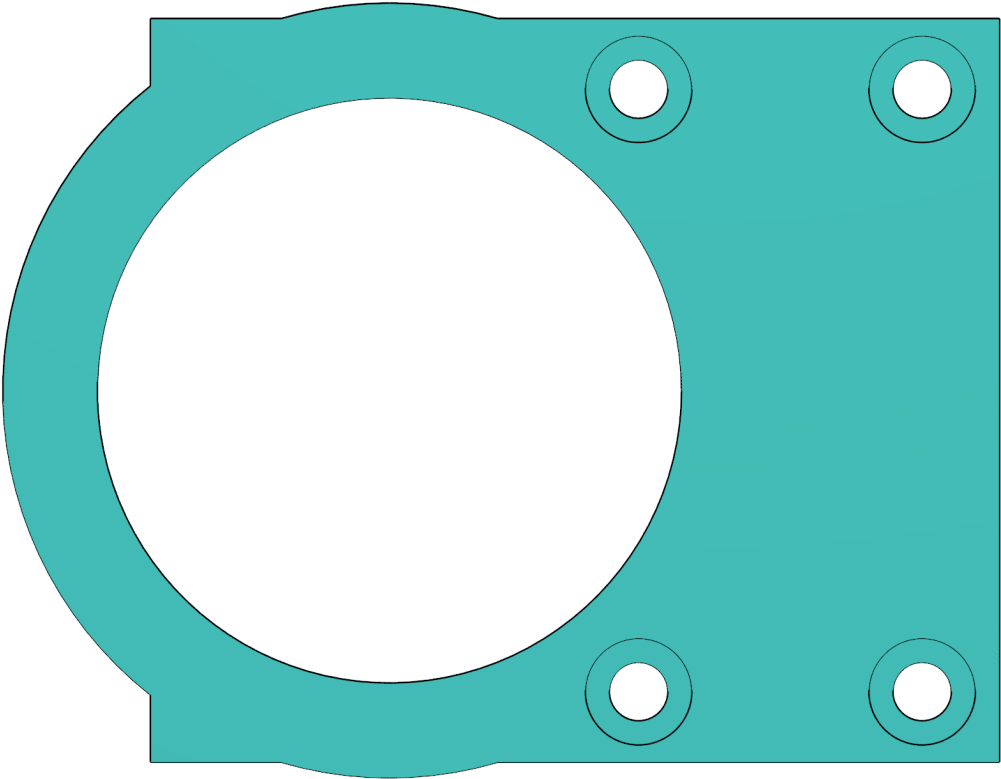


j6_cap -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

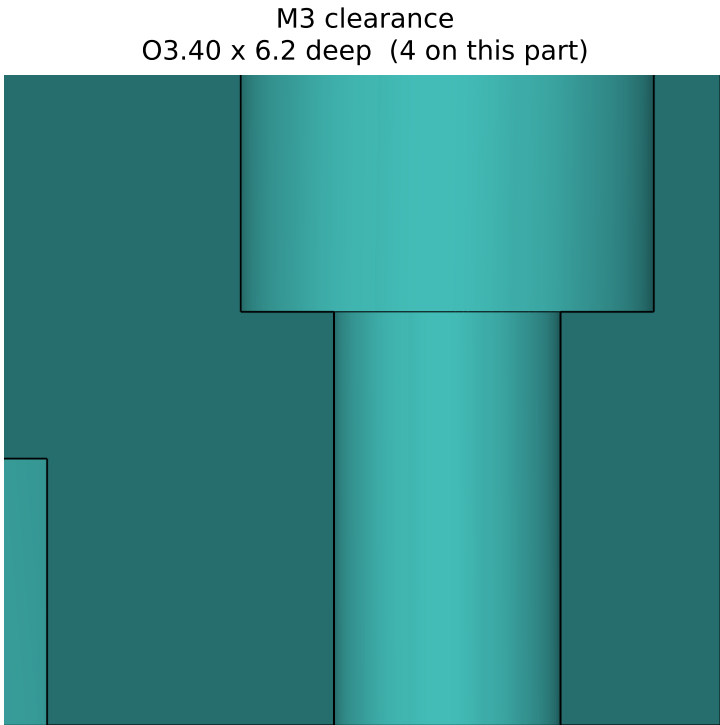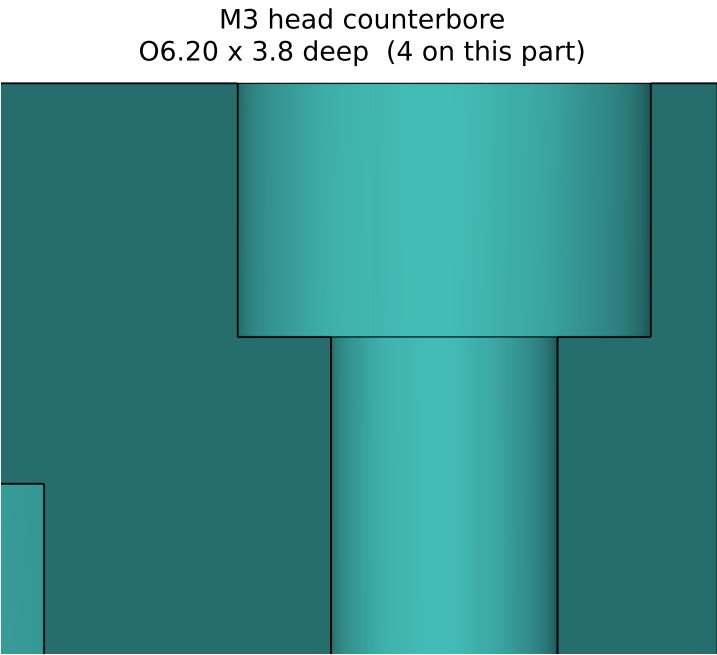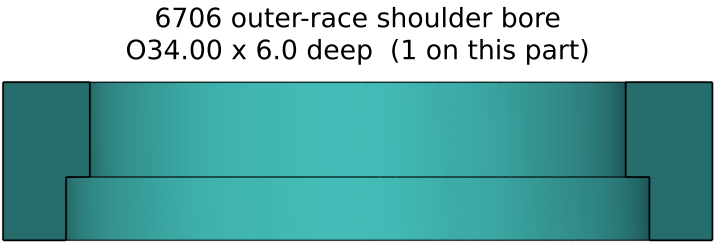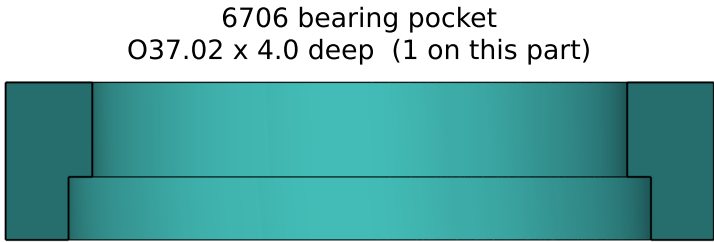


Part 27 of 27: j6_flange (print 1) 20 x 46 x 46 mm

isometric

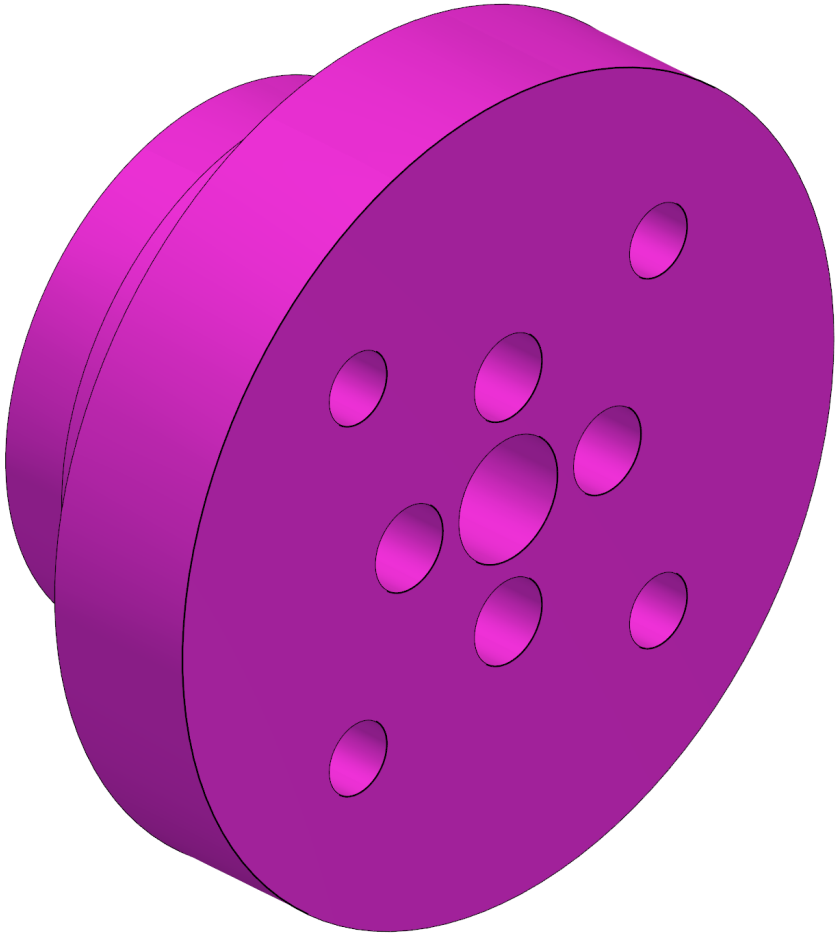

isometric, from behind

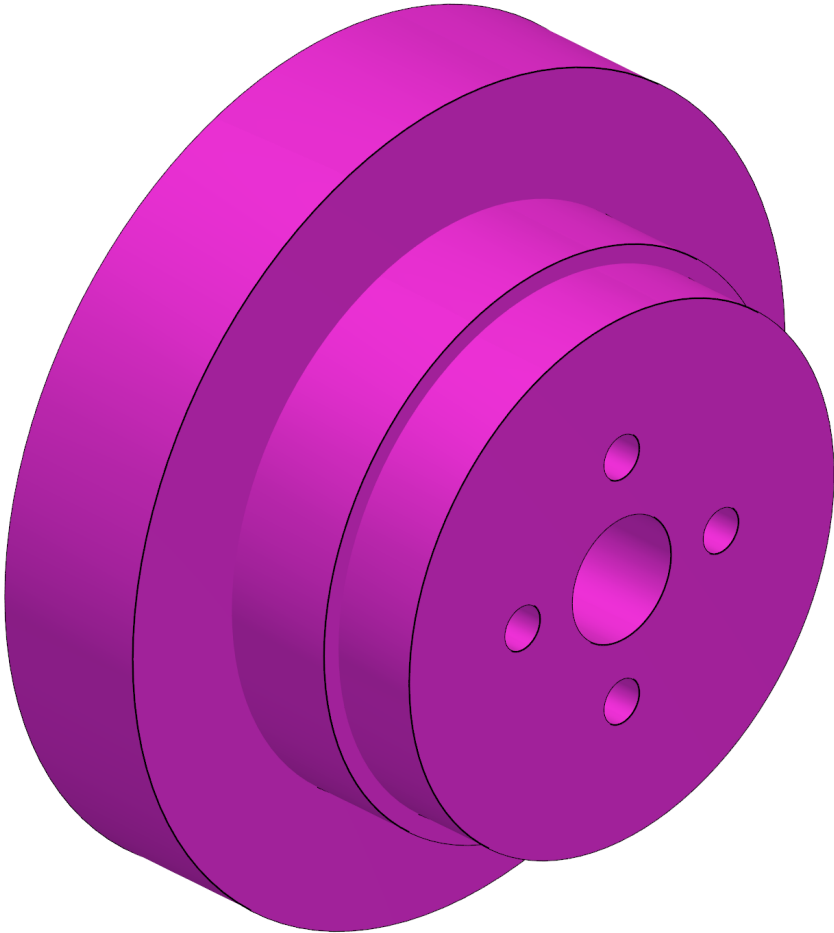


tool flange, bolts to the J6 horn


features found on its own faces
(cylindrical holes, measured):

1 x hole 07.00	0	7.00	depth 20.5
4 x horn-screw counterbore	0	4.80	depth 17.5
4 x M3 insert pocket	0	4.10	depth 7.5
4 x horn-screw hole	0	2.52	depth 3.0

front (-y)

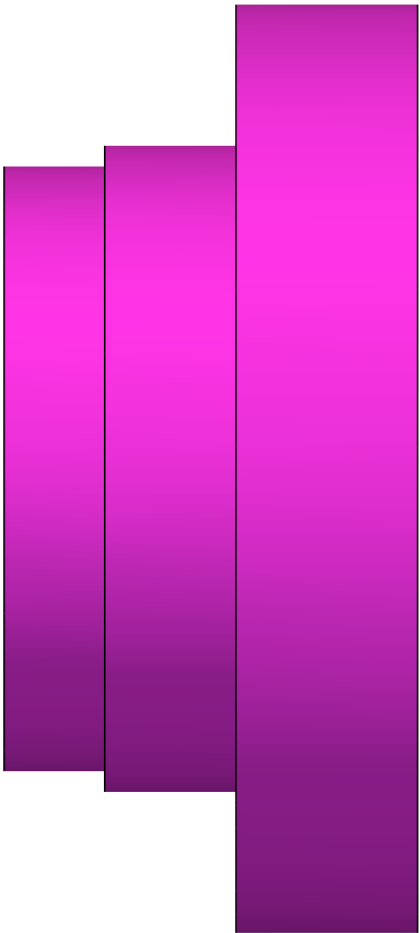

side (+x)

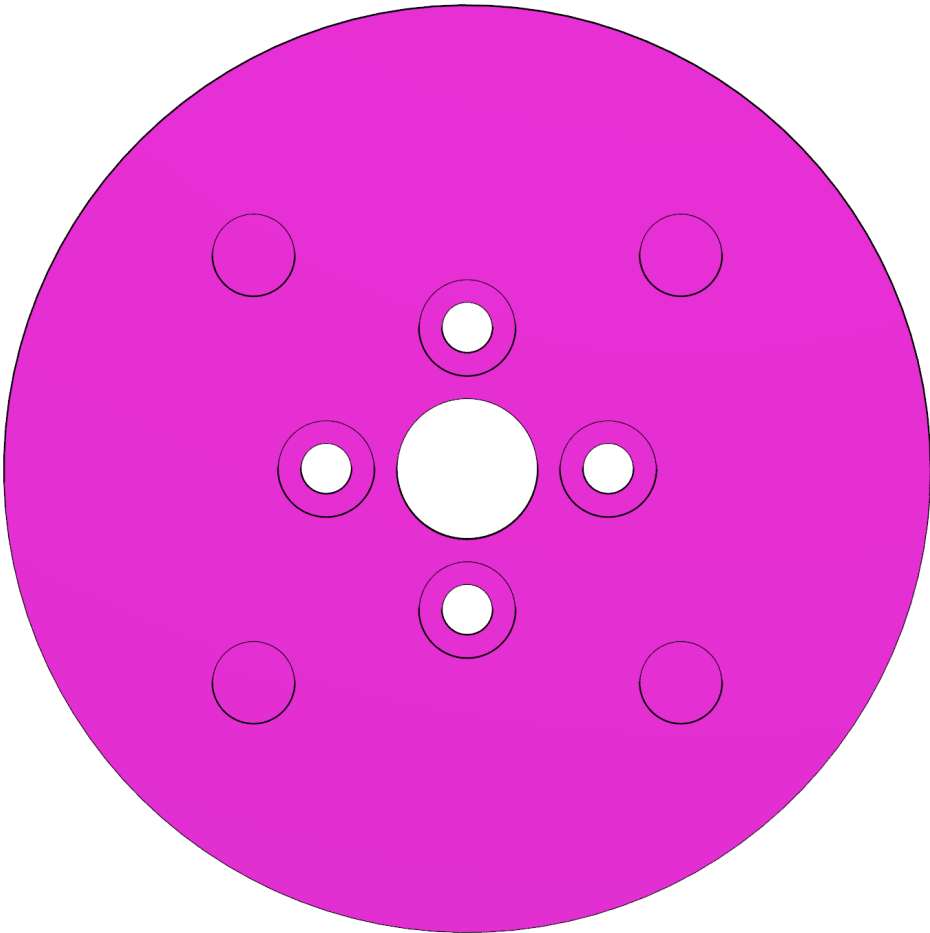

j6_flange -- attention to detail: section through each feature's axis (cut face darker), measured on the part's own faces

