



Pose: home (straight up, as modelled) J1..J6 = +0, +0, +0, +0, +0, +0 deg


isometric

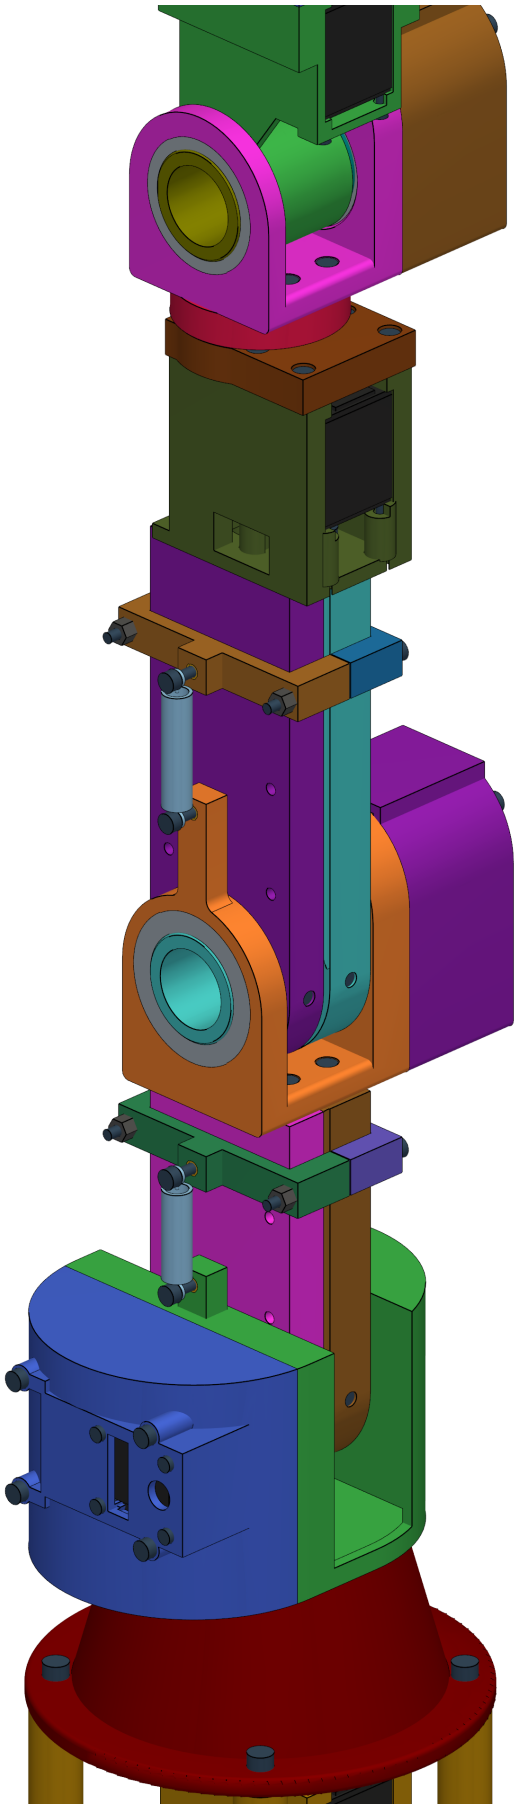


side (from -y)

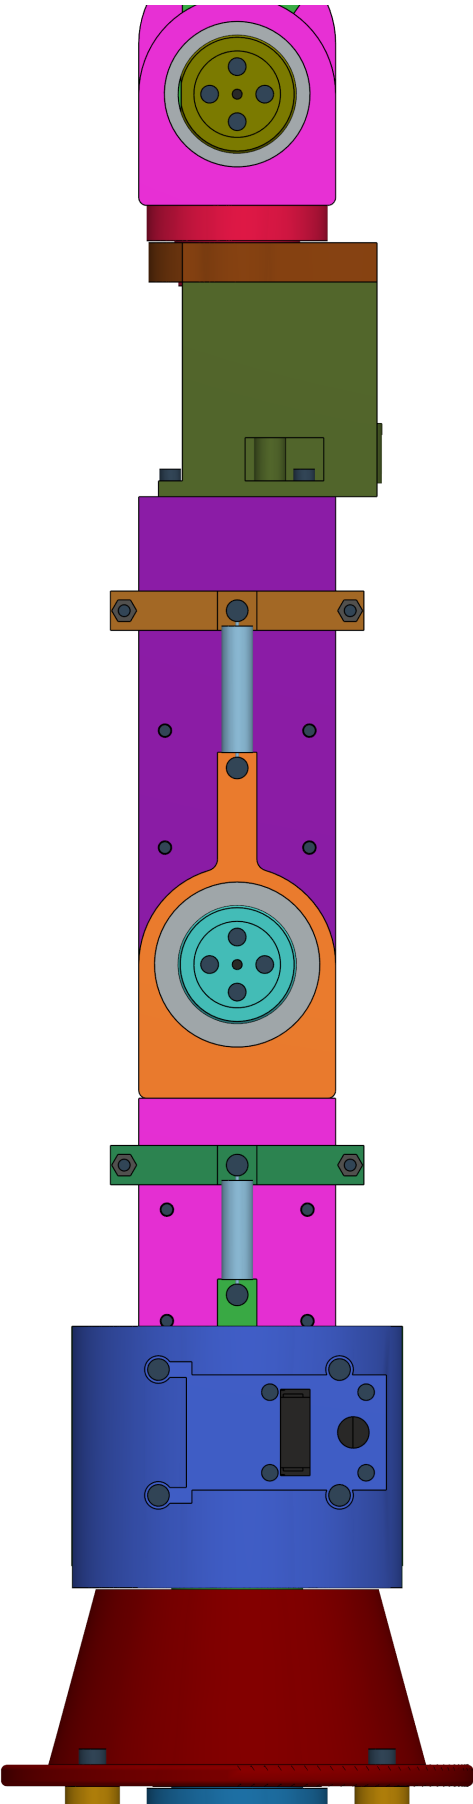

front (from +x)

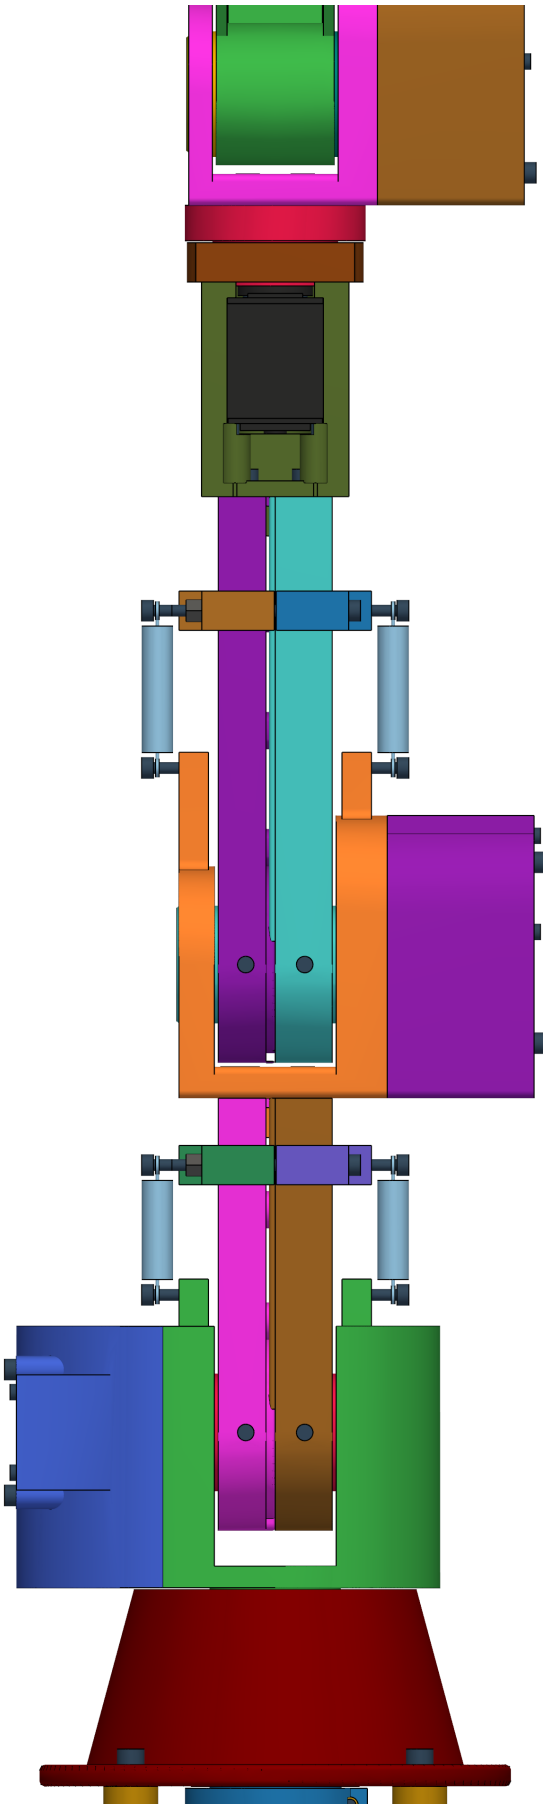


from above

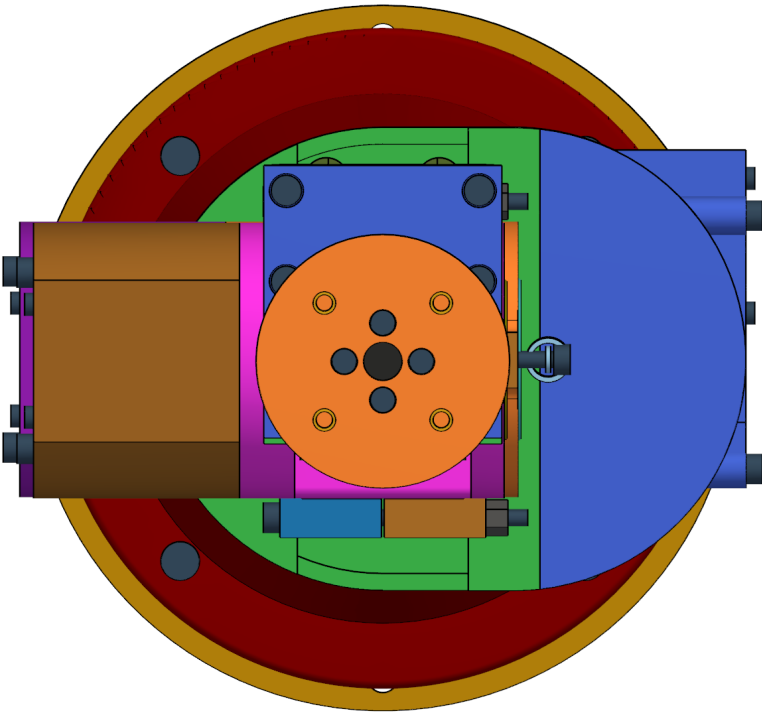


clearance between rigid bodies in this pose (FCL, exact-solid meshes; a joint's own bearing / servo / horn screws excluded):
ground-turret 0.50 turret-upper link 0.51 upper link-forearm 0.51 forearm-J4 hub 0.50 J4 hub-blade 0.48 blade-flange 0.50
closest non-neighbours: ground-upper link 15.0 forearm-blade 19.8 J4 hub-flange 27.8 turret-forearm 55.1
WORST: J4 hub <=> blade 0.476 mm (J5_p1 | J5_spacer_B) -> CLEAR

Pose: ready J1..J6 = +0, +30, -60, +0, +30, +0 deg


isometric

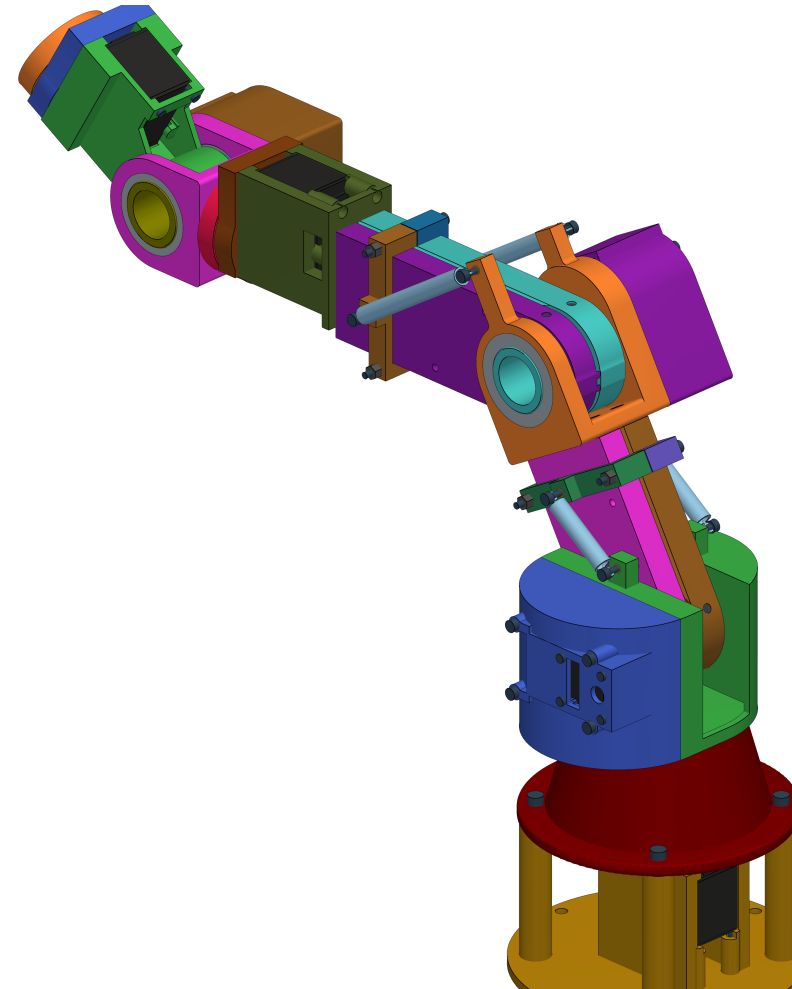

side (from $-y$)

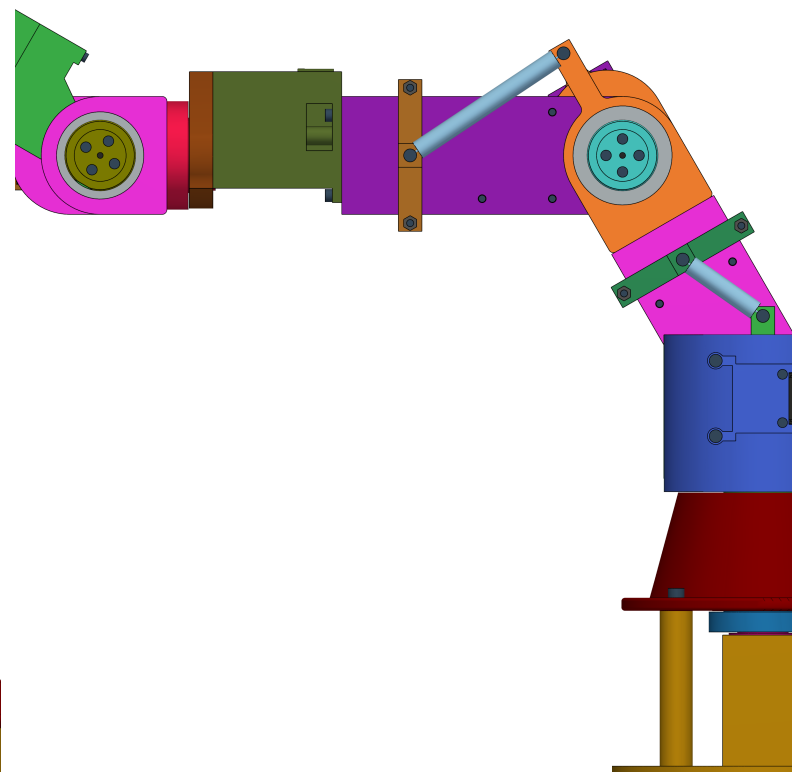

front (from +x)

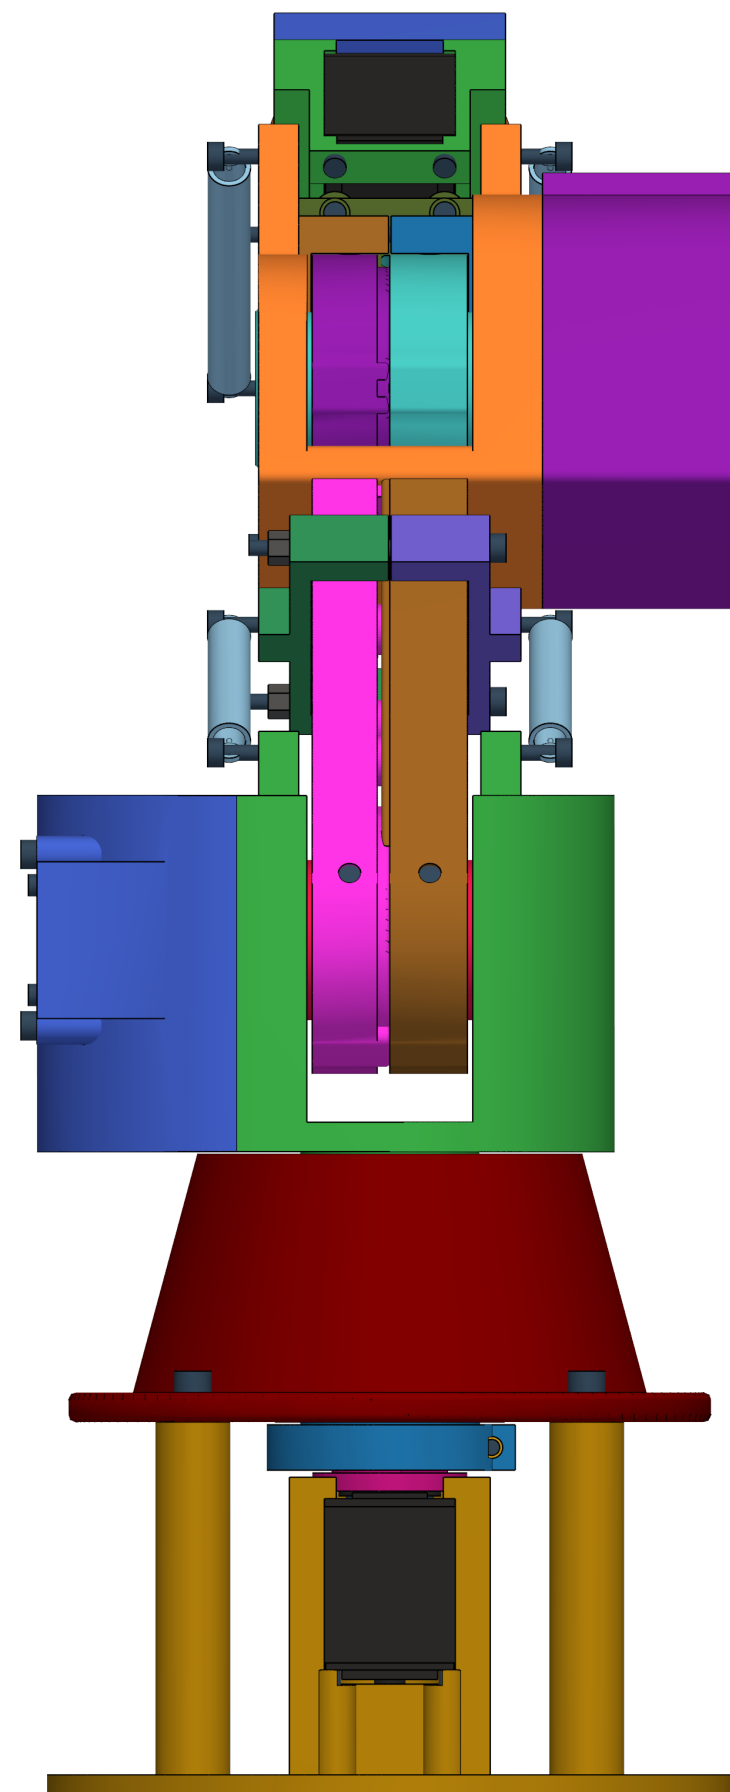


from above




```
clearance between rigid bodies in this pose (FCL, exact-solid meshes; a joint's own bearing / servo / horn screws excluded):
ground-turret 0.50  turret-upper link 0.51  upper link-forearm 0.51  forearm-J4 hub 0.50  J4 hub-blade 0.48  blade-flange 0.50
closest non-neighbours: ground-upper link 15.0  forearm-blade 19.8  J4 hub-flange 29.8  turret-forearm 53.1
WORST: J4 hub <-> blade  0.476 mm  (J5_p1 | J5_spacer_B)  -> CLEAR
```

Pose: reach forward, low J1..J6 = +0, +50, +35, +0, +40, +0 deg


isometric

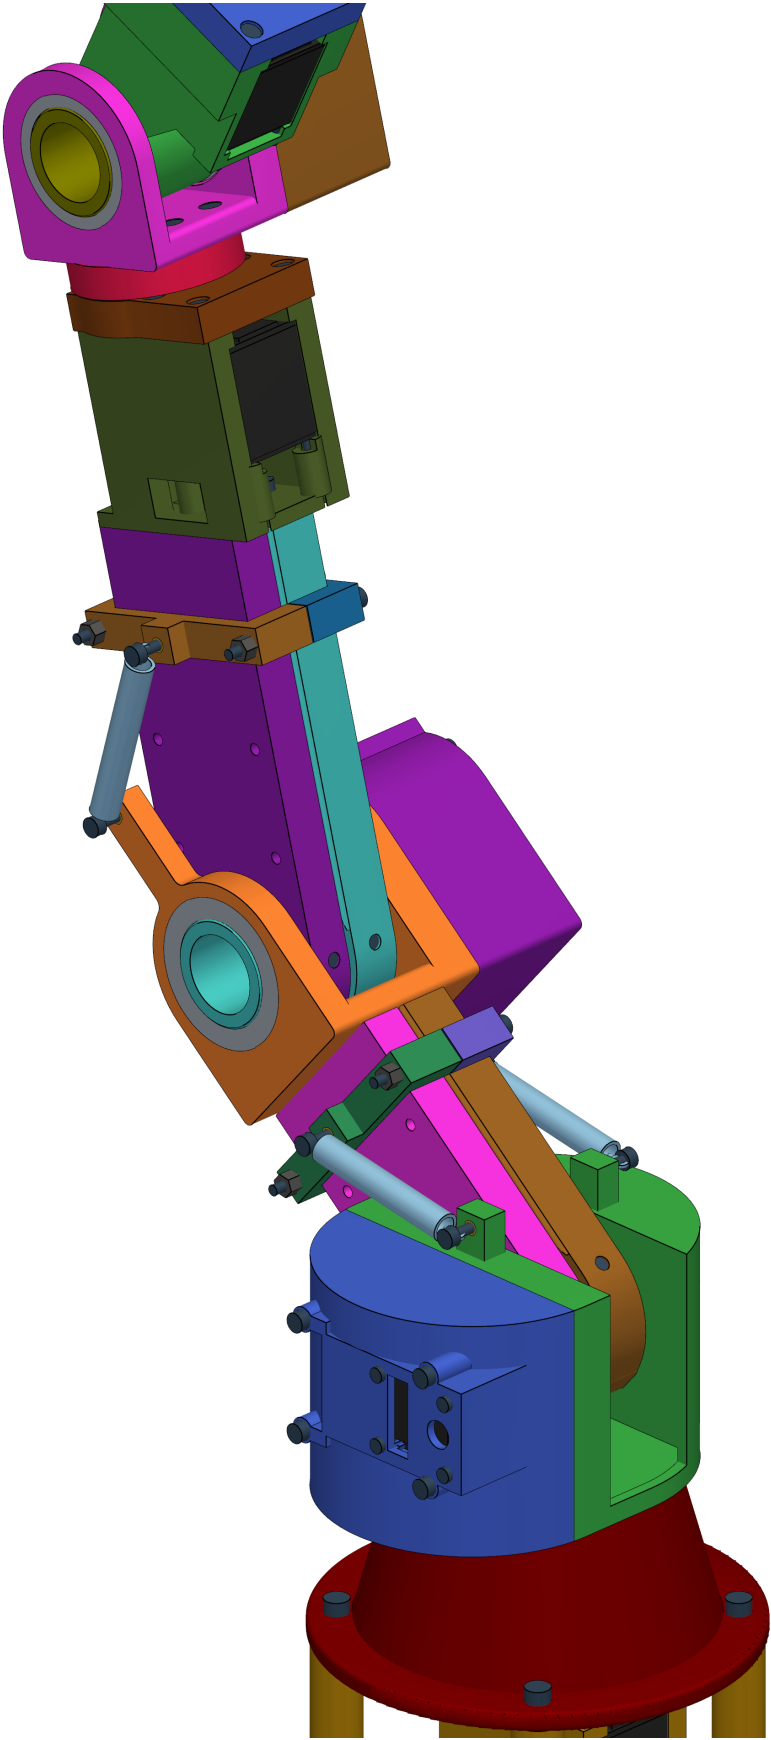


side (from -y)

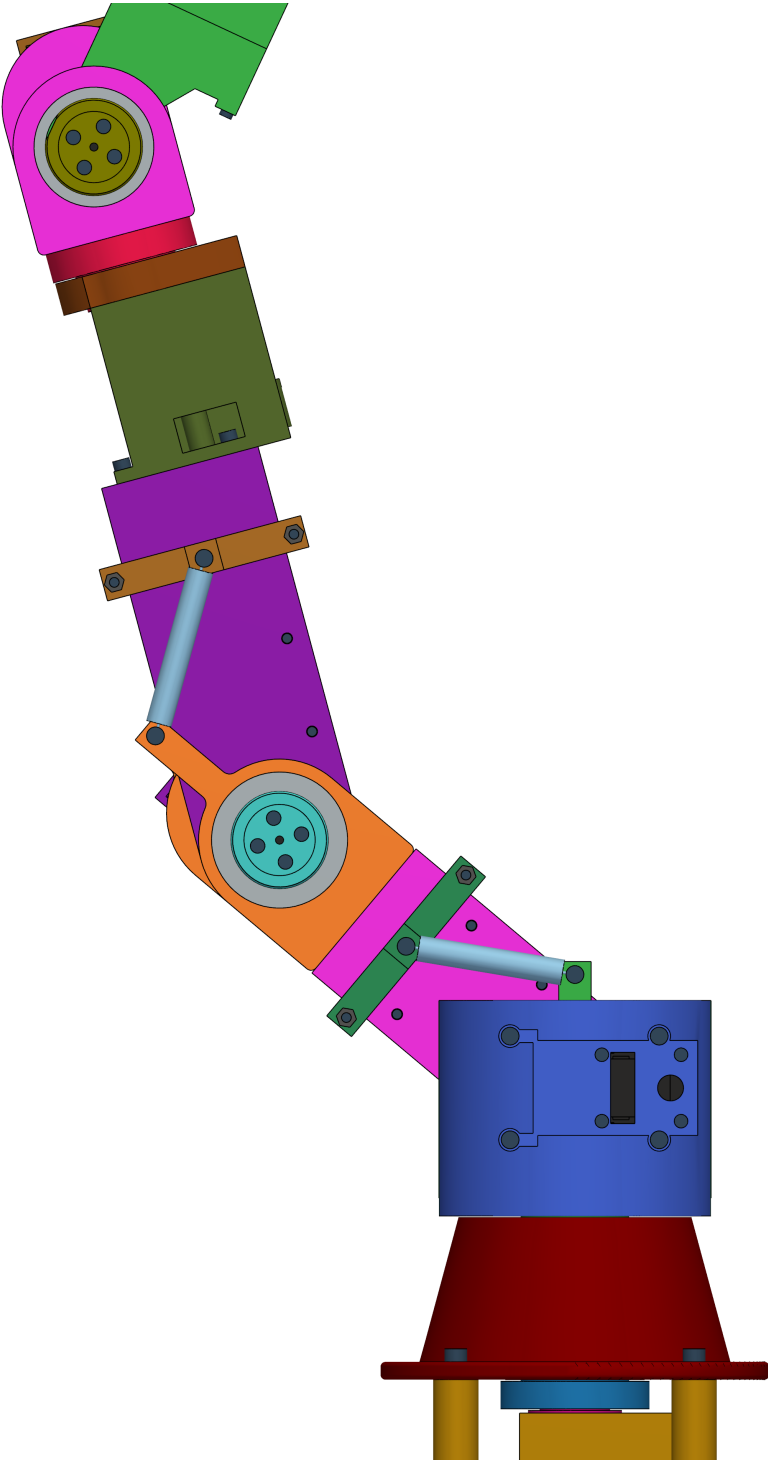

front (from +x)

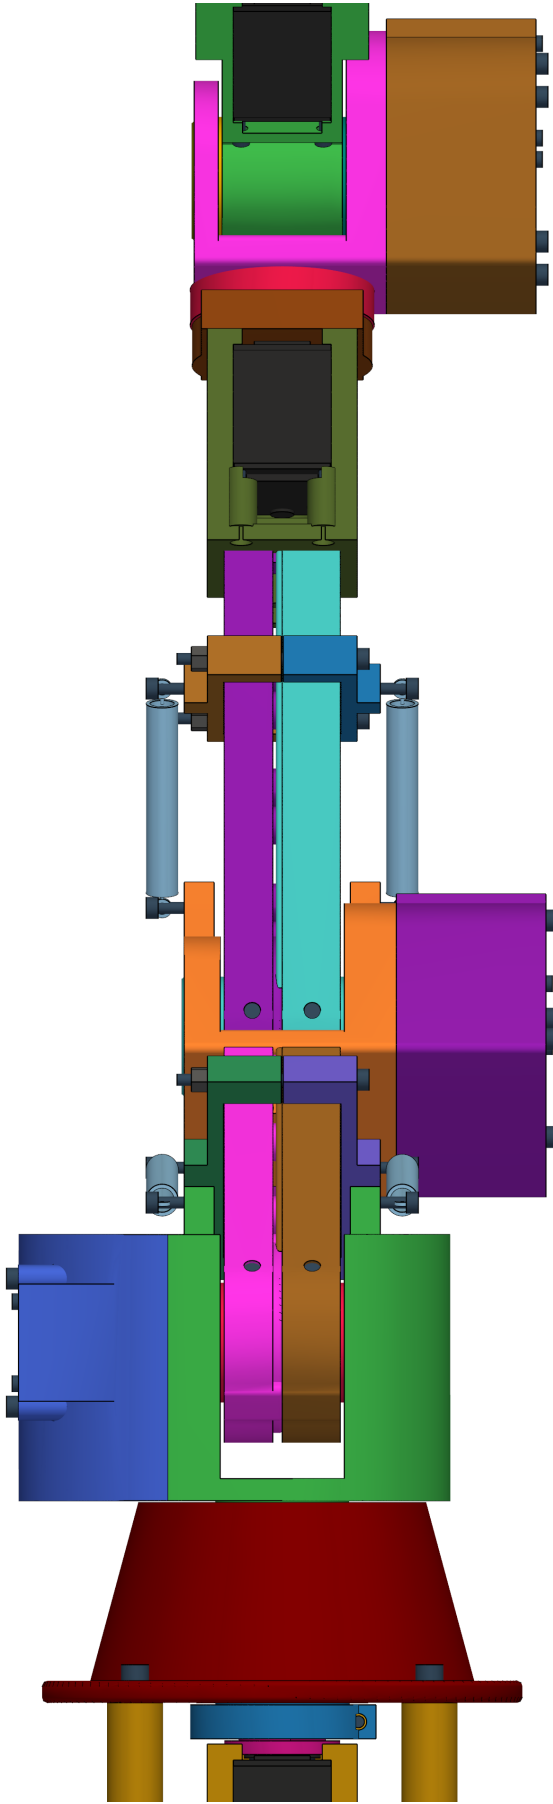


from above

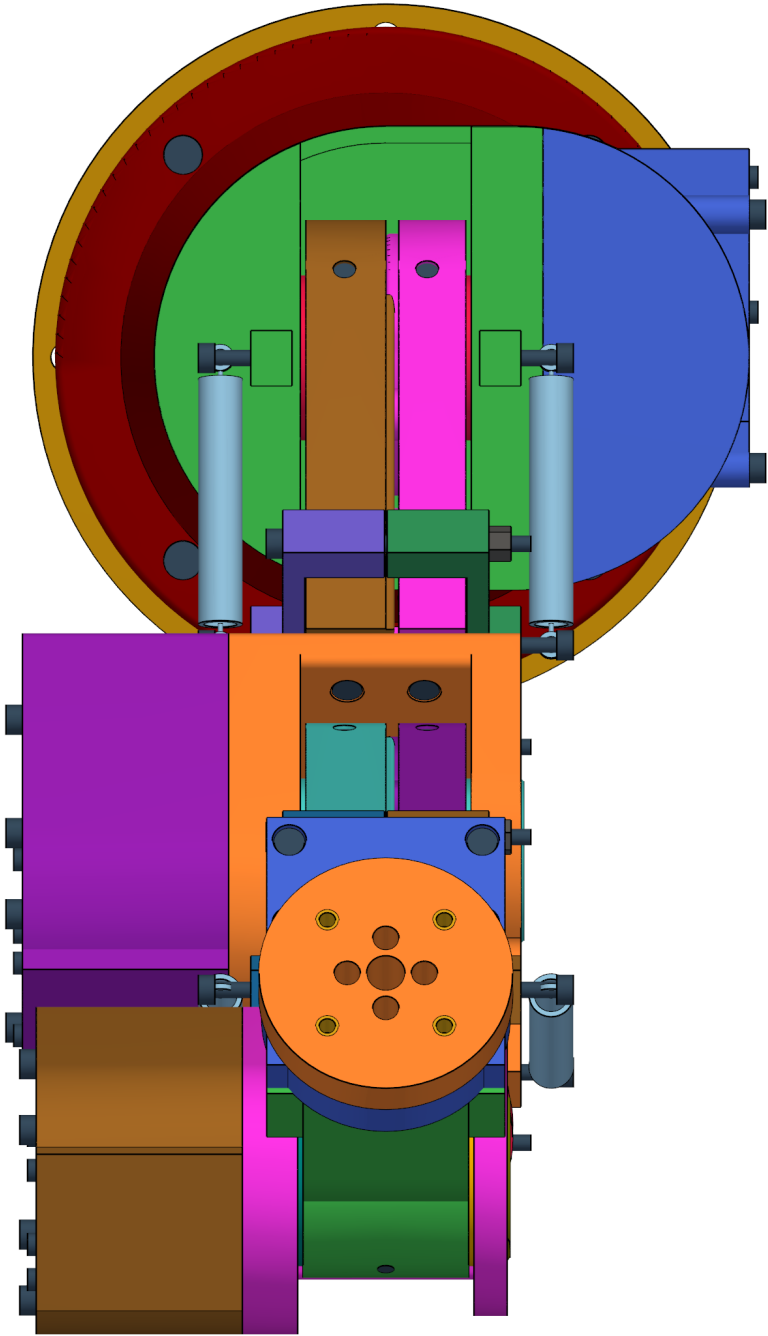


clearance between rigid bodies in this pose (FCL, exact-solid meshes; a joint's own bearing / servo / horn screws excluded):
ground-turret 0.50 turret-upper link 0.51 upper link-forearm 0.51 forearm-J4 hub 0.50 J4 hub-blade 0.48 blade-flange 0.50
closest non-neighbours: ground-upper link 15.0 forearm-blade 19.8 J4 hub-flange 31.3 turret-forearm 44.8
WORST: J4 hub <-> blade 0.476 mm (J5_p1 | J5_spacer_B) -> CLEAR

Pose: turned, elbow up, wrist rolled J1..J6 = +60, -30, -65, +45, -40, +90 deg


isometric

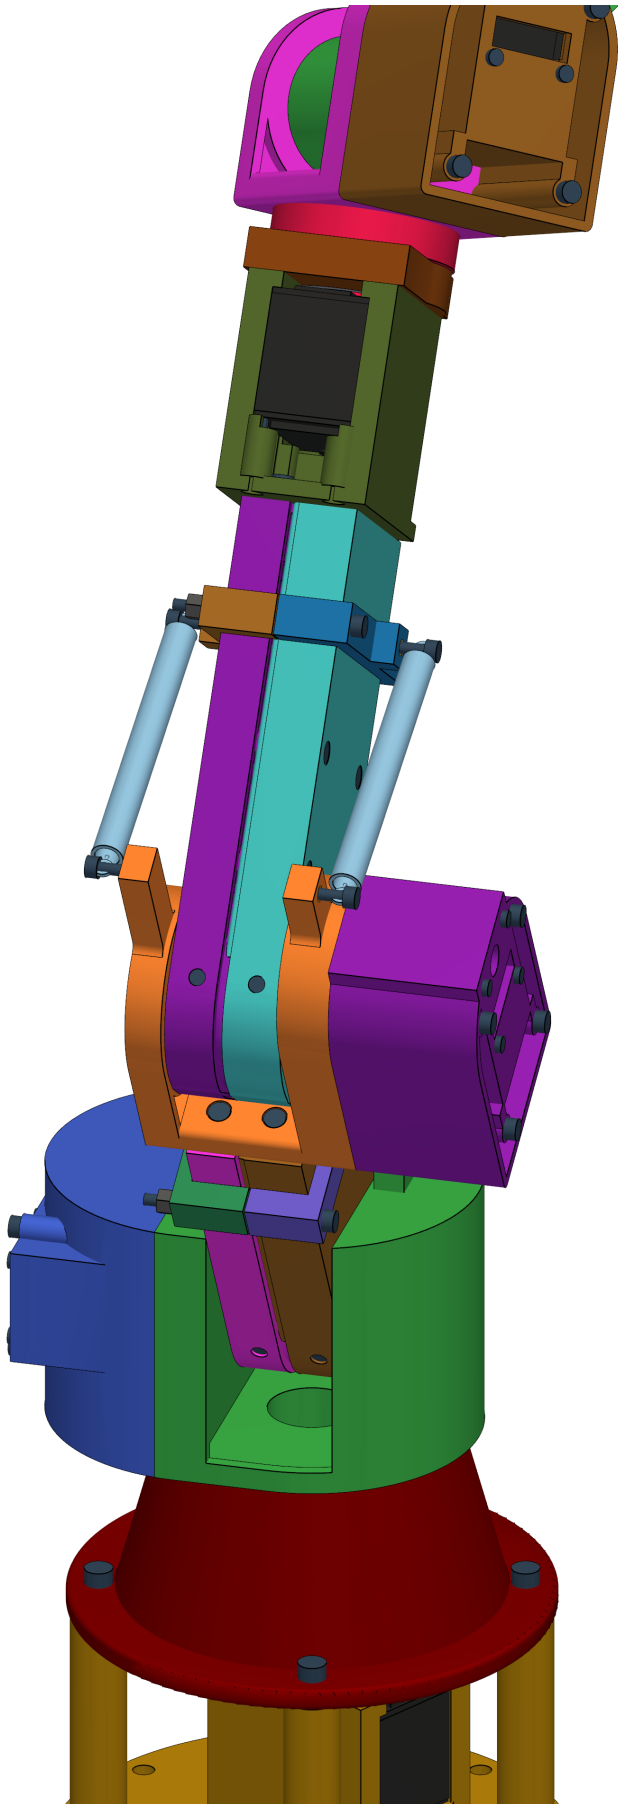


side (from -y)

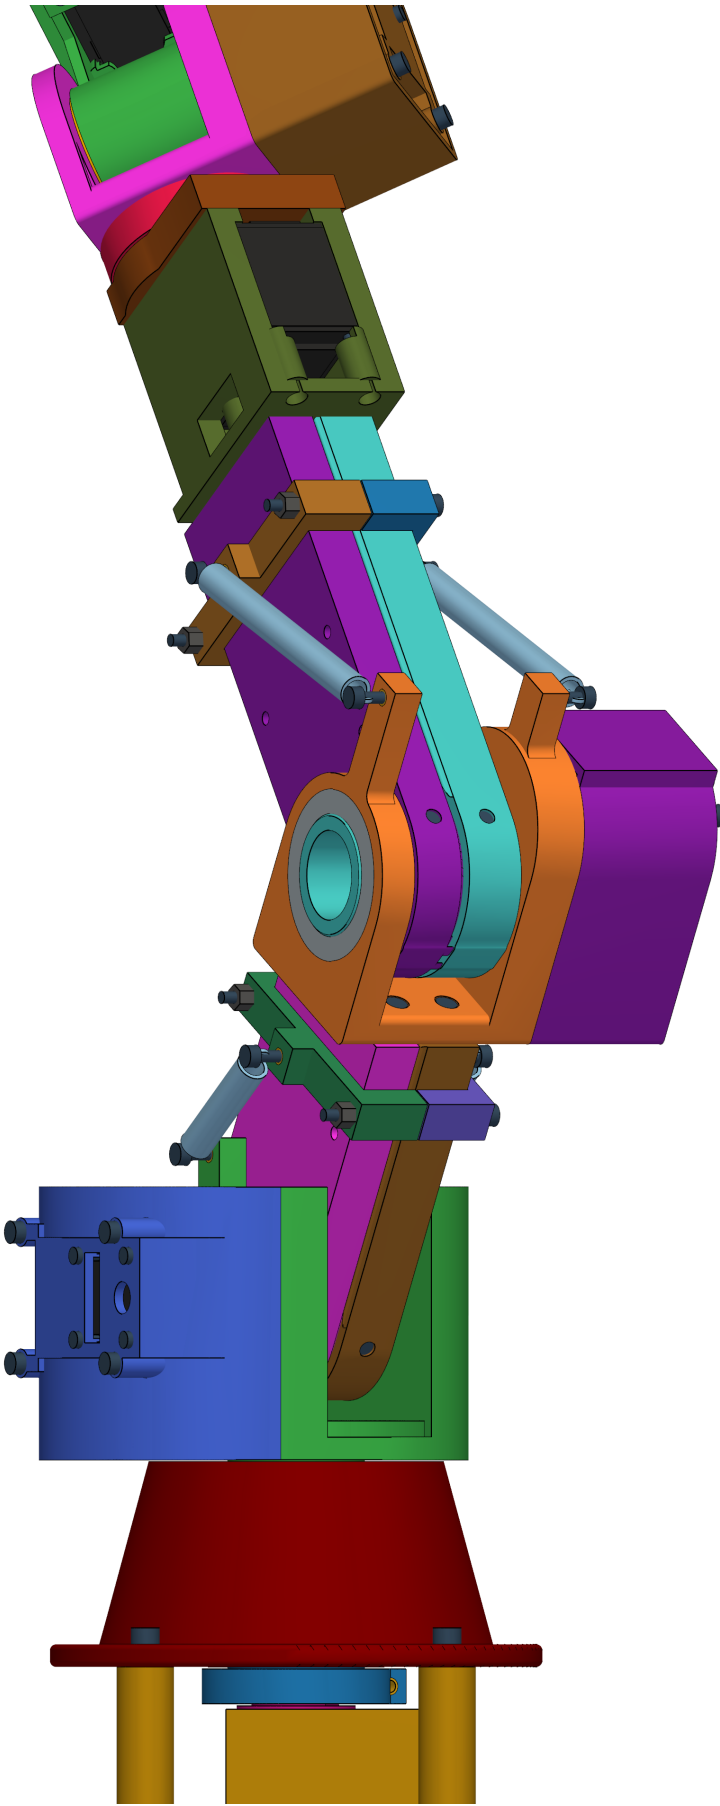

front (from +x)

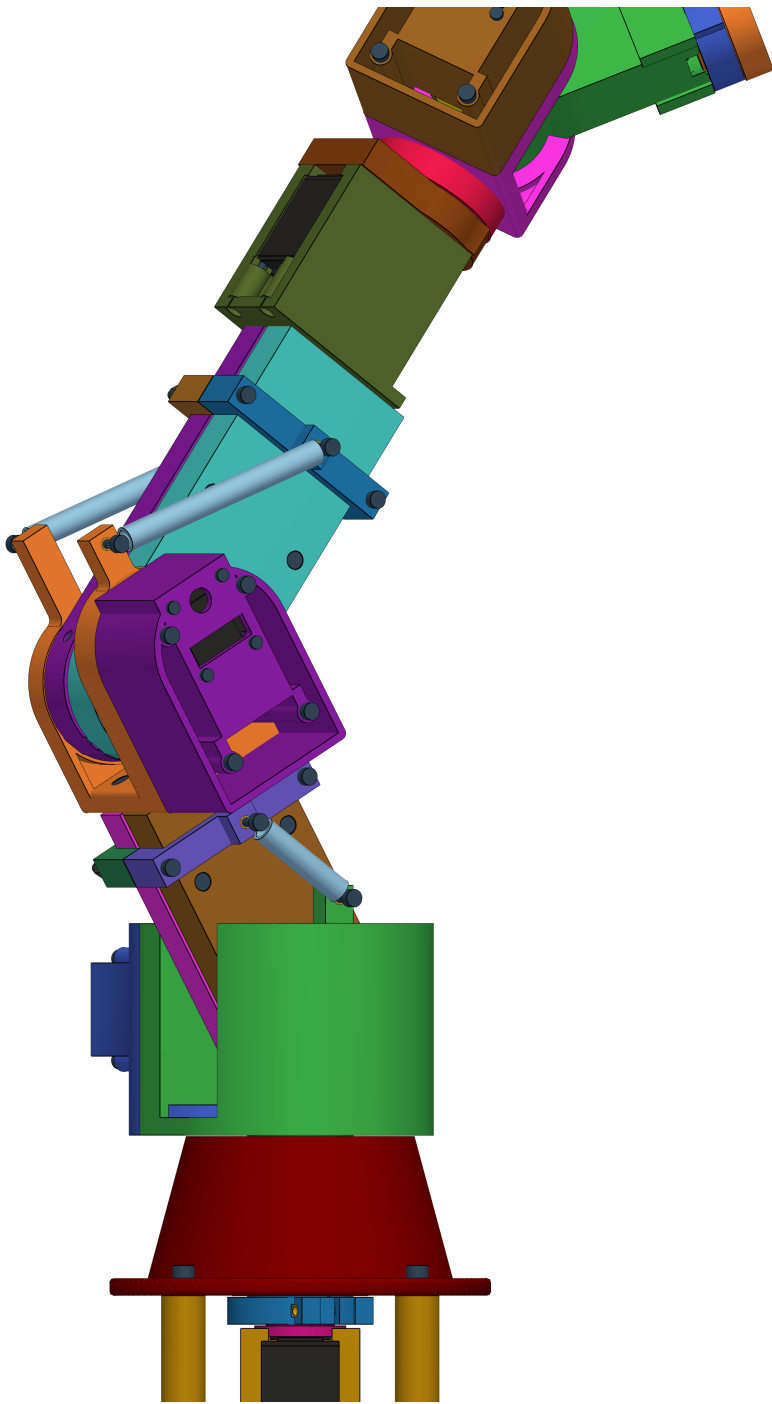


from above

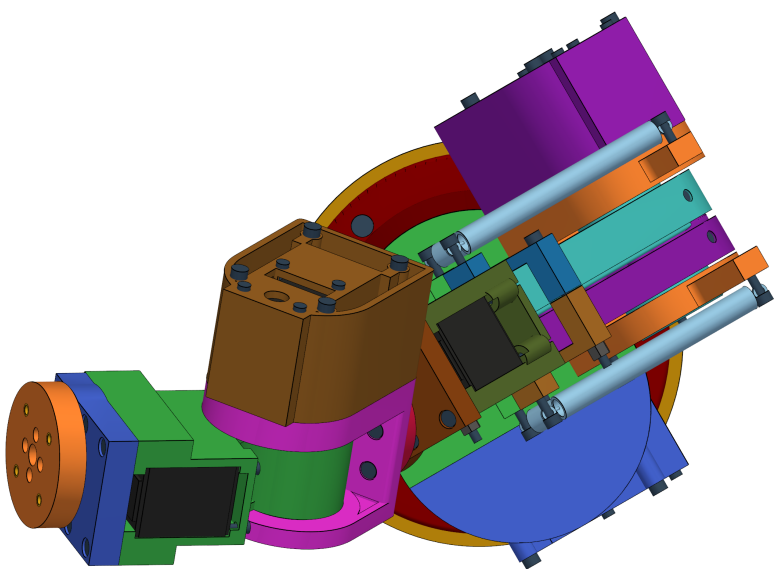


clearance between rigid bodies in this pose (FCL, exact-solid meshes; a joint's own bearing / servo / horn screws excluded):
ground-turret 0.50 turret-upper link 0.51 upper link-forearm 0.51 forearm-J4 hub 0.50 J4 hub-blade 0.48 blade-flange 0.50
closest non-neighbours: ground-upper link 15.0 forearm-blade 19.8 J4 hub-flange 31.3 turret-forearm 53.1
WORST: J4 hub <-> blade 0.476 mm (J5_p1 | J5_spacer_B) -> CLEAR

Pose: turned the other way, wrist pitched J1..J6 = -70, +25, +50, -90, +46, -60 deg


isometric

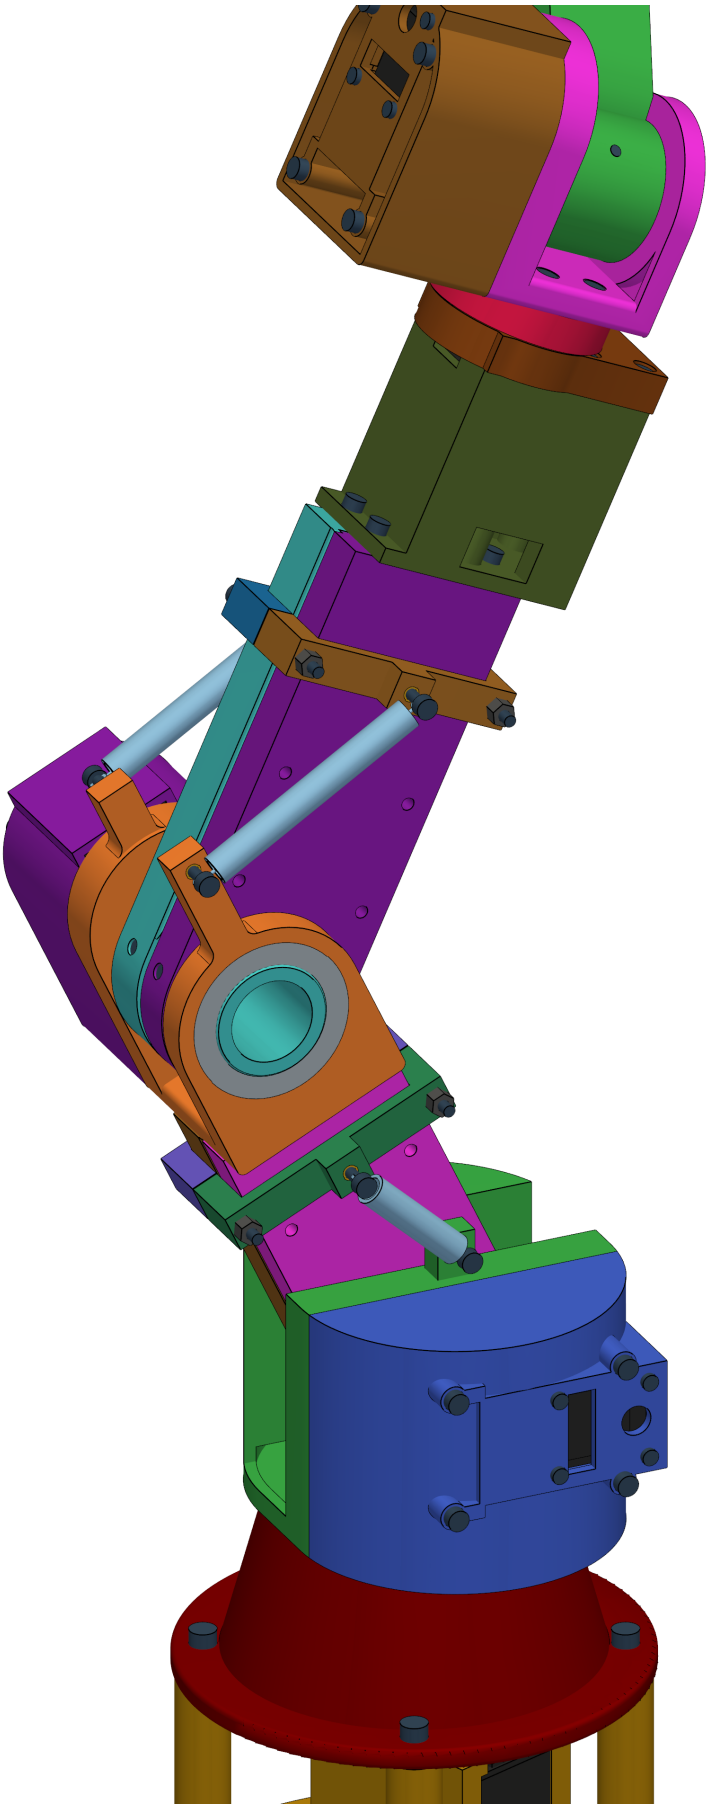


side (from -y)

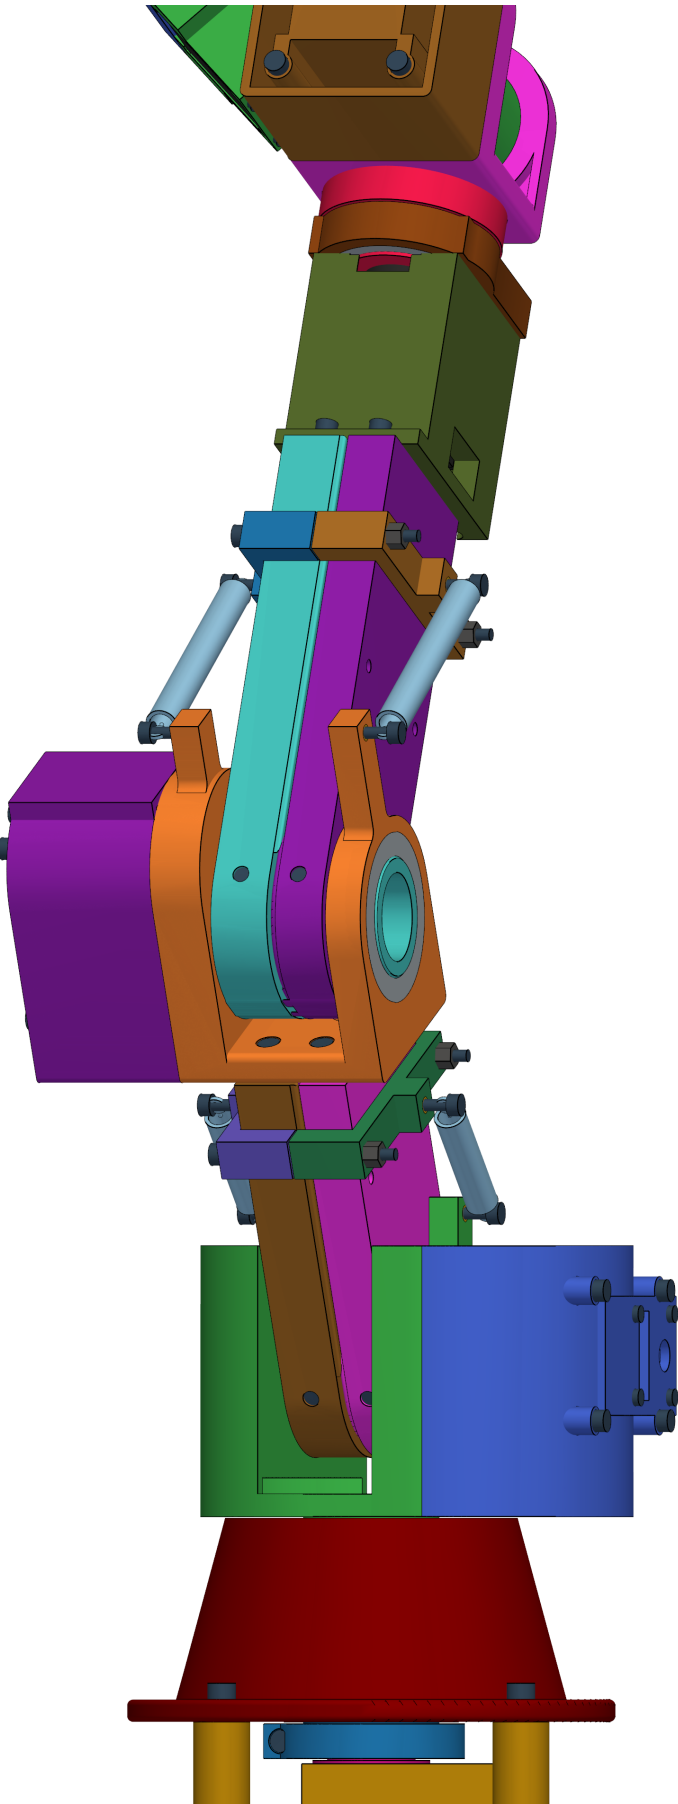

front (from +x)

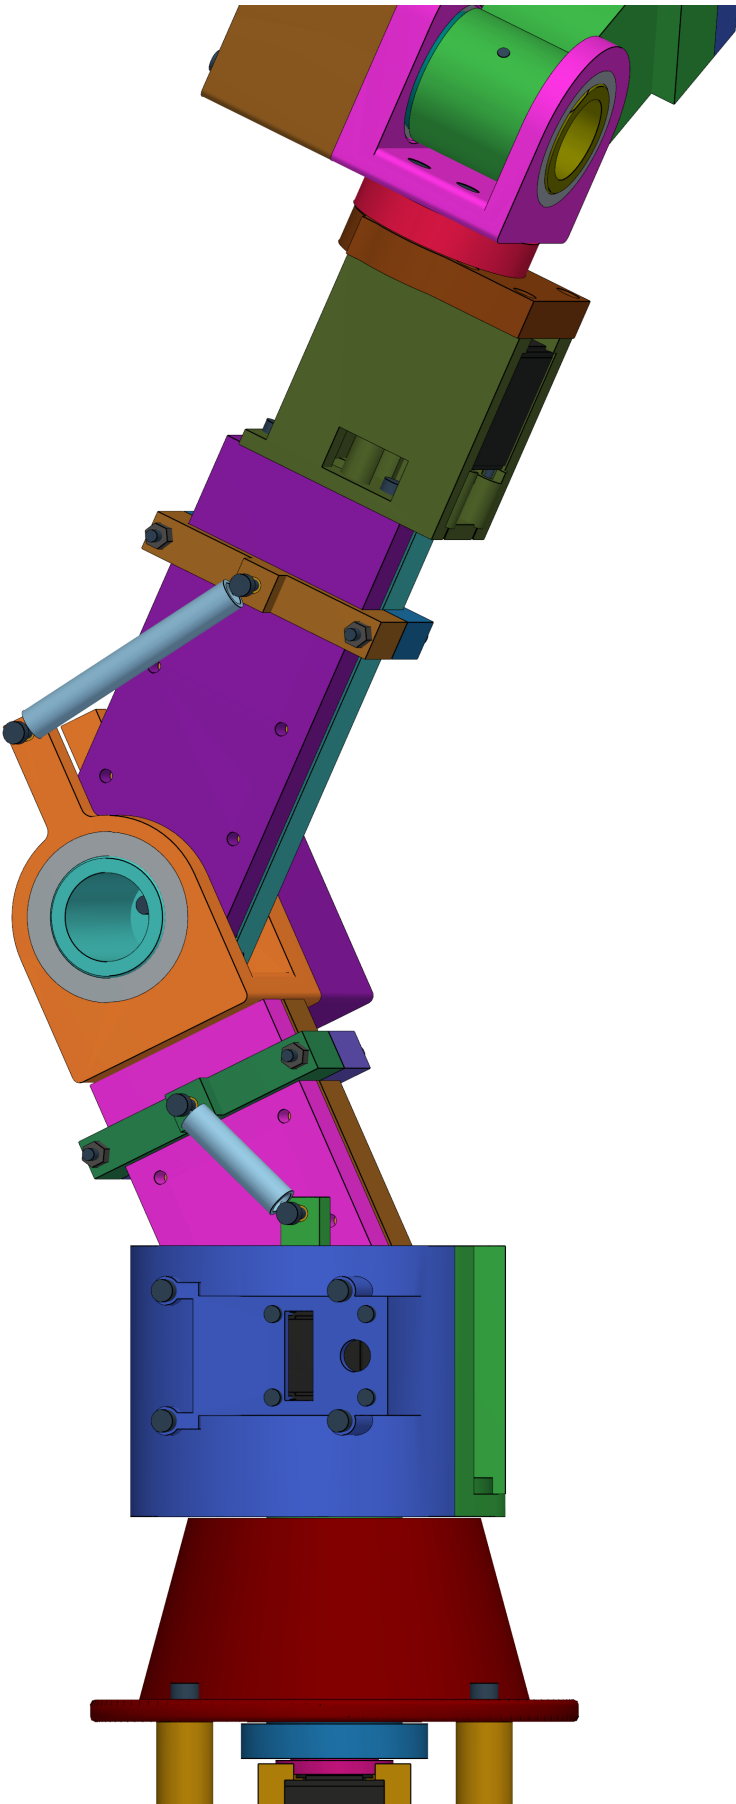


from above

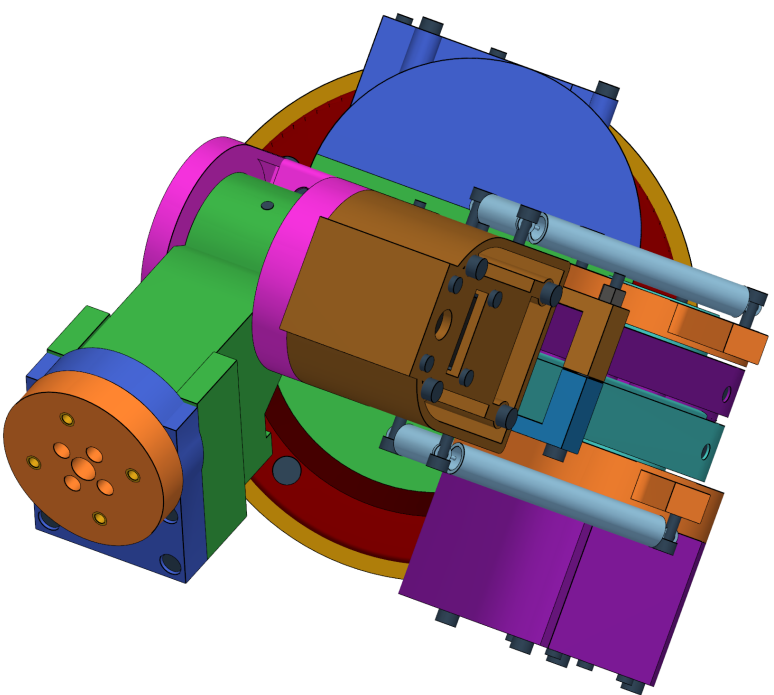


clearance between rigid bodies in this pose (FCL, exact-solid meshes; a joint's own bearing / servo / horn screws excluded):
ground-turret 0.50 turret-upper link 0.51 upper link-forearm 0.51 forearm-J4 hub 0.50 J4 hub-blade 0.48 blade-flange 0.50
closest non-neighbours: ground-upper link 15.0 forearm-blade 19.8 J4 hub-flange 32.7 turret-forearm 56.3
WORST: J4 hub <-> blade 0.476 mm (J5_p1 | J5_spacer_B) -> CLEAR

Pose: folded back $j1..j6 = +30, -54, +72, +90, -46, +45$ deg


isometric

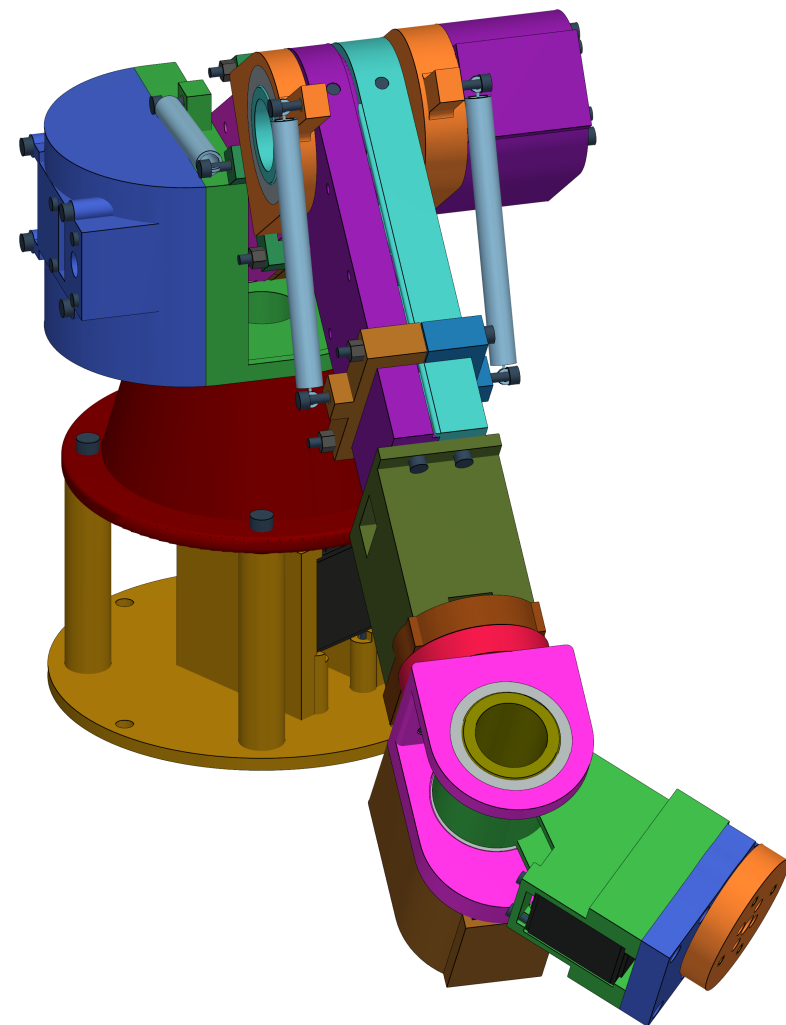


side (from $-y$)

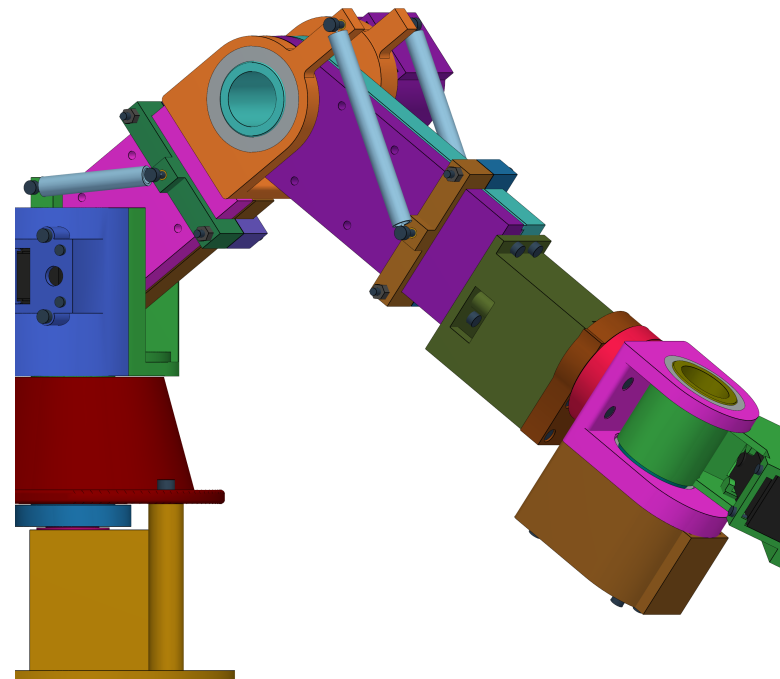

front (from +x)

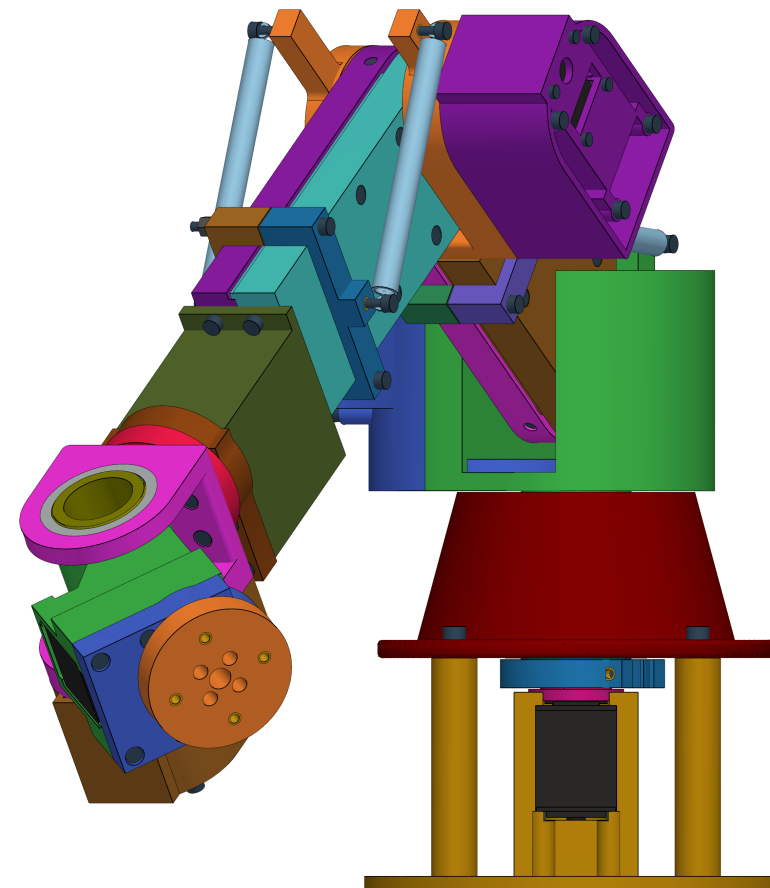

from above

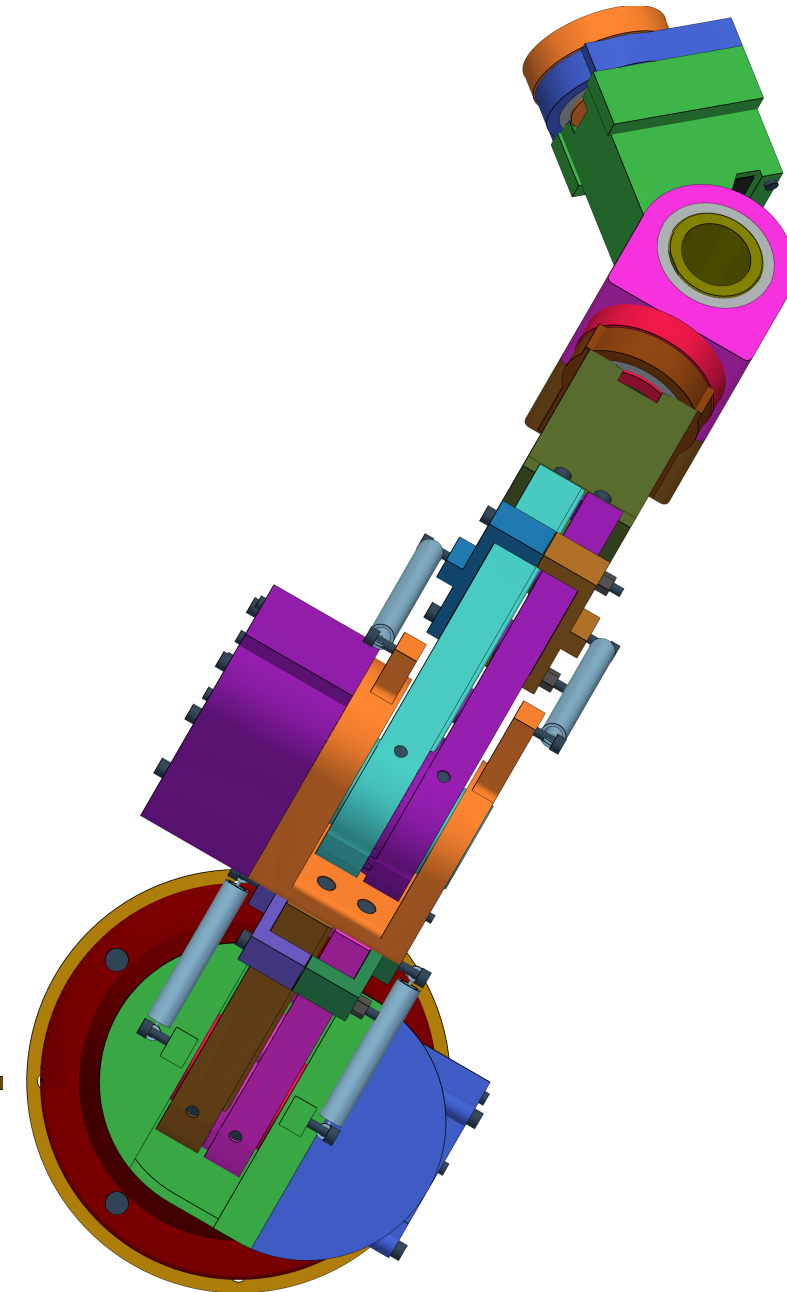

```
clearance between rigid bodies in this pose (FCL, exact-solid meshes; a joint's own bearing / servo / horn screws excluded):
ground-turret 0.50  turret-upper link 0.51  upper link-forearm 0.51  forearm-J4 hub 0.50  J4 hub-blade 0.48  blade-flange 0.50
closest non-neighbours: ground-upper link 15.0  forearm-blade 19.8  J4 hub-flange 32.3  turret-forearm 44.2
WORST: J4 hub <-> blade  0.476 mm  (J5_p1 | J5_spacer_B)  -> CLEAR
```