

2.54mm(.100") HEADER 180°

但

MATERIAL

Insulator: PBT UL 94V-0

Color: Contact: Black or white

Brass 0.64mm(.025") square wire pins

Plating: Gold or tin plated

SPECIFICATIONS

Current rating: Temperature range:

Dielectric withstand voltage: Voltage rating:

Contact resistance: Insulation resistance:


1000 MΩ min.

 $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$ 1. 0A 250V AC 600V AC 0.015Ω max.

. 54

13. 4 .528

3. 26 .128

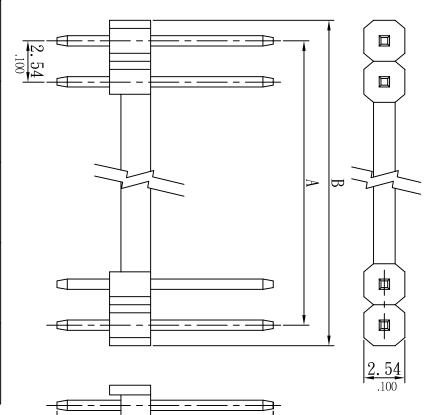

7. 60 .299

Dimensional Information

			_	_									
14	13	12	11	10	9	œ	7	6	5	4	3	2	Circuits
33.02(1.300)	30.48(1.200)	27.94(1.100)	25.40(1.000)	22.86(0.900)	20.32(0.800)	17.78(0.700)	15.24(0.600)	12.70(0.500)	10.16(0.400)	7.62(0.300)	5.08(0.200)	2.54(0.100)	Dim. A
35.76(1.408)	33.22(1.308)	30.68(1.208)	28.14(1.108)	25.60(1.008)	23.06(0.908)	20.52(0.808)	17.98(0.708)	15.44(0.608)	12.90(0.508)	10.36(0.408)	7.82(0.308)	5.28(0.208)	Dim. B
27	26	25	24	23	22	21	20	19	18	17	16	15	Circuits
66.04(2.600)	63.50(2.500)	60.96(2.400)	58.42(2.300)	55.88(2.200)	53.34(2.100)	50.80(2.000)	48.26(1.900)	45.72(1.800)	43.18(1.700)	40.64(1.600)	38.10(1.500)	35.56(1.400)	Dim. A
68.78(2.708)	66.24(2.608)	63.70(2.508)	61.16(2.408)	58.62(2.308)	56.08(2.208)	53.54(2.108)	51.00(2.008)	48.46(1.908)	45.92(1.808)	43.38(1.708)	40.84(1.608)	38.30(1.508)	Dim. B
40	39	38	37	36	35	34	33	32	31	30	29	28	Circuits
99.06(3.900)	96.52(3.800)	93.98(3.700)	91.44(3.600)	88.90(3.500)	86.36(3.400)	83.82(3.300)	81.28(3.200)	78.74(3.100)	76.20(3.000)	73.66(2.900)	71.12(2.800)	68.58(2.700)	Dim. A
06(3.900) 101.60(4.000)	99.26(3.908)	96.72(3.808)	94.18(3.708)	91.64(3.608)	89.10(3.508)	86.56(3.408)	84.02(3.308)	81.48(3.208)	78.94(3.108)	76.40(3.008)	73.86(2.908)	71.32(2.808)	Dim. B

DWG NAME

R110xxTS076JS134 (RoHS)

DRAWN NAME

李今察

05.06.09

R110xxTS076JS134

CHECKED

APPROVED 蔡慧秋 DATE

SCALE: 1:4

REV NO

DATE

DESCRIPTION

ВУ

CHECKED

TOLERANCE UNLESS NOTED

LINEAR±

.00 ±0.20(.008) .0 ±0.30(.012)

000±0.10(.004)

UNIT:mm(in. CAD NO

徐秉禧

