M4 Macros for Electric Circuit Diagrams in LaTeX Documents

Dwight Aplevich

Version 8.3

Contents

1 Introduction

> It appears that people who are unable to execute pretty pictures with pen and paper find it gratifying to try with a computer [10].

This manual describes a method for drawing electric circuits and other diagrams in LaTeX and web documents. The diagrams are defined in the simple pic drawing language [9] augmented with m4 macros [8], and are processed by m4 and a pic processor to convert them to PSTricks, Tikz PGF, other LaTeX-compatible code, or SVG. In its basic form, the method has the advantages and disadvantages of TeX itself, since it is macro-based and non-WYSIWYG, with ordinary text input. The book from which the above quotation is taken correctly points out that the payoff can be in quality of diagrams at the price of the time spent in learning how to draw them.

A collection of basic components, most based on IEEE standards [6], and conventions for their internal structure are described. Macros such as these are only a starting point, since it is often convenient to customize elements or to package combinations of them for particular drawings.

2 Using the macros

This section describes the basic process of adding circuit diagrams to LaTeX documents to produce postscript or pdf files. On some operating systems, project management software with graphical interfaces can be used to automate the process but the steps can be performed by a script, makefile, or by hand for simple documents as described in Section 2.1.

The diagram source file is preprocessed as illustrated in Figure 1. The predefined macros, followed by the diagram source, are read by m4. The result is passed through a pic interpreter to produce .tex output that can be inserted into a .tex document using the \input command.
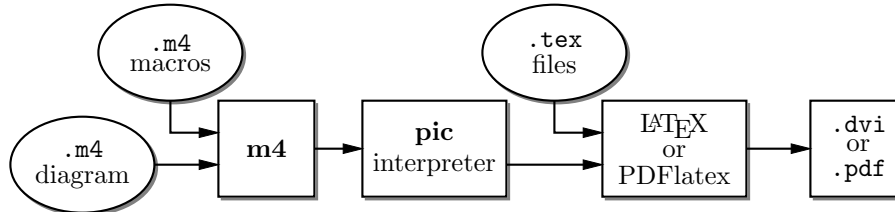

Figure 1: Inclusion of figures and macros in the LaTeX document.

The interpreter output contains PSTricks [16] commands, Tikz PGF [15] commands, basic LaTeX graphics, tpic specials, or other formats, depending on the chosen options, These variations are described in Section 14.

There are two principal choices of pic interpreter. One is dpic, described later in this document. A partial alternative is GNU gpic -t (sometimes simply named pic) [11] together with a printer driver that understands tpic specials, typically dvips [13]. The dpic processor extends the pic language in small but important ways; consequently, some of the macros and examples in this distribution work fully only with dpic. Pic processors contain basic macro facilities, so some of the concepts applied here do not require m4.

2.1 Quick start

The contents of file `quick.m4` and resulting diagram are shown in Figure 2 to illustrate the language, to show several ways for placing circuit elements, and to provide sufficient information for producing basic labeled circuits.

```
.PS                         # Pic input begins with .PS
cct_init                    # Read in macro definitions and set defaults
elen = 0.75                 # Variables are allowed; default units are inches
Origin: Here                # Position names are capitalized
   source(up_ elen); llabel(-,v_s,+)
   resistor(right_ elen);  rlabel(,R,)
   dot
   {                        # Save the current position and direction
     capacitor(down_ to (Here,Origin))    #(Here,Origin) = (Here.x,Origin.y)
     rlabel(+,v,-); llabel(,C,)
     dot
     }                      # Restore position and direction
   line right_ elen*2/3
   inductor(down_ Here.y-Origin.y); rlabel(,L,); b_current(i)
   line to Origin
.PE                         # Pic input ends
```


Figure 2: The file `quick.m4` and resulting diagram. There are several ways of drawing the same picture; for example, nodes (such as `Origin`) can be defined and circuit branches drawn between them; or absolute coordinates can be used (e.g., `source(up_ from (0,0) to (0,0.75))`). Element sizes and styles can be varied as described in later sections.

To process the file, make sure that the libraries `libcct.m4` and `libgen.m4` are installed and readable. Verify that m4 is installed and accepts the `-I` option; otherwise, see . Now there are at least two basic possibilities as follows, but be sure to read Section 2.1.3 for simplified use.

2.1.1 Processing with dpic and PSTricks or Ti*k*z PGF

If you are using dpic with PSTricks, type the following commands or put them into a script:

```
m4 -I installdir pstricks.m4 quick.m4 > quick.pic
dpic -p quick.pic > quick.tex
```

where *installdir* is the full name (i.e., the path) of the directory containing `libcct.m4`. The option `-I` *installdir* can be omitted if environment variable `M4PATH` points to *installdir*. Put `\usepackage{pstricks}` in the main LaTeX source file header and the following in the body:

```
\begin{figure}[hbt]
   \centering
   \input quick
   \caption{Customized caption for the figure.}
   \label{Symbolic_label}
\end{figure}
```

Then the commands `latex` *file*; `dvips` *file* produce *file*.`ps` that can be printed or viewed using `gsview`, for example.

The effect of the m4 command above is shown in Figure 3. Configuration file `pstricks.m4` causes library `libgen.m4` to be read, thereby defining the macro `cct_init`. The diagram source file is then read and the circuit-element macros in `libcct.m4` are defined during expansion of `cct_init`.
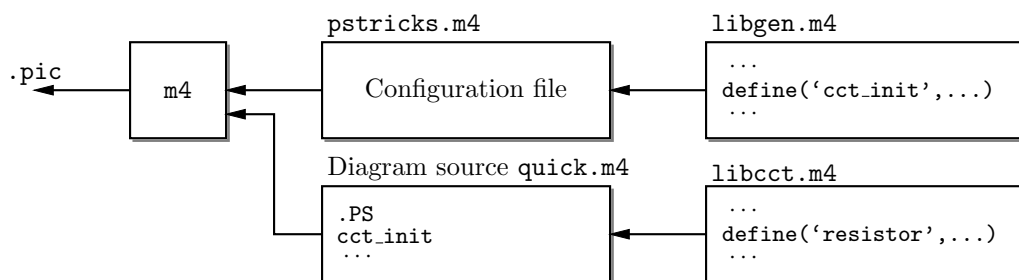
Figure 3: The command `m4 -I` *installdir* `pstricks.m4 quick.m4 > quick.pic`.

To produce Ti*k*z PGF code, the commands are modified to read `pgf.m4` and invoke the `-g` option of dpic as follows:

```
m4 -I installdir pgf.m4 quick.m4 > quick.pic
dpic -g quick.pic > quick.tex
```

The LaTeX header should contain `\usepackage{tikz}`, but the inclusion statements are the same as for PSTricks input. Invoking PDFlatex on the source produces `.pdf` output directly.

In all cases the essential line is `\input quick`, which inserts the previously created file `quick.tex`.

2.1.2 Processing with gpic

If your printer driver understands tpic specials and you are using gpic (on some systems the gpic command is `pic`), the commands are

```
m4 -I installdir gpic.m4 quick.m4 > quick.pic
gpic -t quick.pic > quick.tex
```

and the figure inclusion statements are as shown:

3

```
\begin{figure}[hbt]
   \input quick
   \centerline{\box\graph}
   \caption{Customized caption for the figure.}
   \label{Symbolic_label}
   \end{figure}
```

2.1.3 Simplifications

m4 must read a configuration file followed by the macro definitions in one or more library files, either before reading the diagram source file or at the beginning of it. There are several ways to control the process, as follows:

1. The macros can be processed by LATEX-specific project software and by graphic applications such as Cirkuit [7]. Alternatively when many files are to be processed, a facility such as Unix "make," which is also available in PC and Mac versions, can be employed to automate the required commands. On systems without such facilities, a scripting language can be used.

2. The m4 commands illustrated above can be shortened to

   `m4 -I` *installdir* `quick.m4 > quick.pic`

   by inserting `include(pstricks.m4)` (assuming PSTricks processing) or `include(libgen.m4)` (assuming the default processor is to be used) after the `.PS` line. The effect of the first include statement is shown in Figure 4 and the second in Figure 5.
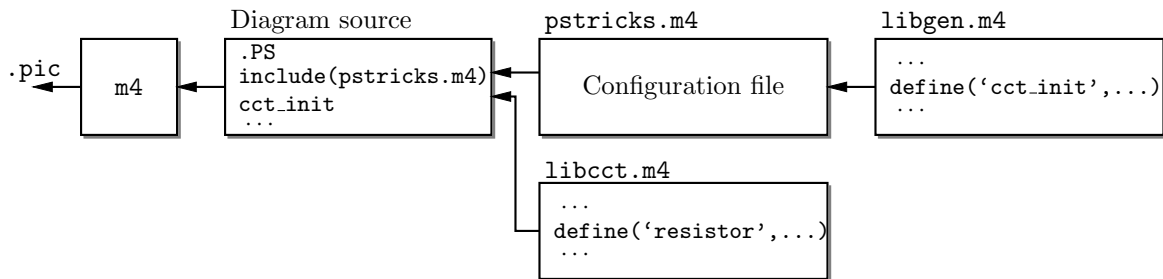
Figure 4: The command `m4 -I` *installdir* `quick.m4 > quick.pic`, with `include(pstricks.m4)` preceding `cct_init`.
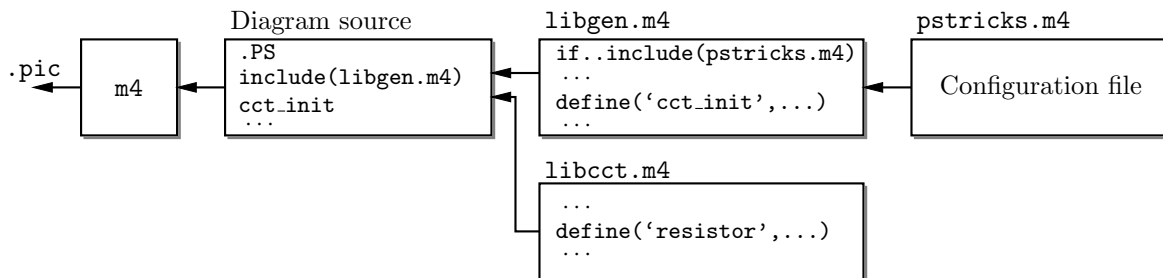

Figure 5: The command `m4 -I` *installdir* `quick.m4 > quick.pic`, with `include(libgen.m4)` preceding `cct_init`, causing the default configuration file to be read.

3. On some systems, setting the environment variable `M4PATH` to *installdir* allows the `-I` *installdir* option of m4 to be omitted, but it will be kept in following examples.

4. In the absence of a need to examine the file `quick.pic`, the commands for producing the `.tex` file can be reduced (provided the above inclusions have been made) to

   ```
   m4 -I installdir quick.m4 | dpic -p > quick.tex
   ```

5. It may be desirable to invoke m4 and dpic automatically from the document file as shown:

   ```
   \documentclass{article}
   \usepackage{tikz}
   \newcommand\mtotex[2]{\immediate\write18{m4 -I installdir #2.m4 | dpic -#1 > #2.tex}}%
   \begin{document}
   \mtotex{g}{FileA}
   \input{FileA.tex} \par
   \mtotex{g}{FileB}
   \input{FileB.tex}
   \end{document}
   ```

   The first argument of `\mtotex` is a `p` for pstricks or `g` for pgf. Sources `FileA.m4` and `FileB.m4` must contain any required `include` statements, and the main document should be processed using the latex or pdflatex option `-shell-escape`. This method processes the picture source each time LaTeX is run, so for large documents containing many diagrams, the `\mtotex` line could be commented out after debugging the corresponding graphic.

6. You can put several diagrams into a single source file. Make each diagram the body of a LaTeX macro, as shown:

   ```
   \newcommand{\diaA}{%
   .PS
   drawing commands
   .PE
   \box\graph }%  \box\graph not required for dpic
   \newcommand{\diaB}{%
   .PS
   drawing commands
   .PE
   \box\graph }%  \box\graph not required for dpic
   ```
   Produce a `.tex` file using `\mtotex` or m4 and dpic or gpic, insert the `.tex` into the LaTeX source, and invoke the macros `\diaA` and `\diaB` at the appropriate places.

2.2   Including the libraries

The configuration files for dpic are as follows, depending on the output format (see Section 14): `pstricks.m4`, `pgf.m4`, `mfpic.m4`, `mpost.m4`, `postscript.m4`, `psfrag.m4`, `svg.m4`, `gpic.m4`, or `xfig.m4`. The file `psfrag.m4` simply defines the macro `psfrag_` and then reads `postscript.m4`. For gpic, the configuration file is `gpic.m4`. The usual case for producing circuit diagrams is to read `pstricks.m4` or `pgf.m4` first when dpic is the postprocessor or to set one of these as the default configuration file.

At the top of each diagram source, put one or more initialization commands; that is,

   `cct_init, log_init, sfg_init, darrow_init, threeD_init`

or, for diagrams not requiring specialized macros, `gen_init`. As shown in Figure 3 to Figure 5, each initialization command reads in the appropriate macro library if it hasn't already been read; for example, `cct_init` tests whether `libcct.m4` has been read and includes it if necessary.

A few of the distributed example files contain other experimental macros that can be pasted into diagram source files; see `Flow.m4` or `Buttons.m4`, for example.

The libraries contain hints and explanations that might help in debugging or if you wish to modify any of the macros. Macros are generally named using the obvious circuit element names so that programming becomes something of an extension of the pic language. Some macro names end in an underscore to reduce the chance of name clashes. These can be invoked in the diagram source but there is no long-term guarantee that their names and functionality will remain unchanged. Finally, macros intended only for internal use begin with the characters `m4`.

3 Pic essentials

Pic source is a sequence of lines in a file. The first line of a diagram begins with `.PS` with optional following arguments, and the last line is normally `.PE`. Lines outside of these pass through the pic processor unchanged.

The visible objects can be divided conveniently into two classes, the *linear* objects `line, arrow, spline, arc,` and the *planar* objects `box, circle, ellipse.`

The object `move` is linear but draws nothing. A compound object, or `block,` is planar and consists of a pair of square brackets enclosing other objects, as described in Section 3.5. Objects can be placed using absolute coordinates or relative to other objects.

Pic allows the definition of real-valued variables, which are alphameric names beginning with lower-case letters, and computations using them. Objects or locations on the diagram can be given symbolic names beginning with an upper-case letter.

3.1 Manuals

The classic pic manual [9] is still a good introduction to pic, but a more complete manual [12] can be found in the GNU groff package, and both are available on the web [9, 12]. Reading either will give you competence with pic in an hour or two. Explicit mention of `*roff` string and font constructs in these manuals should be replaced by their equivalents in the LaTeX context. A man-page language summary is appended to the dpic manual [1].

A web search will yield good discussions of "little languages"; for pic in particular, see Chapter 9 of [2]. Chapter 1 of reference [4] also contains a brief discussion of this and other languages.

3.2 The linear objects: `line, arrow, spline, arc`

A line can be drawn as follows:

    line from *position* to *position*
where *position* is defined below or

    line *direction* *distance*
where *direction* is one of `up, down, left, right.` When used with the m4 macros described here, it is preferable to add an underscore: `up_, down_, left_, right_.` The *distance* is a number or expression and the units are inches, but the assignment

    scale = 25.4
has the effect of changing the units to millimetres, as described in Section 10.

Lines can also be drawn to any distance in any direction. The example,

    line up_ 3/sqrt(2) right_ 3/sqrt(2) dashed
draws a line 3 units long from the current location, at a 45° angle above horizontal. Lines (and other objects) can be specified as `dotted, dashed,` or `invisible,` as above.

The construction

    line from A to B chop x
truncates the line at each end by `x` (which may be negative) or, if `x` is omitted, by the current circle radius, which is convenient when A and B are circular graph nodes, for example. Otherwise

    line from A to B chop x chop y
truncates the line by `x` at the start and `y` at the end.

Any of the above means of specifying line (or arrow) direction and length will be called a *linespec*. Lines can be concatenated. For example, to draw a triangle:

    line up_ sqrt(3) right_ 1 then down_ sqrt(3) right_ 1 then left_ 2

3.3 Positions

A *position* can be defined by a coordinate pair, e.g. `3,2.5`, more generally using parentheses by (*expression, expression*), as a sum or difference as *position* + (*expression, expression*), or by the construction (*position, position*), the latter taking the x-coordinate from the first position and the y-coordinate from the second. A position can be given a symbolic name beginning with an upper-case letter, e.g. `Top: (0.5,4.5).` Such a definition does not affect the calculated figure

boundaries. The current position `Here` is always defined and is equal to $(0,0)$ at the beginning of a diagram or block. The coordinates of a position are accessible, e.g. `Top.x` and `Top.y` can be used in expressions. The center, start, and end of linear objects (and the defined points of other objects as described below) are predefined positions, as shown in the following example, which also illustrates how to refer to a previously drawn element if it has not been given a name:

```
line from last line.start to 2nd last arrow.end then to 3rd line.center
```

Objects can be named (using a name commencing with an upper-case letter), for example:

```
Bus23:  line up right
```

after which, positions associated with the object can be referenced using the name; for example:

```
arc cw from Bus23.start to Bus23.end with .center at Bus23.center
```

An arc is drawn by specifying its rotation, starting point, end point, and center, but sensible defaults are assumed if any of these are omitted. Note that

```
arc cw from Bus23.start to Bus23.end
```

does *not* define the arc uniquely; there are two arcs that satisfy this specification. This distribution includes the m4 macros

```
arcr( position, radius, start radians, end radians)
arcd( position, radius, start degrees, end degrees)
arca( chord linespec, ccw|cw, radius, modifiers)
```

to draw uniquely defined arcs. For example,

```
arcd((1,1),2,0,-90) -> cw
```

draws a clockwise arc with centre at $(1,1)$, radius 2, from $(3,1)$ to $(1,-1)$, and

```
arca(from (1,1) to (2,2),,1,->)
```

draws an acute angled arc with arrowhead on the chord defined by the first argument.

The linear objects can be given arrowheads at the start, end, or both ends, for example:

```
line dashed <- right 0.5
arc <-> height 0.06 width 0.03 ccw from Here to Here+(0.5,0) \
    with .center at Here+(0.25,0)
spline -> right 0.5 then down 0.2 left 0.3 then right 0.4
```

The arrowheads on the arc above have had their shape adjusted using the `height` and `width` parameters.

3.4   The planar objects: `box`, `circle`, `ellipse`, and text

Planar objects are drawn by specifying the width, height, and position, thus:

```
A: box ht 0.6 wid 0.8 at (1,1)
```

after which, in this example, the position `A.center` is defined, and can be referenced simply as `A`. In addition, the compass corners `A.n`, `A.s`, `A.e`, `A.w`, `A.ne`, `A.se`, `A.sw`, `A.nw` are automatically defined, as are the dimensions `A.height` and `A.width`. Planar objects can also be placed by specifying the location of a defined point; for example, two touching circles can be drawn as shown:

```
circle radius 0.2
circle diameter (last circle.width * 1.2) with .sw at last circle.ne
```

The planar objects can be filled with gray or colour. For example, the line

```
box dashed fill
```

produces a dashed box filled with a medium gray by default. The gray density is controlled using the `fill_(`*number*`)` macro, where $0 \leq number \leq 1$, with 0 corresponding to black and 1 to white.

Basic colours for lines and fills are provided by gpic and dpic, but more elaborate line and fill styles can be incorporated, depending on the printing device, by inserting `\special` commands or other lines beginning with a backslash in the drawing code. In fact, arbitrary lines can be inserted into the output using

```
command "string"
```

where *string* is one or more lines to be inserted.

Arbitrary text strings, typically meant to be typeset by LaTeX, are delimited by double-quote characters and occur in two ways. The first way is illustrated by

```
"\large Resonances of $C_{20}H_{42}$" wid x ht y at position
```

which writes the typeset result, like a box, at *position* and tells pic its size. The default size assumed by pic is given by parameters `textwid` and `textht` if it is not specified as above. The exact typeset size of formatted text can be obtained as described in . The second occurrence associates one or more strings with an object, e.g., the following writes two words, one above the other, at the centre of an ellipse:

```
ellipse "\bf Stop" "\bf here"
```

The C-like pic function `sprintf("`*format string*`",`*numerical arguments*`)` is equivalent to a string.

3.5 Compound objects

A compound object is a group of statements enclosed in square brackets. Such an object is placed by default as if it were a box, but it can also be placed by specifying the final position of a defined point. A defined point is the center or compass corner of the bounding box of the compound object or one of its internal objects. Consider the last line of the code fragment shown:

```
Ands: [ right_
        And1: AND_gate
        And2: AND_gate at And1 - (0,And1.ht*3/2)
        ...
      ] with .And2.In1 at position
```

The two gate macros evaluate to compound objects containing `Out`, `In1`, and other locations. The final positions of all objects inside the square brackets are determined in the last line by specifying the position of `In1` of gate `And2`.

3.6 Other language facilities

All objects have default sizes, directions, and other characteristics, so part of the specification of an object can sometimes be profitably omitted.

Another possibility for defining positions is

expression `between` *position* `and` *position*

which means

1st position + expression × (2nd position − 1st position)

and which can be abbreviated as

expression `<` *position* `,` *position* `>`

Care has to be used in processing the latter construction with m4, since the comma may have to be put within quotes, ',' to distinguish it from the `m4` argument separator.

Positions can be calculated using expressions containing variables. The scope of a position is the current block. Thus, for example,

```
theta = atan2(B.y-A.y,B.x-A.x)
line to Here+(3*cos(theta),3*sin(theta)).
```

Expressions are the usual algebraic combinations of primary quantities: constants, environmental parameters such as `scale`, variables, horizontal or vertical coordinates of terms such as *position*.`x` or *position*.`y`, dimensions of pic objects, e.g. `last circle.rad`. The elementary algebraic operators are `+`, `-`, `*`, `/`, `%`, `=`, `+=`, `-=`, `*=`, `/=`, and `%=`, similar to the C language.

The logical operators `==`, `!=`, `<=`, `>=`, `>`, and `<` apply to expressions and strings. A modest selection of numerical functions is also provided: the single-argument functions `sin`, `cos`, `log`, `exp`, `sqrt`, `int`, where `log` and `exp` are base-10, the two-argument functions `atan2`, `max`, `min`, and the random-number generator `rand()`. Other functions are also provided using macros.

A pic manual should be consulted for details, more examples, and other facilities, such as the branching facility

`if` *expression* `then` `{` *anything* `}` `else` `{` *anything* `}`,

the looping facility

`for` *variable* `=` *expression* `to` *expression* `by` *expression* `do` `{` *anything* `}`,

operating-system commands, pic macros, and external file inclusion.

4 Two-terminal circuit elements

There is a fundamental difference between the two-terminal elements, each of which is drawn on an invisible straight-line segment, and other elements, which are compound objects mentioned in Section 3.5. The two-terminal element macros follow a set of conventions described in this section, and other elements will be described in Section 6.

4.1 Circuit and element basics

A list of the library macros and their arguments is in Section 17. The arguments have default values, so that only those that differ from defaults need be specified.

Figure 6, which shows a resistor, also serves as an example of pic commands. The first part of the source file for this figure is on the left:
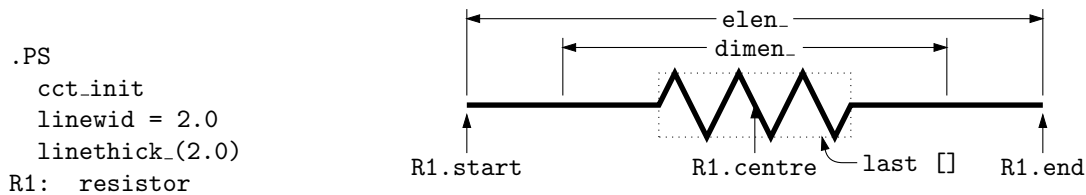
```
.PS
  cct_init
  linewid = 2.0
  linethick_(2.0)
R1:  resistor
```


Figure 6: Resistor named R1, showing the size parameters, enclosing block, and predefined positions.

The lines of Figure 6 and the remaining source lines of the file are explained below:

- The first line invokes the macro cct_init that loads the library libcct.m4 and initializes local variables needed by some circuit-element macros.

- The sizes of circuit elements are multiples of the pic environmental variable linewid, so redefining this variable changes element sizes. The element body is drawn in proportion to dimen_, a macro that evaluates to linewid unless redefined, and the default element length is elen_, which evaluates to dimen_*3/2 unless redefined. Setting linewid to 2.0 as in the example means that the default element length becomes 3.0 in. For resistors, the default length of the body is dimen_/2, and the width is dimen_/6. All of these values can be customized. Element scaling and the use of SI units is discussed further in Section 10.

- The macro linethick_ sets the default thickness of subsequent lines (to 2.0 pt in the example). Macro arguments are written within parentheses following the macro name, with no space between the name and the opening parenthesis. Lines can be broken before macro arguments because m4 and dpic ignore white space immediately preceding arguments. Otherwise, a long line can be continued to the next by putting a backslash as the rightmost character.

- The two-terminal element macros expand to sequences of drawing commands that begin with 'line invis *linespec*', where *linespec* is the first argument of the macro if it is non-blank, otherwise the line is drawn a distance elen_ in the current direction, which is to the right by default. The invisible line is first drawn, then the element is drawn on top of it. The element—rather, the initial invisible line—can be given a name, R1 in the example, so that positions R1.start, R1.centre, and R1.end are automatically defined as shown.

- The element body is overlaid by a block, which can be used to place labels around the element. The block corresponds to an invisible rectangle with horizontal top and bottom lines, regardless of the direction in which the element is drawn. A dotted box has been drawn in the diagram to show the block boundaries.

- The last sub-element, identical to the first in two-terminal elements, is an invisible line that can be referenced later to place labels or other elements. If you create your own macros, you might choose simplicity over generality, and include only visible lines.

To produce Figure 6, the following embellishments were added after the previously shown source:

9

```
        thinlines_
        box dotted wid last [].wid ht last [].ht at last []

        move to 0.85 between last [].sw and last [].se
        spline <- down arrowht*2 right arrowht/2 then right 0.15; "\tt last []" ljust

        arrow <- down 0.3 from R1.start chop 0.05; "\tt R1.start" below
        arrow <- down 0.3 from R1.end chop 0.05; "\tt R1.end" below
        arrow <- down last [].c.y-last arrow.end.y from R1.c; "\tt R1.centre" below

        dimension_(from R1.start to R1.end,0.45,\tt elen\_,0.4)
        dimension_(right_ dimen_ from R1.c-(dimen_/2,0),0.3,\tt dimen\_,0.5)
.PE
```

- The line thickness is set to the default thin value of $0.4\,\text{pt}$, and the box displaying the element body block is drawn. Notice how the width and height can be specified, and the box centre positioned at the centre of the block.

- The next paragraph draws two objects, a spline with an arrowhead, and a string left justified at the end of the spline. Other string-positioning modifiers than ljust are rjust, above, and below.

- The last paragraph invokes a macro for dimensioning diagrams.

4.2   The two-terminal elements

The two-terminal elements are shown in Figure 7 to Figure 12. Several elements are included more than once to illustrate some of their arguments, which are listed in Section 17.
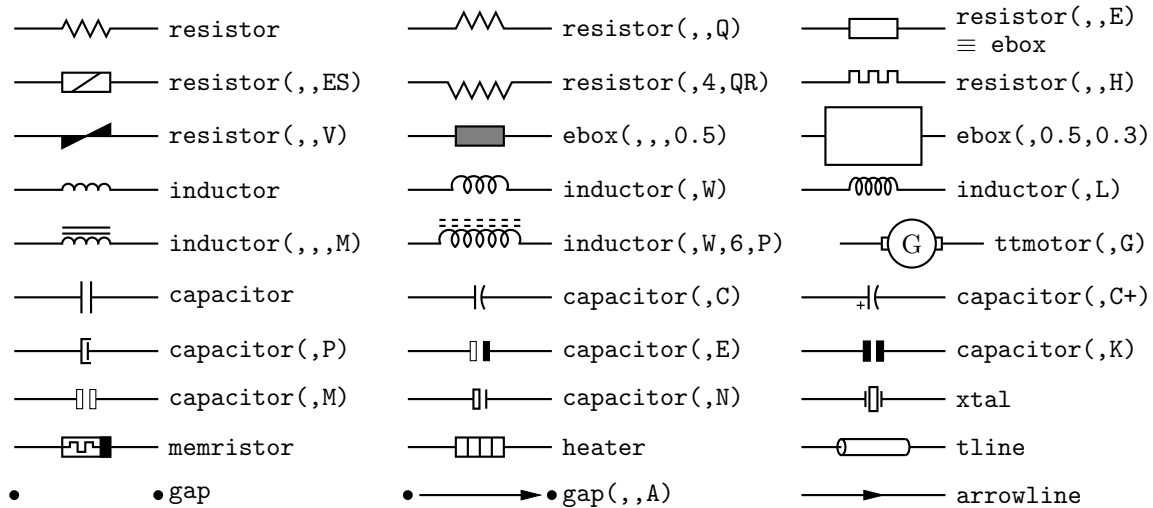
Figure 7: Basic two-terminal elements, showing some variations.

The first macro argument specifies the invisible line segment along which the element is drawn. If the argument is blank, the element is drawn from the current position in the current drawing direction along a default length. The other arguments produce variants of the default elements. Thus, for example,

    resistor(up_ 1.25,7)

draws a resistor 1.25 units long up from the current position, with 7 vertices per side. The macro up_ evaluates to up but also resets the current directional parameters to point up.

Most of the two-terminal elements are oriented; that is, they have a defined polarity. Several element macros include an argument that reverses polarity, but there is also a more general mechanism, as follows.
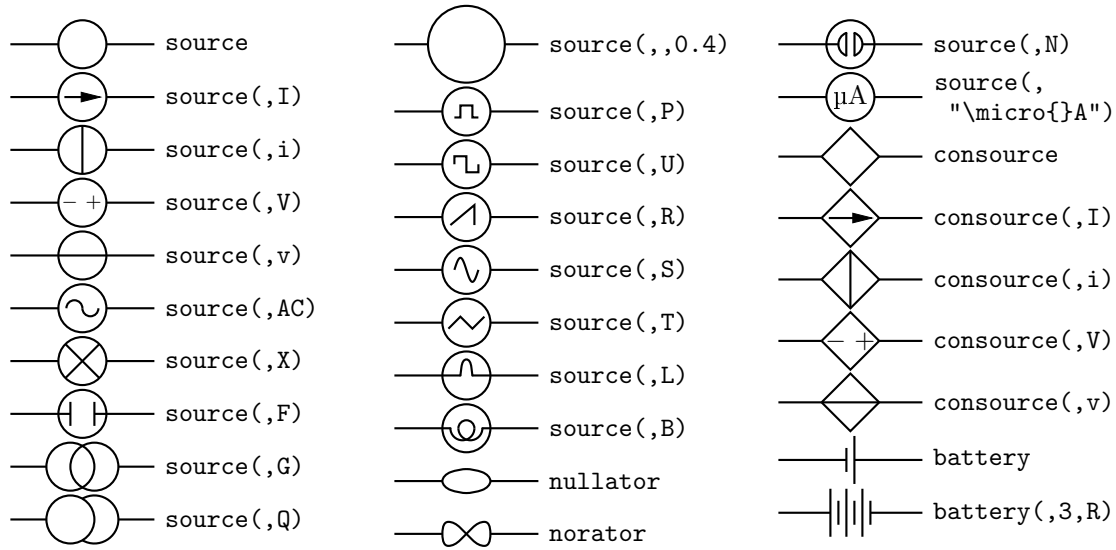
Figure 8: Sources and source-like elements.
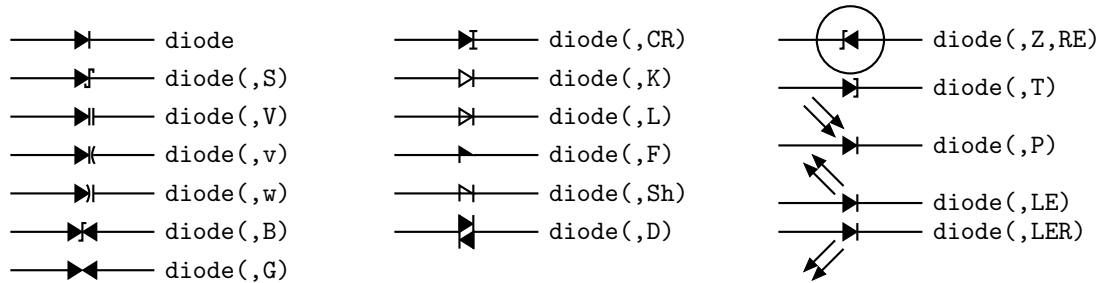
Figure 9: The macro diode(*linespec*,B|CR|D|K|L|LE[R]|P[R]|S|T|V|v|w|Z,[R][E]).
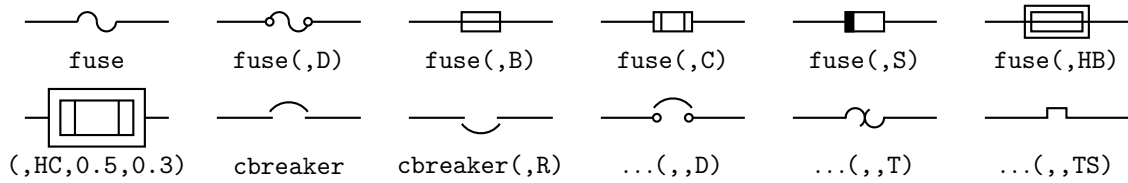
Figure 10: Variations of the macros fuse(*linespec*, A|dA|B|C|D|E|S|HB|HC, *wid*, *ht*) and cbreaker(*linespec*,L|R,D|T|TS).
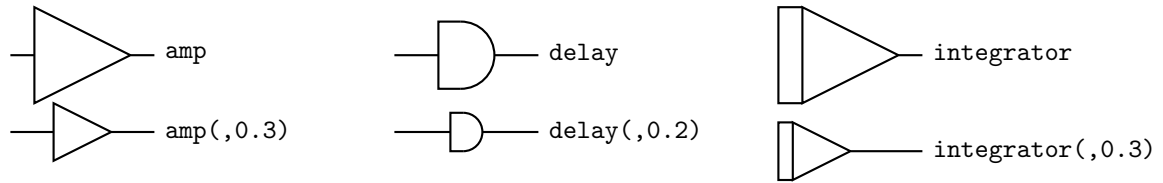
Figure 11: Amplifier, delay, and integrator.

The first argument of the macro

    reversed('*macro name*',*macro arguments*)

is the name of a two-terminal element in quotes, followed by the element arguments. The element is drawn with reversed direction. Thus,

    diode(right_ 0.4); reversed('diode',right_ 0.4)

draws two diodes to the right, but the second one points left.

lswitch   (,,O)   (,,C)   (,,D)   (,,DO)   (,,DC)

(,,K)   (,,KD)   (,,KOD)   (,,KCD)   bswitch   (,,C)

W B
dswitch=
switch(,,,D)

dB K
(,,WdBK)   (,,WBuD)   (,,WBF)   (,,WdBKF)   (,,WBL)

(,,WdBKL)   (,,WBT)   (,,WdBKC)   (,,WBM)   (,,WBCO)   (,,WBMP)

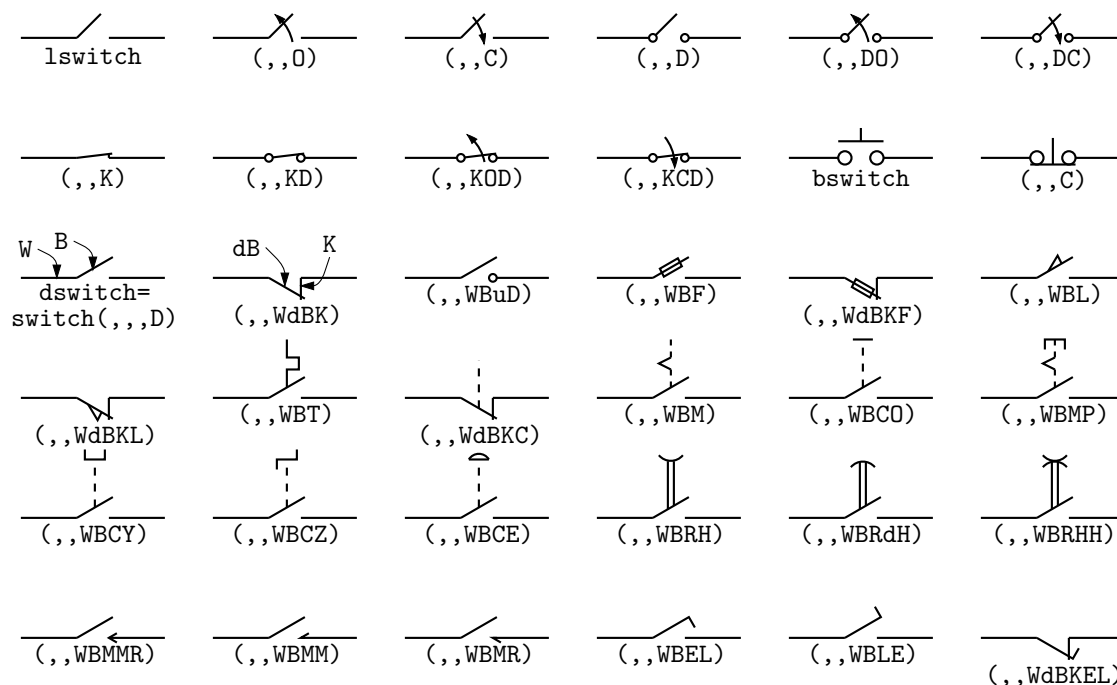(,,WBCY)   (,,WBCZ)   (,,WBCE)   (,,WBRH)   (,,WBRdH)   (,,WBRHH)

(,,WBMMR)   (,,WBMM)   (,,WBMR)   (,,WBEL)   (,,WBLE)   (,,WdBKEL)

Figure 12: The switch(*linespec*,L|R,*chars*,L|B|D) macro is a wrapper for the macros lswitch(*linespec*,[L|R],[O|C][D][K]), bswitch(*linespec*,[L|R],[O|C]), and the many-optioned dswitch(*linespec*,R,W[ud]B[K] *chars*) shown. The switch is drawn in the current drawing direction. A second-argument R produces a mirror image with respect to the drawing direction.

Similarly, the macro

resized(*factor*,'*macro name*',*macro arguments*)

can be used to resize the body of an element by temporarily multiplying the dimen_ macro by *factor*. More general resizing should be done by redefining dimen_ as described in Section 10.1. These two macros can be nested; the following scales the above example by 1.8, for example

resized(1.8,'diode',right_ 0.4); resized(1.8,'reversed','diode',right_ 0.4)

Figure 13 shows some two-terminal elements with arrows or lines overlaid to indicate variability using the macro variable('*element*',*type*,*angle*,*length*), where *type* is one of A, P, L, N, with C or S optionally appended to indicate continuous or stepwise variation. Alternatively, this macro can be invoked similarly to the label macros in Section 4.4 by specifying an empty first argument; thus, the following line draws the resistor in Figure 13:

resistor(down_ dimen_); variable(,uN)
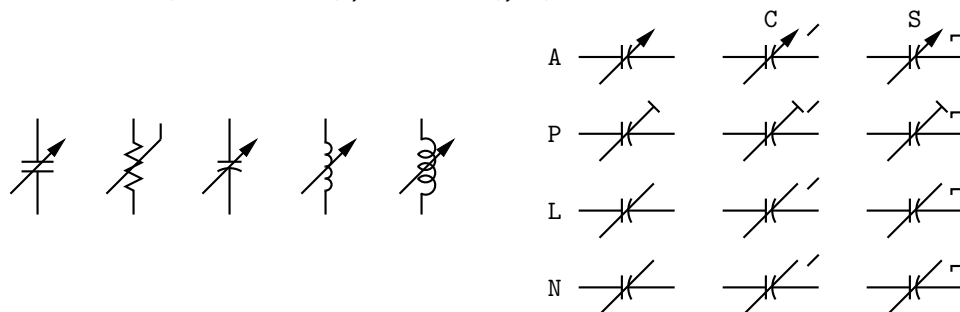
C   S

A

P

L

N

Figure 13: Illustrating variable('*element*',[A|P|L|[u]N][C|S],*angle*,*length*). For example, variable('capacitor(down_ dimen_)') draws the leftmost capacitor shown above, and variable('resistor(down_ dimen_)',uN) draws the resistor. The default angle is 45°, regardless of the direction of the element. The array on the right shows the effect of the second argument.

Figure 14 contains arrows for indicating radiation effects. The arrow stems are named *A1*, *A2*, and each pair is drawn in a `[]` block, with the names *Head* and *Tail* defined to aid placement near another device. The second argument specifies absolute angle in degrees (default 135 degrees).
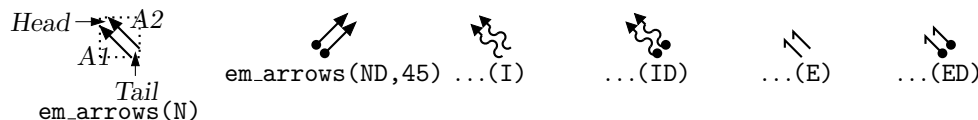

Figure 14: Radiation arrows: `em_arrows(`*type, angle, length*`)`

4.3 Branch-current arrows

Arrowheads and labels can be added to conductors using basic pic statements. For example, the following line adds a labeled arrowhead at a distance `alpha` along a horizontal line that has just been drawn. Many variations of this are possible:

    arrow right arrowht from last line.start+(alpha,0) "i_1" above

Macros have been defined to simplify labelling two-terminal elements, as shown in Figure 15. The macro

    b_current(label, above_|below_, In|O[ut], Start|E[nd], frac)

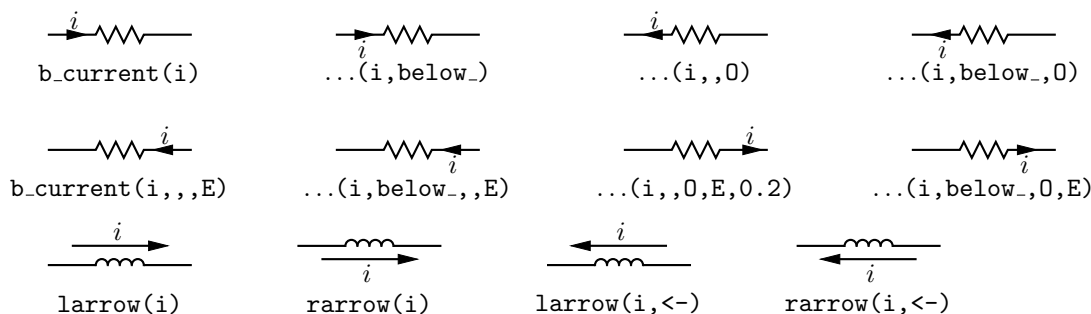draws an arrow from the start of the last-drawn two-terminal element *frac* of the way toward the body.

Figure 15: Illustrating `b_current,` `larrow,` and `rarrow`. The drawing direction is to the right.

If the fourth argument is `End`, the arrow is drawn from the end toward the body. If the third element is `Out`, the arrow is drawn outward from the body. The first argument is the desired label, of which the default position is the macro `above_`, which evaluates to `above` if the current direction is right or to `ljust, below, rjust` if the current direction is respectively down, left, up. The label is assumed to be in math mode unless it begins with `sprintf` or a double quote, in which case it is copied literally. A non-blank second argument specifies the relative position of the label with respect to the arrow, for example `below_`, which places the label below with respect to the current direction. Absolute positions, for example `below` or `ljust`, also can be specified.

For those who prefer a separate arrow to indicate the reference direction for current, the macros `larrow(`*label,* `->|<-,`*dist*`)` and `rarrow(`*label,* `->|<-,`*dist*`)` are provided. The label is placed outside the arrow as shown in Figure 15. The first argument is assumed to be in math mode unless it begins with `sprintf` or a double quote, in which case the argument is copied literally. The third argument specifies the separation from the element.

4.4 Labels

Special macros for labeling two-terminal elements are included:

    llabel(arg1,arg2,arg3)
    clabel(arg1,arg2,arg3)
    rlabel(arg1,arg2,arg3)
    dlabel(long,lat,arg1,arg2,arg3,[X][A|B][L|R])

13

The first macro places the three arguments, which are treated as math-mode strings, on the left side of the element block *with respect to the current direction:* up, down, left, right. The second places the arguments along the centre, and the third along the right side. A simple circuit example with labels is shown in Figure 16. The macro dlabel performs these functions for an obliquely drawn element, placing the three macro arguments at vec_(-long,lat), vec_(0,lat), and vec_(long,lat) respectively relative to the centre of the element. In the fourth argument, an X aligns the labels with respect to the line joining the two terminals rather than the element body, and A, B, L, R use absolute above, below, left, or right alignment respectively for the labels. Labels beginning with sprintf or a double quote are copied literally rather than assumed to be in math mode.

Arbitrary LATEX including \includegraphics, for example, can also be placed on a diagram using

"*LATEX text*" wid *width* ht *height* at *position*

```
.PS
# 'Loop.m4'
cct_init
define('dimen_',0.75)
loopwid = 1; loopht = 0.75
  source(up_ loopht); llabel(-,v_s,+)
  resistor(right_ loopwid); llabel(,R,); b_current(i)
  inductor(down_ loopht,W); rlabel(,L,)
  capacitor(left_ loopwid,C); llabel(+,v_C,-); rlabel(,C,)
.PE
```


Figure 16: A loop containing labeled elements, with its source code.

5 Placing two-terminal elements

The length and position of a two-terminal element are defined by a straight-line segment and, possibly, a direction, so four numbers are required to place the element as in the following example:

resistor(from (1,1) to (2,1)).

However, pic has a very useful concept of the current point (explicitly named Here); thus,

resistor(to (2,1))

is equivalent to

resistor(from Here to (2,1)).

Any defined position can be used; for example, if *C1* and *L2* are names of previously defined two-terminal elements, then, for example, the following places the resistor:

resistor(from L2.end to C1.start)

A line segment starting at the current position can also be defined using a direction and length. To draw a resistor up *d* units from the current position, for example:

resistor(up_ d)

Pic stores the current drawing direction, the latter unfortunately limited to up, down, left, right, which is assumed when necessary. The circuit macros need to know the current direction, so whenever up, down, left, right are used they should be written respectively as the macros up_, down_, left_, right_ as in the above example.

To allow drawing circuit objects in other than the standard four directions, a transformation matrix is applied at the macro level to generate the required pic code. Potentially, the matrix can be used for other transformations. The macro

setdir_(*direction, default direction*)

is preferred when setting drawing direction. The *direction* arguments are of the form

R[ight] | L[eft] | U[p] | D[own] | *degrees,*

but the macros Point_(*degrees*), point_(*radians*), and rpoint_(*relative linespec*) are employed in many macros to re-define the entries of the matrix (named m4a_, m4b_, m4c_, and m4d_) for the required rotation. The macro eleminit_ in the two-terminal elements invokes rpoint_ with a specified or default *linespec* to establish element length and direction.

As shown in Figure 17, 'Point_(-30); resistor' draws a resistor along a line with slope of -30 degrees, and 'rpoint_(to Z)' sets the current direction cosines to point from the current location to location Z. Macro vec_(x,y) evaluates to the position (x,y) rotated as defined by the argument of the previous setdir_, Point_, point_ or rpoint_ command. The principal device used to define relative locations in the circuit macros is rvec_(x,y), which evaluates to position Here + vec_(x,y). Thus, line to rvec_(x,0) draws a line of length x in the current direction.

Figure 17 illustrates that some hand placement of labels using dlabel may be useful when elements are drawn obliquely. The figure also illustrates that any commas within m4 arguments must be treated specially because the arguments are separated by commas. Argument commas are protected either by parentheses as in inductor(from Cr to Cr+vec_(elen_,0)), or by multiple single quotes as in ‘‘,’’, as necessary. Commas also may be avoided by writing 0.5 between L and T instead of 0.5<L,T>.

```
.PS
# 'Oblique.m4'
cct_init

Ct:dot; Point_(-60); capacitor(,C); dlabel(0.12,0.12,,,C_3)
Cr:dot; left_; capacitor(,C); dlabel(0.12,0.12,C_2,,)
Cl:dot; down_; capacitor(from Ct to Cl,C); dlabel(0.12,-0.12,,,C_1)

T:dot(at Ct+(0,elen_))
   inductor(from T to Ct); dlabel(0.12,-0.1,,,L_1)

   Point_(-30); inductor(from Cr to Cr+vec_(elen_,0))
      dlabel(0,-0.07,,L_3,)
R:dot
L:dot( at Cl-(R.x-Cr.x,Cr.y-R.y) )

   inductor(from L to Cl); dlabel(0,-0.12,,L_2,)
   right_; resistor(from L to R); rlabel(,R_2,)
   resistor(from T to R); dlabel(0,0.15,,R_3,) ; b_current(y,ljust)
   line from L to 0.2<L,T>
   source(to 0.5 between L and T); dlabel(sourcerad_+0.07,0.1,-,,+)
      dlabel(0,sourcerad_+0.07,,u,)
   resistor(to 0.8 between L and T); dlabel(0,0.15,,R_1,)
   line to T
.PE
```
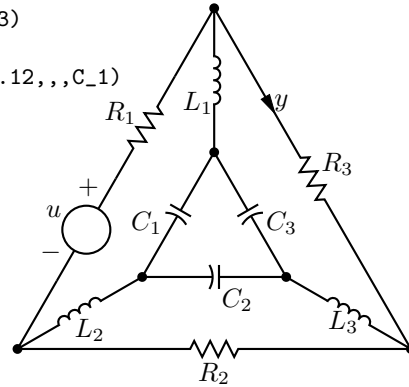
Figure 17: Illustrating elements drawn at oblique angles.

5.1 Series and parallel circuits

To draw elements in series, each element can be placed by specifying its line segment as described previously, but the pic language makes some geometries particularly simple. Thus,
    setdir_(Right)
    resistor; llabel(,R); capacitor; llabel(,C); inductor; llabel(,L)
draws three elements in series as shown in the top line of Figure 18. However, the default length

Figure 18: Three ways of drawing basic elements in series.

elen_ appears too long for some diagrams. It can be redefined temporarily (to dimen_, say), by

enclosing the above line in the pair

```
    pushdef('elen_',dimen_), ... popdef('elen_')
```

with the result shown in the middle row of the figure.

Alternatively, the length of each element can be tuned individually; for example, the capacitor in the above example can be shortened as shown, producing the bottom line of Figure 18:

```
    resistor; llabel(,R)
    capacitor(right_ dimen_/4); llabel(,C)
    inductor; llabel(,L)
```
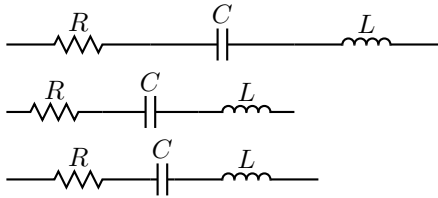
If a macro that takes care of common cases automatically is to be preferred, you can use the macro series_(*elementspec, elementspec*, ...). This macro draws elements of length dimen_ from the current position in the current drawing direction, enclosed in a [ ] block. The internal names Start, End, and C (for centre) are defined, along with any element labels. An *elementspec* is of the form [*Label*:]   *element*; [*attributes*], where an attribute is zero or more of llabel(...), rlabel(...), or b_current(...).

Drawing elements in parallel requires a little more effort but, for example, three elements can be drawn in parallel using the code snippet shown, producing the left circuit in Figure 19:

```
  define('elen_',dimen_)
  L: inductor(right_ 2*elen_,W); llabel(+,L,-)
  R1: resistor(right elen_ from L.start+(0,-dimen_)); llabel(,R1)
  R2: resistor; llabel(,R2)
  C: capacitor(right 2*elen_ from R1.start+(0,-dimen_)); llabel(,C)
     line from L.start to C.start
     line from L.end to C.end
```
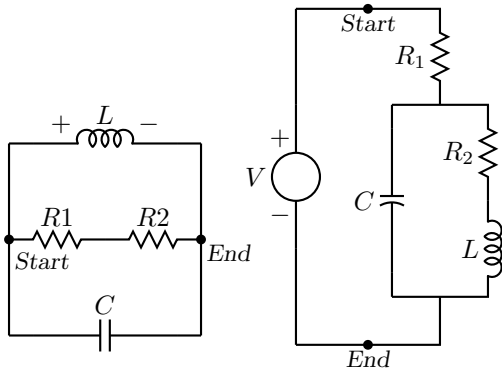


```
setdir_(Down)
parallel_(
 series_('R1:resistor; rlabel(,R_1)',
  parallel_(
    series_('resistor; rlabel(,R_2)',
           'inductor(,W); rlabel(,L)'),
   'capacitor(,C); rlabel(,C)' ),
  line down dimen_/2),
 'Sep=linewid*3/2; V:source; rlabel(+,V,-)')
```

```
parallel_( 'L:inductor(,W); llabel(+,L,-)',
 series_('R1:resistor; llabel(,R1)', 'R2:resistor; llabel(,R2)'),
 'C:capacitor; llabel(,C)' )
```

Figure 19: Illustrating the macros parallel_ and series_, with Start and End points marked.

A macro that produces the same effect automatically is

    parallel_('*elementspec*', '*elementspec*', ...)

The arguments should be quoted to delay expansion, unless an argument is a nested parallel_ macro, in which case it is not quoted. The elements are drawn in a [ ] block with defined points Start, End, and C. An *elementspec* is of the form

    [Sep=*val*;][*Label*:]   *element*; [*attributes*]

where an *attribute* is of the form

    [llabel(...);] | [rlabel(...)] | [b_current(...);]

Putting Sep=*val*; in the first branch sets the default separation of all branches to *val*; in a later element, Sep=*val*; applies only to that branch. An element may have normal arguments but should not change the drawing direction. An element may also be series_(*args*) or nested parallel_(*args*) without quotes, as illustrated in Figure 19.

16

6 Composite circuit elements

Many basic elements are not two-terminal. These elements are usually enclosed in a [ ] pic block, and contain named interior locations and components. The block must be placed by using its compass corners, thus: *element* with *corner* at *position* or, when the block contains a predefined location, thus: *element* with *location* at *position*. A few macros are positioned with the first argument; the `ground` macro, for example: `ground(at position)`. In some cases, an invisible line can be specified by the first argument to determine length and direction (but not position) of the block.

Nearly all elements drawn within blocks can be customized by adding an extra argument, which is executed as the last item within the block.

The macro `potentiometer(`*linespec,cycles,fractional pos,length,* ...), shown in Figure 20, first draws a resistor along the specified line, then adds arrows for taps at fractional positions along the body, with default or specified length. A negative length draws the arrow from the right of the current drawing direction.
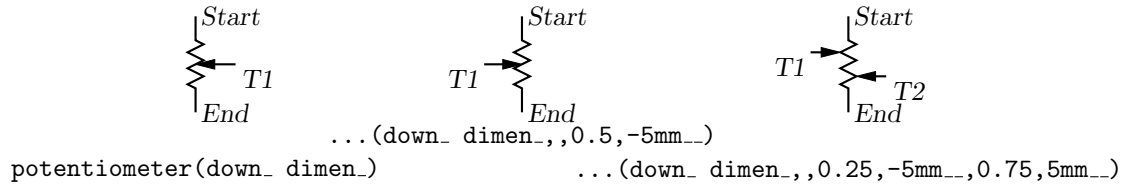

Figure 20: Default and multiple-tap potentiometer.

The macro `addtaps([`*arrowhd* | `type=`*arrowhd*`;name=`*Name*`]`, *fraction, length, fraction, length,* ...), shown in Figure 21, will add taps to the immediately preceding two-terminal element. However, the default names `Tap1, Tap2` ... may not be unique in the current scope. An alternative name for the taps can be specified or, if preferable, the tapped element can be drawn in a [ ] block using the macro `tapped(`'*two-terminal element*', `[`*arrowhd* | `type=`*arrowhd*`;name=`*Name*`]`, *fraction, length, fraction, length,* ...). Internal names `.Start`, `.End`, and `.C` are defined automatically, corresponding to the drawn element. These and the tap names can be used to place the block. These two macros require the two-terminal element to be drawn either up, down, to the left, or to the right; they are not designed for obliquely drawn elements.
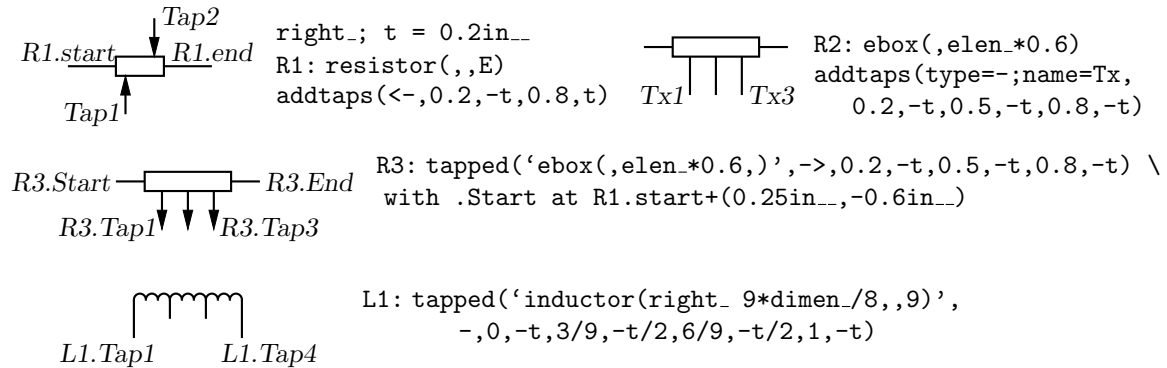
Figure 21: Macros for adding taps to two-terminal elements.

A few composite symbols derived from two-terminal elements are shown in Figure 22.

The ground symbol is shown in Figure 23. The first argument specifies position; for example, the two lines shown have identical effect:

```
move to (1.5,2); ground
ground(at (1.5,2))
```

The second argument truncates the stem, and the third defines the symbol type. The fourth argument specifies the angle at which the symbol is drawn, with D (down) the default. This macro
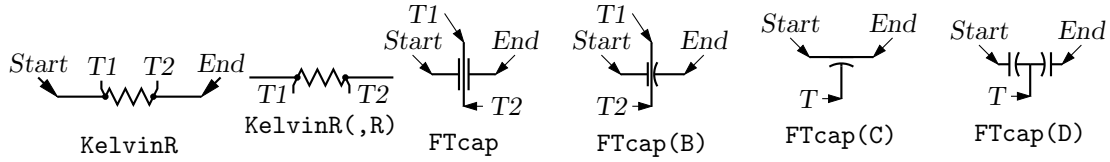
Figure 22: Composite elements `KelvinR(`*cycles*`,[R],`*cycle wid*`)` and `FTcap(`*chars*`)` .

is one of several in which a temporary drawing direction is set using the `setdir_(` U|D|L|R|*degrees, default* R|L|U|D|*degrees* `)` macro and reset at the end using `resetdir_`.

Figure 23: The `ground(` at *position*`,` T`,` N|F|S|L|P|E`,` U|D|L|R|*degrees* `)` macro.

The arguments of the macro `antenna(` at *position*`,` T`,` A|L|T|S|D|P|F`,` U|D|L|R|*degrees* `)` shown in Figure 24 are similar to those of `ground`.

Figure 24: Antenna symbols, with macro arguments shown above and terminal names below.

Figure 25 illustrates the macro `opamp(`*linespec, - label, + label, size, chars*`)`. The element is enclosed in a block containing the predefined internal locatio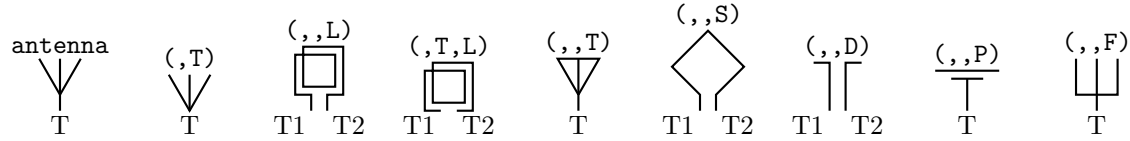ns shown. These locations can be referenced in later commands, for example as '`last []`.`Out`.' The first argument defines the direction and length of the opamp, but the position is determined either by the enclosing block of the opamp, or by a construction such as '`opamp with .In1 at Here`', which places the internal position *In1* at the specified location. There are optional second and third arguments for which the defaults are `\scriptsize$-$` and `\scriptsize$+$` respectively, and the fourth argument changes the size of the opamp. The fifth argument is a string of characters. `P` adds a power connection, `R` exchanges the second and third entries, and `T` truncates the opamp point.
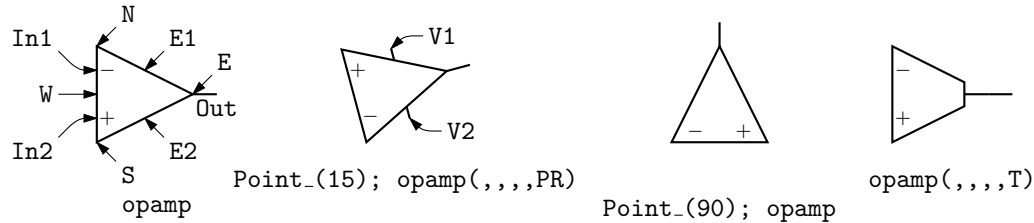
Figure 25: Operational amplifiers. The `P` option adds power connections. The second and third arguments can be used to place and rotate arbitrary text at `In1` and `In2`.

Typeset text associated with circuit elements is not rotated by default, as illustrated by the second and third opamps in Figure 25. The `opamp` labels can be rotated if necessary by using postprocessor commands (for example PSTricks `\rput`) as second and third arguments.

The code in Figure 26 places an opamp with three connections.

Figure 27 shows variants of the transformer macro, which has predefined internal locations *P1, P2, S1, S2, TP,* and *TS*. The first argument specifies the direction and distance from *P1* to *P2*, with position determined by the enclosing block as for opamps. The second argument places the

```
line right 0.2 then up 0.1
A: opamp(up_,,,0.4,R) with .In1 at Here
  line right 0.2 from A.Out
  line down 0.1 from A.In2 then right 0.2
```

Figure 26: A code fragment invoking the `opamp(`*linespec*`,-,+,`*size*`,[R][P])` macro.

secondary side of the transformer to the left or right of the drawing direction. The optional third and fifth arguments specify the number of primary and secondary arcs respectively. If the fourth argument string contains an `A`, the iron core is omitted; if a `P`, the core is dashed (powder); and if it contains a `W`, wide windings are drawn. A `D1` puts phase dots at the *P1, S1* end, `D2` at the *P2, S2* ends, and `D12` or `D21` puts dots at opposite ends.

Figure 27: The `transformer(`*linespec*`,L|R,`*np*`,[A|P][W|L][D1|D2|D12|D21],`*ns*`)` macro (drawing direction `down`), showing predefined terminal and centre-tap points.

Figure 28 shows some audio devices, defined in `[]` blocks, with predefined internal locations as shown. The first argument specifies the device orientation.
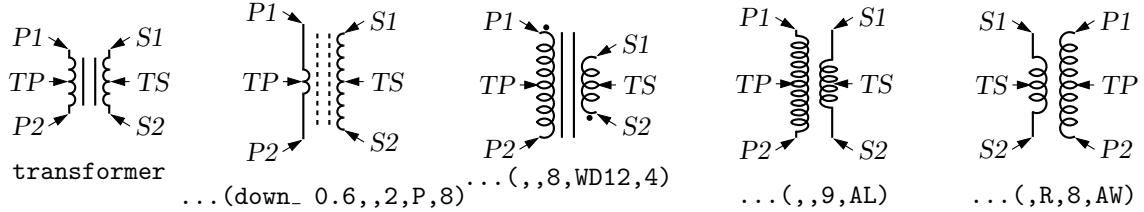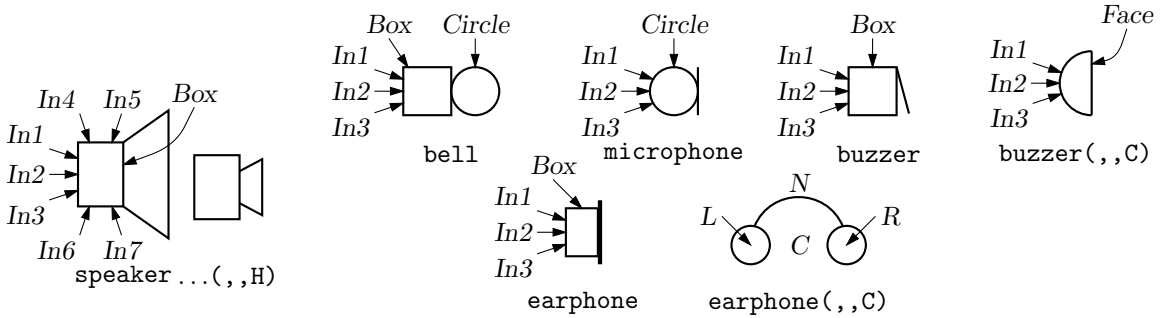

Figure 28: Audio components: `speaker(U|D|L|R|`*degrees*`,`*size*`,`*type*`)`, `bell`, `microphone`, `buzzer`, `earphone`, with their internally named positions and components.

Thus,
```
S: speaker(U) with .In2 at Here
```
places an upward-facing speaker with input *In2* at the current location.

The `nport(`*box specs* `[; `*other commands*`]`*, nw, nn, ne, ns, space ratio, pin lgth, style*`)` macro is shown in Figure 29. The macro begins with the line `define('nport','[Box: box '$1'`, so the first argument is a box specification such as size, fill, or text. The second to fifth arguments specify the number of ports (pin pairs) to be drawn respectively on the west, north, east, and south sides of the box. The end of each pin is named according to the side, port number, and *a* or *b* pin, as shown. The sixth argument specifies the ratio of port width to inter-port space, the seventh is the pin length, and setting the eighth argument to `N` omits the pin dots. The macro ends with `'$9']')`, so that a ninth argument can be used to add further customizations within the enclosing block.

The `nterm(`*box specs, nw, nn, ne, ns, pin lgth, style*`)` macro illustrated in Figure 29 is similar to the `nport` macro but has one fewer argument, draws single pins instead of pin pairs, and defaults to a 3-terminal box.

Many custom labels or added elements may be required, particularly for 2-ports. These elements can be added using the first argument and the ninth of the `nport` macro. For example, the following code adds a pair of labels to the box immediately after drawing it but within the enclosing block:
```
nport(; '"0"' at Box.w ljust; '"∞"' at Box.e rjust)
```

19
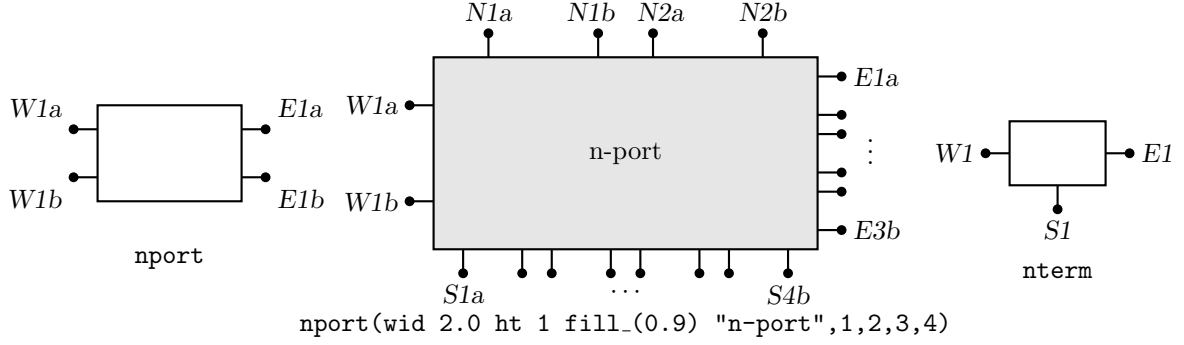
Figure 29: The nport macro draws a sequence of pairs of named pins on each side of a box. The pin names are shown. The default is a twoport. The nterm macro draws single pins instead of pin pairs.

If this trick were to be used extensively, then the following custom wrapper would save typing, add the labels, and pass all arguments to nport:

```
define('nullor','nport('$1'
  {'"${}0$"' at Box.w ljust
   '"$\infty$"' at Box.e rjust},shift($@))')
```

The above example and the related gyrator macro are illustrated in Figure 30.
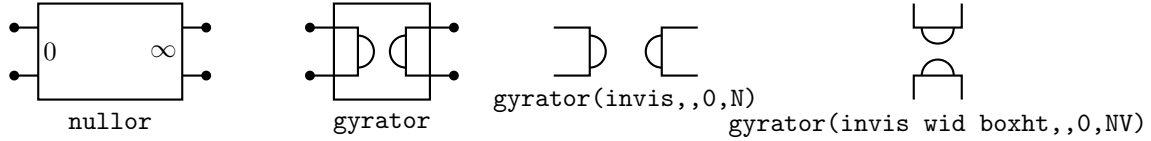
Figure 30: The nullor example and the gyrator macro are customizations of the nport macro.

A basic winding macro for magnetic-circuit sketches and similar figures is shown in Figure 31. For simplicity, the complete spline is first drawn and then blanked in appropriate places using the background (core) color (lightgray for example, default white).
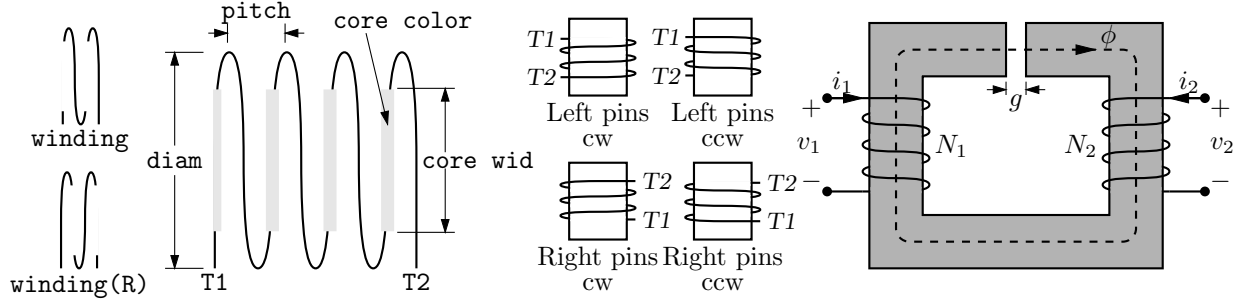
Figure 31: The winding(L|R, diam, pitch, turns, core wid, core color) macro draws a coil with axis along the current drawing direction. Terminals T1 and T2 are defined. Setting the first argument to R draws a right-hand winding.

Figure 32 shows the macro contact(chars), which contains predefined locations P, C, O for the armature and normally closed and normally open terminals. An I in the first argument draws open circles for contacts. The macro relay(poles, chars, R) defines coil terminals $V1$, $V2$ and contact terminals P_i, C_i, O_i.

The double-throw switches shown in Figure 33 are drawn in the current drawing direction like the two-terminal elements, but are composite elements that must be placed accordingly.

The jack and plug macros and their defined points are illustrated in Figure 34. The first argument of both macros establishes the drawing direction. The second argument is a string of
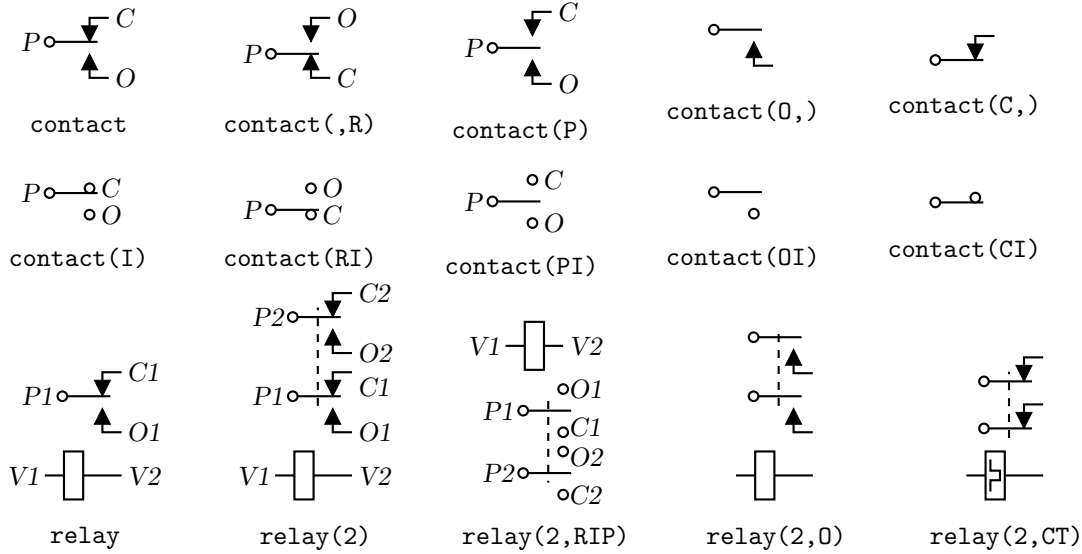
Figure 32: The contact(O|C,R) and relay(poles,O|C,R) macros (default direction right).
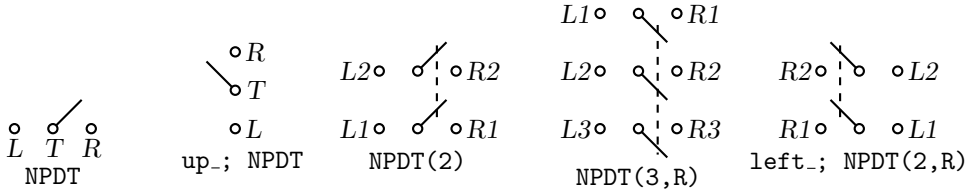
Figure 33: Multipole double-throw switches drawn by NPDT(npoles, [R]).
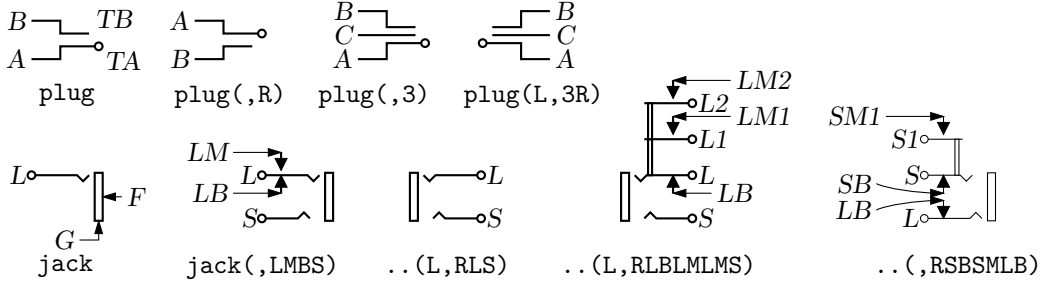
Figure 34: The jack(U|D|L|R|degrees, chars) and plug(U|D|L|R|degrees,[2|3][R]) components and their defined points.

characters defining drawn components. An R in the string specifies a right orientation with respect to the drawing direction. The two principal terminals of the jack are included by putting L S or both into the string with associated make (M) or break (B) points. Thus, LMB within the third argument draws the L contact with associated make and break points. Repeated L[M|B] or S[M|B] substrings add auxiliary contacts with specified make or break points.

A macro for drawing headers is in Figure 35, and some experimental connectors are shown in Figure 36 and Figure 37. The tstrip macros allows key=value; arguments for width and height.
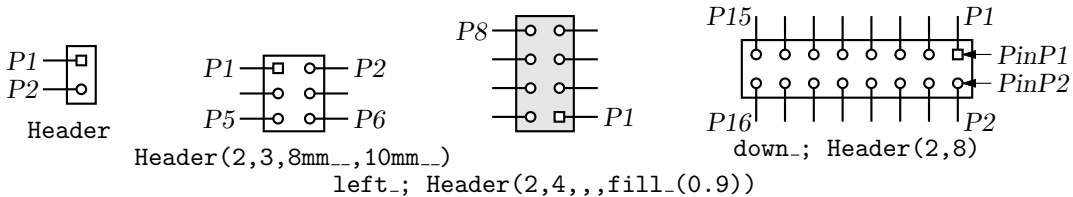
Figure 35: Macro Header(1|2, rows, wid, ht, type).

Figure 36: Macros tstrip(R|L|U|D|*degrees*, *chars*), ccoax(at *location*, M|F, *diameter*), and tconn(*linespec*, >|>>|<|<<|O[F], *wid*).

Figure 37: A small set of power connectors drawn by pconnex(R|L|U|D|*degrees, chars*). Each connector has an internal H, N, and where applicable, a G shape.

6.1 Semiconductors

Figure 38 shows the variants of bipolar transistor macro bi_tr(*linespec*,L|R,P,E) which contains predefined internal locations E, B, C. The first argument defines the distance and direction from E

Figure 38: Bipolar transistor variants (current direction upward).

to C, with location determined by the enclosing block as for other elements, and the base placed to the left or right of the current drawing direction according to the second argument. Setting the third argument to 'P' creates a PNP device instead of NPN, and setting the fourth to 'E' draws an envelope around the device. Figure 39 shows a composite macro with several optional internal elements.

Figure 39: Macro Darlington(L|R,[E][P][B1][E1|R1][E2|R2][D][Z]), drawing direction up_.

The code fragment example in Figure 40 places a bipolar transistor, connects a ground to the emitter, and connects a resistor to the collector.

```
S: dot; line left_ 0.1; up_
Q1: bi_tr(,R) with .B at Here
ground(at Q1.E)
line up 0.1 from Q1.C; resistor(right_ S.x-Here.x); dot
```

Figure 40: The bi_tr(*linespec*,L|R,P,E) macro.

The bi_tr and igbt macros are wrappers for the macro bi_trans(*linespec*, L|R, *chars*, E), which draws the components of the transistor according to the characters in its third argument. For example, multiple emitters and collectors can be specified as shown in Figure 41.
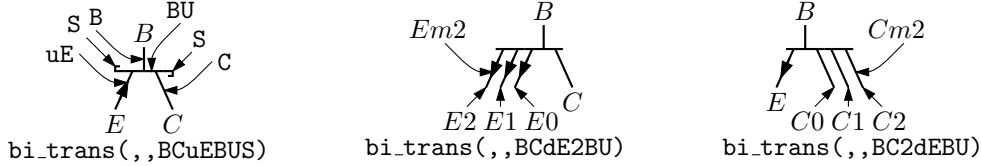
Figure 41: The bi_trans(*linespec*,L|R,*chars*,E) macro. The sub-elements are specified by the third argument. The substring E*n* creates multiple emitters *E0* to *En*. Collectors are similar.

A UJT macro with predefined internal locations *B1*, *B2*, and *E* is shown in Figure 42, and a thyristor macro with predefined internal locations *G* and *T1*, *T2*, or *A*, *K* is in Figure 43. Except for the *G* terminal, a thyristor (the IEC variant excluded) is much like an two-terminal element. The

Figure 42: UJT devices, with current drawing direction up_.
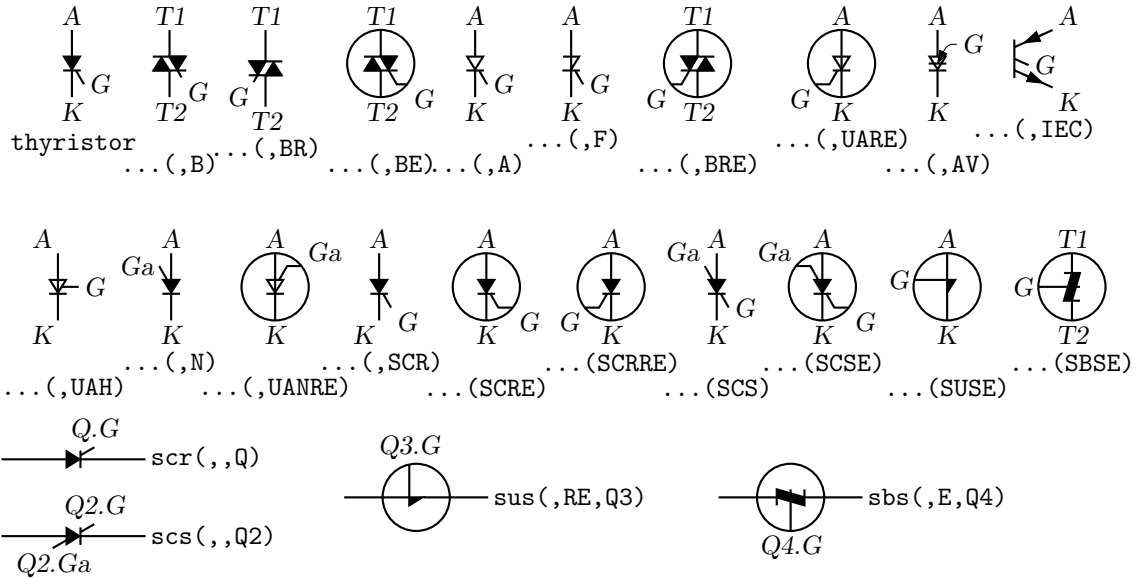
Figure 43: The top two rows illustrate use of the thyristor(*linespec, chars*) macro, drawing direction down_, and the bottom row shows wrapper macros (drawing direction right_) that place the thyristor like a two-terminal element.

wrapper macro `scr`(*linespec, chars, label*) and similar macros `scs, sus,` and `sbs` place thyristors using *linespec* as for a two-terminal element, but require a third argument for the label for the compound block; thus,

        scr(from A to B,,Q3); line right from Q3.G

draws the element from position *A* to position *B* with label *Q3*, and draws a line from *G*.

The number of possible semiconductor symbols is very large, so these macros must be regarded as prototypes. Often an element is a minor modification of existing elements. For example, the `thyristor`(*linespec, chars*) macro illustrated in Figure 43 is derived from the diode and bipolar transistor macros. Another example is the `tgate` macro shown in Figure 44, which also shows a pass transistor.
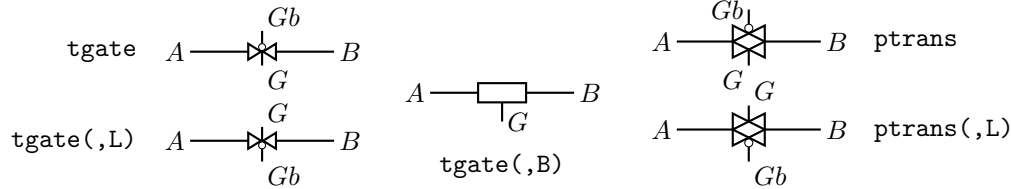
Figure 44: The `tgate`(*linespec,* `[B][R|L]`) element, derived from a customized diode and `ebox`, and the `ptrans`(*linespec,* `[R|L]`) macro. These are not two-terminal elements, so the *linespec* argument defines the direction and length of the line from *A* to *B* but not the element position.

Some FETs with predefined internal locations *S*, *D*, and *G* are also included, with similar arguments to those of `bi_tr,` as shown in Figure 45. In all cases the first argument is a linespec, and entering `R` as the second argument orients the *G* terminal to the right of the c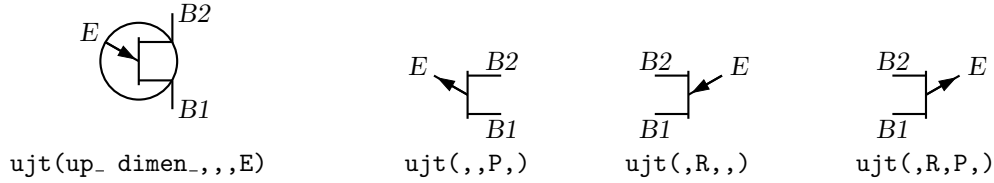urrent drawing direction. The macros in the top three rows of the figure are wrappers for the general macro `mosfet`(*linespec,*R,*characters,*E). The third argument of this macro is a subset of the characters {`BDEFGLMQRSTXZ`}, each letter corresponding to a diagram component as shown in the bottom row of the figure. Preceding the characters `B`, `G`, and `S` by `u` or `d` adds an up or down arrowhead to the pin, preceding `T` by `d` negates the pin, and preceding `M` by `u` or `d` puts the pin at the drain or source end respectively of the gate. The obsolete letter `L` is equivalent to `dM` and has been kept temporarily for compatibility. This system allows considerable freedom in choosing or customizing components, as illustrated in Figure 45.
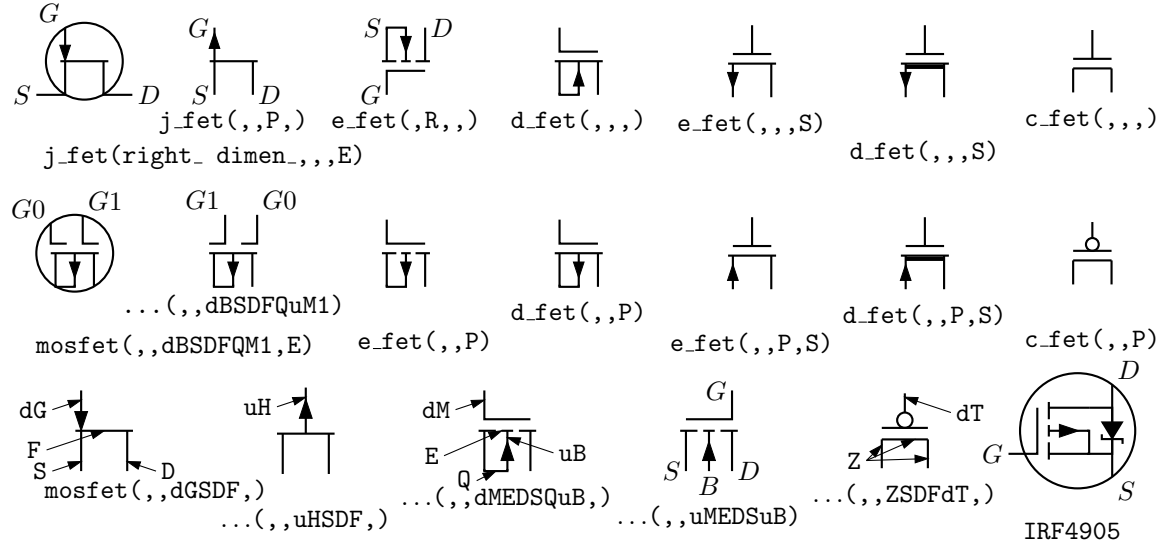
Figure 45: JFET, insulated-gate enhancement and depletion MOSFETs, and simplified versions. These macros are wrappers that invoke the `mosfet` macro as shown in the middle and bottom rows. The two lower-right examples show custom devices, the first defined by omitting the substrate connection, and the second defined using a wrapper macro.

Some other non-two-terminal macros are `dot`, which has an optional argument '`at` *location*', the line-thickness macros, the `fill_` macro, and `crossover`, which is a useful if archaic method to show non-touching conductor crossovers, as in Figure 46.
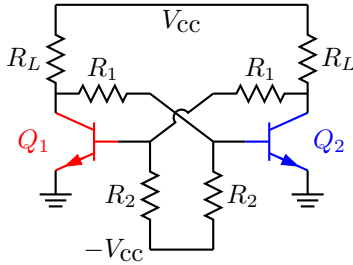
Figure 46: Bipolar transistor circuit, illustrating `crossover` and colored elements.

This figure also illustrates how elements and labels can be colored using the macro

`rgbdraw(`*r*, *g*, *b*, *drawing commands*`)`

where the *r, g, b* values are in the range 0 to 1 (integers from 0 to 255 for SVG) to specify the rgb color. This macro is a wrapper for the following, which may be more convenient if many elements are to be given the same color:

`setrgb(`*r*, *g*, *b*`)`
drawing commands
`resetrgb`

A macro is also provided for colored fills:

`rgbfill(`*r*, *g*, *b*, *drawing commands*`)`

These macros depend heavily on the postprocessor and are intended only for PSTricks, Ti*k*z PGF, MetaPost, SVG, and the Postscript or PDF output of dpic.

7 Corners

If two straight lines meet at an angle then, depending on the postprocessor, the corner may not be mitred or rounded unless the two lines belong to a multisegment line, as illustrated in Figure 47. This is normally not an issue for circuit diagrams unless the figure is magnified or thick lines are drawn. Rounded corners can be obtained by setting post-processor parameters, but the figure shows the effect of macros `round` and `corner`. The macros `mitre_(`*Position1,Position2,Position3,length,attributes*`)` and `Mitre_(`*Line1,Line2,length,attributes*`)` may assist as shown. Otherwise, a rght-angle line can be extended by half the line thickness (macro `hlth`) as shown on the upper row of the figure, or a two-segment line can be overlaid at the corner to produce the same effect.
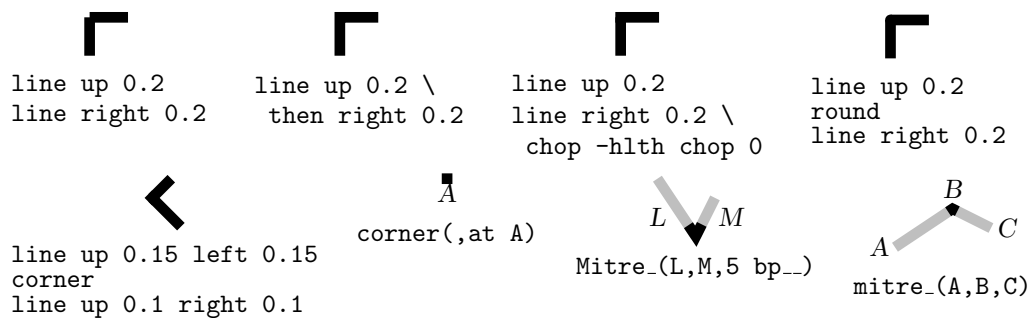
Figure 47: Producing mitred angles and corners.

8 Looping

Sequential actions can be performed using either the dpic command

```
for variable=expression to expression [by expression] do { actions }
```
or at the m4 processing stage. The `libgen` library defines the macro
```
for_(start, end, increment, 'actions')
```
for this and other purposes. Nested loops are allowed and the innermost loop index variable is `m4x`. The first three arguments must be integers and the *end* value must be reached exactly; for example, `for_(1,3,2,'print In''m4x')` prints locations *In1* and *In3*, but `for_(1,4,2,'print In''m4x')` does not terminate since the index takes on values 1, 3, 5, ...

Repetitive actions can also be performed with the `libgen` macro
```
Loopover_('variable', actions, value1, value2, ...)
```
which evaluates *actions* for each instance of *variable* set to *value1, value2, ...*.

9   Logic gates

Figure 48 shows the basic logic gates included in library `liblog.m4`. The first argument of the gate macros can be an integer N from 0 to 16, specifying the number of input locations `In1`, ... `In`N, as illustrated for the NOR gate in the figure. By default, $N = 2$ except for macros `NOT_gate` and `BUFFER_gate`, which have one input `In1` unless they are given a first argument, which is treated as the line specification of a two-terminal element.
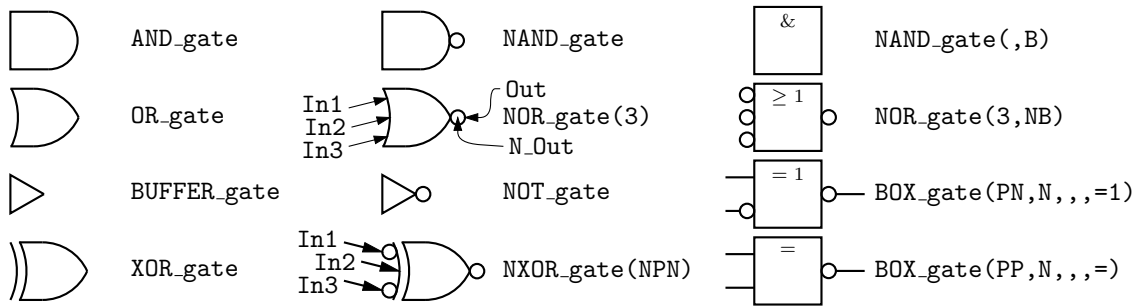
Figure 48: Basic logic gates. The input and output locations of a three-input NOR gate are shown. Inputs are negated by including an `N` in the second argument letter sequence. A `B` in the second argument produces a box shape as shown in the rightmost column, where the second example has AND functionality and the bottom two are examples of exclusive OR functions.

Input locations retain their positions relative to the gate body regardless of gate orientation, as in Figure 49. Beyond a default number (6) of inputs, the gates are given wings as in Figure 50.

```
.PS
# 'FF.m4'
log_init
S: NOR_gate
   left_
R: NOR_gate at S+(0,-L_unit*(AND_ht+1))
   line from S.Out right L_unit*3 then down S.Out.y-R.In2.y then to R.In2
   line from R.Out left L_unit*3 then up S.In2.y-R.Out.y then to S.In2
   line left 4*L_unit from S.In1 ; "$S$sp_" rjust
   line right 4*L_unit from R.In1 ; "sp_$R$" ljust
.PE
```


Figure 49: *SR* flip-flop.

Negated inputs or outputs are marked by circles drawn using the `NOT_circle` macro. The name marks the point at the outer edge of the circle and the circle itself has the same name prefixed by `N_`. For example, the output circle of a nand gate is named `N_Out` and the outermost point of the circle is named `Out`. Instead of a number, the first argument can be a sequence of letters `P` or `N` to define normal or negated inputs; thus for example, `NXOR_gate(NPN)` defines a 3-input nxor gate with not-circle inputs `In1` and `In3` and normal input `In2` as shown in the figure. The macro `IOdefs` can also be used to create a sequence of custom named inputs or outputs.
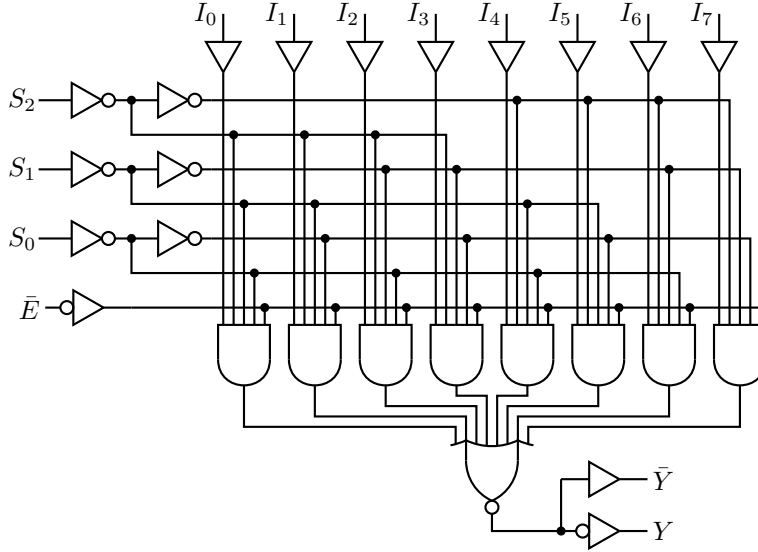
Figure 50: Eight-input multiplexer, showing a gate with wings.

Gates are typically not two-terminal elements and are normally drawn horizontally or vertically (although arbitrary directions may be set with e.g. Point_(*degrees*)). Each gate is contained in a block of typical height 6*L_unit where L_unit is a macro intended to establish line separation for an imaginary grid on which the elements are superimposed.

Including an N in the second argument character sequence of any gate negates the inputs, and including B in the second argument invokes the general macro BOX_gate([P|N]...,[P|N],*horiz size*,*vert size*,*label*), which draws box gates. Thus, BOX_gate(PNP,N,,8,\geq 1) creates a gate of default width, eight L_units height, negated output, three inputs with the second negated, and internal label "≥ 1". If the fifth argument begins with sprintf or a double quote then the argument is copied literally; otherwise it is treated as scriptsize mathematics.

The macro BUFFER_gate(*linespec*,[N|B],*wid*,*ht*,[N|P]*,[N|P]*) is a wrapper for the composite element BUFFER_gen. If the second argument is B, then a box gate is drawn; otherwise the gate is triangular. Arguments 5 and 6 determine the number of defined points along the northeast and southeast edges respectively, with an N adding a NOT circle. If the first argument is non-blank however, then the buffer is drawn along an invisible line like a two-terminal element, which is convenient sometimes but requires internal locations of the block to be referenced using last [], as shown in Figure 51.
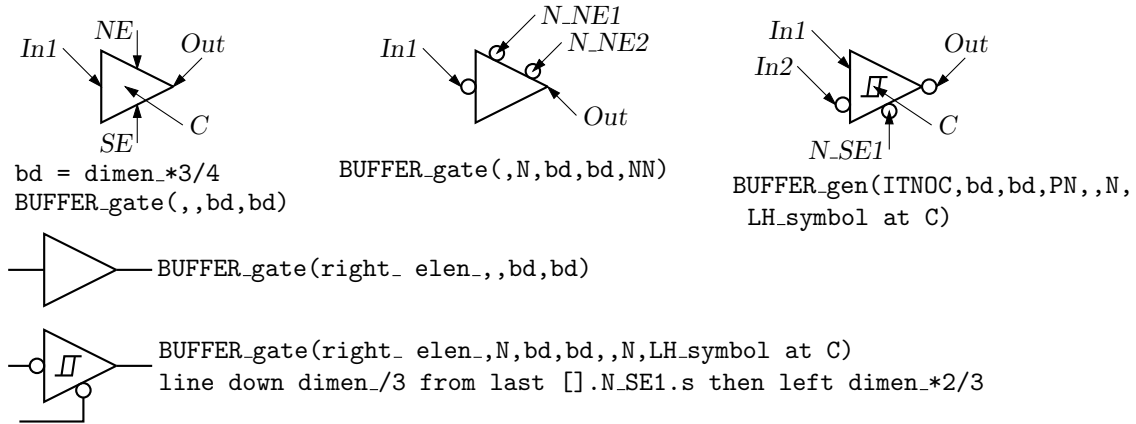
Figure 51: The BUFFER_gate and BUFFER_gen macros. The bottom two examples show how the gate can be drawn as a two-terminal macro but internal block locations must be referenced using last [].

A good strategy for drawing complex logic circuits might be summarized as follows:

- Establish the absolute locations of gates and other major components (e.g. chips) relative to a grid of mesh size commensurate with L_unit, which is an absolute length.
- Draw minor components or blocks relative to the major ones, using parameterized relative distances.
- Draw connecting lines relative to the components and previously drawn lines.
- Write macros for repeated objects.
- Tune the diagram by making absolute locations relative, and by tuning the parameters. Some useful macros for this are the following, which are in units of L_unit:

    AND_ht, AND_wd: the height and width of basic AND and OR gates

    BUF_ht, BUF_wd: the height and width of basic buffers

    N_diam: the diameter of NOT circles

Figure 52 shows a multiplexer block with variations, and Figure 53 shows the very similar demultiplexer.
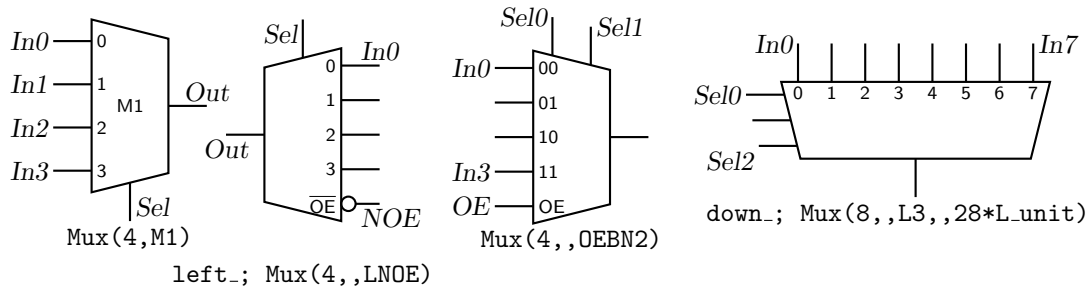
Figure 52: The Mux(*input count*, *label*, [L][B|H][N[*n*]|S[*n*]][[N]OE],*wid*,*ht*) macro.
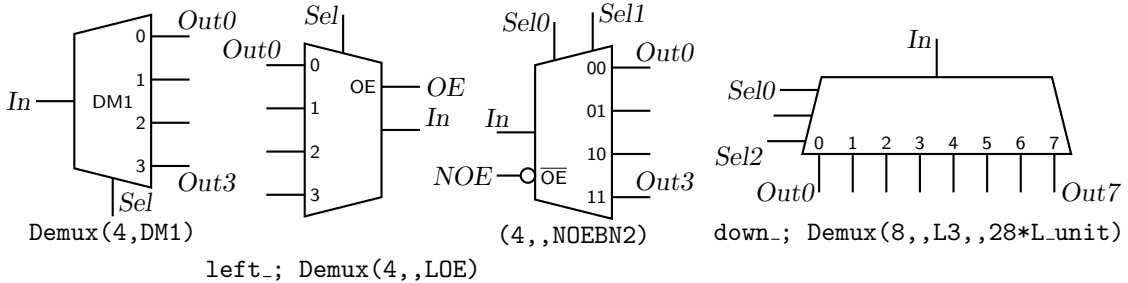
Figure 53: The Demux(*input count*, *label*, [L][B|H][N[*n*]|S[*n*]][[N]OE],*wid*,*ht*) macro.

Figure 54 shows the macro FlipFlop(D|T|RS|JK, *label, boxspec*), which is a wrapper for the more general macro FlipFlopX(*boxspec, label, leftpins, toppins, rightpins, bottompins*). Each of arguments 3 to 6 is null or a string of *pinspecs* separated by semicolons (;). *Pinspecs* are either empty (null) or of the form [*pinopts*]:[*label*[:*Picname*]]. The first colon draws the pin. Pins are placed top to bottom or left to right along the box edges with null pinspecs counted for placement. Pins are named by side and number by default; eg W1, W2, ..., N1, N2, ..., E1, ..., S1, ... ; however, if :*Picname* is present in a *pinspec* then *Picname* replaces the default name. A *pinspec* label is text placed at the pin base. Semicolons are not allowed in labels; use eg \char59{} instead, and to put a bar over a label, use lg_bartxt(*label*). The *pinopts* are [L|M|I|O][N][E] as for the lg_pin macro.

Customized gates can be defined simply. For example, the following code defines the custom flipflops in Figure 55.

```
define('customFF','FlipFlopX(wid 10*L_unit ht FF_ht*L_unit,,
    :S;NE:CK::R, N:PR, :Q;;ifelse('$1',1,:lg_bartxt(Q)), N:CLR) ')
```
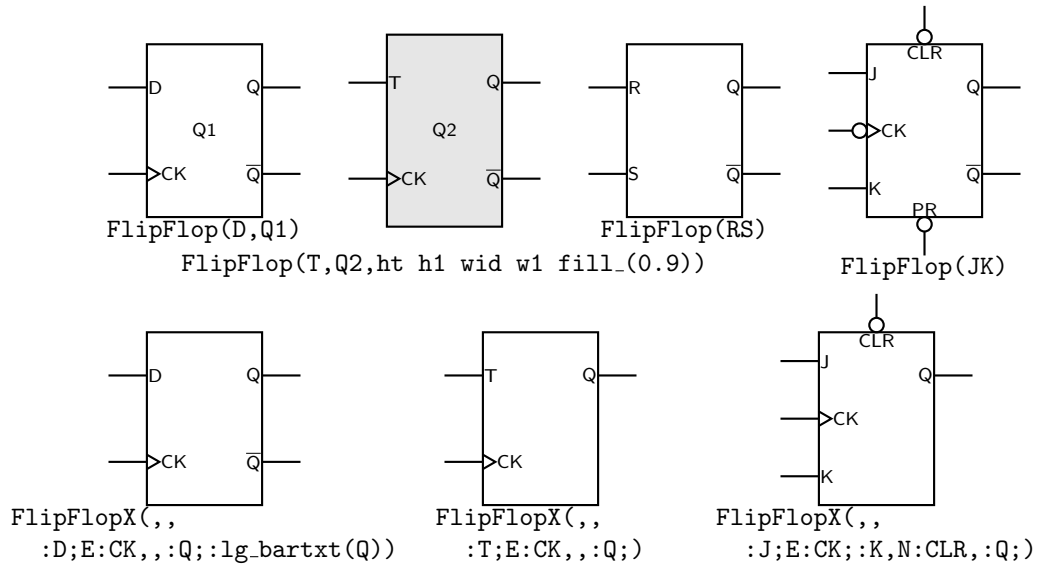
Figure 54: The `FlipFlop` and `FlipFlopX` macros, with variations.
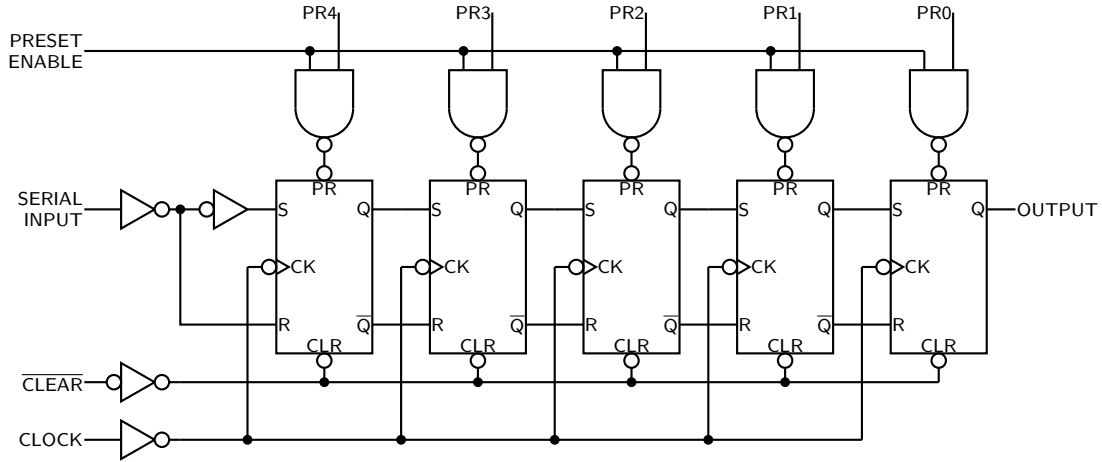
Figure 55: A 5-bit shift register.

This definition makes use of macros `L_unit` and `FF_ht` that predefine dimensions. There are three pins on the right side; the centre pin is null and the bottom is null if the first macro argument is 1.

For hybrid applications, the `dac` and `adc` macros are illustrated in Figure 56. The figure shows the default and predefined internal locations, the number of which can be specified as macro arguments.
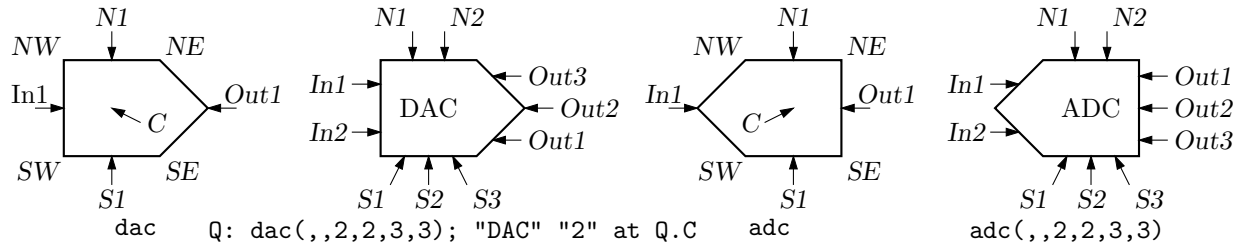
Figure 56: The `dac(`*width,height,*`nIn,nN,nOut,nS)` and `adc(`*width,height,*`nIn,nN,nOut,nS)` macros.

In addition to the logic gates described here, some experimental IC chip diagrams are included with the distributed example files.

10 Element and diagram scaling

There are several issues related to scale changes. You may wish to use millimetres, for example, instead of the default inches. You may wish to change the size of a complete diagram while keeping the relative proportions of objects within it. You may wish to change the sizes or proportions of individual elements within a diagram. You must take into account that line widths are scaled separately from drawn objects, and that the size of typeset text is independent of the pic language.

The scaling of circuit elements will be described first, then the pic scaling facilities.

10.1 Circuit scaling

The circuit elements all have default dimensions that are multiples of the pic environmental parameter `linewid`, so changing this parameter changes default element dimensions. The scope of a pic variable is the current block; therefore, a sequence such as

```
  resistor
T: [linewid = linewid*1.5; up_; Q: bi_tr] with .Q.B at Here
  ground(at T.Q.E)
  resistor(up_ dimen_ from T.Q.C)
```

connects two resistors and a ground to an enlarged transistor. Alternatively, you may redefine the default length `elen_` or the body-size parameter `dimen_`. For example, adding the line

```
    define('dimen_',(dimen_*1.2))
```

after the `cct_init` line of `quick.m4` produces slightly larger body sizes for all circuit elements. For logic elements, the equivalent to the `dimen_` macro is `L_unit`, which has default value (`linewid/10`).

The macros `capacitor`, `inductor`, and `resistor` have arguments that allow the body sizes to be adjusted individually. The macro `resized` mentioned previously can also be used.

10.2 Pic scaling

There are at least three kinds of graphical elements to be considered:

1. When generating final output after reading the `.PE` line, pic processors divide distances and sizes by the value of the environmental parameter `scale`, which is 1 by default. Therefore, the effect of assigning a value to `scale` at the beginning of the diagram is to change the drawing unit (initially 1 inch) throughout the figure. For example, the file `quick.m4` can be modified to use millimetres as follows:

   ```
   .PS                         # Pic input begins with .PS
   scale = 25.4                # mm
   cct_init                    # Set defaults

   elen = 19                   # Variables are allowed
   ...
   ```

   The default sizes of pic objects are redefined by assigning new values to the environmental parameters `arcrad`, `arrowht`, `arrowwid`, `boxht`, `boxrad`, `boxwid`, `circlerad`, `dashwid`, `ellipseht`, `ellipsewid`, `lineht`, `linewid`, `moveht`, `movewid`, `textht`, and `textwid`. The `...ht` and `...wid` parameters refer to the default sizes of vertical and horizontal lines, moves, etc., except for `arrowht` and `arrowwid`, which are arrowhead dimensions. The `boxrad` parameter can be used to put rounded corners on boxes. Assigning a new value to `scale` also multiplies all of these parameters except `arrowht`, `arrowwid`, `textht`, and `textwid` by the new value of `scale` (gpic multiplies them all). Therefore, objects drawn to default sizes are unaffected by changing `scale` at the beginning of the diagram. To change default sizes, redefine the appropriate parameters explicitly.

2. The `.PS` line can be used to scale the entire drawing, regardless of its interior. Thus, for example, the line `.PS 100/25.4` scales the entire drawing to a width of 100 mm. Line thickness, text size, and dpic arrowheads are unaffected by this scaling.

   If the final picture width exceeds `maxpswid`, which has a default value of 8.5, then the picture is scaled to this size. Similarly, if the height exceeds `maxpsht` (default 11), then the picture is scaled to fit. These parameters can be assigned new values as necessary, for example, to accommodate landscape figures.

3. The finished size of typeset text is independent of pic variables, but can be determined as in Section 12. Then, `"text" wid` x `ht` y tells pic the size of `text`, once the printed width x and height y have been found.

4. Line widths are independent of diagram and text scaling, and have to be set explicitly. For example, the assignment `linethick = 1.2` sets the default line width to 1.2 pt. The macro `linethick_(points)` is also provided, together with default macros `thicklines_` and `thinlines_`.

11 Writing macros

The m4 language is quite simple and is described in numerous documents such as the original reference [8] or in later manuals [14]. If a new circuit or other element is required, then it may suffice to modify and rename one of the library definitions or simply add an option to it. Hints for drawing general two-terminal elements are given in `libcct.m4`. However, if an element or block is to be drawn in only one orientation then most of the elaborations used for general two-terminal elements in Section 4 can be dropped. If you develop a library of custom macros in the installation directory then the statement `include(mylibrary.m4)` can bring its definitions into play.

It may not be necessary to define your own macro if all that is needed is a small addition to an existing element that is defined in an enclosing `[ ]` block. After the element arguments are expanded, one argument beyond the normal list is automatically expanded before exiting the block, as mentioned near the beginning of Section 6. This extra argument can be used to embellish the element.

A macro is defined using quoted name and replacement text as follows:

`define(‘name’,‘replacement text’)`

After this line is read by the m4 processor, then whenever *name* is encountered as a separate string, it is replaced by its replacement text, which may have multiple lines. The quotation characters are used to defer macro expansion. Macro arguments are referenced inside a macro by number; thus `$1` refers to the first argument. A few examples will be given.

Example 1: Custom two-terminal elements can often be defined by writing a wrapper for an existing element. For example, an enclosed thermal switch can be defined as shown in Figure 57.

```
define(‘thermalsw’,
 ‘dswitch(‘$1’,‘$2’,WDdBT)
  circle rad distance(M4T,last line.c) at last line.c ’)
```

Figure 57: A custom thermal switch defined from the `dswitch` macro.

Example 2: In the following, two macros are defined to simplify the repeated drawing of a series resistor and series inductor, and the macro `tsection` defines a subcircuit that is replicated several times to generate Figure 58.

```
.PS
# ‘Tline.m4’
cct_init
hgt = elen_*1.5
ewd = dimen_*0.9
define(‘sresistor’,‘resistor(right_ ewd); llabel(,r)’)
define(‘sinductor’,‘inductor(right_ ewd,W); llabel(,L)’)
```
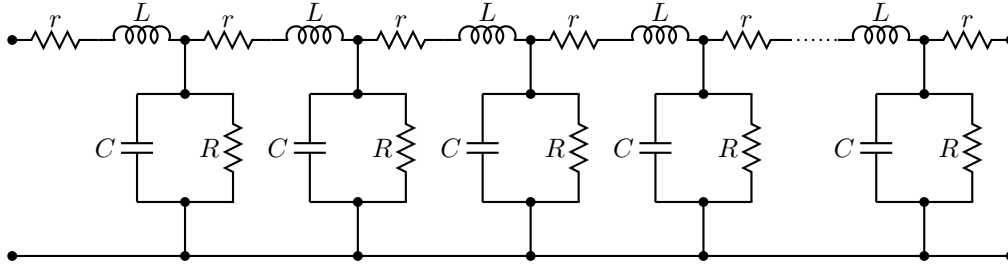
Figure 58: A lumped model of a transmission line, illustrating the use of custom macros.

```
define(`tsection',`sinductor
  { dot; line down_ hgt*0.25; dot
    parallel_(`resistor(down_ hgt*0.5); rlabel(,R)',
              `capacitor(down_ hgt*0.5); rlabel(,C)')
    dot; line down_ hgt*0.25; dot }
  sresistor ')

SW: Here
  gap(up_ hgt)
  sresistor
  for i=1 to 4 do { tsection }
  line dotted right_ dimen_/2
  tsection
  gap(down_ hgt)
  line to SW
.PE
```

Example 3: Composite elements containing several basic elements may be required. Figure 59 shows a circuit that can be drawn in any reference direction prespecified by Point_(*degrees*), containing labels that always appear in their natural horizontal orientation. Two flags in the argument
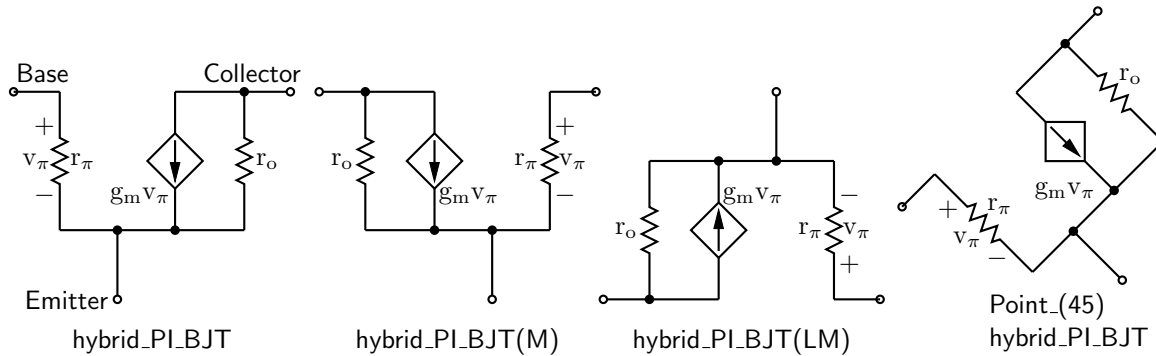
Figure 59: A composite element containing several basic elements

determine the circuit orientation with respect to the current drawing direction and whether a mirrored circuit is drawn. The key to writing such a macro is to observe that the pic language allows two-terminal elements to change the current drawing direction, so the value of rp_ang should be saved and restored as necessary after each internal two-terminal element has been drawn. A draft of such a macro follows:

```
#                              `Point_(degrees)
#                               hybrid_PI_BJT([L][M])
#                               L=left orientation; M=mirror'
define(`hybrid_PI_BJT',
`[                              # Size (and direction) parameters:
   hunit = ifinstr(`$1',M,-)dimen_
```

```
        vunit = ifinstr(`$1',L,-)dimen_*3/2
        hp_ang = rp_ang                # Save the reference direction

     Base: dot(,,1)
        line to rvec_(hunit/2,0)
     Rpi: resistor(to rvec_(0,-vunit)); point_(hp_ang)    # Restore direction
        line to rvec_(hunit*5/4,0)
     Dot1: dot
     Gm: consource(to rvec_(0,vunit),I,R); point_(hp_ang) # Restore direction
        line to rvec_(hunit*3/4,0)
     Ro: resistor(to rvec_(0,-vunit)); point_(hp_ang)     # Restore direction
        line to Dot1
     Dotro: dot(at Ro.start)
        line to rvec_(hunit/2,0)
     Collector: dot(,,1)
     Dot2: dot(at 0.5 between Rpi.end and Dot1)
        line to rvec_(0,-vunit/2)
     Emitter: dot(,,1)
                            # Labels
     `"$\mathrm{r_\pi}$"' at Rpi.c+vec_(hunit/4,0)
     `"$ + $"' at Rpi.c+vec_(-hunit/6, vunit/4)
     `"$ - $"' at Rpi.c+vec_(-hunit/6,-vunit/4)
     `"$\mathrm{v_\pi}$"' at Rpi.c+vec_(-hunit/4,0)
     `"$\mathrm{g_m}$$\mathrm{v_\pi}$"' at Gm.c+vec_(-hunit*3/8,-vunit/4)
     `"$\mathrm{r_o}$"' at Ro.c+vec_(hunit/4,0)
     `$2' ] ')
```

Example 4: A number of elements have arguments meant explicitly for customization. Figure 60 customizes the `source` macro to show a cycle of a horizontal sinusoid with adjustable phase given by argument 2 in degrees, as might be wanted for a 3-phase circuit:

```
define(`phsource',`source($1,
#`Set angle to 0, draw sinusoid, restore angle'
 m4smp_ang = rp_ang; rp_ang = 0
 sinusoid(m4h/2,twopi_/(m4h),
  ifelse(`$2',,,`($2)/360*twopi_+')pi_/2,-m4h/2,m4h/2) with .Origin at Here
 rp_ang = m4smp_ang,
$3,$4,$5)')
```


phsource(,120)

Figure 60: A source element customized using its second argument.

Example 5: Repeated subcircuits might have different orientations but the potential orientations often include only the element and its mirror image, so the power of the `vec_()` and `rvec_()` macros is not required. Suppose that an optoisolator is to be drawn with left-right or right-left orientation as shown in Figure 61.

Figure 61: Showing `opto` and `opto(BR)`, with defined labels.

The macro interface could be something like the following:
```
opto( [L|R][A|B] ),
```

where an `R` in the argument string signifies a right-left (mirrored) orientation and the element is of either `A` or `B` type; that is, there are two related elements that might be drawn in either orientation, for a total of four possibilities. Those who find such an interface to be too cryptic might prefer to invoke the macro as

    opto(orientation=Rightleft;type=B),

which includes semantic sugar surrounding the `R` and `B` characters for readability; this usage is made possible by testing the argument string using the `ifinstr()` macro rather than requiring an exact match. A draft of the macro follows, and the file `Optoiso.m4` in the examples directory adds a third type option.

```
#                               `opto([R|L][A|B])'
define(`opto',`[{u = dimen_/2
 Q: bi_trans(up u*2,ifinstr(`$1',R,R),ifinstr(`$1',B,B)CBUdE)
 E: Q.E; C: Q.C; A:ifinstr(`$1',R,Q.e+(u*3/2,u),Q.w+(-u*3/2,u)); K: A-(0,u*2)
   ifinstr(`$1',B,line from Q.B to (Q.B,E); B: Here)
 D: diode(from A to K)
   arrow from D.c+(0,u/6) to Q.ifinstr(`$1',R,e,w)+(0,u/6) chop u/3 chop u/4
   arrow from last arrow.start-(0,u/3) to last arrow.end-(0,u/3)
 Enc: box rad u wid abs(C.x-A.x)+u*2 ht u*2 with .c at 0.5 between C and K
  `$2' }]')
```

Two instances of this subcircuit are drawn and placed by the following code, with the result shown in Figure 61.

```
Q1: opto
Q2: opto(type=B;orientation=Rightleft) with .w at Q1.e+(dimen_,0)
```

12   Interaction with LATEX

The sizes of typeset labels and other TEX boxes are generally unknown prior to processing the diagram by LATEX. Although they are not needed for many circuit diagrams, these sizes may be required explicitly for calculations or implicitly for determining the diagram bounding box. The following example shows how text sizes can affect the overall size of a diagram:

```
.PS
B: box
  "Left text" at B.w rjust
  "Right text: $x^2$" at B.e ljust
.PE
```

The pic interpreter cannot know the size of the text to the left and right of the box, and the diagram is generated using default text values. One solution to this problem is to measure the text sizes by hand and include them literally, thus:

    "Left text" wid 38.47pt__ ht 7pt__ at B.w rjust

but this is tedious.

Often, a better solution is to process the diagram twice. The diagram source is processed as usual by m4 and a pic processor, and the main document source is LATEXed to input the diagram and format the text, and also to write the text dimensions into a supplementary file. Then the diagram source is processed again, reading the required dimensions from the supplementary file and producing a diagram ready for final LATEXing. This hackery is summarized below, with an example in Figure 62.

- Put `\usepackage{boxdims}` into the document source.

- Insert the following at the beginning of the diagram source, where *jobname* is the name of the main LATEX file:
    sinclude(*jobname*.dim)
    s_init(*unique name*)

34

```
.PS
gen_init
sinclude(CMman.dim)
s_init(stringdims)
B: box
  s_box(Left text) at B.w rjust
  s_box(Right text:  $x^%g$,2) at B.e ljust
.PE
```


Figure 62: The macro `s_box` sets string dimensions automatically when processed twice. If two or more arguments are given to `s_box`, they are passed through `sprintf`. The dots show the figure bounding box.

- Use the macro `s_box`(*text*) to produce typeset text of known size as shown in Figure 62; alternatively, invoke the macros `\boxdims` and `boxdim` described later.

The macro `s_box`(*text*) evaluates initially to

"`\boxdims{`*name*`}{`*text*`}`" `wid boxdim(`*name*`,w) ht boxdim(`*name*`,v)`

On the second pass, this is equivalent to

"*text*" `wid` *x* `ht` *y*

where *x* and *y* are the typeset dimensions of the LaTeX input text. If `s_box` is given two or more arguments as in Figure 62 then they are processed by `sprintf`.

The argument of `s_init`, which should be unique within *jobname*.dim, is used to generate a unique `\boxdims` first argument for each invocation of `s_box` in the current file. If `s_init` has been omitted, the symbols "**!!**" are inserted into the text as a warning. Be sure to quote any commas in the arguments. Since the first argument of `s_box` is LaTeX source, make a rule of quoting it to avoid comma and name-clash problems. For convenience, the macros `s_ht`, `s_wd`, and `s_dp` evaluate to the dimensions of the most recent `s_box` string or to the dimensions of their argument names, if present.

The file `boxdims.sty` distributed with this package should be installed where LaTeX can find it. The essential idea is to define a two-argument LaTeX macro `\boxdims` that writes out definitions for the width, height and depth of its typeset second argument into file *jobname*.dim, where *jobname* is the name of the main source file. The first argument of `\boxdims` is used to construct unique symbolic names for these dimensions. Thus, the line

`box "\boxdims{Q}{\Huge Hi there!}"`

has the same effect as

`box "\Huge Hi there!"`

except that the line

`define(`Q_w`,77.6077pt__)define(`Q_h`,17.27779pt__)define(`Q_d`,0.0pt__)dnl`

is written into file *jobname*.dim (and the numerical values depend on the current font). These definitions are required by the `boxdim` macro described below.

The LaTeX macro

`\boxdimfile{`*dimension file*`}`

is used to specify an alternative to *jobname*.dim as the dimension file to be written. This simplifies cases where *jobname* is not known in advance or where an absolute path name is required.

Another simplification is available. Instead of the `sinclude(`*dimension file*`)` line above, the dimension file can be read by m4 before reprocessing the source for the second time:

m4 *library files* *dimension file* *diagram source file* ...

Objects can be tailored to their attached text by invoking `\boxdims` and `boxdim` explicitly. The small source file in Figure 63, for example, produces the box in the figure.

The figure is processed twice, as described previously. The line `sinclude(`*jobname*.dim`)` reads the named file if it exists. The macro `boxdim(`*name,suffix,default*`)` from `libgen.m4` expands the expression `boxdim(Q,w)` to the value of `Q_w` if it is defined, else to its third argument if defined, else to 0, the latter two cases applying if *jobname*.dim doesn't exist yet. The values of `boxdim(Q,h)` and `boxdim(Q,d)` are similarly defined and, for convenience, `boxdim(Q,v)` evaluates to the sum of these. Macro `pt__` is defined as `*scale/72.27` in `libgen.m4`, to convert points to drawing coordinates.

```
.PS
# 'eboxdims.m4'
sinclude(CMman.dim)  # The main input file is CMman.tex
box fill_(0.9) wid boxdim(Q,w) + 5pt__ ht boxdim(Q,v) + 5pt__ \
  "\boxdims{Q}{\large$\displaystyle\int_0^T e^{tA}\,dt$}"
.PE
```

$$\boxed{\int_0^T e^{tA}\,dt} \quad \updownarrow \text{Q\_h+Q\_d}$$
$$\longleftarrow \text{Q\_w} \longrightarrow$$

Figure 63: Fitting a box to typeset text.

Sometimes a label needs a plain background in order to blank out previously drawn components overlapped by the label, as shown on the left of Figure 64. The technique illustrated in Figure 63 is automated by the macro f_box(*boxspecs, label arguments*). For the special case of only one argument, e.g., f_box(Wood chips), this macro simply overwrites the label on a white box of identical size. Otherwise, the first argument specifies the box characteristics (except for size), and the macro evaluates to

box *boxspecs* s_box(*label arguments*).

For example, the result of the following command is shown on the right of Figure 64.

Wood chips

$$n^3$$

Figure 64: Illustrating the f_box macro.

```
f_box(color "lightgray" thickness 2 rad 2pt__,"\huge$n^{%g}$",4-1)
```

More tricks can be played. The example

```
Picture: s_box('\includegraphics{file.eps}') with .sw at location
```

shows a nice way of including eps graphics in a diagram. The included picture (named Picture in the example) has known position and dimensions, which can be used to add vector graphics or text to the picture. To aid in overlaying objects, the macro boxcoord(*object name, x-fraction, y-fraction*) evaluates to a position, with boxcoord(*object name*,0,0) at the lower left corner of the object, and boxcoord(*object name*,1,1) at its upper right.

13 PSTricks and other tricks

This section applies only to a pic processor (dpic) that is capable of producing output compatible with PSTricks, Ti*k*z PGF, or in principle, other graphics postprocessors.

By using command lines, or simply by inserting LATEX graphics directives along with strings to be formatted, one can mix arbitrary PSTricks (or other) commands with m4 input to create complicated effects.

Some commonly required effects are particularly simple. For example, the rotation of text by PSTricks postprocessing is illustrated by the file

```
.PS
# 'Axes.m4'
  arrow right 0.7 "'$x$-axis'" below
  arrow up 0.7 from 1st arrow.start "'\rput[B]{90}(0,0){$y$-axis}'" rjust
.PE
```

which contains both horizontal text and text rotated 90° along the vertical line. This rotation of text is also implemented by the macro rs_box, which is similar to s_box but rotates its text argument by 90°, a default angle that can be changed by preceding invocation with define('text_ang',*degrees*). The rs_box macro requires either PSTricks or Ti*k*z PGF and, like s_box, it calculates the size of the resulting text box but requires the diagram to be processed twice.

Another common requirement is the filling of arbitrary shapes, as illustrated by the following lines within a .m4 file:

```
command "'\pscustom[fillstyle=solid,fillcolor=lightgray]{'"
```
drawing commands for an arbitrary closed curve
```
command "'}%'"
```

For colour printing or viewing, arbitrary colours can be chosen, as described in the PSTricks manual. PSTricks parameters can be set by inserting the line

```
command "'\psset{option=value, ...}'"
```

in the drawing commands or by using the macro `psset_`(*PSTricks options*).

The macros `shade`(*gray value,closed line specs*) and `rgbfill`(*red value, green value, blue value, closed line specs*) can be invoked to accomplish the same effect as the above fill example, but are not confined to use only with PSTricks.

Since arbitrary LaTeX can be output, either in ordinary strings or by use of `command` output, complex examples such as found in reference [3], for example, can be included. The complications are twofold: LaTeX and dpic may not know the dimensions of the formatted result, and the code is generally unique to the postprocessor. Where postprocessors are capable of equivalent results, then macros such as `rs_box`, `shade`, and `rgbfill` mentioned previously can be used to hide code differences.

14 Web documents, `pdf`, and alternative output formats

Circuit diagrams contain graphics and symbols, and the issues related to web publishing are similar to those for other mathematical documents. Here the important factor is that gpic-`t` generates output containing tpic `\special` commands, which must be converted to the desired output, whereas dpic can generate several alternative formats, as shown in Figure 65. One of the easiest methods for producing web documents is to generate postscript as usual and to convert the result to pdf format with Adobe Distiller® or equivalent.
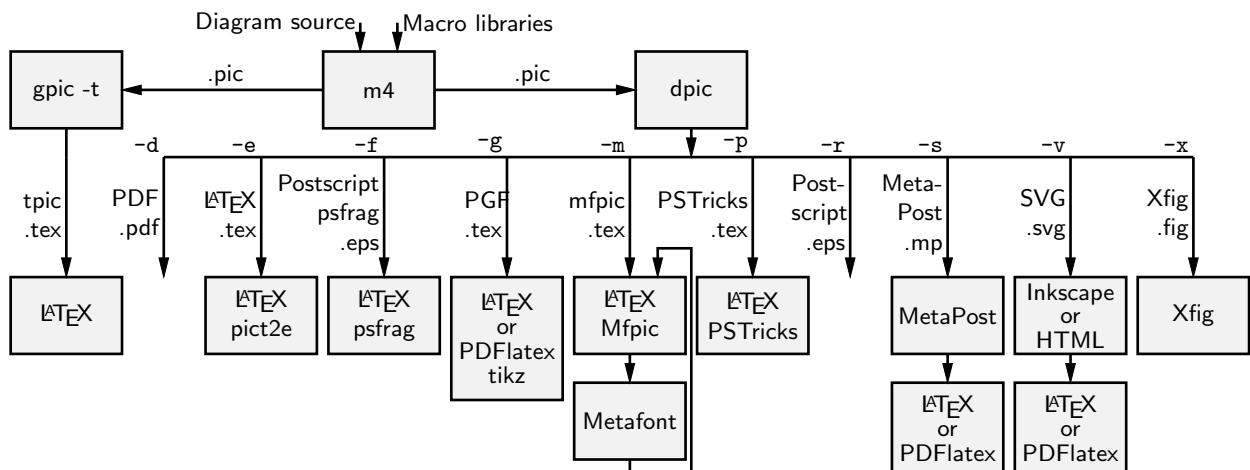
Figure 65: Output formats produced by gpic-`t` and dpic. SVG output can be read by Inkscape or used directly in web documents.

PDFlatex produces pdf without first creating a postscript file but does not handle tpic `\special`s, so dpic must be installed.

Most PDFLatex distributions are not directly compatible with PSTricks, but the Ti*k*z PGF output of dpic is compatible with both LaTeX and PDFLatex. Several alternative dpic output formats such as mfpic and MetaPost also work well. To test MetaPost, create a file *filename*.`mp` containing appropriate header lines, for example:

```
verbatimtex
\documentclass[11pt]{article}
```

```
\usepackage{times,boxdims,graphicx}
\boxdimfile{tmp.dim}
\begin{document} etex
```

Then append one or more diagrams by using the equivalent of

   m4 <*installdir*>mpost.m4 *library files diagram*.m4 | dpic -s >> *filename*.mp

   The command "mpost --tex=latex *filename*.mp end" processes this file, formatting the diagram text by creating a temporary .tex file, LaTeXing it, and recovering the .dvi output to create *filename*.1 and other files. If the boxdims macros are being invoked, this process must be repeated to handle formatted text correctly as described in Section 12. In this case, either put sinclude(tmp.dim) in the diagram .m4 source or read the .dim file at the second invocation of m4 as follows:

   m4 <*installdir*>mpost.m4 *library files* tmp.dim *diagram*.m4 | dpic -s >> *filename*.mp

   On some operating systems, the absolute path name for tmp.dim has to be used to ensure that the correct dimension file is written and read. This distribution includes a Makefile that simplifies the process; otherwise a script can automate it.

   Having produced *filename*.1, rename it to *filename*.mps and, *voilà,* you can now run PDFlatex on a .tex source that includes the diagram using \includegraphics{*filename*.mps} as usual.

   The dpic processor is capable of other output formats, as illustrated in Figure 65 and in example files included with the distribution. The LaTeX drawing commands alone or with eepic or pict2e extensions are suitable only for simple diagrams.

15   Developer's notes

Years ago in the course of writing a book, I took a few days off to write a pic-like interpreter (dpic) to automate the tedious coordinate calculations required by LaTeX picture objects. The macros in this distribution and the interpreter are the result of that effort, drawings I have had to produce since, and suggestions received from others. The interpreter has been upgraded over time to generate mfpic, MetaPost [5], raw Postscript, Postscript with psfrag tags, raw PDF, PSTricks, and TikZ PGF output, the latter two my preference because of their quality and flexibility, including facilities for colour and rotations, together with simple font selection. Xfig-compatible output was introduced early on to allow the creation of diagrams both by programming and by interactive graphics. Recently, SVG output was added, and seems suitable for producing web diagrams directly and for further editing by the Inkscape interactive graphics editor. The latest addition is raw PDF output, which has very basic text capability and is most suitable for creating diagrams without labels on which sophisticated text can be overlaid. Dpic can write the coordinates of selected locations to an external file to be used in overlaying text or other items on the diagram.

   Instead of using pic macros, I preferred the equally simple but more powerful m4 macro processor, and therefore m4 is required here, although dpic now supports pic-like macros. Free versions of m4 are available for Unix, Windows, and other operating systems.

   If starting over today would I not just use one of the other drawing packages available these days? It would depend on the context, but pic remains a good choice for line drawings because it is easy to learn and read but powerful enough for coding the geometrical calculations required for precise component sizing and placement. It would be nice if arbitrary rotations and scaling were simpler and if a general path element were available as in Postscript.

   The main value of this distribution is not in the use of a specific language but in the element data encoded in the macros, which have been developed with reference to standards and refined over two decades. Some of them have become less readable as more options and flexibility have been added, and if starting over today, perhaps I would change some details. Compromises have been made in order to retain reasonable compatibility with the variety of postprocessors. No choice of tool is without compromise, and producing good graphics seems to be time consuming, no matter how it is done.

   The dpic interpreter has several output-format options that may be useful. The eepicemu and pict2e extensions of the primitive LaTeX picture objects are supported. The mfpic output allows the production of Metafont alphabets of circuit elements or other graphics, thereby essentially

removing dependence on device drivers, but with the complication of treating every alphabetic component as a TEX box. The xfig output allows elements to be precisely defined with dpic and interactively placed with xfig. Similarly, the SVG output can be read directly by the Inkscape graphics editor, but SVG can also be used directly for web pages. Dpic will also generate low-level MetaPost or Postscript code, so that diagrams defined using pic can be manipulated and combined with others. The Postscript output can be imported into CorelDraw® and Adobe Illustrator® for further processing. With raw Postscript and PDF output, the user is responsible for ensuring that the correct fonts are provided and for formatting the text.

Many thanks to the people who continue to send comments, questions, and, occasionally, bug fixes. What began as a tool for my own use changed into a hobby that has persisted, thanks to your help and advice.

16 Bugs

The distributed macros are not written for maximum robustness. Arguments could be entered in a key–value style (for example, `resistor(up_ elen_,style=N;cycles=8`) instead of by positional parameters. Macro arguments could be tested for correctness and explanatory error messages could be written as necessary, but that would make the macros more difficult to read and to write. You will have to read them when unexpected results are obtained or when you wish to modify them.

Maintaining compatibility with both gpic and dpic has resulted in some macros being more complicated than is preferable.

Here are some hints, gleaned from experience and from comments I have received.

1. **Misconfiguration:** One of the configuration files listed in Section 2.2 and `libgen.m4` *must* be read by m4 before any of the drawing macros. If only PSTricks is to be used, for example, then the simplest strategy is to set it as the default processor by typing "make psdefault" in the installation directory to change the mention of `gpic` to `pstricks` near the top of `libgen.m4`. Similarly if only Ti*kz* PGF will be used, change `gpic` to `pgf` using the Makefile. The package default is to read `gpic.m4` for historical compatibility. The processor options must be chosen correspondingly, `gpic -t` for `gpic.m4` and, most often, `dpic -p` or `dpic -g` when dpic is employed. For example, the pipeline for PSTricks output from file `quick.m4` is

   `m4 -I` *installdir* `pstricks.m4 quick.m4 | dpic -p > quick.tex`

   but for Ti*kz* PGF processing, the configuration file and dpic option have to be changed:

   `m4 -I` *installdir* `pgf.m4 quick.m4 | dpic -g > quick.tex`

   Any non-default configuration file must appear explicitly in the command line or in an `include()` statement.

2. **Pic objects versus macros:** A common error is to write something like

   `line from A to B; resistor from B to C; ground at D`

   when it should be

   `line from A to B; resistor(from B to C); ground(at D)`

   This error is caused by an unfortunate inconsistency between pic object attributes and the way m4 and pic pass macro arguments.

3. **Commas:** Macro arguments are separated by commas, so any comma that is part of an argument must be protected by parentheses or quotes. Thus,

   `shadebox(box with .n at w,h)`

   produces an error, whereas

   `shadebox(box with .n at w`,`'h)`

   and

   `shadebox(box with .n at (w,h))`

   do not. The parentheses are preferred.

4. **Default directions and lengths:** The *linespec* argument of element macros requires both a direction and a length, and if either is omitted, a default value is used. Writing

```
source(up_)
```

draws a source up a distance equal to the current `lineht` value, which may cause confusion. Writing

```
source(0.5)
```

draws a source of length 0.5 units in the current pic default direction, which is one of `right, left, up,` or `down.` The best practice is to specify both the direction and length of an element, thus:

```
source(up_ elen_).
```

The effect of a *linespec* argument is independent of any direction set using the `Point_` or similar macros. To draw an element at an obtuse angle (see Section 7) try, for example,

```
Point_(45); source(to rvec_(0.5,0))
```

5. **Processing sequence:** It is easy to forget that m4 finishes before pic processing begins. Consequently, it may be puzzling that the following mix of a pic loop and the m4 macro `s_box` does not appear to produce the required result:

```
for i=1 to 5 do {s_box(A[i]); move }
```

In this example, the `s_box` macro is expanded only once and the index `i` is not a number. This particular example can be repaired by using an m4 loop:

```
for_(1,5,1,'s_box(A[m4x]); move')
```

6. **Quotes:** Single quote characters are stripped in pairs by m4, so the string

```
"''inverse''"
```

will be typeset as if it were

```
"'inverse'".
```

The cure is to add single quotes.

The only subtlety required in writing m4 macros is deciding when to quote arguments. In the context of circuits it seemed best to assume that macro arguments would not be protected by quotes at the level of macro invocation, but should be quoted inside each macro. There may be cases where this rule is not optimal or where the quotes could be omitted.

7. **Dollar signs:** The i-th argument of an m4 macro is $\$i$, where i is an integer, so the following construction can cause an error when it is part of a macro,

```
"$0$" rjust below
```

since `$0` expands to the name of the macro itself. To avoid this problem, put the string in quotes or write `"$''0$"`.

8. **Name conflicts:** Using the name of a macro as part of a comment or string is a simple and common error. Thus,

```
arrow right "$\dot x$" above
```

produces an error message because `dot` is a macro name. Macro expansion can be avoided by adding quotes, as follows:

```
arrow right '"$\dot x$"' above
```

Library macros intended only for internal use have names that begin with `m4` or `M4` to avoid name clashes, but in addition, a good rule is to quote all LaTeX in the diagram input.

If extensive use of strings that conflict with macro names is required, then one possibility is to replace the strings by macros to be expanded by LaTeX, for example the diagram

```
.PS
 box "\stringA"
.PE
```

with the LaTeX macro

```
\newcommand{\stringA}{
```

```
Circuit containing planar inductor and capacitor}
```

9. **Current direction:**   Some macros, particularly those for labels, do unexpected things if care is not taken to preset the current direction using macros `right_`, `left_`, `up_`, `down_`, or `rpoint_(·)`. Thus for two-terminal macros it is good practice to write, e.g.

```
resistor(up_ from A to B); rlabel(,R_1)
```

rather than

```
resistor(from A to B); rlabel(,R_1),
```

which produce different results if the last-defined drawing direction is not `up`. It might be possible to change the label macros to avoid this problem without sacrificing ease of use.

10. **Position of elements that are not 2-terminal:**   The *linespec* argument of elements defined in `[ ]` blocks must be understood as defining a direction and length, but not the position of the resulting block. In the pic language, objects inside these brackets are placed by default *as if the block were a box*. Place the element by its compass corners or defined interior points as described in the first paragraph of Section 6 on page 17, for example

```
igbt(up_ elen_) with .E at (1,0)
```

11. **Pic error messages:**   Some errors are detected only after scanning beyond the end of the line containing the error. The semicolon is a logical line end, so putting a semicolon at the end of lines may assist in locating bugs.

12. **Line continuation:**   A line is continued to the next if the rightmost character is a backslash or, with dpic, if the backslash is followed immediately by the `#` character. A blank after the backslash, for example, produces a pic error.

13. **Scaling:**   Pic and these macros provide several ways to scale diagrams and elements within them, but subtle unanticipated effects may appear. The line `.PS` x provides a convenient way to force the finished diagram to width x. However, if gpic is the pic processor then all scaled parameters are affected, including those for arrowheads and text parameters, which may not be the desired result. A good general rule is to use the `scale` parameter for global scaling unless the primary objective is to specify overall dimensions.

14. **Buffer overflow:**   For some m4 implementations, the error message `pushed back more than 4096 chars` results from expanding large macros or macro arguments, and can be avoided by enlarging the buffer. For example, the option `-B16000` enlarges the buffer size to 16000 bytes. However, this error message could also result from a syntax error.

15. **PSTricks anomaly:**   If you are using PSTricks and you get the error message `Graphics parameter 'noCurrentPoint' not defined.` then your version of PSTricks is older than August 2010. You can do the following:

   (a) Update your PSTricks package.

   (b) Instead, comment out the second definition of `M4PatchPSTricks` in `pstricks.m4`. The first definition works for some older PSTricks distributions.

   (c) Insert `define('M4PatchPSTricks',)` immediately after the `.PS` line of your diagram. This change prevents the line `\psset{noCurrentPoint}` from being added to the `.tex` code for the diagram. This line is a workaround for a "feature" of the current PSTricks `\psbezier` command that changes its behaviour within the `\pscustom` environment. This situation occurs rarely and so the line is unnecessary for many diagrams.

(d) For very old versions of PSTricks such as pstricks97, disable the workaround totally by changing the second definition in `pstricks.m4` to `define(‘M4PatchPSTricks’,)`. Undo the change if you later update PSTricks.

16. **m4 -I error:** Some old versions of m4 do not implement the `-I` option or the `M4PATH` environment variable that simplify file inclusion. The simplest course of action is probably to install GNU m4, which is free and widely available. Otherwise, all `include(`*filename*`)` statements in the libraries and calling commands have to be given absolute *filename* paths. You can define the `HOMELIB_` macro in `libgen.m4` to the path of the installation directory and change the library include statements to the form `include(HOMELIB_‘’`*filename*`)`.

17 List of macros

The following table lists the macros in the libraries and configuration files. Some of the sources in the `examples` directory contain additional macros, such as for flowcharts, Boolean logic, and binary trees.

Internal macros defined within the libraries begin with the characters m4 or M4 and, for the most part, are not listed here.

The library in which each macro is found is given, and a brief description.

`Along_(`*LinearObj,distance,*`[R])` gen		Distance arg2 (default all the way) along a linear object from `.start` to `.end` (from `.end` to `.start` if arg3=R)
`AND_gate(`*n*`,N)`	log	basic 'and' gate, 2 or *n* inputs; N=negated input. Otherwise, arg1 can be a sequence of letters `P|N` to define normal or negated inputs.
`AND_gen(`*n*`,`*chars*`,[`*wid*`,[`*ht*`]])`	log	general AND gate: *n*=number of inputs ($0 \leq n \leq 16$); *chars:* B=base and straight sides; A=Arc; [N]NE,[N]SE,[N]I,[N]N,[N]S=inputs or circles; [N]O=output; C=center. Otherwise, arg1 can be a sequence of letters `P|N` to define normal or negated inputs.
`AND_ht`	log	height of basic 'and' and 'or' gates in `L_units`
`AND_wd`	log	width of basic 'and' and 'or' gates in `L_units`
`And, Or, Not, Nand, Nor, Xor, Nxor, Buffer`		
	log	Wrappers of `AND_gate`, ... for use in the `Autologix` macro
`AutoGate`	log	Draw the tree for a gate as in the `Autologix` macro. No inputs or external connections are drawn. The names of the internal gate inputs are stacked in '`AutoInNames`'
`Autologix(`*Boolean function sequence*`,[N[oconnect]][L[eftinputs]][R][V][M][;offset=`*value*`]`		

| | log | Draw the Boolean expressions defined in function notation using `And`, `Or`, `Not`, `Buffer`, `Xor`, `Nand`, `Nor`, `Nxor` and variables, e.g., `Autologix(And(Or(x1, x2),Or( x1,x2)));`. The Boolean functions are separated by semicolons (;). Function outputs are aligned vertically but appending :*location attribute* to a function can be used to place it. Each unique variable *var* causes an input point `In`*var* to be defined. Preceding the variable by a ˜ causes a not gate to be drawn at the input. The inputs are drawn in a row at the upper left by default. An `L` in arg2 draws the inputs in a column at the left; `R` reverses the order of the drawn inputs; `V` scans the expression from right to left when listing inputs; `M` draws the left-right mirror image of the diagram; and `N` draws only the function tree without the input array. The inputs are labelled `In1`, In2, . . . and the function outputs are `Out1`, Out2, ... Each variable *var* corresponds also to one of the input array points with label `In`*var*. Setting `offset=`*value* displaces the drawn input list in order to disambiguate the input connections when `L` is used |

BOX_gate(*inputs,output,swid,sht,label*)

| | log | output=[P\|N], inputs=[P\|N]. . ., sizes swid and sht in `L_units` (default `AND_wd = 7`) |

BUFFER_gate(*linespec*, [N\|B], *wid, ht,* [N\|P]*, [N\|P]*, [N\|P]*)

| | log | basic buffer, dfault 1 input or as a 2-terminal element, arg2: `N`=negated input, `B`=box gate; arg 5: normal (`P`) or negated `N`) inputs labeled In1 |

BUFFER_gen(*chars,wd,ht*,[N\|P]*,[N\|P]*,[N\|P]*)

| | log | general buffer, *chars:* `T`=triangle, `[N]O`=output location `Out` (`NO` draws circle `N_Out`); `[N]I`, `[N]N`, `[N]S`, `[N]NE`, `[N]SE` input locations; `C`=centre location. Args 4-6 allow alternative definitions of respective `In`, `NE`, and `SE` argument sequences |

| **BUF_ht** | log | basic buffer gate height in `L_units` |
| **BUF_wd** | log | basic buffer gate width in `L_units` |

Cintersect(*Pos1, Pos2, rad1, rad2,* [R])

| | gen | Upper (lower if arg5=`R`) intersection of circles at *Pos1* and *Pos2*, radius *rad1* and *rad2* |

| **Cos**(*integer*) | gen | cosine function, *integer* degrees |

Cosine(*amplitude, freq, time, phase*)

| | gen | function $a \times \cos(\omega t + \phi)$ |

Darc(*center position, radius, start radians, end radians, parameters*)

| | darrow | Wrapper for `darc`. CCW arc in `dline` style, with closed ends or (dpic only) arrowheads. Semicolon-separated *parameters*: `thick=`*value*, `wid=`*value*, `ends=` *x-*, *-x*, *x-x*, `->`, *x*`->`, `<-`, `<-`*x*, `<->` where *x* means `|` or (half-thickness line) `!`. |

| **Darlington**(L\|R,*chars*) | cct | Composite Darlington pair Q1 and Q2 with internal locations E, B, C; Characters in *arg2:* E= envelope, P= P-type, B1= internal base lead, D= damper diode, R1= Q1 bias resistor; E1= ebox, R2= Q2 bias resistor; E1= ebox, Z= zener bias diode |

Darrow(*linespec, parameters*)	darrow	Wrapper for `darrow`. Semicolon-separated *parameters*: `S`, `E` truncate at start or end by dline thickness/2; `thick=`*val* (total thicknes, ie width); `wid=`*val* (arrowhead width); `ht=`*val* (arrowhead height); `ends=` *x-x* or *-x* or *x-* where *x* is `!` (half-width line) or `|` (full-width line).
Dline(*linespec, parameters*)	darrow	Wrapper for `dline`. Semicolon-separated *parameters*: `S`, `E` truncate at start or end by dline thickness/2; `thick=`*val* (total thicknes, ie width); `ends=` *x-x* or *-x* or *x-* where *x* is `!` (half-width line) or `|` (full-width line).
E__	gen	the constant e
Equidist3(*Pos1, Pos2, Pos3, Result*)	gen	Calculates location named *Result* equidistant from the first three positions, i.e. the centre of the circle passing through the three positions
FF_ht	cct	flipflop height parameter in **L_units**
FF_wid	cct	flipflop width parameter in **L_units**
Fector(*x1,y1,z1,x2,y2,z2*)	3D	vector projected on current view plane with top face of 3-dimensonal arrowhead normal to x2,y2,z2
FTcap(*chars*)	cct	Feed-through capacitor; example of a composite element derived from a two-terminal element. Defined points: *.Start, .End, .C .T1 .T2 T* Arg 1: (default) `A=` type A, `B=` type B, `C=` type C
FlipFlop(D|T|RS|JK,*label,boxspec*)	log	flip-flops, *boxspec*=e.g. ht x wid y
FlipFlop6(*label,spec,boxspec*)	log	*This macro (6-input flip-flops) has been superseded by* `FlipFlopX` *and may be deleted in future.* *spec=*`[[n]NQ][[n]Q][[n]CK][[n]PR][lb]` `[[n]CLR][[n]S][[n].|D|T|R]` to include and negate pins, `lb` to print labels
FlipFlopJK(*label, spec,boxspec*)	log	*This macro (JK flip-flop) has been superseded by* `FlipFlopX` *and may be deleted in future.* Similar to `FlipFlop6`.
FlipFlopX(*boxspec, label, leftpins, toppins, rightpins, bottompins*)	log	General flipflop. Each of args 3 to 6 is null or a string of *pinspecs* separated by semicolons (`;`). *Pinspecs* are either empty or of the form [*pinopts*]:[*label*[:*Picname*]]. The first colon draws the pin. Pins are placed top to bottom or left to right along the box edges with null *pinspecs* counted for placement. Pins are named by side and number by default; eg `W1, W2, ..., N1, N2, ..., E1, ..., S1, ...` ; however, if :*Picname* is present in a *pinspec* then *Picname* replaces the default name. A *pinspec* label is text placed at the pin base. Semicolons are not allowed in labels; use, e.g., `\char59{}` instead, and to put a bar over a label, use `lg_bartxt`(*label*). The *pinopts* are `[N|L|M][E]`; `N`=pin with not circle; `L`=active low out; `M`=active low in; `E`=edge trigger.
G_hht	log	gate half-height in **L_units**
H_ht	log	hysteresis symbol dimension in **L_units**
Header(1|2,*rows,wid,ht,type*)	log	Header block with 1 or 2 columns and square Pin 1
HeaderPin(*location, type, Picname,*n|e|s|w,*length*)		

	log	General pin for `Header` macro; arg 4 specifies pin direction with respect to the current drawing direction)
`Int_`	gen	corrected (old) gpic *int()* function
`IOdefs(`*linespec*`,`*label*`,[P|N]*,L|R)`		
	log	Define locations *label*1, … *label*n along the line; P= label only; N=with `NOT_circle`; R=circle to right of current direction
`Intersect_(`*Name1*`,`*Name2*`)`	gen	intersection of two named lines
`LCintersect(`*line name, Centre, rad,* `[R])`		
	gen	First (second if arg4 is R) intersection of a line with a circle
`LCtangent(`*Pos1, Centre, rad,* `[R])`		
	gen	Left (right if arg4=R) tangent point of line from Pos1 to circle at Centre with radius arg3
`LH_symbol(U|D|L|R|`*degrees*`)`	log	logic-gate hysteresis symbol
`Loopover_('`*variable*`',`*actions,value1, value2, …*`)`		
	gen	Repeat *actions* with *variable* set successively to *value1, value2, …*, setting macro `m4Lx` to 1, 2, …
`LT_symbol(U|D|L|R|`*degrees*`)`	log	logic-gate triangle symbol
`L_unit`	log	logic-element grid size
`Max(`*arg, arg, …*`)`	gen	Max of an arbitrary number of inputs
`Min(`*arg, arg, …*`)`	gen	Min of an arbitrary number of inputs
`Mitre_(`*Line1,Line2,length,line attributes*`)`		
	gen	e.g., `Mitre_(L,M)` draws angle at intersection of lines L and M with legs of length arg3 (default `linethick bp__/2`); sets `Here` to intersection
`Mux(`*n*`,`*label*`, [L][B|H][N[`*n*`]|S[`*n*`]], `*wid,ht*`)`		
	log	binary multiplexer, *n* inputs, L reverses input pin numbers, B displays binary pin numbers, H displays hexadecimal pin numbers, N[*n*] puts Sel or Sel0 .. Sel*n* at the top (i.e., to the left of the drawing direction), S[*n*] puts the Sel inputs at the bottom (default)
`Mux_ht`	cct	Mux height parameter in `L_unit`s
`Mux_wid`	cct	Mux width parameter in `L_unit`s
`Mx_pins`	log	max number of gate inputs without wings
`NAND_gate(`*n*`,N)`	log	'nand' gate, 2 or *n* inputs; N=negated input. Otherwise, arg1 can be a sequence of letters P|N to define normal or negated inputs.
`NOR_gate(`*n*`,N)`	log	'nor' gate, 2 or *n* inputs; N=negated input. Otherwise, arg1 can be a sequence of letters P|N to define normal or negated inputs.
`NeedDpicTools`	gen	executes `copy "HOMELIB_/dpictools.pic"` if the file has not been read
`NOT_circle`	log	'not' circle
`NOT_gate(`*linespec*`,N)`	log	'not' gate, 1 input or as a 2-terminal element, N=negated input
`NOT_rad`	log	'not' radius in absolute units
`NPDT(`*npoles*`,[R])`	cct	Double-throw switch; *npoles:* number of poles; R= right orientation with respect to drawing direction

`NXOR_gate(`*n*`,N)`	log	'nxor' gate, 2 or *n* inputs; N=negated input. Otherwise, arg1 can be a sequence of letters `P`|`N` to define normal or negated inputs.
`N_diam`	log	diameter of 'not' circles in `L_units`
`N_rad`	log	radius of 'not' circles in `L_units`
`OR_gate(`*n*`,N)`	log	'or' gate, 2 or *n* inputs; N=negated input. Otherwise, arg1 can be a sequence of letters `P`|`N` to define normal or negated inputs.
`OR_gen(`*n*`,`*chars*`,[`*wid*`,[`*ht*`]])`	log	general OR gate: *n*=number of inputs ($0 \le n \le 16$); *chars:* B=base and straight sides; A=Arcs; [N]NE,[N]SE,[N]I,[N]N,[N]S=inputs or circles; [N]P=XOR arc; [N]O=output; C=center. Otherwise, arg1 can be a sequence of letters `P`|`N` to define normal or negated inputs.
`OR_rad`	log	radius of OR input face in `L_units`
`Point_(`*integer*`)`	gen	sets direction cosines in degrees
`Rect_(`*radius*`,`*angle*`)`	gen	(deg) polar-to-rectangular conversion
`SIdefaults`	gen	Sets `scale = 25.4` for drawing units in mm, and sets pic parameters `lineht = 12`, `linewid = 12`, `moveht = 12`, `movewid = 12`, `arcrad = 6`, `circlerad = 6`, `boxht = 12`, `boxwid = 18`, `ellipseht = 12`, `ellipsewid = 18`, `dashwid = 2`, `arrowht = 3`, `arrowwid = arrowht/2`,
`Sin(`*integer*`)`	gen	sine function, *integer* degrees
`SQUID(`*n, diameter, initial angle,* `ccw`|`cw`)		
	cct	Superconducting quantum interface device with n junctions labeled `J1,` `...` `J`*n* placed around a circle with initial angle -90 deg (by default) with respect to the current drawing direction. The default diameter is `dimen_`
`View3D`	3D	The view vector (triple) defined by `setview(`*azim, elev*`)`. The `project` macro projects onto the plane perpendicular to this vector
`Vperp(`*position name, position name*`)`		
	gen	unit-vector pair CCW-perpendicular to line joining two named positions
`Vsprod_(`*position, expression*`)`	gen	The vector in arg 1 multiplied by the scalar in arg 2
`XOR_gate(`*n*`,N)`	log	'xor' gate, 2 or *n* inputs; N=negated input. Otherwise, arg1 can be a sequence of letters `P`|`N` to define normal or negated inputs.
`XOR_off`	log	XOR and NXOR offset of input face
`above_`	gen	string position above relative to current direction
`abs_(`*number*`)`	gen	absolute value function
`adc(`*width,height,nIn,nN,nOut,nS*`)`		
	cct	ADC with defined width, height, and number of inputs In*i*, top terminals N*i*, ouputs Out*i*, and bottom terminals S*i*
`addtaps[`*arrowhd* | `type=`*arrowhd*`;name=`*Name*`],` *fraction, length, fraction, length,* $\cdots$)		

	cct	Add taps to the previous two-terminal element. *arrowhd* = blank or one of `.` `-` `<-` `->` `<->`. Each fraction determines the position along the element body of the tap. A negative length draws the tap to the right of the current direction; positive length to the left. Tap names are Tap1, Tap2, ⋯ by default or Name1, Name2, ⋯ if specified
`amp(`*linespec*`,`*size*`)`	cct	amplifier
`along_(`*linear object name*`)`	gen	short for `between name.start and name.end`
`antenna(at` *location*`, T, A|L|T|S|D|P|F, U|D|L|R|`*degrees*`)`		
	cct	antenna, without stem for nonblank 2nd arg; `A`=aerial, `L`=loop, `T`=triangle, `S`=diamond, `D`=dipole, `P`=phased, `F`=fork; up, down, left, right, or angle from horizontal (default 90)
`arca(`*absolute chord linespec*`, ccw|cw,` *radius, modifiers*`)`		
	gen	arc with acute angle (obtuse if radius is negative), drawn in a [ ] block
`arcd(`*center, radius*`,`*start degrees*`,`*end degrees*`)`		
	gen	arc definition (see `arcr`), angles in degrees
`arcr(`*center*`,`*radius*`,`*start angle*`,`*end angle*`)`		
	gen	arc definition, e.g., `arcr(A,r,0,pi_/2) cw ->`
`arcto(`*position 1*`,`*position 2*`,`*radius*`,[dashed|dotted])`		
	gen	line toward position 1 with rounded corner toward position 2
`arrowline(`*linespec*`)`	cct	line (dotted, dashed permissible) with centred arrowhead
`b_`	gen	blue color value
`b_current(`*label*`,`*pos*`,In|Out,Start|End,`*frac*`)`		
	cct	labelled branch-current arrow to *frac* between branch end and body
`basename_(`*string sequence, separator*`)`		
	gen	Extract the rightmost name from a sequence of names separated by arg2 (default dot ".")
`battery(`*linespec*`,`*n*`,R)`	cct	n-cell battery: default 1 cell, R=reversed polarity
`beginshade(`*gray value*`)`	gen	begin gray shading, see `shade` e.g., `beginshade(.5);` *closed line specs*; `endshade`
`bell( U|D|L|R|`*degrees, size*`)`	cct	bell, *In1* to *In3* defined
`below_`	gen	string position relative to current direction
`bi_tr(`*linespec*`,L|R,P,E)`	cct	left or right, N- or P-type bipolar transistor, without or with envelope
`bi_trans(`*linespec*`,L|R,`*chars*`,E)`		
	cct	bipolar transistor, core left or right; chars: `BU`=bulk line, `B`=base line and label, `S`=Schottky base hooks, `uEn|dEn`=emitters E0 to En, `uE|dE`=single emitter, `Cn|uCn|dCn`=collectors C0 to Cn; `u` or `d` add an arrow, `C`=single collector; `u` or `d` add an arrow, `G`=gate line and location, `H`=gate line; `L`=L-gate line and location, `[d]D`=named parallel diode, `d`=dotted connection, `[u]T`=thyristor trigger line; arg 4 = E: envelope
`binary_(`*n*`, [`*m*`])`	gen	binary representation of *n*, left padded to *m* digits if the second argument is nonblank
`boxcoord(`*planar obj*`,`*x fraction*`,`*y fraction*`)`		

	gen	internal point in a planar object
boxdim(*name*,h|w|d|v,*default*)	gen	evaluate, e.g. *name_w* if defined, else *default* if given, else 0 v gives sum of d and h values
bp__	gen	big-point-size factor, in scaled inches, (*scale/72)
bswitch(*linespec*, [L|R],chars)	cct	pushbutton switch R=right orientation (default L=left); chars: O= normally open, C=normally closed
buzzer(U|D|L|R|*degrees, size,*[C])	cct	buzzer, *In1* to *In3* defined, C=curved
c_fet(*linespec*,L|R,P)	cct	left or right, plain or negated pin simplified MOSFET
capacitor(*linespec,char*[+[L]],R, *height, wid*)	cct	capacitor, *char*: F or none=flat plate, C=curved-plate, E=polarized boxed plates, K=filled boxed plates, M=unfilled boxes, M=one rectangular plate, P=alternate polarized; + adds a polarity sign; +L polarity sign to the left of drawing direction; arg3: R=reversed polarity, arg4 = height (defaults F: dimen_/3, C,P: dimen_/4, E,K: dimen_/5) arg5 = wid (defaults F: *height**0.3, C,P: *height**0.4, E,K: *height*)
cbreaker(*linespec*,L|R,D|T|TS)	cct	circuit breaker to left or right, D=with dots; T=thermal; TS=squared thermal
ccoax(at *location*, M|F, *diameter*)	cct	coax connector, M=male, F=female
cct_init	cct	initialize circuit-diagram environment (reads libcct.m4)
centerline_(*linespec, thickness|color, minimum long dash len, short dash len, gap len*	gen	Technical drawing centerline
clabel(*label,label,label*)	cct	centre triple label
consource(*linespec*,V|I|v|i,R)	cct	voltage or current controlled source with alternate forms; R=reversed polarity
contact(*chars*)	cct	single-pole contact: P= three position, O= normally open, C= normally closed, I= circle contacts, R= right orientation
contline(*line*)	gen	evaluates to continue if processor is **dpic**, otherwise to first arg (default line)
corner(*line thickness,attributes,turn radians*)	gen	Mitre (default filled square) drawn at end of last line or at a given position. arg1 default: current line thickness; arg2: e.g. outlined *string*; if arg2 starts with at *position* then a manhattan (right-left-up-down) corner is drawn; arg3= radians (turn angle, +ve is ccw, default $\pi/2$). The corner is enclosed in braces in order to leave Here unchanged unless arg2 begins with at
cosd(*arg*)	gen	cosine of an expression in degrees
cross(at *location*)	gen	plots a small cross
cross3D(*x1,y1,z1,x2,y2,z2*)	3D	cross product of two triples
crossover(*linespec*, L|R, Line1, ...)	cct	line jumping left or right over named lines
crosswd_	gen	cross dimension
csdim_	cct	controlled-source width
dac(*width,height,nIn,nN,nOut,nS*)		

	cct	DAC with defined width, height, and number of inputs In*i*, top terminals N*i*, ouputs Out*i*, and bottom terminals S*i*
d_fet(*linespec*,L|R,P,S,E|S)	cct	left or right, N or P depletion MOSFET, normal or simplified, without or with envelope or thick channel
dabove(at *location*)	darrow	above (displaced dlinewid/2)
darc(*center position, radius, start radians, end radians, dline thickness, arrowhead wid, arrowhead ht, terminals*)		
	darrow	See also Darc. CCW arc in dline style, with closed ends or (dpic only) arrowheads. Permissible *terminals*: *x*-, -*x*, *x*-*x*, ->, *x*->, <-, <-*x*, <-> where *x* means | or (half-thickness line) !.
darrow(*linespec*, t,t,*width*,*arrowhd wd*,*arrowhd ht*,*parameters*)		
	darrow	See also Darrow. double arrow, truncated at beginning or end, specified sizes, with arrowhead or closed stem. *parameters*= *x*- or -> or *x*-> or <- or <-*x* or <-> where *x* is | or !. The !- or -! parameters close the stem with half-thickness lines to simplify butting to other objects.
darrow_init	darrow	initialize darrow drawing parameters (reads darrow.m4)
dashline(*linespec*,*thickness*|*color*|<->, *dash len, gap len*,G)		
	gen	dashed line with dash at end (G ends with gap)
dbelow(at *location*)	darrow	below (displaced dlinewid/2)
dcosine3D(*i,x,y,z*)	3D	extract i-th entry of triple x,y,z
def_bisect	gen	defines the pic procedure bisect (func, xmin, xmax, eps, result) that finds a root of func(arg,value) to precision eps in the interval (xmin,xmax) by the method of bisection
delay(*linespec*,*size*)	cct	delay element
delay_rad_	cct	delay radius
deleminit_	darrow	sets drawing direction for dlines
dend(at *location*)	darrow	close (or start) double line
dfillcolor	darrow	dline fill color (default white)
diff3D(*x1,y1,z1,x2,y2,z2*)	3D	difference of two triples
diff_(*a,b*)	gen	difference function
dimen_	cct	size parameter for circuit elements
dimension_(*linespec*,*offset*,*label*, D|H|W|*blank width*,*tic offset*,*arrowhead*)		
	gen	macro for dimensioning diagrams; *arrowhead*=-> | <-
diode(*linespec*,B|CR|D|G|K|L|LE[R]|P[R]|S|Sh|T|V|v|w|Z,[R][E])		
	cct	diode: B=bi-directional, CR=current regulator, D=diac, G=Gunn, K=open form, L=open form with centre line, LE[R]=LED [right], P[R]=photodiode [right], S=Schottky, Sh=Shockley, T=tunnel, V=varicap, v=varicap (curved plate), w=varicap (reversed polarity), Z=zener; arg 3: R=reversed polarity, E=enclosure
dir_	darrow	used for temporary storage of direction by darrow macros
distance(*Position 1, Position2*)		
	gen	distance between named positions
distance(*position, position*)	gen	distance between positions
dlabel(*long,lat,label,label,label,chars*)		

	cct	general triple label; *chars:* X displacement is from the centre of the last line rather than the centre of the last [ ]; L,R,A,B align labels ljust, rjust, above, or below (absolute) respectively
dleft	darrow	double line left turn
dline(*linespec*,t,t,*width,parameters*)		
	darrow	See also Dline. Double line, truncated by half width at either end, closed at either or both ends. *parameters=* *x-x* or *-x* or *x-* where *x* is ! (half-width line) or | (full-width line).
dlinewid	darrow	width of double lines
dn_	gen	down with respect to current direction
dljust(at *location*)	darrow	ljust (displaced dlinewid/2)
dna_	cct	characters that determine which components are drawn
dnm_	cct	similar to dna_
dot(at *location,radius,fill*)	gen	filled circle (third arg= gray value: 0=black, 1=white)
dot3D(*x1,y1,z1,x2,y2,z2*)	3D	dot product of two triples
dotrad_	gen	dot radius
down_	gen	sets current direction to down
dright	darrow	double arrow right turn
drjust(at *location*)	darrow	rjust (displaced dlinewid/2)
dswitch(*linespec*,L|R,W[ud]B[K]*chars*)		
	cct	SPST switch left or right, W=baseline, B=contact blade, dB=contact blade to the right of drawing direction, K=vertical closing contact line, C = external operating mechanism, D = circle at contact and hinge, (dD = hinge only, uD = contact only) E = emergency button, EL = early close (or late open), LE = late close (or early open), F = fused, H = time delay closing, uH = time delay opening, HH = time delay opening and closing, K = vertical closing contact, L = limit, M = maintained (latched), MM = momentary contact on make, MR = momentary contact on release, MMR = momentary contact on make and release, O = hand operation button, P = pushbutton, T = thermal control linkage, Y = pull switch, Z = turn switch
dtee([L|R])	darrow	double arrow tee junction with tail to left, right, or (default) back along current direction
dtor_	gen	degrees to radians conversion constant
dturn(*degrees ccw*)	darrow	turn dline arg1 degrees left (ccw)
e_	gen	.e relative to current direction
e_fet(*linespec*,L|R,P,S,E|S)	cct	left or right, N or P enhancement MOSFET, normal or simplified, without or with envelope or thick channel
earphone(U|D|L|R|*degrees, size*)		
	cct	earphone, *In1* to *In3* defined
ebox(*linespec,length,ht,fill value*)		
	cct	two-terminal box element with adjustable dimensions and fill value 0 (black) to 1 (white). *length* and *ht* are relative to the direction of *linespec*

50

elchop(*Name1,Name2*)	gen	chop for ellipses: evaluates to chop r where r is the distance from the centre of ellipse Name1 to the intersection of the ellipse with a line to location Name2; e.g., `line from A to E elchop(E,A)`
eleminit_(*linespec*)	cct	internal line initialization
elen_	cct	default element length
em_arrows([N|I|E][D],*angle,length*)		
	cct	radiation arrows, N=nonionizing, I=ionizing, E=simple; D=dot
endshade	gen	end gray shading, see `beginshade`
expe	gen	exponential, base e
f_box(*boxspecs,text,expr1,···*)	gen	like `s_box` but the text is overlaid on a box of identical size. If there is only one argument then the default box is invisible and filed white
fill_(*number*)	gen	fill macro, 0=black, 1=white
fitcurve(V,n,[e.g. dotted],m (default 0))		
	gen	Draw a spline through positions V[m], *ldots* V[n]: Works only with dpic.
for_(*start,end,increment,*'*actions*')		
	gen	integer for loop with index variable `m4x`
fuse(*linespec, type, wid, ht*)	cct	fuse symbol, type= `A|B|C|D|S|HB|HC` or `dA=D`
g_	gen	green color value
gap(*linespec,fill,A*)	cct	gap with (filled) dots, A=chopped arrow between dots
gen_init	gen	initialize environment for general diagrams (customizable, reads `libgen.m4`)
glabel_	cct	internal general labeller
gpolyline_(*fraction,location,* ...)		
	gen	internal to `gshade`
grid_(*x,y*)	log	absolute grid location
ground(at *location*, T, N|F|S|L|P|E, U|D|L|R|*degrees*)		
	cct	ground, without stem for nonblank 2nd arg; N=normal, F=frame, S=signal, L=low-noise, P=protective, E=European; up, down, left, right, or angle from horizontal (default -90)
graystring(*gray value*)	gen	evaluates to a string compatible with the postprocessor in use to go with `colored`, `shaded`, or `outlined` attributes. (PSTricks, metapost, pgf-tikz, pdf, postscript, svg). The argument is a fraction in the range $[0,1]$; see `rgbstring`
gyrator(*box specs,space ratio,pin lgth,*[N][V])		
	cct	Gyrator two-port wrapper for `nport`, N omits pin dots; V gives a vertical orientation.
gshade(*gray value,*A,B,...,Z,A,B)		
	gen	(Note last two arguments). Shade a polygon with named vertices, attempting to avoid sharp corners
heater(*linespec, ndivisions, wid, ht*)		
	cct	heater element
hex_digit(*n*)	gen	hexadecimal digit for $0 \leq n < 16$
hexadecimal_(*n*, [*m*])	gen	hexadecimal representation of n, left padded to m digits if the second argument is nonblank

`hlth`	gen	current line half thickness in drawing units
`hoprad_`	cct	hop radius in crossover macro
`ht_`	gen	height relative to current direction
`ifdpic(`*if true*`,`*if false*`)`	gen	test if dpic has been specified as pic processor
`ifgpic(`*if true*`,`*if false*`)`	gen	test if gpic has been specified as pic processor
`ifinstr(`*string*`,`*string*`,`*if true*`,`*if false*`)`		
	gen	test if the second argument is a substring of the first; also `ifinstr(`*string*`,`*string*`,`*if true*`,`*string*`,`*string*`,`*if true*`,` *. . . if false*`)`
`ifmfpic(`*if true*`,`*if false*`)`	gen	test if mfpic has been specified as pic post-processor
`ifmpost(`*if true*`,`*if false*`)`	gen	test if MetaPost has been specified as pic post-processor
`ifpgf(`*if true*`,`*if false*`)`	gen	test if Ti*kz* PGF has been specified as pic post-processor
`ifpostscript(`*if true*`,`*if false*`)`	gen	test if Postscript (`dpic -r`) has been specified as pic output format
`ifpsfrag(`*if true*`,`*if false*`)`	gen	Test if either `psfrag` or `psfrag_` has been defined. For postscript with psfrag strings, one or the other should be defined prior to or at the beginning of the diagram
`ifpstricks(`*if true*`,`*if false*`)`	gen	test if PSTricks has been specified as post-processor
`ifroff(`*if true*`,`*if false*`)`	gen	test if **troff** or **groff** has been specified as post-processor
`ifxfig(`*if true*`,`*if false*`)`	gen	test if Fig 3.2 (`dpic -x`) has been specified as pic output format
`igbt(`*linespec*`,L|R,[L][[d]D])`	cct	left or right IGBT, L=alternate gate type, D=parallel diode, dD=dotted connections
`in__`	gen	absolute inches
`inductor(`*linespec*`,W|L,`*n*`,[M|P],`*loop wid*`)`		
	cct	inductor, arg2: narrow (default), W=wide, L=looped; arg3: *n* arcs (default 4); arg4: M=magnetic core, P=powder (dashed) core, arg5: loop width (default L,W: `dimen_/5`; other: `dimen_/8`)
`inner_prod(`*linear obj*`,`*linear obj*`)`		
	gen	inner product of (x,y) dimensions of two linear objects
`integrator(`*linespec*`,`*size*`)`	cct	integrating amplifier
`intersect_(`*line1*`.start,`*line1*`.end,` *line2*`.start,`*line2*`.end)`		
	gen	intersection of two lines
`jack(U|D|L|R|`*degrees*`,`*chars*`)`	cct	arg1: drawing direction; string arg2: R=right orientation, one or more `L[M][B]` for L and auxiliary contacts with make or break points; `S[M][B]` for S and auxiliary contacts
`j_fet(`*linespec*`,L|R,P,E)`	cct	left or right, N or P JFET, without or with envelope
`KelvinR(`*cycles*`,[R],`*cycle wid*`)`	cct	IEEE resistor in a [ ] block with Kelvin taps *T1* and *T2*
`larrow(`*label*`,->|<-,`*dist*`)`	cct	arrow *dist* to left of last-drawn 2-terminal element
`lbox(`*wid*`, `*ht*`, `*type*`)`	gen	box oriented in current direction, type= e.g. dotted
`left_`	gen	left with respect to current direction
`length3D(x,y,z)`	3D	Euclidean length of triple x,y,z
`lg_bartxt`	log	draws an overline over logic-pin text (except for xfig)
`lg_pin(`*location, logical name, pin label*`, n|e|s|w[L|M|I|O][N][E]`*, pinno, optlen*`)`		

	log	comprehensive logic pin; `n|e|s|w`=direction, `L`=active low out, `M`=active low in, `I`=inward arrow, `O`=outward arrow, `N`=negated, `E`=edge trigger
`lg_pintxt`	log	reduced-size text for logic pins
`lg_plen`	log	logic pin length in in `L_units`
`lin_ang`(*line-reference*)	gen	the angle from `.start` to `.end` of a line or move
`lin_leng`(*line-reference*)	gen	length of a line, equivalent to *line-reference*`.len` with dpic
`linethick_`(*number*)	gen	set line thickness in points
`ljust_`	gen	ljust with respect to current direction
`llabel`(*label*,*label*,*label*)	cct	triple label on left side of the element
`loc_`(*x, y*)	gen	location adjusted for current direction
`log10E_`	gen	constant $\log_{10}(e)$
`log_init`	log	initialize environment for logic diagrams (customizable, reads `liblog.m4`)
`loge`	gen	logarithm, base *e*
`lp_xy`	log	coordinates used by `lg_pin`
`lpop`(*xcoord, ycoord, radius, fill, zero ht*)		
	gen	for lollipop graphs: filled circle with stem to (xcoord,zeroht)
`lswitch`(*linespec*, `L|R`, *chars*)		
	cct	knife switch R=right orientation (default L=left); *chars*=[O|C][D][K] O=opening arrow; C=closing arrow; D=dots; K=closed switch
`lthick`	gen	current line thickness in drawing units
`lt_`	gen	left with respect to current direction
`manhattan`	gen	sets direction cosines for left, right, up, down
`memristor`(*linespec, wid, ht*)	cct	memristor element
`microphone`(`U|D|L|R`|*degrees, size*)		
	cct	microphone, *In1* to *In3* defined
`mitre_`(*Position1,Position2,Position3,length,line attributes*)		
	gen	e.g., `mitre_(A,B,C)` draws angle ABC with legs of length arg4 (default `linethick bp__/2`); sets `Here` to Position2
`mm__`	gen	absolute millimetres
`mosfet`(*linespec*,`L|R`,*chars*,`E`)	cct	MOSFET left or right, included components defined by characters, envelope. arg 3 chars: `[u][d]B`: center bulk connection pin; `D`: D pin and lead; `E`: dashed substrate; `F`: solid-line substrate; `[u][d]G`: G pin to substrate at source; `[u][d]H`: G pin to substrate at center; `L`: G pin to channel (obsolete); `[u][d]M`: G pin to channel; u: at drain end; d: at source end `[u][d]M`*n*: multiple gates G0 to G*n* `Pz`: parallel zener diode; `Q`: connect B pin to S pin; `R`: thick channel; `[u][d]S`: S pin and lead u: arrow up; d: arrow down; `[d]T`: G pin to center of channel d: not circle; `X`: XMOSFET terminal; `Z`: simplified complementary MOS
`m4lstring`(*arg1*,*arg2*)	gen	expand *arg1* if it begins with `sprintf` or `"`, otherwise *arg2*
`m4_arrow`(*linespec*,*ht*,*wid*)	gen	arrow with adjustable head, filled when possible

m4dupstr(*string*,*n*,'*name*')	gen	Defines *name* as *n* concatenated copies of *string*.
m4xpand(*arg*)	gen	Evaluate the argument as a macro
m4xtract('*string1*',*string2*)	gen	delete *string2* from *string1*, return 1 if present
n_	gen	.n with respect to current direction
ne_	gen	.ne with respect to current direction
neg_	gen	unary negation
norator(*linespec*,*width*,*ht*)	cct	norator two-terminal element

nport(*box spec*;*other commands, nw,nn,ne,ns,space ratio,pin lgth,style, other commands*)

	cct	Default is a standard-box twoport. Args 2 to 5 are the number of ports to be drawn on w, n, e, s sides. The port pins are named by side, number, and by a or b pin, e.g., W1a, W1b, W2a, ... Arg 6 specifies the ratio of port width to interport space (default 2), and arg 7 is the pin length. Set arg 8 to N to omit the dots on the port pins. Arguments 1 and 9 allow customizations

nterm(*box spec*;*other commands, nw,nn,ne,ns,pin lgth,style, other commands*)

	cct	n-terminal box macro (default three pins). Args 2 to 5 are the number of pins to be drawn on W, N, E, S sides. The pins are named by side and number, e.g. W1, W2, N1, ... Arg 6 is the pin length. Set arg 7 to N to omit the dots on the pins. Arguments 1 and 8 allow customizations, e.g. `nterm(,,,,,,N,"$a$" at Box.w ljust,"$b$" at Box.e rjust, "$c$" at Box.s above)`
nullator(*linespec*,*width*,*ht*)	cct	nullator two-terminal element
nw_	gen	.nw with respect to current direction

opamp(*linespec*,*label*,*label*,*size*,*chars*, `other commands`)

	cct	operational amplifier with $-$, $+$ or other internal labels, specified size. *chars:* `P=` add power connections, `R=` swap In1, In2 labels, `T=` truncated point. The first and last arguments allow added customizations
open_arrow(*linespec*,*ht*,*wid*)	gen	arrow with adjustable open head

parallel_('*elementspec*','*elementspec*'...)

	cct	Parallel combination of two-terminal elements in a `[ ]` block. An elementspec is of the form `[Sep=val;][Label:]` *element*; `[attributes]` where an *attribute* is of the form `[llabel(...);]	[rlabel(...);]	[b_current(...);]` Sep=*val*; in the first branch sets the default separation of all branches to *val*; in a later element Sep=*val*; applies only to that branch. An element may have normal arguments but should not change the drawing direction. An element may also be `series_(...)` or `parallel_(...)` without attributes or quotes

pconnex(R|L|U|D|*degrees*,*chars*)

	cct	power connectors, arg 1: drawing direction; *chars:* `R`=right orientation, `M|F=` male, female, `A|AC=`115V, 3 prong, `B=`box, `C=`circle, `P=` PC connector, `D=` 2-pin connector, `G|GC=` GB 3-pin, `J=` 110V 2-pin
pc__	gen	absolute points
pi_	gen	π

`plug(U|D|L|R|`*degrees*`,[2|3][R])`		
	cct	arg1: drawing direction; string arg2: `R` right orientation, 2|3 number of conductors
`pmod(`*integer*`, `*integer*`)`	gen	+ve $\mathrm{mod}(M,N)$ e.g., `pmod`$(-3,5)=2$
`point_(`*angle*`)`	gen	(radians) set direction cosines
`polar_(`*x*`,`*y*`)`	gen	rectangular-to polar conversion
`potentiometer(`*linespec*`,`*cycles*`,`*fractional pos*`,`*length*`,`$\cdots$`)`		
	cct	resistor with taps T1, T2, ... with specified fractional positions and lengths (possibly neg)
`print3D(x,y,z)`	3D	write out triple for debugging
`prod_(`*a*`,`*b*`)`	gen	binary multiplication
`project(x,(y,(z)`	3D	3D to 2D projection onto the plane perpendicular to the view vector with angles defined by `setview(`*azim, elev*`)`
`psset_(`*PSTricks settings*`)`	gen	set PSTricks parameters
`ptrans(`*linespec*`, [R|L])`	cct	pass transistor; `L`= left orientation
`pt__`	gen	TEX point-size factor, in scaled inches, (`*scale/72.27`)
`r_`	gen	red color value
`rarrow(`*label*`,->|<-,`*dist*`)`	cct	arrow *dist* to right of last-drawn 2-terminal element
`rect_(`*radius*`,`*angle*`)`	gen	(radians) polar-rectangular conversion
`relay(n,`*chars*`)`	cct	relay: n poles (default 1), *chars:* `O`=normally open, `C`=normally closed, `P`=three position, default double throw, `L`=drawn left (default), `R`=drawn right, `T`=thermal. Argument 3=`[L|R]` is deprecated but works for backward compatibility
`resetdir_)`	gen	resets direction set by `setdir_`
`resetrgb`	gen	cancel `r_`, `g_`, `b_` color definitions
`resistor(`*linespec*`,n|E,`*chars*`, `*cycle wid*`)`		
	cct	resistor, n cycles (default 3), *chars:* `E`=ebox, `ES`=ebox with slash, `Q`=offset, `H`=squared, `N`=IEEE, `V`=varistor variant, `R`=right-oriented, *cycle width* (default `dimen_/6`)
`resized(`*factor*`,'`*macro name*`',args)`		
	cct	scale the element body size by *factor*
`restorem4dir(['`*stack name*`'])`	gen	Restore m4 direction parameters from the named stack (default '`savm4dir_`')
`reversed('`*macro name*`',args)`	cct	reverse polarity of 2-terminal element
`rgbdraw(`*color triple*`, `*drawing commands*`)`		
	gen	color drawing for PSTricks, pgf, MetaPost, svg postprocessors; see `setrgb`
`rgbfill(`*color triple*`, `*closed path*`)`		
	gen	fill with arbitrary color; see `setrgb`
`rgbstring(`*color triple or color name*`)`		
	gen	evaluates to a string compatible with the postprocessor in use to go with `colored`, `shaded`, or `outlined` attributes. (PSTricks, metapost, pgf-tikz, pdf, postscript, svg). The arguments are fractions in the range $[0,1]$; For example, `box outlined rgbstring(0.1,0.2,0.7) shaded rgbstring(0.75,0.5,0.25)`. For those postprocessors that allow it, there can be one argument which is the name of a defined color

`right_`	gen	set current direction right
`rjust_`	gen	right justify with respect to current direction
`rlabel(`*label,label,label*`)`	cct	triple label on right side of the element
`rot3Dx(`*radians,x,y,z*`)`	3D	rotates x,y,z about x axis
`rot3Dy(`*radians,x,y,z*`)`	3D	rotates x,y,z about y axis
`rot3Dz(`*radians,x,y,z*`)`	3D	rotates x,y,z about z axis
`rotbox(`*wid,ht,type,*`[r|t=`*val*`])`	gen	box oriented in current direction in `[ ]` block; *type=* e.g. `dotted shaded "green"`. Defined internal locations: N, E, S, W (and NE, SE, NW, SW if arg4 is blank). If arg4 is `r=`*val* then corners have radius *val*. If arg4 is `t=`*val* then a spline with tension *val* is used to draw a "superellipse," and the bounding box is then only approximate.
`rotellipse(`*wid,ht,type*`)`	gen	ellipse oriented in current direction in `[ ]` block; e.g. `Point_(45); rotellipse(,,dotted fill_(0.9))`. Defined internal locations: N, S, E, W.
`round(at` *location,line thickness,attributes*`)`		
	gen	filled circle for rounded corners; attributes=`colored "gray"` for example; leaves `Here` unchanged if arg1 is blank.
`rpoint_(`*linespec*`)`	gen	set direction cosines
`rpos_(`*position*`)`	gen	`Here` + *position*
`rrot_(`*x, y, angle*`)`	gen	`Here` + `vrot_(`*x, y, cos(angle), sin(angle)*`)`
`rs_box(`*text,expr1,*···`)`	gen	like `s_box` but the text is rotated by `text_ang` (default 90) degrees
`rsvec_(`*position*`)`	gen	`Here` + *position*
`rt_`	gen	right with respect to current direction
`rtod_`	gen	constant, degrees/radian
`rtod__`	gen	constant, degrees/radian
`rvec_(`*x,y*`)`	gen	location relative to current direction
`s_`	gen	.s with respect to current direction
`s_box(`*text,expr1,*···`)`	gen	generate dimensioned text string using `\boxdims` from `boxdims.sty`. Two or more args are passed to `sprintf()`
`s_dp(`*name,default*`)`	gen	depth of the most recent (or named) `s_box`
`s_ht(`*name,default*`)`	gen	height of the most recent (or named) `s_box`
`s_init(`*name*`)`	gen	initialize `s_box` string label to *name* which should be unique
`s_name`	gen	the value of the last `s_init` argument
`s_wd(`*name,default*`)`	gen	width of the most recent (or named) `s_box`
`savem4dir([`'*stack name*'`])`	gen	Stack m4 direction parameters in the named stack (default '`savm4dir_`')
`sbs(`*linespec, chars, label*`)`	cct	Wrapper to place an SBS thyristor as a two-terminal element with `[ ]` block label given by the third argument
`sc_draw(`*dna string, chars, iftrue, iffalse*`)`		
	cct	test if chars are in string, deleting chars from string
`scr(`*linespec, chars, label*`)`	cct	Wrapper to place an SCR thyristor as a two-terminal element with `[ ]` block label given by the third argument

scs(*linespec, chars, label*)	cct	Wrapper to place an SCS thyristor as a two-terminal element with [ ] block label given by the third argument
se_	gen	.se with respect to current direction
series_*elementspec, elementspec, . . .*		
	cct	Series combination in a [] block of elements with shortened default length. An *elementspec* is of the form [*Label*:] *element*; [*attributes*], where an *attribute* is of the form [`llabel`(. . .);] | [`rlabel`(. . .);] [`b_current`(. . .);]. Internal points `Start`, `End`, and `C` are defined
setdir_(R|L|U|D|*degrees, default* U|D|R|L|*degrees*)		
	gen	store drawing direction and set it to up, down, left, right, or angle in degrees (reset by `resetdir_`). The directions may be spelled out, i.e., Right, Left, . . .
setrgb(*red value, green value, blue value,*[*name*])		
	gen	define colour for lines and text, optionally named (default `lcspec`); svg values are integers from 0 to 255
setview(*azimuth degrees,elevation degrees*)		
	3D	set projection viewpoint
sfg_init(*default line len, node rad, arrowhd len, arrowhd wid*), (reads libcct.m4)		
	cct	initialization of signal flow graph macros
sfgabove	cct	like above but with extra space
sfgarc(*linespec,text,text justification,*cw|ccw, *height scale factor*)		
	cct	directed arc drawn between nodes, with text label and a height-adjustment parameter
sfgbelow	cct	like below but with extra space
sfgline(*linespec,text,text justification*)		
	cct	directed straight line chopped by node radius, with text label
sfgnode(at *location,text,*above|below,*circle options*)		
	cct	small circle default white interior, with text label. The default label position is inside if the diameter is bigger than `textht` and `textwid`; otherwise it is `sfgabove`. Options such as fill or line thickness can be given.
sfgself(at *location*, U|D|L|R|*degrees, text, text justification,* cw|ccw, *scale factor*)		
	cct	self-loop drawn at angle *angle* from a node, with text label and a size-adjustment parameter
shade(*gray value,closed line specs*)		
	gen	fill arbitrary closed curve
shadebox(*box specification*)	gen	box with edge shading
sign_(*number*)	gen	sign function
sinc(*number*)	gen	the sinc(x) function
sind(*arg*)	gen	sine of an expression in degrees
sinusoid(*amplitude, frequency, phase, tmin, tmax*)		
	gen	draws a sinusoid over the interval ($t_{\min, \max}$
source(*linespec,*V|v|I|i|AC|B|F|G|Q|L|N|P|S|T|X|U|*other,diameter,*R)		
	cct	source, blank or voltage (2 types), current (2 types), AC, or type F, G, Q, B, L, N, X or labelled, P = pulse, U = square, R = ramp, S = sinusoid, T = triangle; other = custom interior label or waveform, R = reversed polarity
sourcerad_	cct	default source radius

`sp_`	gen	evaluates to medium space for gpic strings
`speaker( U`|`D`|`L`|`R`|*degrees,size*,`H)`		
	cct	speaker, *In1* to *In7* defined; `H`=horn
`sprod3D(a,x,y,z)`	3D	scalar product of triple x,y,z by a
`stackargs_('`*stackname*`',`*args*`)`	gen	Stack arg 2, arg 3, ... onto the named stack up to a blank arg
`stackcopy_('`*name 1*`','`*name 2*`')`		
	gen	Copy stack 1 into stack 2, preserving the order of pushed elements
`stackdo_('`*stackname*`',`*commands*`)`		
	gen	Empty the stack to the first blank entry, performing arg 2
`stackexec_('`*name 1*`','`*name 2*`',`*commands*`)`		
	gen	Copy stack 1 into stack 2, performing arg3 for each nonblank entry
`stackprint_('`*stack name*`')`	gen	Print the contents of the stack to the terminal
`stackpromote_(`*prefix*`,'`*stack name*`',`*In name*`)`		
	gen	Define locations `In1` or *In name* 1, … corresponding to the locations in stack *stack name*, as created by the `AutoGate` and `Autologic` macros. Each location is prefixed by argument 1 "."
`stackreverse_('`*stack name*`')`	gen	Reverse the order of elements in a stack, preserving the name
`stacksplit_('`*stack name*`',`*string,separator*`)`		
	gen	Stack the fields of *string* left to right separated by nonblank *separator* (default .). White space preceding the fields is ignored.
`sum3D(`*x1,y1,z1,x2,y2,z2*`)`	3D	sum of two triples
`sum_(`*a,b*`)`	gen	binary sum
`svec_(`*x,y*`)`	log	scaled and rotated grid coordinate vector
`sus(`*linespec, chars, label*`)`	cct	Wrapper to place an SUS thyristor as a two-terminal element with `[ ]` block label given by the third argument
`sw_`	gen	.sw with respect to current direction
`switch(`*linespec*`,L`|`R,[C`|`O][D],[B`|`D])`		
	cct	SPST switch (wrapper for bswitch, lswitch, and dswitch), arg2: R=right orientation (default L=left); if arg4=blank (knife switch): arg3 = [O|C][D] O= opening, C=closing, D=dots; if arg4=B (button switch): arg3 = O|C O=normally open, C=normally closed, if arg4=D: arg3 = same as for dswitch
`ta_xy(`*x, y*`)`	cct	macro-internal coordinates adjusted for `L`|`R`
`tapped('`*two-terminal element*`', [`*arrowhd* | `type=`*arrowhd*`;name=`*Name*`],` *fraction,* *length, fraction, length,* ⋯`)`		
	cct	Draw the two-terminal element with taps in a [ ] block (see `addtaps`). *arrowhd* = blank or one of `. - <- -> <->`. Each fraction determines the position along the element body of the tap. A negative length draws the tap to the right of the current direction; positive length to the left. Tap names are Tap1, Tap2, ⋯ by default or Name1, Name2, ⋯ if specified. Internal block names are `.Start, .End,` and .C corresponding to the drawn element, and the tap names

`tconn(`*linespec,*`>|>>|<|<<|O[F]`*,wid*`)`		
	cct	Terminal connector, `O`=circle; `OF`=filled circle; `>` or `>>` output connector (default `>`) ; `<` or `<<` input `connector`; arg3 is arrowhead width or circle diameter
`tgate(`*linespec,* `[B][R|L])`	cct	transmission gate, `B`= ebox type; `L`= oriented left
`thicklines_(`*number*`)`	gen	set line thickness in points
`thinlines_(`*number*`)`	gen	set line thickness in points
`threeD_init`	3D	initialize 3D transformations (reads `lib3D.m4`)
`thyristor(`*linespec,*`[SCR|SCS|SUS|SBS|IEC][`*chars*`])`		
	cct	Composite thyristor element in `[]`block: types SCR: silicon controlled rectifier (default), SCS: silicon controlled switch, SUS: silicon unilateral switch, SBS: silicon bilateral switch, IEC: type IEC. *Chars* to modify or define the element: A: arrowhead, F: half arrowhead, B: bidirectional diode, E: adds envelope, H: perpendicular gate (endpoint G), N: anode gate (endpoint Ga), U: centre line in diodes V: perpendicular gate across arrowhead centre, R=right orientation, E=envelope
`tline(`*linespec,wid,ht*`)`	cct	transmission line, manhattan direction
`tr_xy(`*x, y*`)`	cct	relative macro internal coordinates adjusted for `L|R`
`tr_xy_init(`*origin, unit size, sign* `)`		
	cct	initialize `tr_xy`
`transformer(`*linespec,*`L|R,`*np,*`[A|P][W|L][D1|D2|D12|D21],`*ns*`)`		
	cct	2-winding transformer or choke with terminals P1, P2, TP, S1, S2, TS: arg2: L = left, R = right, arg3: np primary arcs, arg5: ns secondary arcs, arg4: A = air core, P = powder (dashed) core, W = wide windings, L = looped windings, D1: phase dots at P1 and S1 end; D2 at P2 and S2 end; D12 at P1 and S2 end; D21 at P2 and S1 end
`tstrip(`R|L|U|D*degrees, nterms, chars*`)`		
	cct	terminal strip, chars: I=invisible terminals, C=circle terminals (default), D=dot terminals, O=omitted separator lines, `wid=`value; total strip width, `ht=`value; strip height
`ttmotor(`*linespec, string, diameter, brushwid, brushht*`)`		
	cct	motor with label
`twopi_`	gen	2π
`ujt(`*linespec,*`R,P,E)`	cct	unijunction transistor, right, P-channel, envelope
`unit3D(x,y,z)`	3D	unit triple in the direction of triple x,y,z
`up_`	gen	set current direction up
`up__`	gen	up with respect to current direction
`variable('`*element*`', [A|P|L|[u]N][C|S],`*angle,length*`)`		
	cct	overlaid arrow or line to indicate variable 2-terminal element: `A`=arrow, `P`=preset, `L`=linear, `N`=nonlinear, `C`=continuous, `S`=setpwise
`vec_(`*x,y*`)`	gen	position rotated with respect to current direction
`vlength(`*x,y*`)`	gen	vector length $\sqrt{x^2 + y^2}$
`vperp(`*linear object*`)`	gen	unit-vector pair CCW-perpendicular to linear object

vrot_(*x*,*y*,*xcosine*,*ycosine*)	gen	rotation operator
vscal_(*number*,*x*,*y*)	gen	vector scale operator
w_	gen	.w with respect to current direction
while_('*test*','*actions*')	gen	Integer m4 while loop
wid_	gen	width with respect to current direction
winding(L|R, *diam*, *pitch*, *turns*, *core wid*, *core color*)		
	cct	core winding drawn in the current direction; R=right-handed
xtal(*linespec*)	cct	quartz crystal
xtract(*string*, *substr1*, *substr2*, . . .)		
	gen	returns substrings if present

References

[1] J. D. Aplevich. Drawing with dpic, 2015. In the dpic source distribution.

[2] J. Bentley. *More Programming Pearls*. Addison-Wesley, Reading, Massachusetts, 1988.

[3] D. Girou. Présentation de PSTricks. *Cahiers GUTenberg*, 16, 1994. http://cahiers.gutenberg.eu.org/cg-bin/article/CG_1994___16_21_0.pdf.

[4] M. Goossens, S. Rahtz, and F. Mittelbach. *The LaTeX Graphics Companion*. Addison-Wesley, Reading, Massachusetts, 1997.

[5] J. D. Hobby. A user's manual for MetaPost, 1990.

[6] IEEE. Graphic symbols for electrical and electronic diagrams, 1975. Std 315-1975, 315A-1986, reaffirmed 1993.

[7] KDE-Apps.org. Cirkuit, 2009. KDE application: http://kde-apps.org/content/show.php/Cirkuit?content=107098.

[8] B. W. Kernighan and D. M. Richie. The M4 macro processor. Technical report, Bell Laboratories, 1977.

[9] B. W. Kernighan and D. M. Richie. PIC—A graphics language for typesetting, user manual. Technical Report 116, AT&T Bell Laboratories, 1991. http://www.cs.bell-labs.com/10thEdMan/pic.pdf.

[10] Thomas K. Landauer. *The Trouble with Computers*. MIT Press, Cambridge, 1995.

[11] W. Lemberg. Gpic man page, 2005. http://www.manpagez.com/man/1/groff/.

[12] E. S. Raymond. Making pictures with GNU PIC, 1995. In GNU groff source distribution, also in the dpic package and at http://www.kohala.com/start/troff/gpic.raymond.ps.

[13] T. Rokicki. DVIPS: A TeX driver. Technical report, Stanford, 1994.

[14] R. Seindal *et al.* GNU m4, 1994. http://www.gnu.org/software/m4/manual/m4.html.

[15] T. Tantau. Tikz & pgf, 2013. http://mirrors.ctan.org/graphics/pgf/base/doc/pgfmanual.pdf.

[16] T. Van Zandt. PSTricks: Postscript macros for generic tex, 2007. http://mirrors.ctan.org/graphics/pstricks/base/doc/pst-user.pdf.