




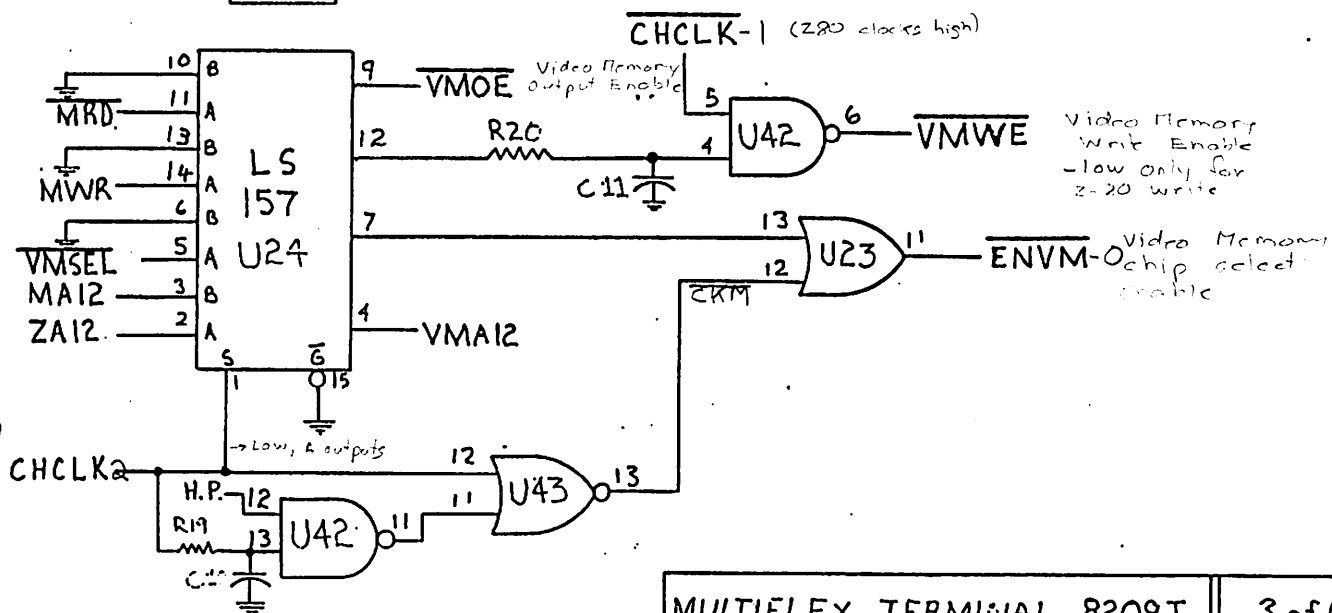
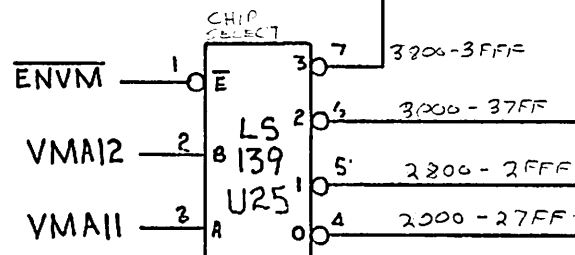
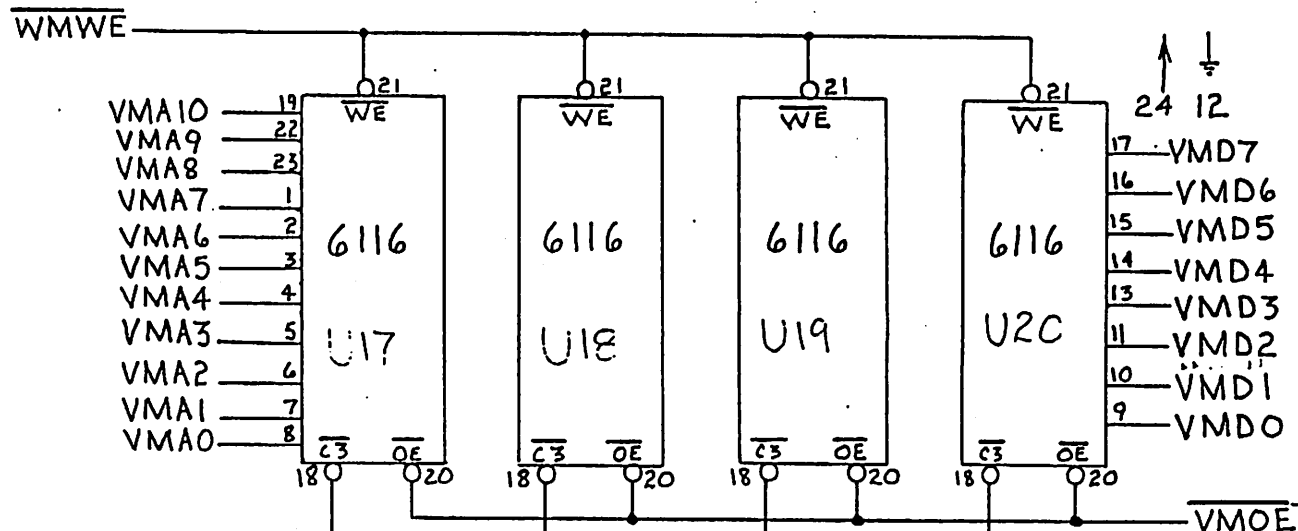
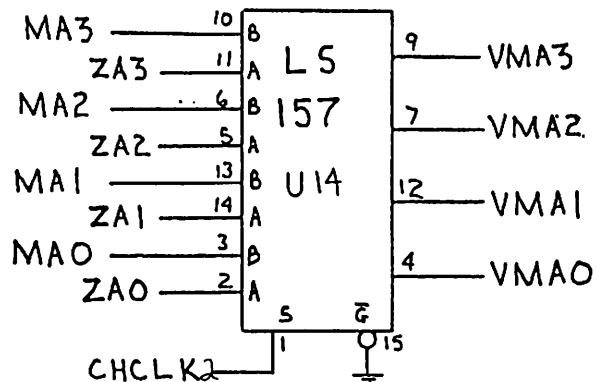
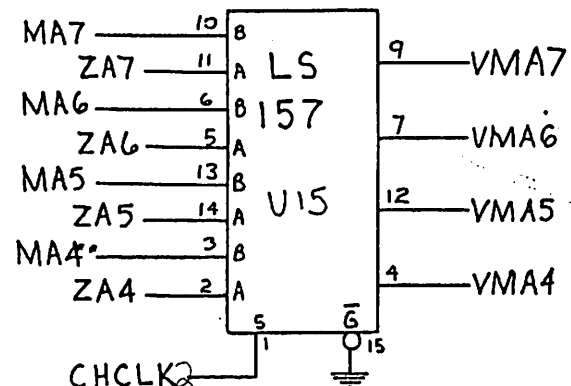
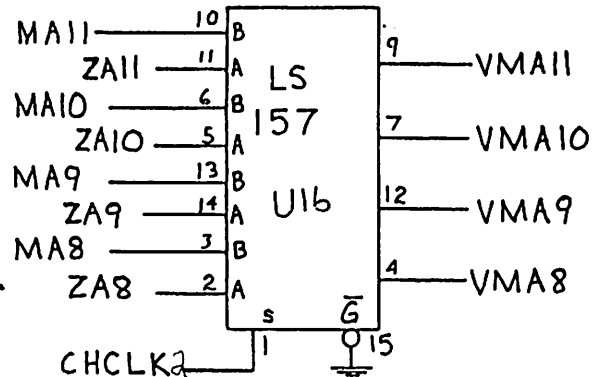
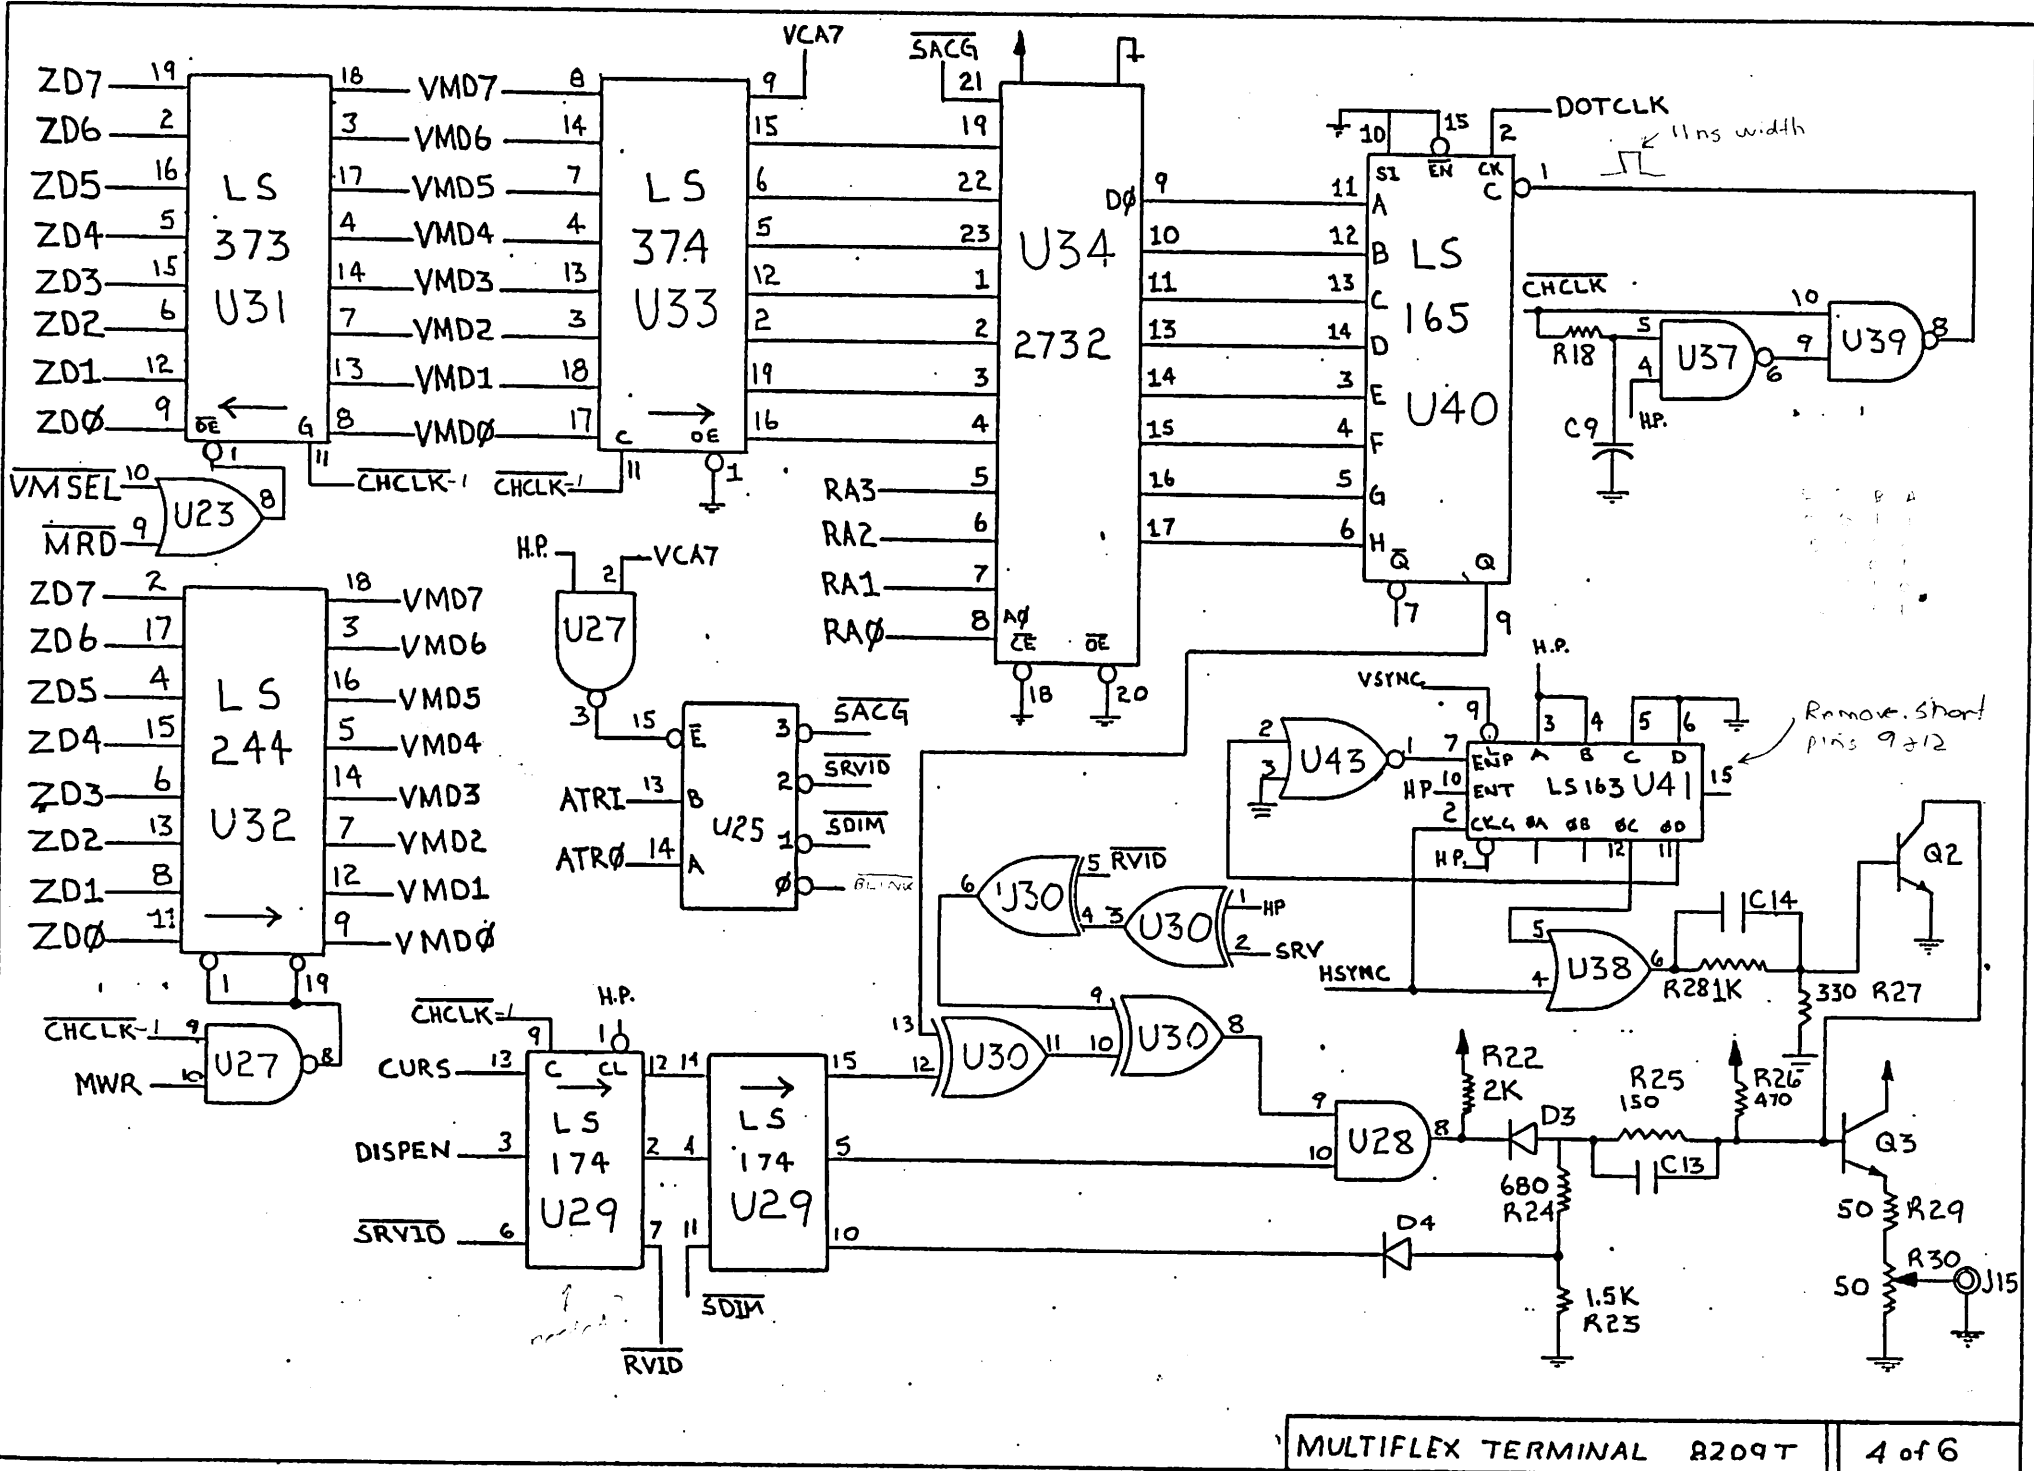


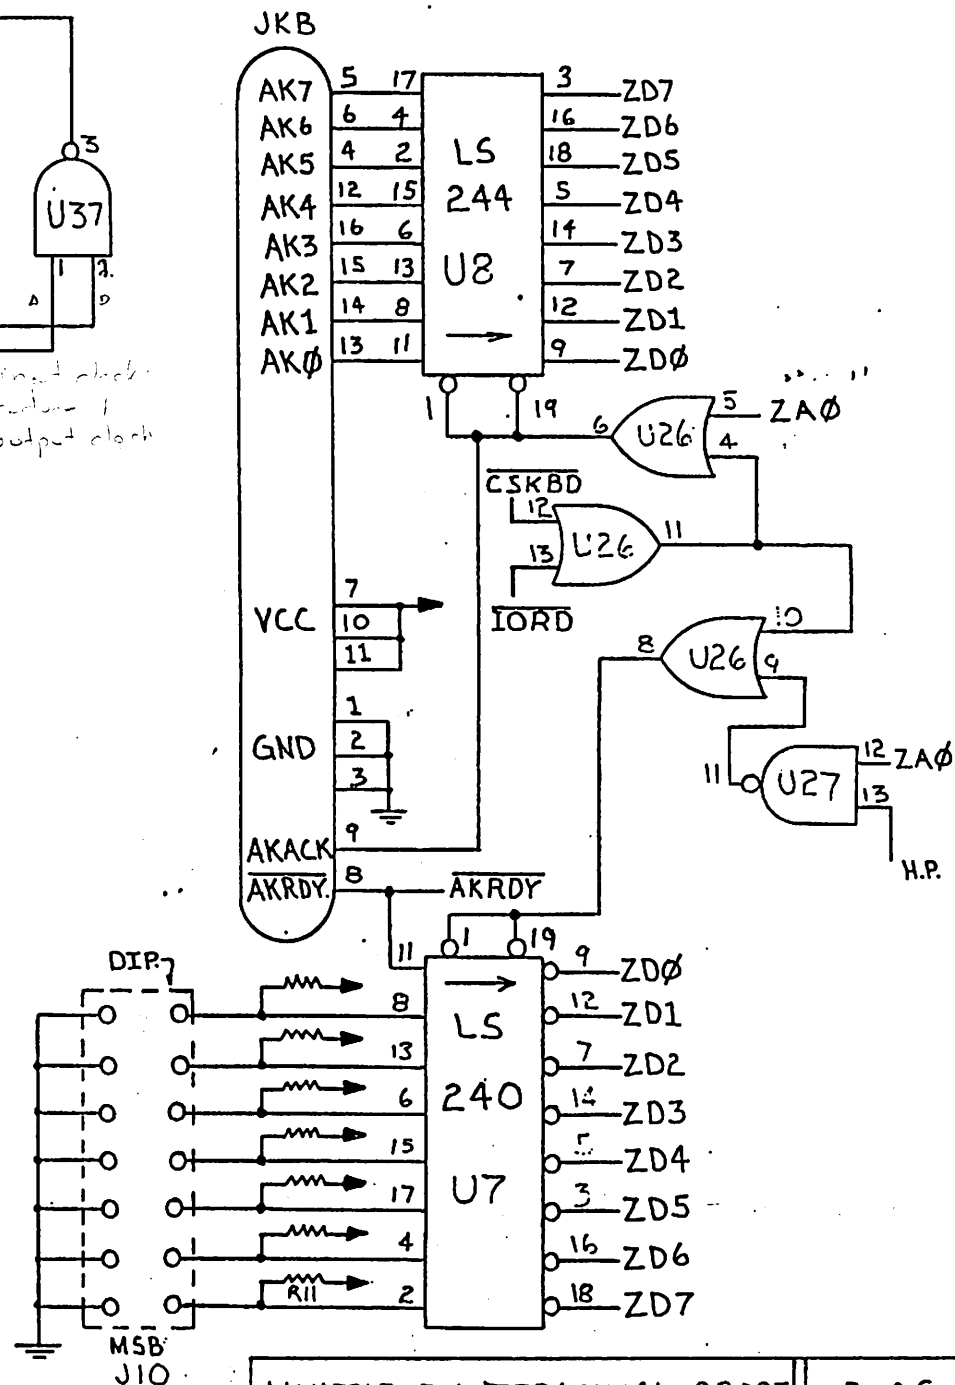

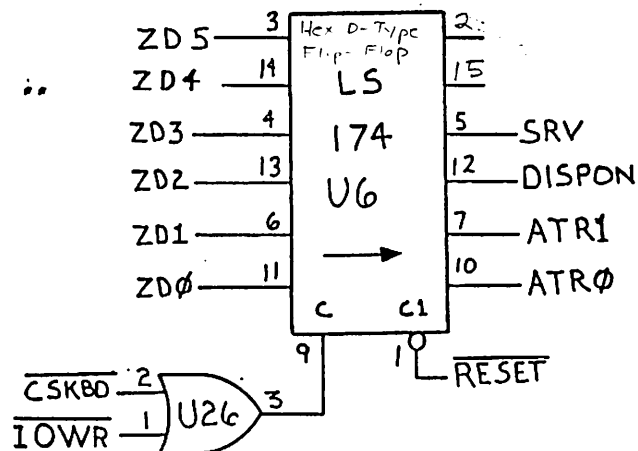

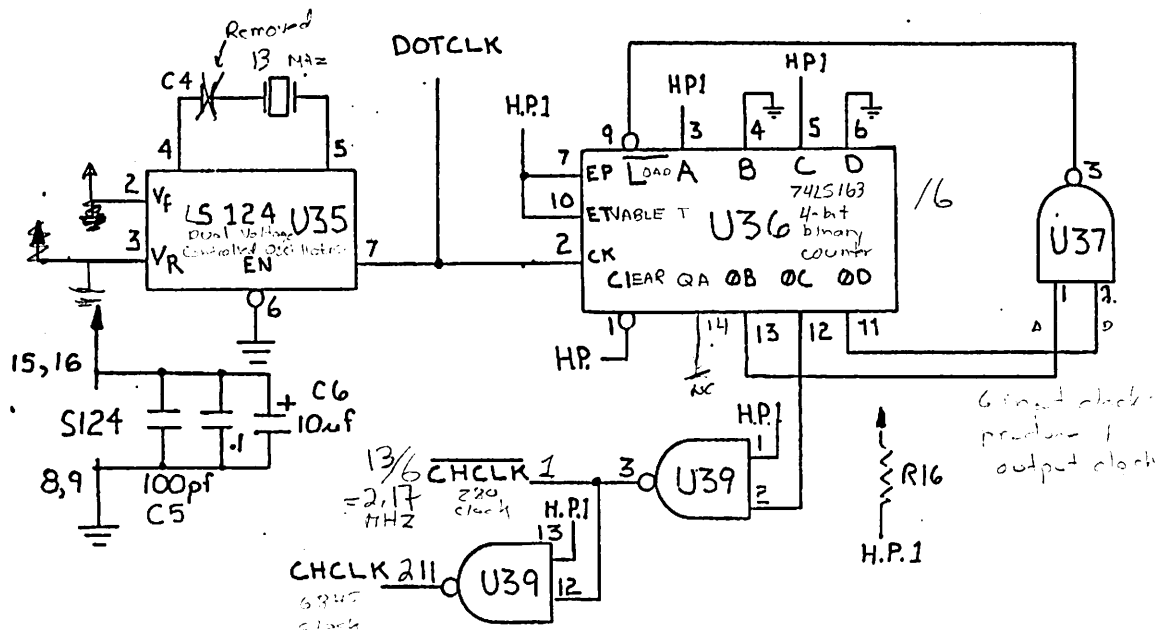

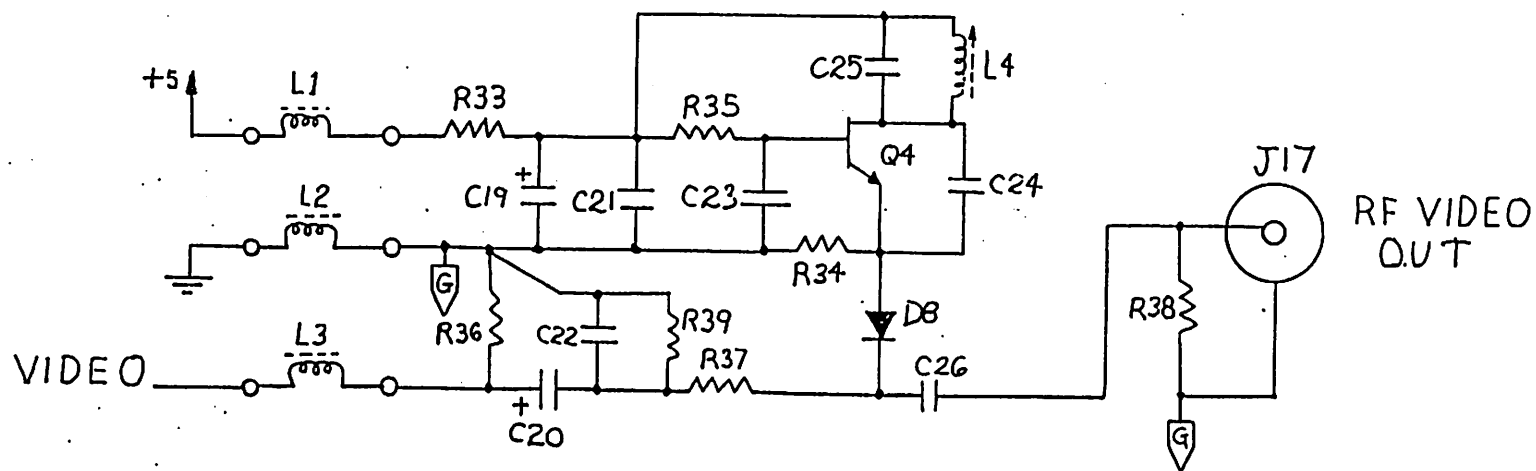

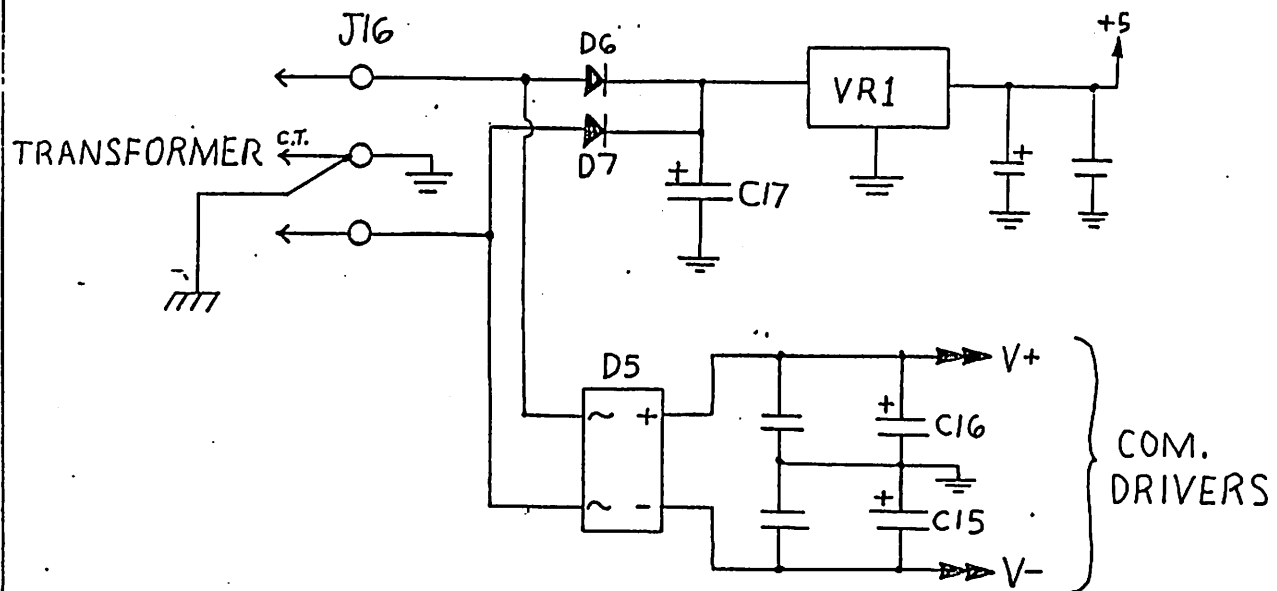

U1 = 74LS244

U2 = 2716

U3 = 74LS175

U4 = 74LS393

U5 = 74LS150

U6 = 74LS138


U7, U12 = 74LS132

U8 = 74LS74

U9 = 74LS08

U10 = 74LS86

U11 = 74LS123

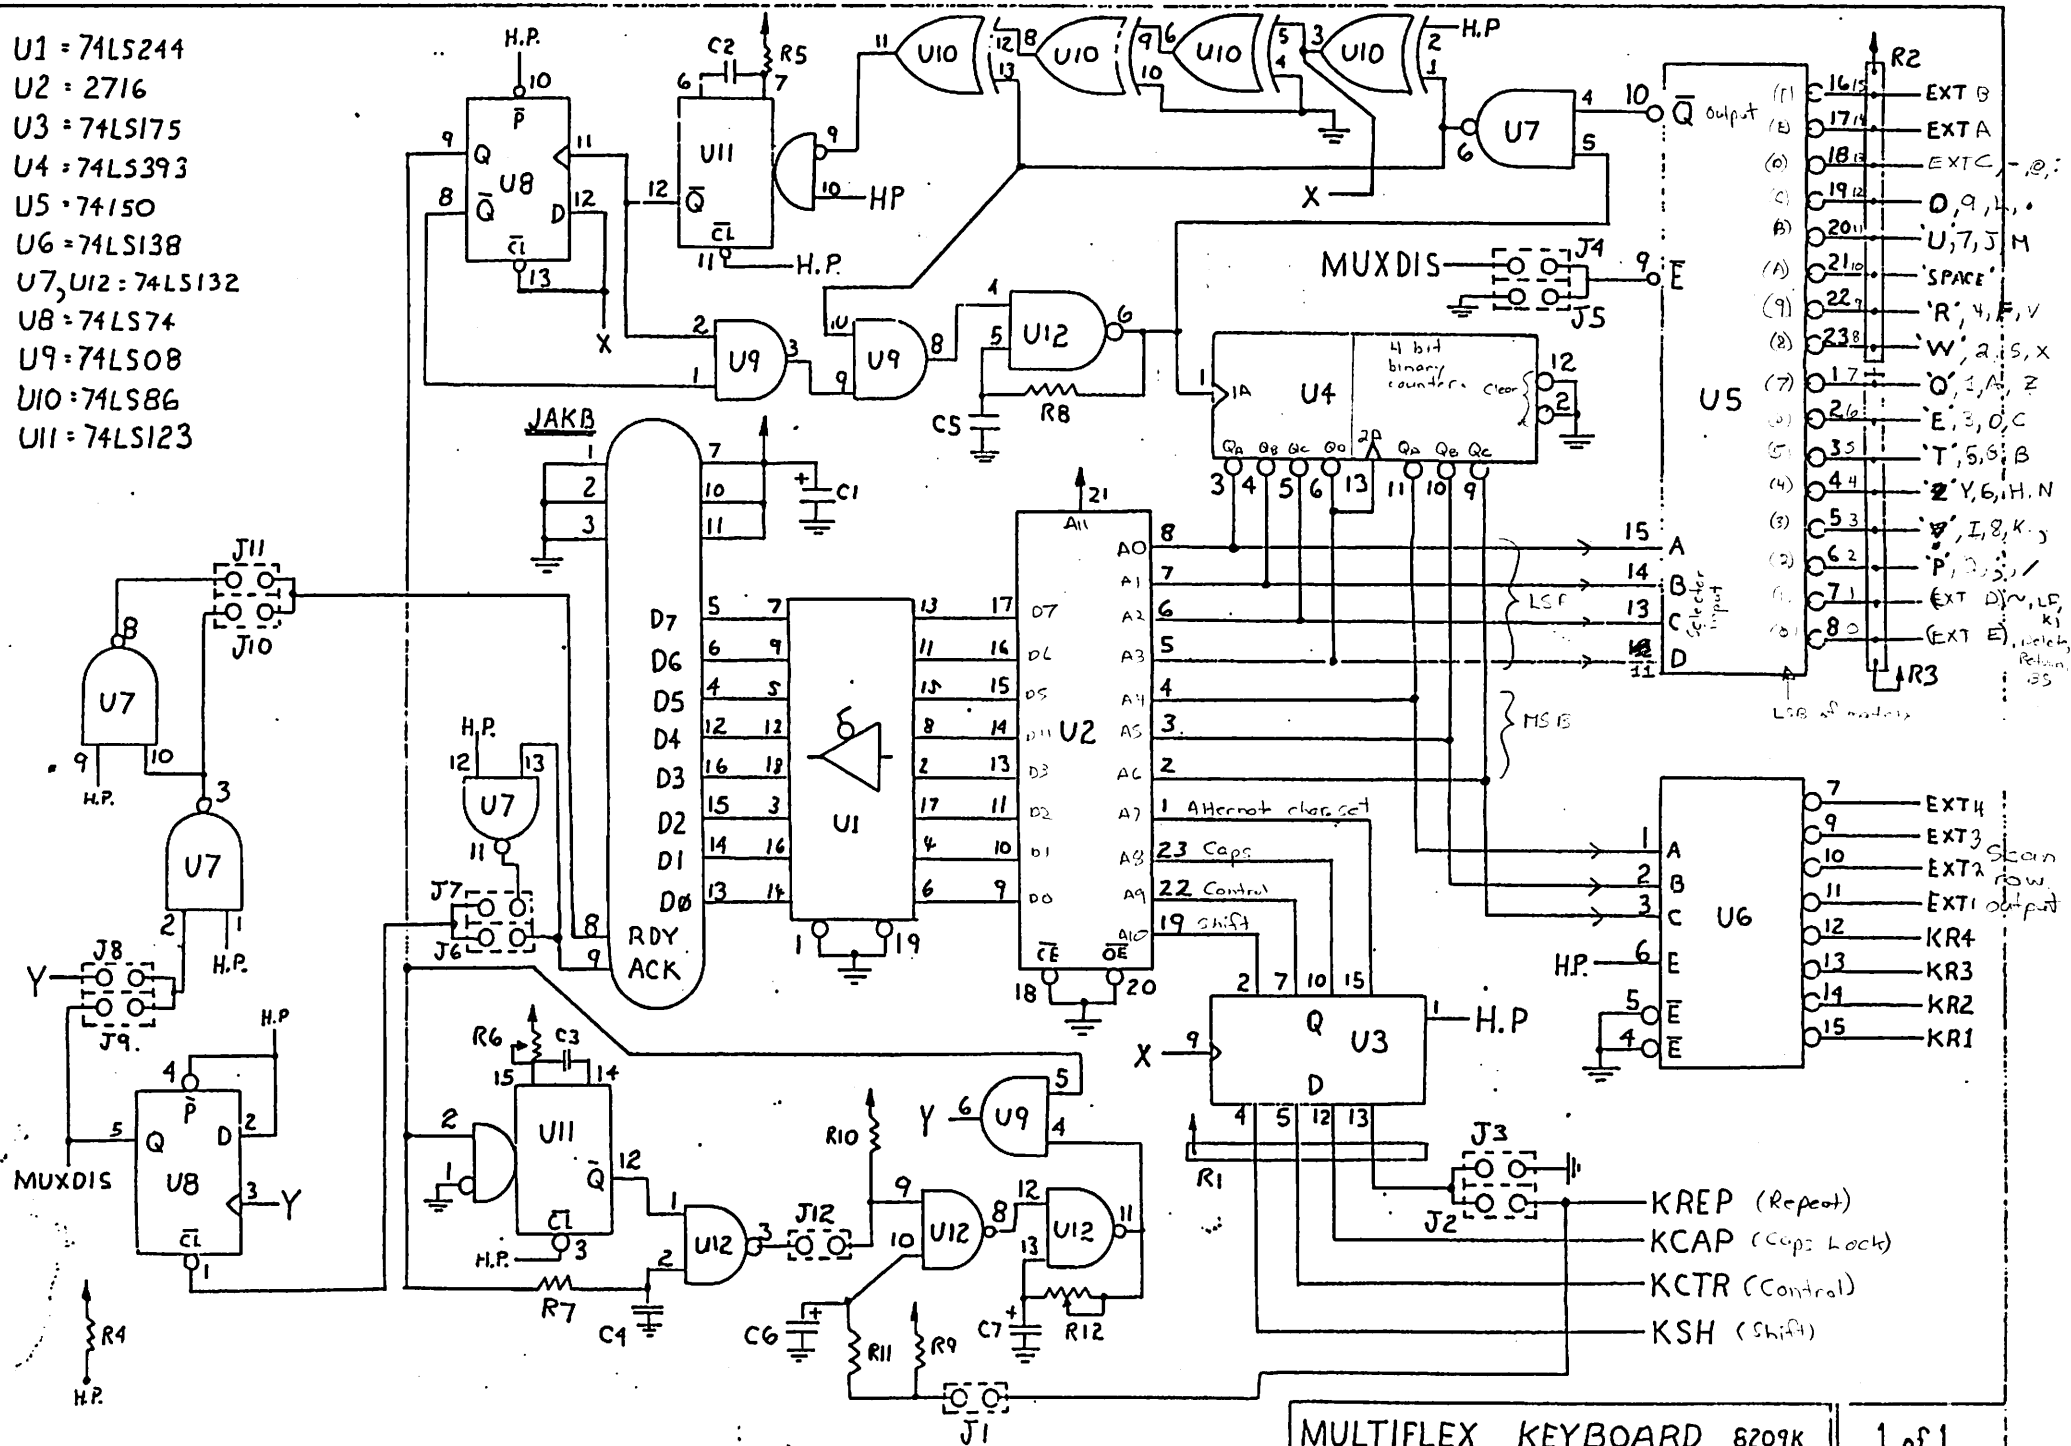

PARTS LIST

TERMINAL SECTION

IC's

[]	1	74S00	U39
[]	2	74LS00	U22, U27
[]	1	74LS02	U43
[]	2	74LS04	U12, U21
[]	1	74LS08	U28
[]	3	74LS32	U23, U26, U38
[]	1	74LS86	U30
[]	1	74S124	U35
[]	2	74LS132	U37, U42
[]	2	74LS139	U4, U25
[]	4	74LS157	U14, U15, U16, U24
[]	1	74S163 or 74LS163	U36
[]	1	74LS163	U41
[]	1	74LS165	U40
[]	2	74LS174	U6, U29
[]	1	74LS240	U7
[]	2	74LS244	U8, U32
[]	1	74LS373	U31
[]	1	74LS374	U33
[]	2	1489	U1, U2
[]	1	1488	U3
[]	1	Z80-CPU	U11
[]	1	6845/6545	U13
[]	1	8251	U9
[]	2	2732	U5 ("MON"), U34 ("CHAR. GEN")
[]	1	8253	U10
[]	2	6116/2016	U17, U20

Resistors:

[]	1	20R	R2
[]	1	47R	R3
[]	1	50R	R29
[]	1	150R	R25
[]	6	330R	R18-21, R27, R31
[]	1	470R	R26
[]	1	680R	R24
[]	3	1K	R8, R9, R28
[]	1	1.5K	R23
[]	9	2K	R4, R5, R12-16, R22, R32
[]	3	5.6K	R40-42
[]	3	10K	R6, R7, R17
[]	1	50R vertical trimpot	R1
[]	1	50R " "	R30
[]	1	2.2K 8 pin SIP	R11

Capacitors:

[]	1	10 pF	C4
[]	1	33 pF	C9
[]	1	68 pF	C11
[]	3	100 pF	C5, C10, C12
[]	1	470 pF	C18
[]	1	1 nF	C3
[]	31	.1 μ F	C1, C2, and 29 bypass caps.
[]	3	10 μ F tant.	C6, C7, C27
[]	1	22 μ F "	C8

Misc. Components:

[]	1	MPSA13	Q1
[]	2	2N4401, PN2222	Q2, Q3
[]	4	1N914	D1-4
[]	1	DB25S	JPC1
[]	1	2 MHz XTAL	Y1
[]	1	10 MHz XTAL	Y2

Sockets:

[]	2	40 pin
[]	2	28 pin
[]	6	24 pin
[]	5	20 pin
[]	13	16 pin
[]	16	14 pin

KEYBOARD ENCODER

IC's:

[]	1	74LS08	U9
[]	1	74LS74	U8
[]	1	74LS86	U10
[]	1	74LS123	U11
[]	2	74LS132	U7, U12
[]	1	74LS138	U6
[]	1	74150	U5
[]	1	74LS175	U3
[]	1	74LS244	U1
[]	1	74LS393	U4
[]	1	2716	U2 ("KYBD ENC.")

Resistors:

[]	2	330R	R7, R8
[]	2	1K	R10, R11
[]	2	2K	R9, R4
[]	1	82K	R5
[]	1	1K Horiz. trimpot	R12

[]	1	220K Vert.	"	R6
[]	2	2.2K 10 pin SIP		R2, R3
[]	1	2.2K 8 pin SIP		R1

Capacitors:

[]	1	1 nF		C4
[]	13	.1 μ F		C2 (2), C5, and 10 bypass
[]	1	10 μ F tant.		C1
[]	1	15 μ F	"	C6
[]	1	47 μ F elec.		C3
[]	1	220 μ F	"	C7


Sockets:

[]	2	24 pin
[]	1	20 pin
[]	4	16 pin
[]	6	14 pin

OPTIONS:

[]	1	Speaker
[]	4	Keyswitch c/w caps
[]	2	6116/2016
[]	1	DB25S
[]	1	Power supply parts kit
[]	1	RF modulator parts kit
[]	1	Reset Pushbutton

KEYBOARD

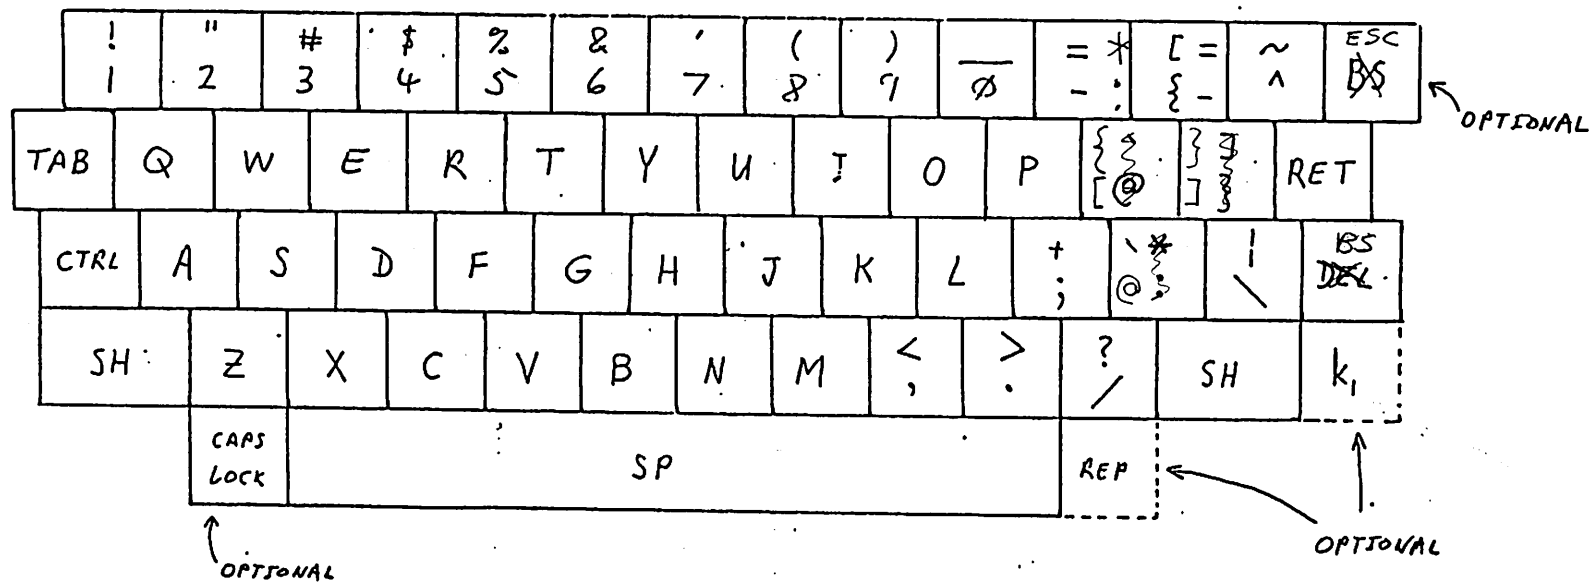

EXT	
EXT1	EXTB
EXT2	EXTA
EXT3	EXTC
EXT4	EXTD
	U
	Space
	R
	W

KEYBOARD MATRIX


		EXTB	EXTA	EXTC	O	U	Space	R	W
EXT4 7									
MSD EXT3 6									
EXT2 5									
EXT1 4									
KR4 3	Z	C	B	N	<	?	k ₁		
KR3 2	A	D	G	H	K	+		BS DEL	
KR2 1	Q	E	T	Y	I	P	]	CR	
KR1 0	!	#	%	&	(	-	[	~	
	7	6	5	4	3	2	1	0	F E D C B A 9 8

LSD

2716
EPROM PAGES

0	
20	
40	
60	
80	
100	
120	
140	
160	
180	
200	
220	
240	
260	
280	
300	
320	
340	
360	
380	
400	
420	
440	
460	
480	
500	
520	
540	
560	
580	
600	
620	
640	
660	
680	
700	
720	
740	
760	
780	

ALT KEY CODES

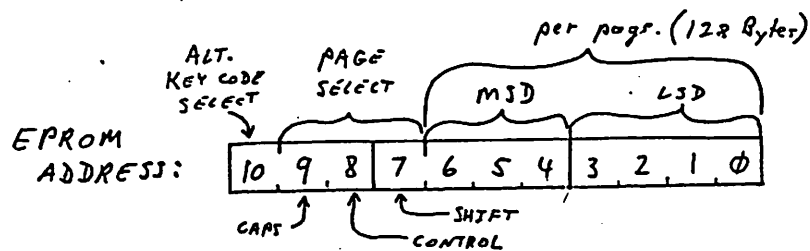

-ALL UNENCODED KEYS (BLANK ENTRIES) ARE FF.H.

Function keys

F1	Shift Ctrl	1
F2		2
F3		3
F4		4
F5		5
Blue		6
Red		7
Gray		8

output from
Terminal

output
From Keyboard

Esc S	F0h
T	F1h
U	F2h
V	F3h
W	F4h
P	F5h
Q	F6h
R	F7h

→ Shift-Control-Esc or Shift-Caps-Control Esc enters
Setup mode if in remot mode (Keyboard sends E0h)