

Received 5 July 2025, accepted 4 August 2025, date of publication 7 August 2025, date of current version 14 August 2025.

Digital Object Identifier 10.1109/ACCESS.2025.3596507

RESEARCH ARTICLE

Analysis of Magnetic Barkhausen Noise to Reveal Domain Wall Dynamics in Amorphous/Nanocrystalline Ribbons

TAKAHIRO YAMAZAKI¹, SHINGO TAMARU², and MASATO KOTSUGI¹, (Member, IEEE)

¹Department of Materials Science and Technology, Tokyo University of Science, Tokyo 125-8585, Japan

²Research Institute for Hybrid Functional Integration (HyFI-RI), National Institute of Advanced Industrial Science and Technology (AIST), Tsukuba 305-8568, Japan

Corresponding author: Takahiro Yamazaki (takahiro.yamazaki@rs.tus.ac.jp)

This work was supported in part by Japanese Government [Ministry of Education, Culture, Sports, Science and Technology (MEXT)]-Program for Creation of Innovative Core Technology for Power Electronics under Grant JPJ009777, in part by Japan Science and Technology Agency ACT-X under Grant JPMJAX22AL, and in part by Japan Society for the Promotion of Science-JSPS KAKENHI under Grant 23K13636.

ABSTRACT Understanding and minimizing iron loss in soft magnetic materials is essential for the development of high-efficiency next-generation power electronics systems. Excess eddy current loss, which arises from localized eddy currents induced by moving domain walls (DWs), constitutes a major fraction of the total iron loss at high frequencies. However, the detailed physical mechanisms underlying excess eddy current loss remain unclear, primarily due to the lack of suitable experimental and analytical techniques. In this study, a wide-band and high-sensitivity magnetic Barkhausen noise (MBN) measurement system was developed to investigate DW dynamics in 25 μm -thick amorphous/nanocrystalline Fe–Si–B–P–Cu (NANOMET)[®] ribbons. This system enabled high-fidelity and single-shot capture of individual MBN pulses, which provided direct experimental evidence of DW relaxation in metallic ribbons. In the non-annealed amorphous state, isolated MBN pulses with steep leading edges and exponentially decaying trailing edges were clearly observed. Statistical analysis of these events yielded a mean relaxation time of 3.8 μs with a standard deviation of 1.8 μs . Analytical modelling suggests that eddy current damping exceeds intrinsic DW damping in the relaxation process. These findings advance the understanding of excess eddy current loss mechanism and thereby contribute to the microstructural design of low-loss soft magnetic materials.

INDEX TERMS Domain wall dynamics, excess eddy current loss, relaxation process, magnetic Barkhausen noise (MBN), amorphous/nanocrystalline alloy ribbons, power electronics, soft magnetic materials.

I. INTRODUCTION

The rapid advancement of next-generation power electronics technology has intensified the demand for low-loss soft magnetic materials for inductor/transformer cores [1], [2], [3], [4], [5]. The operational efficiency of these components is fundamentally limited by iron loss, which consists of hysteresis loss, classical eddy current loss, and excess eddy current loss. Among these, excess eddy current loss due to localized eddy currents induced by domain wall (DW) motion becomes increasingly dominant at high frequencies [6], [7], [8], [9],

[10]. Therefore, a comprehensive understanding and effective reduction of excess eddy current loss have emerged as crucial issues in materials engineering of soft magnetic materials for high-frequency applications [11], [12], [13], [14], [15], [16], [17].

Magnetic Barkhausen noise (MBN), spike pulses generated when DWs are depinned, serves as a useful probe of impulsive DW dynamics [18], [19], [20], [21], [22], [23]. The rapid changes in DW velocity at depinning increase the induction of localized eddy currents, resulting in additional energy dissipation and significantly influencing iron losses [24], [25], [26], [27], [28], [29]. Conventional MBN studies, including scaling-law analysis [30], [31], magnetic

The associate editor coordinating the review of this manuscript and approving it for publication was Vitor Monteiro¹.

TABLE 1. Comparison of recent magnetic Barkhausen noise (MBN) measurement systems, specimen, objective, methods, and key performance metrics.

Specimen / Material	Objective / Focus	Excitation / Sensing methods	Bandwidth / Time-Res.	Noise Level	Key Features	Reference
Fe-based amorphous ribbon (25 μm)	Single-pulse DW relaxation, time-resolved	1 Hz sine; 40-turn encircling coil	< 625 kHz; 1.25 MS/s	1.4 nV/ $\sqrt{\text{Hz}}$; < 1 dB system rise; EM shield	Single-shot detection in metallic ribbon	This work
Fe ₄₂ Co ₅₈ thin film (1.8 μm)	Stress detection in thin films	0.5 Hz sine; 30-turn air-core surface coil	100 Hz–100 kHz; 0.1 MS/s	Not detailed; no EM shield	ML applied to time-series profiles	Omae et al. 2023 [36]
Commercial steels (bulk)	Simplified, low-cost system	< 10 Hz sine; air-core surface coil;	1 kHz–100 kHz; 2.5 MS/s	0.5 mV mean background	Educational, open-source design	Ortiz et al., 2025 [37]
Fe-based bilayer ribbon (50 μm)	Burst/asymmetry in bilayer ribbons	125 Hz sine; surface coil	50 kHz–1 MHz; 6.4 MS/s	Not detailed (via RollScan 350)	Double-burst analysis, surface structure	Neslušan et al., 2021 [38]
Fe ₇₅ Si ₁₅ B ₁₀ amorphous film (50–1000 nm)	Timing statistics of MBN pulses	0.05 Hz triangle; 400-turn encircling coil	< 100 kHz; 4 MS/s	Not detailed, EM shield	Stochastic waiting-time distributions analysis	Sousa et al., 2020 [20]
LiHo _{0.4} Y _{0.6} F ₄ (single crystal)	Time-resolved, eddy-current-free in insulator magnet	< 1 mHz triangle; 150-turn encircling coil	1 kHz–250 kHz; ~1 MS/s	Not detailed; threshold at 3.5 σ above noise	Direct quantum MBN detection	Simon et al. 2024 [39]

domain imaging [32], [33] and machine learning (ML)-based characterization [8], [34], [35], [36], have mainly focused on statistical averages over multiple depinning events. While informative, these approaches tend to obscure the fast, event-specific DW dynamics essential for clarifying the energy dissipation mechanisms.

Recent developments in MBN measurement systems have significantly advanced temporal resolution, signal-to-noise ratio (SNR), and analytical techniques, as summarized in Table 1. For instance, Sousa et al. [20] demonstrated the potential of high-speed acquisition methods for stochastic analysis of MBN pulses, focusing on waiting-time distributions in amorphous films. Omae et al. [36] applied machine learning (ML) techniques for direct profiling of MBN signals in Fe–Co thin films, though single-pulse resolution was not attained. Furthermore, wide-band, high-sampling-rate measurements by Neslušan et al. [38] have enhanced understanding of burst asymmetry and layer-specific magnetization behavior in Fe-based bilayer ribbons, focusing on surface effects and magnetic coupling during cyclic magnetization. In addition, studies employing high-resolution MBN measurements in insulating single-crystal ferromagnets, such as those by Simon et al. [39] and Silevitch et al. [40], have provided valuable insights into intrinsic DW dynamics by capturing isolated MBN signals. These experiments benefit from the suppression of extrinsic damping effects, as the absence of eddy currents in insulating materials allows for direct observation of DW motion.

Despite these advances, existing MBN measurement systems still lack the capability to simultaneously achieve wide frequency coverage and high-sensitivity sufficient to resolve

individual MBN events in metallic soft magnetic materials. Consequently, the fundamental physical mechanisms behind excess eddy current loss remain unclear, and the direct relationship between DW dynamics and eddy current losses has yet to be fully established.

The present study addresses these challenges by developing a wide-band and high-sensitivity MBN measurement system and applying it to 25 μm -thick Fe–Si–B–P–Cu (NANOMET[®]) ribbons [6], [9], [16], [41], [42], [43], thereby providing the direct experimental evidence of DW relaxation in a metallic ribbon. The major contributions of this study are as follows:

- Built a high-fidelity MBN measurement system integrating a dual-layer coil jig with full electromagnetic shielding, differential wiring, and custom low-noise amplifier, enabling single-shot capture of individual MBN pulses.
- Extracted the statistical distribution of DW relaxation time constants by applying exponential-decay fitting to the trailing edges of isolated MBN pulses.
- Demonstrated analytical modeling that eddy current damping in metallic ribbons exceeds intrinsic magnetic damping by more than an order of magnitude.

The following sections describe the experimental MBN measurement setup and signal processing procedure in detail. We then present the results of pulse-resolved MBN detection together with the accompanying statistical analyses. Lastly, we discuss the implications for understanding iron loss mechanisms based on physics-based analytical modeling of DW

motion, with a view toward advancing the design of low-loss soft magnetic materials for next-generation power electronics technology.

II. EXPERIMENTAL

A. MBN MEASUREMENT SETUP

Figs. 1(a) and (b) show, respectively, a block diagram of the MBN measurement system and a photo of the jig developed in this study. The jig consists of dual-layer coils made by winding AWG32 enameled wire: one of the two coils is a 40-turn excitation coil, and the other is a 120-turn pick-up coil. The jig has an opening of $3\text{ mm} \times 1.6\text{ mm}$, into which the sample under test (SUT) cut into a rectangle of approximately $2.5\text{ mm} \times 10\text{ mm}$ is inserted.

A data acquisition (DAQ) unit (NI USB-6251) synthesizes a sine wave of 1 Hz and 100 cycles. The signal is amplified by a custom-built balanced current amplifier designed to deliver up to 400 mA, then sent to the excitation coil to generate a magnetizing field that drives DW motion. The change in magnetization of the SUT by DW motion induces an electrical signal in the pick-up coil. The signal, which is proportional to the time derivative of the magnetization, i.e., DW velocity, is amplified by a low-noise differential amplifier (LNDA, Stanford Research Systems SR552), and acquired by the DAQ unit at a sampling rate of 1.25 MS/s.

The system must be designed to minimize noise while maintaining a sufficiently wide bandwidth to capture the MBN waveform with the highest possible fidelity. Fig. 1(c) shows the noise power spectral density (NPSD) of the read channel alone shown in blue and the entire channel shown in red. The NPSD of the read channel alone (blue line) is observed when the differential inputs of the LNDA are both short terminated to GND. According to the specifications of SR552, the input referred noise level is $1.4\text{ nV}/\sqrt{\text{Hz}}$ ($= 177.1\text{ dBV}/\sqrt{\text{Hz}}$) at 1 kHz, which is indicated as a green broken line in the figure. Except for some peaks, which are external noises, the blue line in the frequency range below approximately 300 kHz almost coincides with the green broken line, and gradually rolls off above 300 kHz as the frequency increases due to the gain reduction of the LNDA. At 625 kHz, which is the Nyquist frequency of the DAQ unit acquiring the signal at 1.25 MS/s, the NPSD is approximately 3 dB lower than the green broken line, indicating that the bandwidth of the LNDA is also around 625 kHz. The input referred noise level of the LNDA shown by the green broken line is the same as the Johnson noise of $120\text{ }\Omega$ resistor, which is one of the lowest levels among the commercially available wide band LNDAs that we have searched for.

The NPSD of the entire channel (red line) is observed when all components are connected as shown in Fig. 1(a), which is only slightly above the blue line by less than 1 dB except for some peaks. This indicates that noises introduced by the jig and current amplifier are very small. In fact, the design of the current amplifier is customized for this system as follows. First, it acts as a low pass filter with a cut off frequency

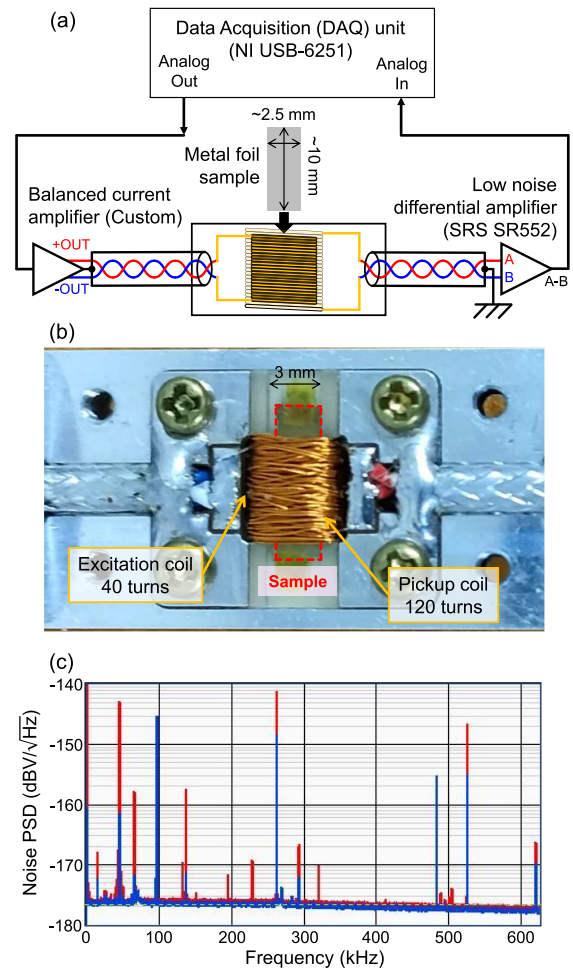


FIGURE 1. (a) Block diagram of the MBN measurement system. (b) Photo of the jig. (c) NPSD of the read channel (blue) and entire channel (red). The green broken line is the input referred noise level of the LNDA.

of approximately 110 Hz to cut noise higher than 110 Hz. Second, $22\text{ }\Omega$ resistors are inserted into the balanced outputs to prevent noise current from being fed to the excitation coil. Without these resistors, small voltage noises appearing at the outputs of the current amplifier would cause large noise currents to flow into the excitation coil due to low total impedance of the current amplifier outputs and the excitation coil. The two interconnects, one from the current amplifier to the jig and the other from the jig to the LNDA, are both made to be differential. In addition, all interconnects, as well as the jig and the two amplifiers are carefully shielded to ensure the best immunity to external noises. The number of windings for the pick-up coil is optimized to the maximum value that does not cause instability in the LNDA, i.e., more than 120 windings were found to induce oscillation in the LNDA at a few MHz, corresponding to the coil's self-resonant frequency. These elaborations resulted in only a slight increase in the noise level compared to the level observed for the read channel alone.

The resistance of the pick-up coil was measured to be approximately 3.5Ω . This indicates that, in theory, the noise level could be further reduced by a factor of $\sqrt{3.5/120} \sim 1/6$. However, achieving this should require a completely new design of the LNDA and even more elaborate noise shielding. Since this involves significant engineering effort, this is left as one of the future tasks in this study.

B. MBN DATA PROCESSING

The acquired time-domain signals were Fast Fourier transformed to convert them into the frequency domain, then all components below 1 Hz, as well as components at 1 Hz and its second and third harmonics, were removed from the spectrum to suppress low-frequency drifts and harmonic distortions. The resulting frequency-domain signals were inverse Fast Fourier transformed to reconstruct the filtered time-domain signals.

To extract individual MBN pulses, a peak detection algorithm was applied under the following three conditions. First, each candidate pulse spans at least five consecutive sampling points to ensure that the waveform contains sufficient information for reliable analysis. Second, the peak amplitude exceeds 20 mV. This threshold was determined by comparing the signal with the measured noise floor because smaller excursions could not be distinguished from background fluctuations. Third, successive peaks are considered only if they are separated by at least $40 \mu\text{s}$, a requirement to prevent closely spaced events from being mistaken for a single pulse.

III. RESULTS

A. MBN DETECTION AND ANALYSIS

This study investigated the MBN characteristics and DW relaxation dynamics in $25 \mu\text{m}$ -thick Fe-Si-B-P-Cu (NANOMET[®]) ribbons. NANOMET[®] was selected because of its exceptionally low coercivity and renowned soft-magnetic behaviors arising from an amorphous structure. When the ribbons are annealed, nanocrystallites form within the amorphous matrix and alter the distribution and strength of DW pinning sites, thereby changing the character of DW motion [42], [44]. The clear shift in the pinning characteristics from the fully amorphous to the nanocrystalline-amorphous state makes NANOMET[®] an ideal material for probing individual depinning events and their relaxation dynamics.

Fig. 2(a) shows typical MBN signals acquired from a non-annealed NANOMET[®] ribbon under the 1 Hz magnetizing field. In these measurements, a series of large and discrete spikes were observed during DW displacements. These transient events are interpreted as DW pinning-depinning processes, where DWs, initially trapped by localized energy barriers associated with microstructural defects or compositional inhomogeneities, suddenly overcome these barriers and accelerate rapidly. The fact that only a limited number of DWs are present, and their motion is expected to be smooth

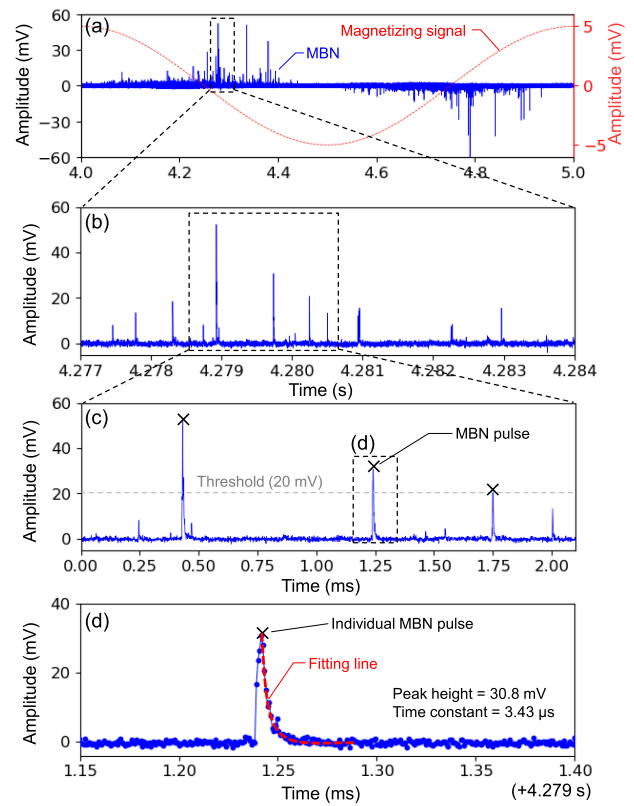


FIGURE 2. (a) Captured MBN pulses from a non-annealed NANOMET[®] ribbon. The magnetizing field profile and corresponding MBN signals are shown in red and blue, respectively. (b) A magnified view highlighting individual MBN pulses with the pulse heights exceeding the detection threshold (20 mV). (c) Time-resolved MBN pulse shapes with distinct peak events marked. (d) An example of isolated MBN pulse shown with a fitted decay curve illustrating its steep leading edge and gentle decay profiles, characteristic of DW dynamics.

due to the sparse distribution of pinning sites, makes it possible to clearly resolve individual depinning events.

A closer look at representative isolated MBN pulses with peak heights in the 20–60 mV range is provided in Figs. 2(b) and (c). Each pulse is characterized by a steep leading edge, reflecting the abrupt acceleration of the DW immediately after release from a pinning site, followed by a much more gradual, almost exponentially decaying trailing edge. This trailing edge is attributed to the overdamped nature of DW motion. The clear observation of the steep leading edge confirms that the trailing edge is not an artifact of the measurement system (e.g., due to limited bandwidth), but rather an intrinsic feature of the DW dynamics. Most observed pulses share a similar general shape to the one shown in Fig. 2(d).

To quantitatively analyze the relaxation behavior of these isolated MBN pulses, a simple analytical model was employed, describing the exponential decay of the MBN voltage as a function of time following depinning:

$$V_{MBN} = A \cdot e^{-\frac{1}{\tau}(t-t_0)} + B, \quad (1)$$

where V_{MBN} is the measured MBN voltage, A is the pulse amplitude, τ is the relaxation time constant, t_0 is the onset time of DW release, and B is a baseline offset accounting for background signals not directly related to DW motion. For the majority of pulses analyzed, the baseline term B was found to be negligibly small, indicating negligible baseline contribution in the observed pulses. Parameter extraction was performed using nonlinear least-squares fitting based on the Levenberg–Marquardt algorithm, as implemented in the SciPy library [45].

B. STATISTICAL DISTRIBUTION OF TIME CONSTANTS

To further clarify the characteristics of DW relaxation, a statistical analysis was conducted on a large set of MBN pulses, specifically those with peak amplitudes higher than 20 mV. In total, 888 individual pulses were extracted from 100 magnetization cycles for quantitative evaluation. Fig. 3 illustrates the relationship between τ and A , alongside their respective frequency distributions. At lower peak heights, the τ values are broadly dispersed across the entire analysis range. As the MBN peak height increases, the τ values tend to cluster closely together. The overall statistical analysis of all 888 extracted pulses yields a mean value of $\sim 3.8 \mu\text{s}$ and a standard deviation of $\sim 1.8 \mu\text{s}$. This behavior suggests that smaller, more localized depinning events produce a wide variety of relaxation responses, likely influenced by variations in local pinning strength, DW shapes, and changes in internal magnetic fields or residual stresses caused by microstructural inhomogeneities. In contrast, for higher peak heights, the distribution of τ becomes much narrower, indicating that a single relaxation mechanism is likely to be dominant during larger depinning events, and the effect of local microstructural differences is reduced. More detailed information on the relaxation time distribution for each peak amplitude range is provided in Supplementary Fig. S1 and Table S1.

A direct comparison of the MBN response before and after annealing is shown in Fig. 4, which presents persistence plots of MBN signals over 100 magnetizing cycles for both non-annealed and annealed NANOMET[®] ribbons. The non-annealed (amorphous) sample (Fig. 4(a)) displays clear, high-amplitude MBN peaks, with individual pulse heights reaching up to 160 mV, and most of which appear immediately after the reversal of the applied magnetic field. In contrast, the annealed (nanocrystalline/amorphous composite) sample (Fig. 4(b)) exhibits greatly reduced MBN amplitudes, with a maximum pulse height of at most several mV, and the signals start to appear earlier during the decay of the applied field. Notably, all MBN pulses observed in the annealed state fall below the 20 mV threshold used for single-pulse analysis in this study, making detailed statistical characterization of DW relaxation in this regime impossible with the current measurement system. Supplementary Fig. S2 provides representative raw MBN signals from both types of ribbons, as well as magnified views of the annealed sample. These supplemental data clearly demonstrate the

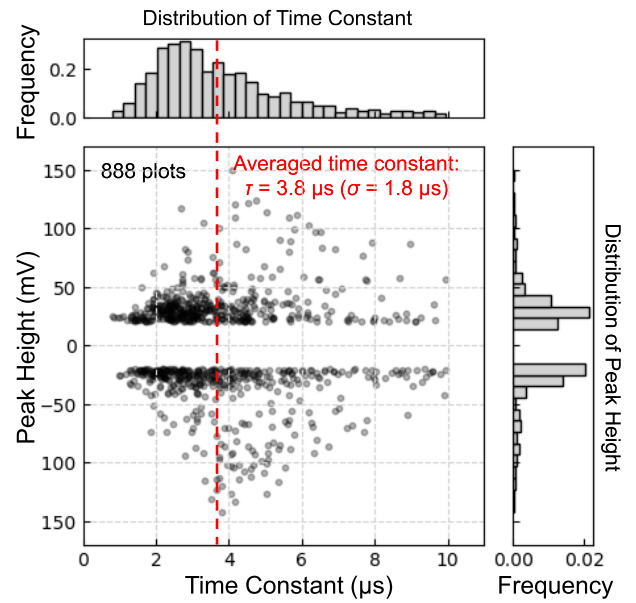


FIGURE 3. Relationship between peak height and time constant obtained from individual MBN pulses at the peak height of 20–170 mV.

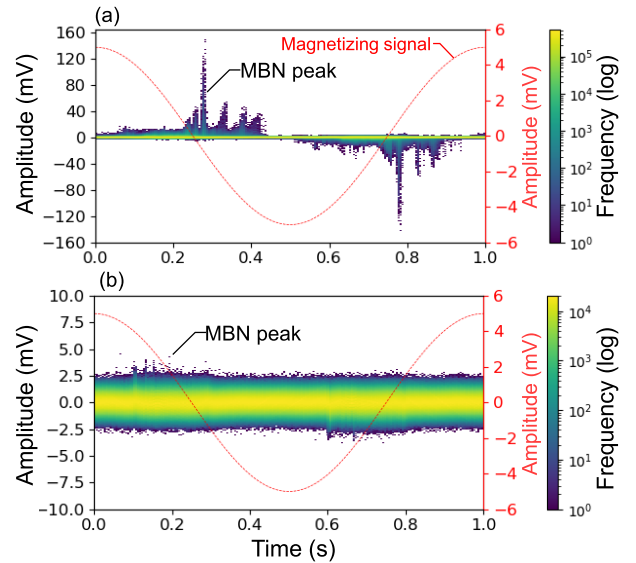


FIGURE 4. Time-resolved frequency distribution of MBN signals for (a) non-annealed and (b) annealed nanocrystalline NANOMET[®] ribbons over 100 magnetization cycles.

drastic reduction in MBN pulse amplitude after annealing, and the challenge of distinguishing MBN events from noise in nanocrystalline state.

These results indicate that, while the present measurement system provides high fidelity for amorphous state, further improvements in sensitivity and temporal resolution are needed to characterize subtle DW dynamics in low-loss nanocrystalline materials.

Taken together, these results demonstrated the significant impact that microstructural changes have on DW dynamics and MBN behavior in NANOMET[®] ribbons. In the

amorphous state, the frequent and distinct MBN pulses reflect strong pinning of DWs by structural defects, including local stress variations and microstructural inhomogeneities. Annealing promotes the formation of nanocrystalline α -Fe grains, which decreases the number and strengths of pinning sites [42]. This change allows DWs to move more smoothly, suppressing large MBN pulses, reducing coercivity, and ultimately improving the soft magnetic properties of the material.

IV. DISCUSSION

Our experimental results demonstrate that non-annealed NANOMET[®] sample exhibits pronounced MBN spikes, indicating that DW motion is frequently pinned by structural defects in the amorphous state. These frequent pinning–depinning events generate large, intermittent MBN signals, emphasizing the importance of DW dynamics and excess eddy current damping in iron loss control.

When a conductive magnetic material undergoes an abrupt change in magnetization, circulating eddy currents are induced, producing opposing magnetic fields that exert a damping force on moving DWs. This results in overdamped DW dynamics, which are essential for understanding magnetization processes at the microscale, where localized energy barriers and material properties influence the speed and uniformity of DW motion.

To interpret our findings, we applied an analytical model describing DW motion governed by a balance of inertial, damping, and restoring forces [9], [41], [46]. Here, we assume that DW dynamics can be approximated as linear, thus follow a second order linear differential equation:

$$m\ddot{q} + \zeta\dot{q} + kq = 2\mu_0 M_s H_{\text{ext}} \quad (2)$$

where q is the DW position, m is the effective mass per unit length of the DW, ζ is the damping coefficient, k is the restoring spring constant, μ_0 is the permeability of free space, M_s is the saturation magnetization, and H_{ext} is the external magnetic field.

Under the low-frequency (1 Hz) excitation used in this study, where MBN events arise from depinned DWs, we simplify the equation by removing the external magnetic field ($H_{\text{ext}} = 0$). In addition, the steep leading edge, which reflects abrupt DW acceleration, permits the inertial force to be neglected ($m\ddot{q} = 0$):

$$\zeta\dot{q} + kq = 0 \quad (3)$$

This differential equation represents an overdamped system. The solution of Eq. (3) is an exponential decay in DW velocity, characterized by the time constant

$$\tau = \frac{\zeta}{k} = \frac{\zeta_{\text{dw}} + \zeta_{\text{eddy}}}{k} \quad (4)$$

The value of τ depends on DW damping coefficient (ζ_{dw}) and eddy currents damping coefficient (ζ_{eddy}), as described

by the Bertotti model [4], [17], [24]:

$$\zeta_{\text{dw}} = \frac{2J_s\alpha}{\gamma\delta_w}, \quad (5)$$

$$\zeta_{\text{eddy}} = 4\sigma GJ_s^2 d \quad (6)$$

where γ is the gyromagnetic ratio, δ_w is the DW width, α is the Gilbert damping parameter, σ is the electrical conductivity, $G = 0.1356$ is a geometric factor, and d is the ribbon thickness. Using reported parameter values [9]: $J_s = \mu_0 M_s = 1.2$ T, $\alpha = 0.02$, $\gamma = 2.21 \times 10^5$ m/As, $\delta_w = 4 \times 10^{-7}$ m, $\sigma = 0.65 \mu\Omega\cdot\text{m}$, $d = 25 \mu\text{m}$, we estimate $\zeta_{\text{dw}} \approx 0.54$ kg/(s m²) and $\zeta_{\text{eddy}} \approx 30.1$ kg/(s m²). The much larger value of ζ_{eddy} indicates that eddy current damping is the dominant relaxation mechanism. These values align with previous findings [9], [47], [48].

Assuming a restoring spring constant $k = 5.544 \times 10^5$ N/m³ (from a 50.8 μm -thick FeNi foil [48]), the estimated time constant is $\tau \approx (\zeta_{\text{eddy}} + \zeta_{\text{dw}}) / k = 55.3 \mu\text{s}$. This value is more than an order of magnitude larger than the experimentally observed $\tau \approx 3.8 \mu\text{s}$, indicating that the actual k for Fe-based amorphous ribbons is considerably larger than the referenced value. Determining k with high accuracy is particularly challenging because it is strongly influenced by microstructural features, local strain, and intrinsic magnetic properties.

Physically, k represents the local stiffness of a DW against deformation by defects, while ζ characterizes the dissipation of energy during DW motion. Both parameters play essential roles in governing DW dynamics and associated energy losses. However, their precise values and theoretical descriptions remain subjects of ongoing debate, particularly due to the intricate interplay of microstructural, elastic, and magnetic factors in real materials. Supplementary Fig. S3 provides a schematic illustration of the physical meaning of k . It should also be noted that our analytical model may not fully capture all the relevant factors influencing DW dynamics in such systems. Thus, further experimental and theoretical investigations are required to achieve reliable determination and a comprehensive understanding of both k and ζ underlying DW relaxation and energy dissipation.

Moreover, the observed spread in relaxation time constants implies the involvement of additional damping mechanisms, such as magnetic viscosity and magnetostrictive damping, particularly in low-loss nanocrystalline materials [9], [41], [48], [49]. The interplay of microstructural disorder, conductivity, magnetic anisotropy, and various damping processes complicates direct modeling. To isolate and clarify these contributions, further studies using well-controlled samples, such as ribbons with different compositions and annealing processes, will be necessary. Such investigations will also allow us to assess the generalizability of our findings and validate the proposed measurement and analysis techniques across a broader range of soft magnetic materials.

By employing a high-fidelity MBN measurement system, this study establishes a direct link between DW pinning, relaxation behavior, and excess eddy current loss in metallic

systems. This direct observation suggests that microstructural control to facilitate smoother DW motion, such as nanocrystallization to suppress fluctuations in DW velocity, as well as compositional optimization or the development of composite structures to increase electrical resistivity, could be effective strategies for reducing eddy current losses in soft magnetic materials. Such approaches, in combination with established methods like laminated structures with insulating coatings, offer promising directions for advancing the performance and efficiency of magnetic devices.

V. CONCLUSION

In this study, we developed a wide-band and high-sensitivity MBN measurement system to investigate DW dynamics in 25 μm -thick amorphous/nanocrystalline Fe–Si–B–P–Cu (NANOMET[®]) ribbons. This system enabled high-fidelity and single-shot capture of individual MBN pulses, providing direct experimental evidence of DW relaxation in metallic ribbons. In the non-annealed amorphous state, isolated MBN pulses exhibit steep leading edges followed by exponentially decaying trailing edges reflecting real-time DW depinning and relaxation. After heat treatment inducing partial nanocrystallization, the amplitudes of MBN pulses decreased markedly, indicating substantial reduction of both the number and strengths of DW pinning sites.

Statistical analysis of the relaxation events revealed a mean relaxation time constant τ of 3.8 μs with a standard deviation of 1.8 μs , which is an order of magnitude smaller than values predicted by conventional models based on reported restoring spring constant k and damping coefficient ζ . A physics-based analytical model incorporating the effects of eddy current damping and restoring forces qualitatively reproduced the observed relaxation behavior. This analysis demonstrates that eddy current damping is stronger than intrinsic DW damping in these metallic ribbons. Furthermore, the broad τ distribution observed in low amplitude MBN pulses suggests that microstructural disorder, local strain, and intrinsic magnetic properties significantly influence DW dynamics. These findings deepen the understanding of the relationship between DW dynamics and excess eddy current loss, offering practical guidance for microstructural engineering aimed at low-loss soft magnetic materials.

Future work will focus on improving the sensitivity and temporal resolution of the MBN measurement system, expanding the range of material systems studied, and refining theoretical models to independently determine both k and ζ . Such advancements will be crucial for a comprehensive understanding of DW relaxation phenomena and the design of energy-efficient materials for next-generation power electronics.

ACKNOWLEDGMENT

The authors would like to thank Tohoku Magnetic Institute Company Ltd., and Prof. Y. Endo and Prof. S. Okamoto of Tohoku University for providing samples and their fruitful suggestions.

REFERENCES

- [1] J. M. Silveyra, E. Ferrara, D. L. Huber, and T. C. Monson, "Soft magnetic materials for a sustainable and electrified world," *Science*, vol. 362, no. 6413, p. 195, Oct. 2018.
- [2] J. He, H. Yuan, M. Nie, H. Guo, H. Yu, Z. Liu, and R. Sun, "Soft magnetic materials for power inductors: State of art and future development," *Mater. Today Electron.*, vol. 6, Dec. 2023, Art. no. 100066.
- [3] D. Neumayr, "The essence of the little box challenge—Part A: Key design challenges & solutions," *CPSS Trans. Power Electron. Appl.*, vol. 5, no. 2, pp. 158–179, Jun. 2020.
- [4] G. Bertotti, *Hysteresis in Magnetism*. San Diego, CA, USA: Academic, 1998.
- [5] M. H. Rashid, Ed., *Power Electronics Handbook*. Oxford, U.K.: Butterworth-Heinemann, 2017.
- [6] M. Ohta, R. Hasegawa, and H. Itabashi, "Development of block cores comprising high-B₅ nanocrystalline alloy Ribbon," *IEEE Trans. Magn.*, vol. 54, no. 5, pp. 1–4, Feb. 2018.
- [7] Y. Zhang, M.-C. Cheng, and P. Pillay, "Magnetic characteristics and excess eddy current losses," in *Proc. IEEE Ind. Appl. Soc. Annu. Meeting*, Houston, TX, USA, Oct. 2009, pp. 1–5.
- [8] A. L. Foggia, R. Nagaoka, M. Taniwaki, T. Yamazaki, T. Ogasawara, I. Obayashi, Y. Hiraoka, C. Mitsumata, and M. Kotsugi, "Analysis of the excess loss in high-frequency magnetization process through machine learning and topological data analysis," *IEEE Trans. Magn.*, vol. 60, no. 9, pp. 1–5, Sep. 2024.
- [9] H. Huang, H. Tsukahara, A. Kato, K. Ono, and K. Suzuki, "Origin of excess core loss in amorphous and nanocrystalline soft magnetic materials," *Phys. Rev. B, Condens. Matter*, vol. 109, no. 10, Mar. 2024, Art. no. 104408.
- [10] G. Hellmiss and L. Storm, "Movement of an individual bloch wall in a single-crystal picture frame of silicon iron at very low velocities," *IEEE Trans. Magn.*, vol. MAG-10, no. 1, pp. 36–38, Mar. 1974.
- [11] S. Chikazumi, *Physics of Ferromagnetism*. Oxford, U.K.: Oxford Univ. Press, 1997.
- [12] A. M. Leary, P. R. Ohodnicki, and M. E. McHenry, "Soft magnetic materials in high-frequency, high-power conversion applications," *JOM*, vol. 64, no. 7, pp. 772–781, Jul. 2012.
- [13] D. Hou, M. Mu, F. C. Lee, and Q. Li, "New high-frequency core loss measurement method with partial cancellation concept," *IEEE Trans. Power Electron.*, vol. 32, no. 4, pp. 2987–2994, Apr. 2017.
- [14] M. Mu, Q. Li, D. J. Gilham, F. C. Lee, and K. D. T. Ngo, "New core loss measurement method for high-frequency magnetic materials," *IEEE Trans. Power Electron.*, vol. 29, no. 8, pp. 4374–4381, Aug. 2014.
- [15] A. J. Hanson, J. A. Belk, S. Lim, C. R. Sullivan, and D. J. Perreault, "Measurements and performance factor comparisons of magnetic materials at high frequency," *IEEE Trans. Power Electron.*, vol. 31, no. 11, pp. 7909–7925, Nov. 2016.
- [16] C. S. Ragusa, S. Dobák, C. Beatrice, L. Solimene, A. Magni, and F. Fiorillo, "Predicting energy loss and permeability of field-annealed amorphous and nanocrystalline alloys up to 1 GHz," *IEEE Access*, vol. 12, pp. 136713–136726, 2024.
- [17] G. Bertotti, F. Fiorillo, and M. Sassi, "A new approach to the study of loss anomaly in SiFe," *IEEE Trans. Magn.*, vol. MAG-17, no. 6, pp. 2852–2856, Nov. 1981.
- [18] H. Barkhausen, "Two phenomena revealed with the help of new amplifiers," *Phys. Z.*, vol. 29, no. 6, pp. 401–403, 1919.
- [19] T. Yamazaki, Y. Furuya, and W. Nakao, "Experimental evaluation of domain wall dynamics by Barkhausen noise analysis in Fe₃₀Co₇₀ magnetostrictive alloy wire," *J. Magn. Magn. Mater.*, vol. 475, pp. 240–248, Apr. 2019.
- [20] I. P. de Sousa, G. Z. dos Santos Lima, M. A. Correa, R. L. Sommer, G. Corso, and F. Bohn, "Waiting-time statistics in magnetic systems," *Sci. Rep.*, vol. 10, no. 1, p. 9692, Jun. 2020.
- [21] G. Z. dos Santos Lima, M. A. Corrêa, R. L. Sommer, and F. Bohn, "Multifractality in domain wall dynamics of a ferromagnetic film," *Phys. Rev. E, Stat. Phys. Plasmas Fluids Relat. Interdiscip. Top.*, vol. 86, no. 6, Dec. 2012, Art. no. 066117.
- [22] S. Zapperi, P. Cizeau, G. Durin, and H. E. Stanley, "Dynamics of a ferromagnetic domain wall: Avalanches, depinning transition, and the Barkhausen effect," *Phys. Rev. B, Condens. Matter*, vol. 58, no. 10, pp. 6353–6366, Sep. 1998.

- [23] H. M. Hurst, V. Galitski, and T. T. Heikkilä, "Electron-induced massive dynamics of magnetic domain walls," *Phys. Rev. B, Condens. Matter*, vol. 101, no. 5, Feb. 2020, Art. no. 054407.
- [24] G. Bertotti, "Space-time correlation properties of the magnetization process and eddy current losses: Theory," *J. Appl. Phys.*, vol. 54, no. 9, pp. 5293–5305, Sep. 1983.
- [25] A. A. Samimi, T. W. Krause, L. Clapham, M. Gallagher, Y. Ding, P. Ghosh, R. Chromik, and A. M. Knight, "Correlation between AC core loss and surface magnetic Barkhausen noise in electric motor steel," *J. Nondestruct. Eval.*, vol. 33, no. 4, pp. 663–669, Dec. 2014.
- [26] F. Colaioni, G. Durin, and S. Zapperi, "Eddy current damping of a moving domain wall: Beyond the quasistatic approximation," *Phys. Rev. B, Condens. Matter*, vol. 76, no. 22, Dec. 2007, Art. no. 224416.
- [27] O. Stupakov, "Local non-contact evaluation of the AC magnetic hysteresis parameters of electrical steels by the Barkhausen noise technique," *J. Nondestruct. Eval.*, vol. 32, no. 4, pp. 405–412, Dec. 2013.
- [28] M. Birsan, J. A. Szpunar, T. W. Krause, and D. L. Atherton, "Correlation between the Barkhausen noise power and the total power losses in 3% Si-Fe," *J. Appl. Phys.*, vol. 79, no. 8, pp. 6042–6044, Apr. 1996.
- [29] P. Fagan, B. Ducharme, L. Daniel, and A. Skarlatos, "Multiscale modelling of the magnetic Barkhausen noise energy cycles," *J. Magn. Magn. Mater.*, vol. 517, Jan. 2021, Art. no. 167395.
- [30] G. Durin and S. Zapperi, "Scaling exponents for Barkhausen avalanches in polycrystalline and amorphous ferromagnets," *Phys. Rev. Lett.*, vol. 84, no. 20, pp. 4705–4708, May 2000.
- [31] D.-H. Kim, S.-B. Choe, and S.-C. Shin, "Direct observation of Barkhausen avalanche in Co thin films," *Phys. Rev. Lett.*, vol. 90, no. 8, Feb. 2003, Art. no. 087203.
- [32] T. Ogasawara and A. Yamaguchi, "Observation of frequency dependent resonances in magnetic vortex core gyration using time-resolved magneto-optical Kerr microscope with pulsed semiconductor laser illumination," *Jpn. J. Appl. Phys.*, vol. 61, no. 1, Jan. 2022, Art. no. 018001.
- [33] R. Nagaoka, K. Masuzawa, M. Taniwaki, A. Lira Foggiatto, T. Yamazaki, I. Obayashi, Y. Hiraoka, C. Mitsumata, and M. Kotsugi, "Quantification of the coercivity factor in soft magnetic materials at different frequencies using topological data analysis," *IEEE Trans. Magn.*, vol. 60, no. 9, pp. 1–5, Sep. 2024.
- [34] K. Omae, T. Yamazaki, K. Sano, C. Oka, J. Sakurai, and S. Hata, "Effect of noise on accuracy of grain size evaluation by magnetic Barkhausen noise analysis," *Int. J. Autom. Technol.*, vol. 18, no. 4, pp. 528–536, Jul. 2024.
- [35] S. Kunii, K. Masuzawa, A. L. Foggiatto, C. Mitsumata, and M. Kotsugi, "Causal analysis and visualization of magnetization reversal using feature extended Landau free energy," *Sci. Rep.*, vol. 12, no. 1, p. 19892, Nov. 2022.
- [36] K. Omae, T. Yamazaki, C. Oka, J. Sakurai, and S. Hata, "Stress measurement based on magnetic Barkhausen noise for thin films," *Microelectron. Eng.*, vol. 279, Jul. 2023, Art. no. 112057.
- [37] P. Martínez-Ortiz, C. P. Gómez-Castañeda, and J. A. Pérez-Benítez, "Streamlining Barkhausen effect measurements: A simplified apparatus approach," *Measurement*, vol. 242, Jan. 2025, Art. no. 115945.
- [38] M. Neslušan, D. Kajánek, M. Pitoňák, D. Janičkovič, and F. Andrejka, "Barkhausen noise emission in soft magnetic bilayer ribbons," *AIP Adv.*, vol. 9, no. 7, 2021, Art. no. 075008.
- [39] C. Simon, D. M. Silevitch, P. C. E. Stamp, and T. F. Rosenbaum, "Quantum Barkhausen noise induced by domain wall cotunneling," *Proc. Nat. Acad. Sci. USA*, vol. 121, no. 13, Mar. 2024, Art. no. e2315598121.
- [40] D. M. Silevitch, J. Xu, C. Tang, K. A. Dahmen, and T. F. Rosenbaum, "Magnetic domain dynamics in an insulating quantum ferromagnet," *Phys. Rev. B, Condens. Matter*, vol. 100, no. 13, Oct. 2019, Art. no. 134405.
- [41] H. Tsukahara, H. Imamura, C. Mitsumata, K. Suzuki, and K. Ono, "Role of magnetostriction on power losses in nanocrystalline soft magnets," *NPG Asia Mater.*, vol. 14, no. 1, p. 44, Dec. 2022.
- [42] A. Makino, H. Men, T. Kubota, K. Yubuta, and A. Inoue, "New ferromagnetic based nanocrystalline alloys with high Bs of 1.9T and excellent magnetic softness," *J. Appl. Phys.*, vol. 105, no. 7, Apr. 2009, Art. no. 07A308.
- [43] T. Yamazaki, T. Tomita, K. Uji, H. Kuwata, K. Sano, C. Oka, J. Sakurai, and S. Hata, "Combinatorial synthesis of nanocrystalline FeSiBPCu–Ni–(Nb,Mo) soft magnetic alloys with high corrosion resistance," *J. Non-Crystalline Solids*, vol. 563, Jul. 2021, Art. no. 120808.
- [44] E. Puppini, E. Pinotti, and M. Brenna, "Barkhausen noise in variable thickness amorphous finemet films," *J. Appl. Phys.*, vol. 101, no. 6, Mar. 2007, Art. no. 063903.
- [45] A. Ranganathan, "The Levenberg–Marquardt algorithm," *Tutorial LM Algorithm*, vol. 11, no. 1, pp. 101–110, 2004.
- [46] J. A. Baldwin and G. J. Culler, "Wall-pinning model of magnetic hysteresis," *J. Appl. Phys.*, vol. 40, no. 7, pp. 2828–2835, Jun. 1969.
- [47] J. A. Baldwin, F. Milstein, R. C. Wong, and J. L. West, "Slow magnetic domain wall motion," *J. Appl. Phys.*, vol. 48, no. 6, pp. 2612–2617, Jun. 1977.
- [48] D. Spasojević, M. Marinković, D. Jovković, S. Janičević, L. Laurson, and A. Djordjević, "Barkhausen noise in disordered striplike ferromagnets: Experiment versus simulations," *Phys. Rev. E, Stat. Phys. Plasmas Fluids Relat. Interdiscip. Top.*, vol. 109, no. 2, Feb. 2024, Art. no. 024110.
- [49] G. G. Savenkov and Y. I. Meshcheryakov, "Structural viscosity of solids," *Combustion, Explosion Shock Waves*, vol. 38, no. 3, pp. 352–357, May 2002.
- [50] C. Vittoria, S. D. Yoon, and A. Widom, "Relaxation mechanism for ordered magnetic materials," *Phys. Rev. B, Condens. Matter*, vol. 81, no. 1, Jan. 2010, Art. no. 014412.



TAKAHIRO YAMAZAKI received the B.S. and M.S. degrees in physics and the Ph.D. degree in materials science and engineering from Yokohama National University, in 2019.

Since 2020, he has lead research on magnetic Barkhausen noise (MBN) and nanocrystalline magnetic materials, with support from JSPS KAKENHI for Young Scientists and JST ACT-X. He is currently an Adjunct Assistant Professor at Tokyo University of Science, Japan. He previously was a JSPS Postdoctoral Research Fellow at Nagoya University and the University of Maryland. His research interests include multi-scale design of magnetic materials, machine learning-based magnetic analysis, and synchrotron radiation techniques, focusing on magnetostrictive effects and MBN in soft magnetic materials for improving energy efficiency and functionality.



SHINGO TAMARU received the Ph.D. degree in electrical and computer engineering from Carnegie Mellon University, USA, in 2005. He is currently a Senior Research Scientist at the National Institute of Advanced Industrial Science and Technology (AIST), Japan. Then, he joined Seagate Technology, USA, where he was engaged in the development of ultra-high density ferroelectric and magnetic data storage devices. He moved to the current institute, in 2012. He specializes in

magnetization dynamics, high-frequency spintronics, and instrumentation. His current main research interest is focused on soft magnetic materials for power electronics applications.



MASATO KOTSUGI (Member, IEEE) received the Ph.D. degree in engineering science from Osaka University, in 2001.

He is currently a Professor with the Department of Materials Science and Technology, Tokyo University of Science (TUS). He previously held positions at Hiroshima University and Synchrotron Radiation Research Center and SPring-8/Japan Synchrotron Radiation Research Institute (JASRI) before joining TUS, in 2015. He conducted postdoctoral research at the Max Planck Institute in Germany. His research focuses on developing high-performance, functional magnetic materials through the integration of data science, robotics, and materials informatics. He specializes in analyzing material functions using synchrotron radiation and designing mathematical models to uncover hidden material properties. With over 170 publications, he has received several awards, including the Young Scientist Award from the Physical Society of Japan, in 2014, and the Paper Award from the Magnetism Society of Japan, in 2024.

...