RSLogix Micro Project Report

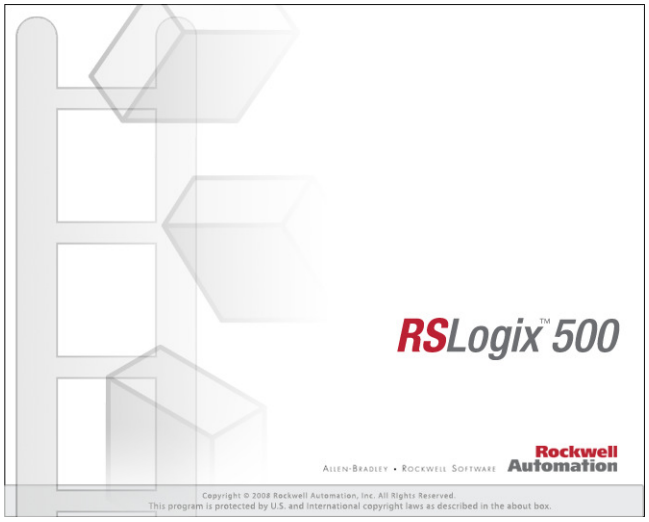

Processor Information

Processor Type: Bul.1763 MicroLogix 1100 Series B

Processor Name: P2

Total Memory Used: 195 Instruction Words Used - 43 Data Table Words Used

Total Memory Left: 6461 Instruction Words Left

Program Files: 6

Data Files: 9

Program ID: fea9

I/O Configuration

0	Bul.1763	MicroLogix 1100 Series B
1		
2		
3		
4		

Channel Configuration

CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Edit Resource/Owner Timeout: 60
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Passthru Link ID: 1
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Write Protected: No
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Comms Servicing Selection: Yes
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Message Servicing Selection: Yes
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 1st AWA Append Character: \d
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 2nd AWA Append Character: \a

   Source ID: 1 (decimal)
   Baud: 19200
   Parity: NONE
   Control Line : No Handshaking
   Error Detection: CRC
   Embedded Responses: Auto Detect
   Duplicate Packet Detect: Yes
   ACK Timeout(x20 ms): 50
   NAK Retries: 3
   ENQ Retries: 3

CHANNEL 1 (SYSTEM) - Driver: Ethernet
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Edit Resource/Owner Timeout: 60
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Passthru Link ID: 1
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Write Protected: No
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Comms Servicing Selection: Yes
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Message Servicing Selection: Yes

   Hardware Address: 00:00:00:00:00:00
   IP Address: 0.0.0.0
   Subnet Mask: 0.0.0.0
   Gateway Address: 0.0.0.0
   Msg Connection Timeout (x 1mS): 15000
   Msg Reply Timeout (x mS): 3000
   Inactivity Timeout (x Min): 30
   Bootp Enable: Yes
   Dhcp Enable No
   SNMP Enable: No
   HTTP Enable: Yes
   Auto Negotiate Enable: Yes
   Port Speed Enable: 10/100 Mbps Full Duplex/Half Duplex
   Contact:
   Location:

Program File List

Name	Number	Type	Rungs	Debug	Bytes
[SYSTEM]	0	SYS	0	No	0
	1	SYS	0	No	0
	2	LADDER	4	No	30
IO	3	LADDER	8	No	115
CONTROL	4	LADDER	6	No	214
CYCLE	5	LADDER	5	No	235

Data File List

Name	Number	Type	Scope	Debug	Words	Elements	Last
OUTPUT	0	O	Global	No	12	4	O:3
INPUT	1	I	Global	No	18	6	I:5
STATUS	2	S	Global	No	0	66	S:65
BINARY	3	B	Global	No	1	1	B3:0
TIMER	4	T	Global	No	3	1	T4:0
COUNTER	5	C	Global	No	3	1	C5:0
CONTROL	6	R	Global	No	3	1	R6:0
INTEGER	7	N	Global	No	1	1	N7:0
FLOAT	8	F	Global	No	2	1	F8:0

LAD 2 - --- Total Rungs in File = 4

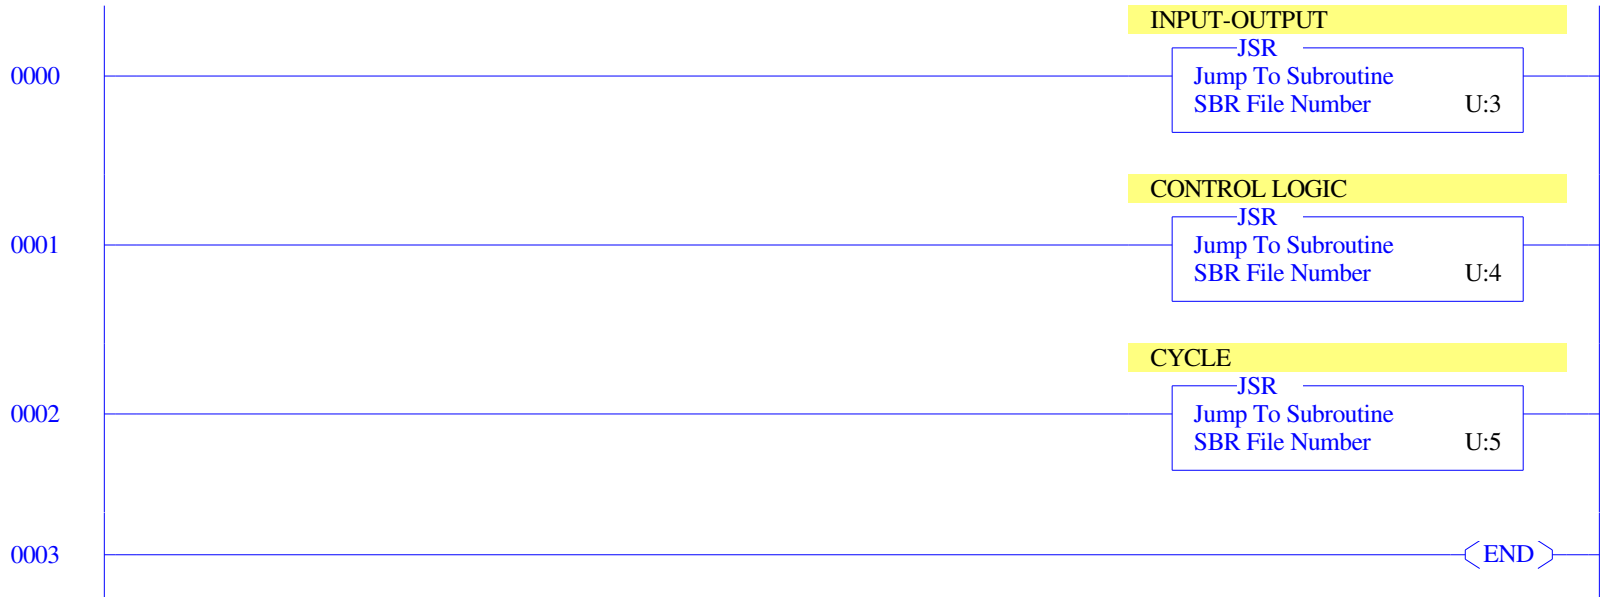

LAD 3 - IO --- Total Rungs in File = 8

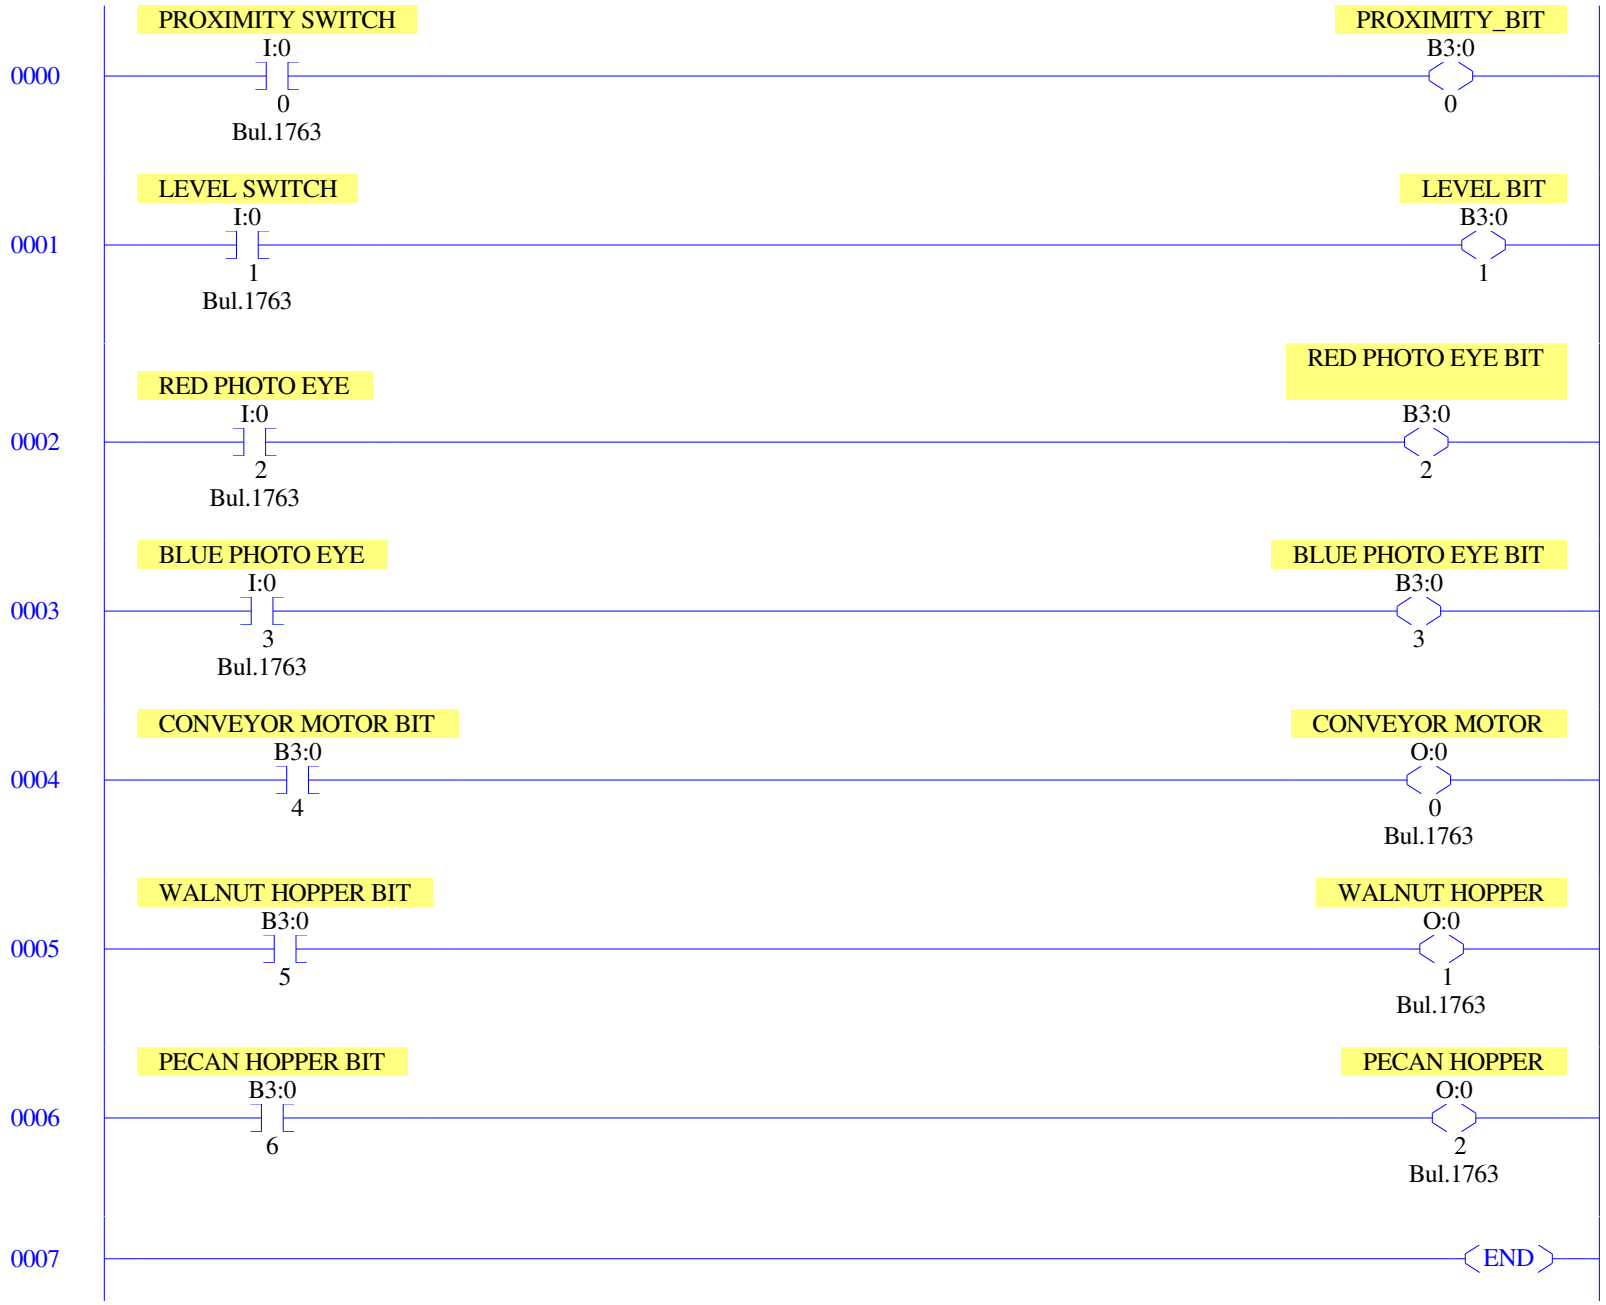

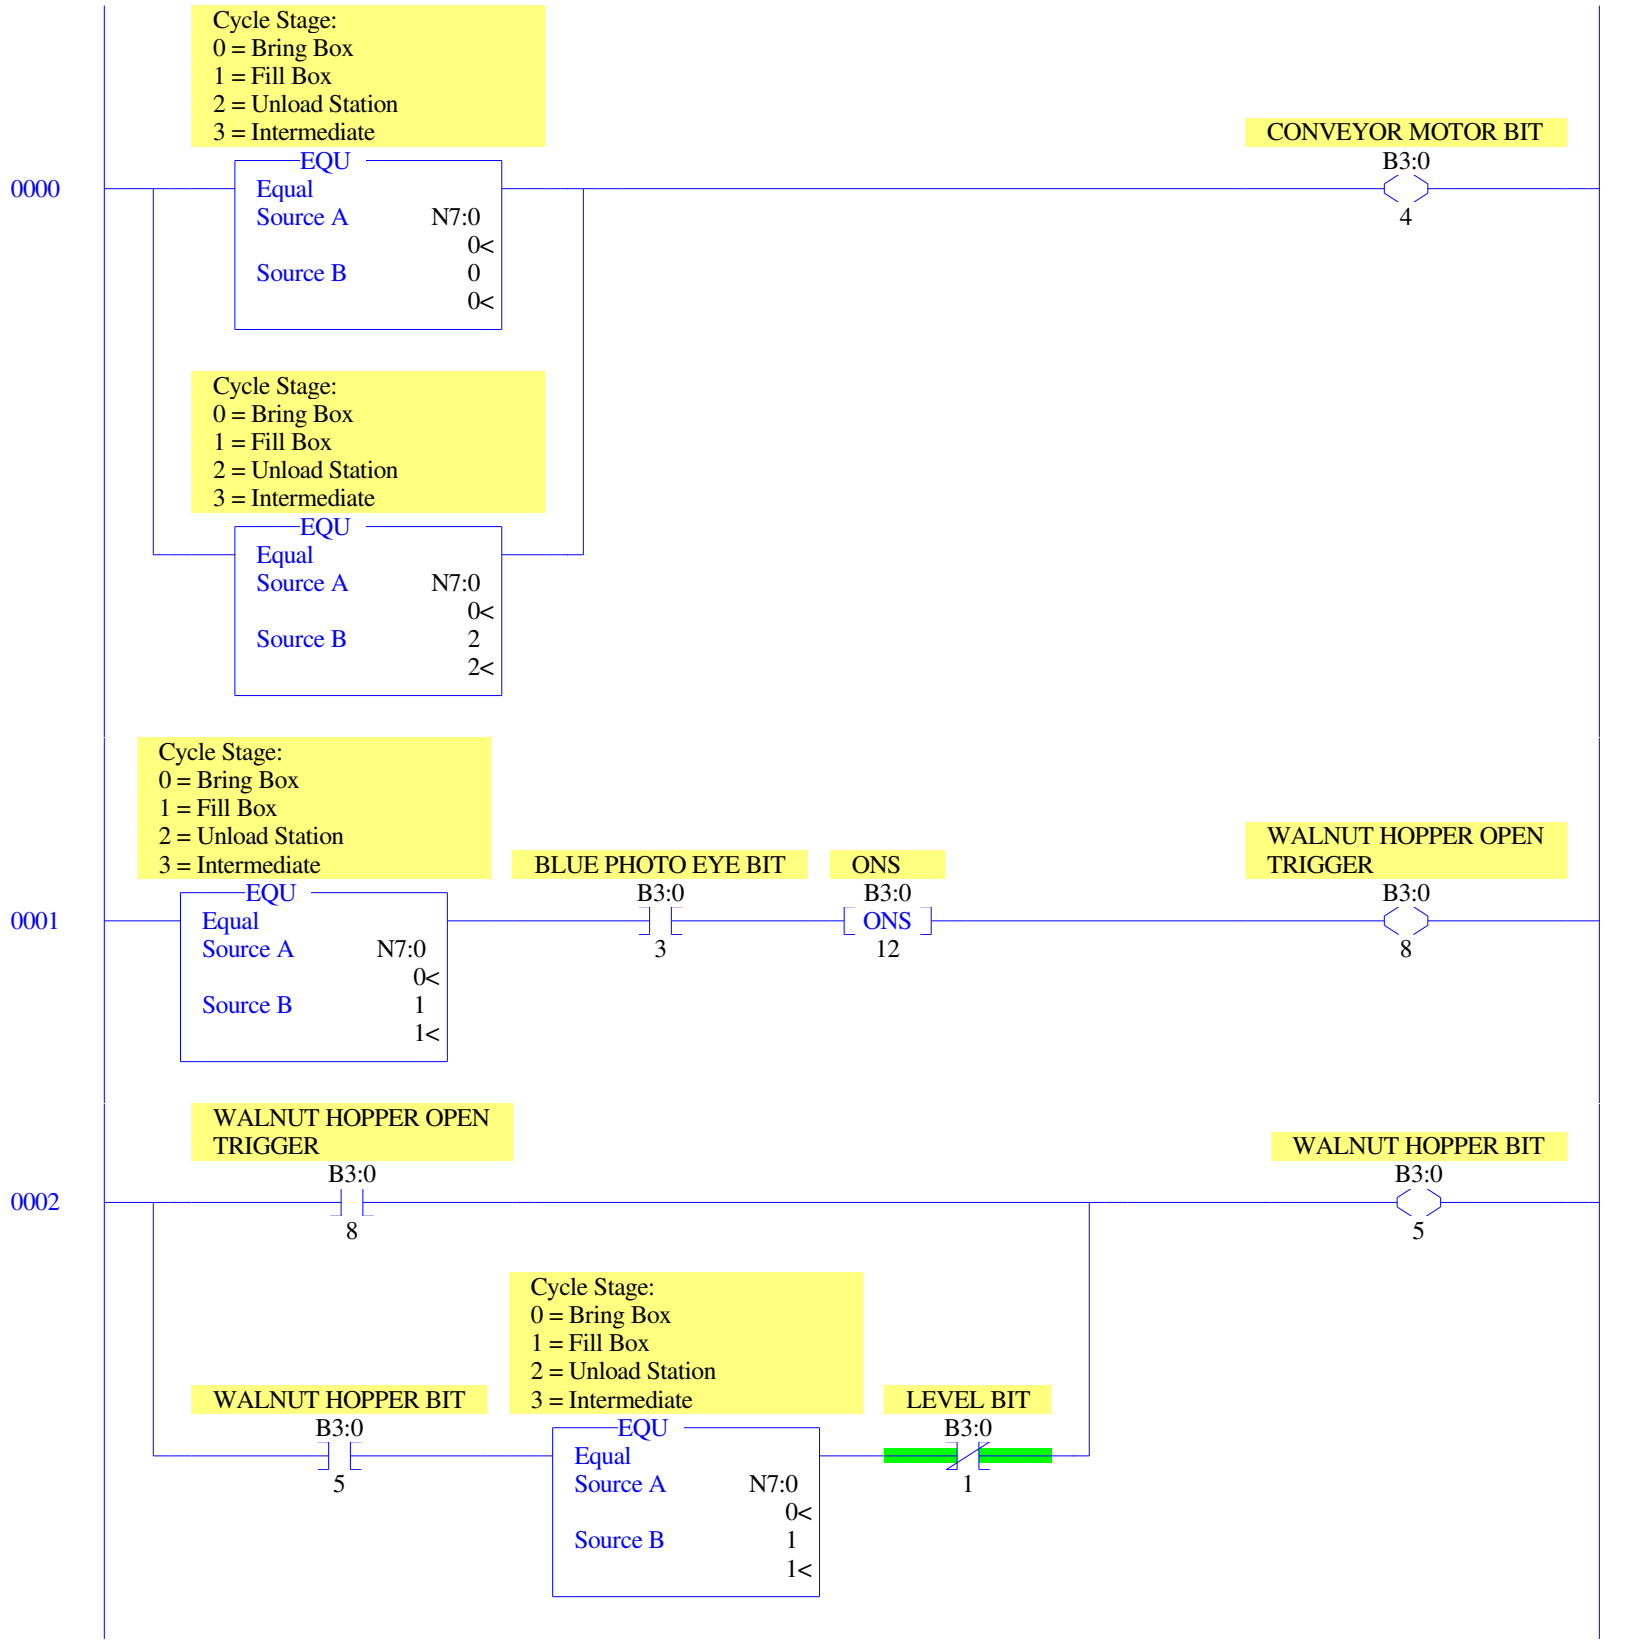
Cycle Stage:
0 = Bring Box
1 = Fill Box
2 = Unload Station
3 = Intermediate
CONVEYOR MOTOR BIT
B3:0
4
0000
EQU
Equal
Source A N7:0
0<
Source B 0
0<
Cycle Stage:
0 = Bring Box
1 = Fill Box
2 = Unload Station
3 = Intermediate
EQU
Equal
Source A N7:0
0<
Source B 2
2<
Cycle Stage:
0 = Bring Box
1 = Fill Box
2 = Unload Station
3 = Intermediate
BLUE PHOTO EYE BIT
B3:0
3
ONS
B3:0
ONS
12
WALNUT HOPPER OPEN TRIGGER
B3:0
8
0001
EQU
Equal
Source A N7:0
0<
Source B 1
1<
WALNUT HOPPER OPEN TRIGGER
B3:0
8
WALNUT HOPPER BIT
B3:0
5
0002
Cycle Stage:
0 = Bring Box
1 = Fill Box
2 = Unload Station
3 = Intermediate
WALNUT HOPPER BIT
B3:0
5
EQU
Equal
Source A N7:0
0<
Source B 1
1<
LEVEL BIT
B3:0
1

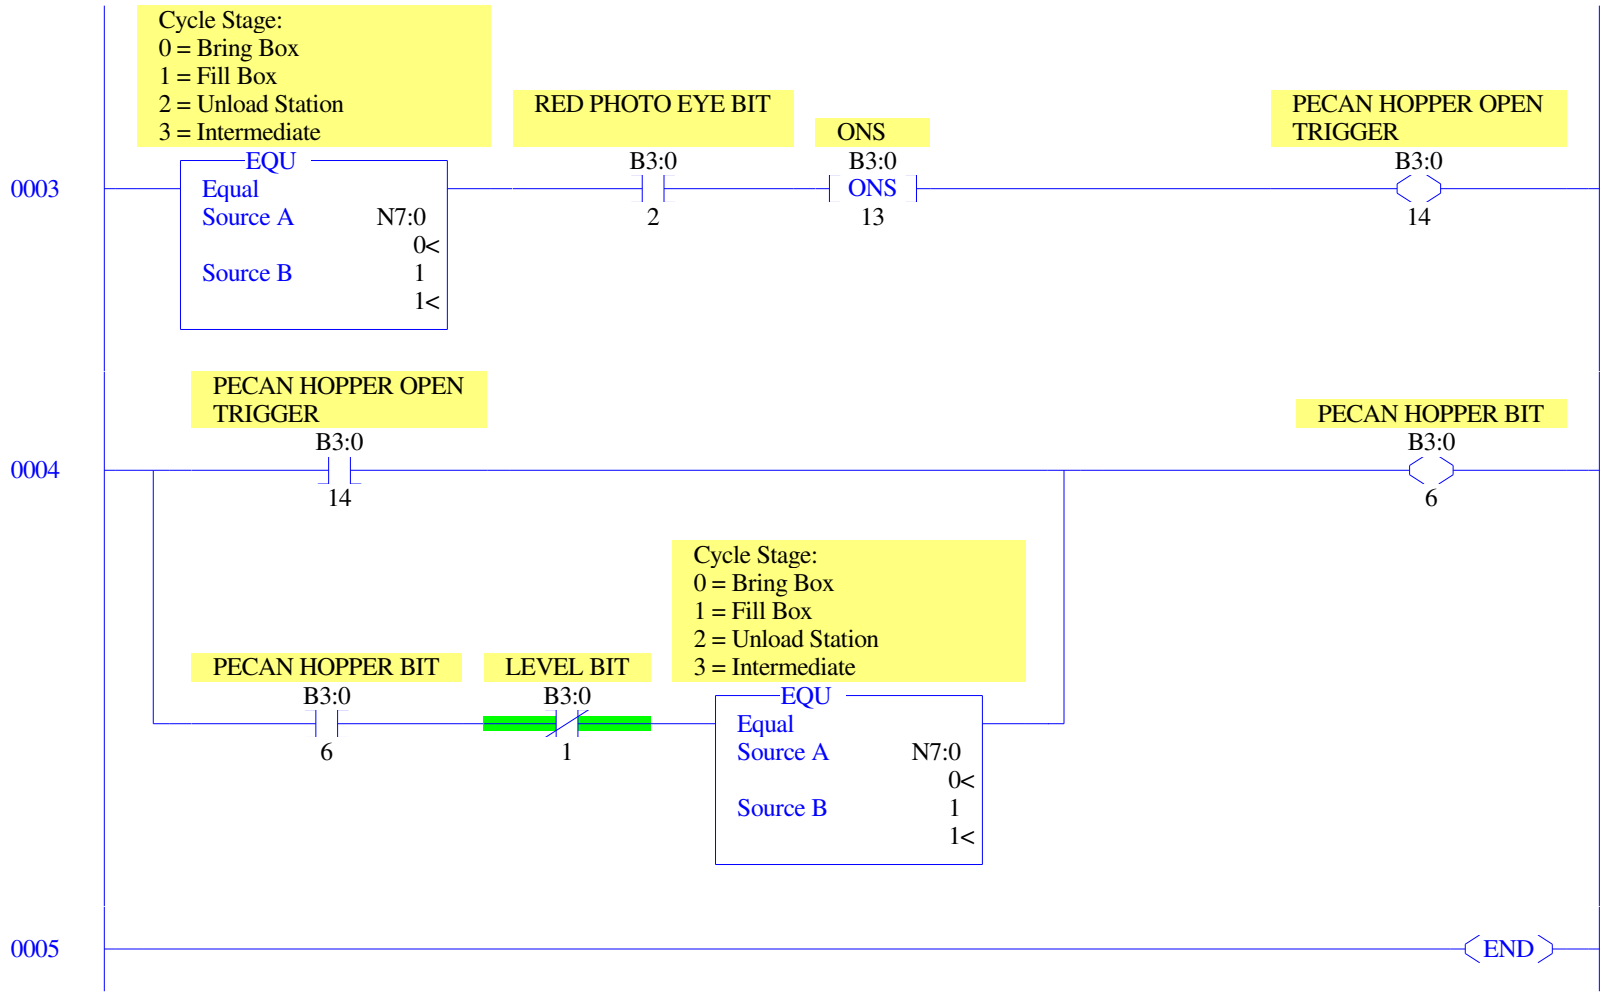
Cycle Stage:
0 = Bring Box
1 = Fill Box
2 = Unload Station
3 = Intermediate
RED PHOTO EYE BIT
ONS
PECAN HOPPER OPEN TRIGGER
0003
EQU
Equal
Source A
N7:0
0<
Source B
1
1<
B3:0
2
B3:0
ONS
13
B3:0
14
PECAN HOPPER OPEN TRIGGER
PECAN HOPPER BIT
0004
B3:0
14
B3:0
6
Cycle Stage:
0 = Bring Box
1 = Fill Box
2 = Unload Station
3 = Intermediate
PECAN HOPPER BIT
LEVEL BIT
EQU
Equal
Source A
N7:0
0<
Source B
1
1<
B3:0
6
B3:0
1
0005
END

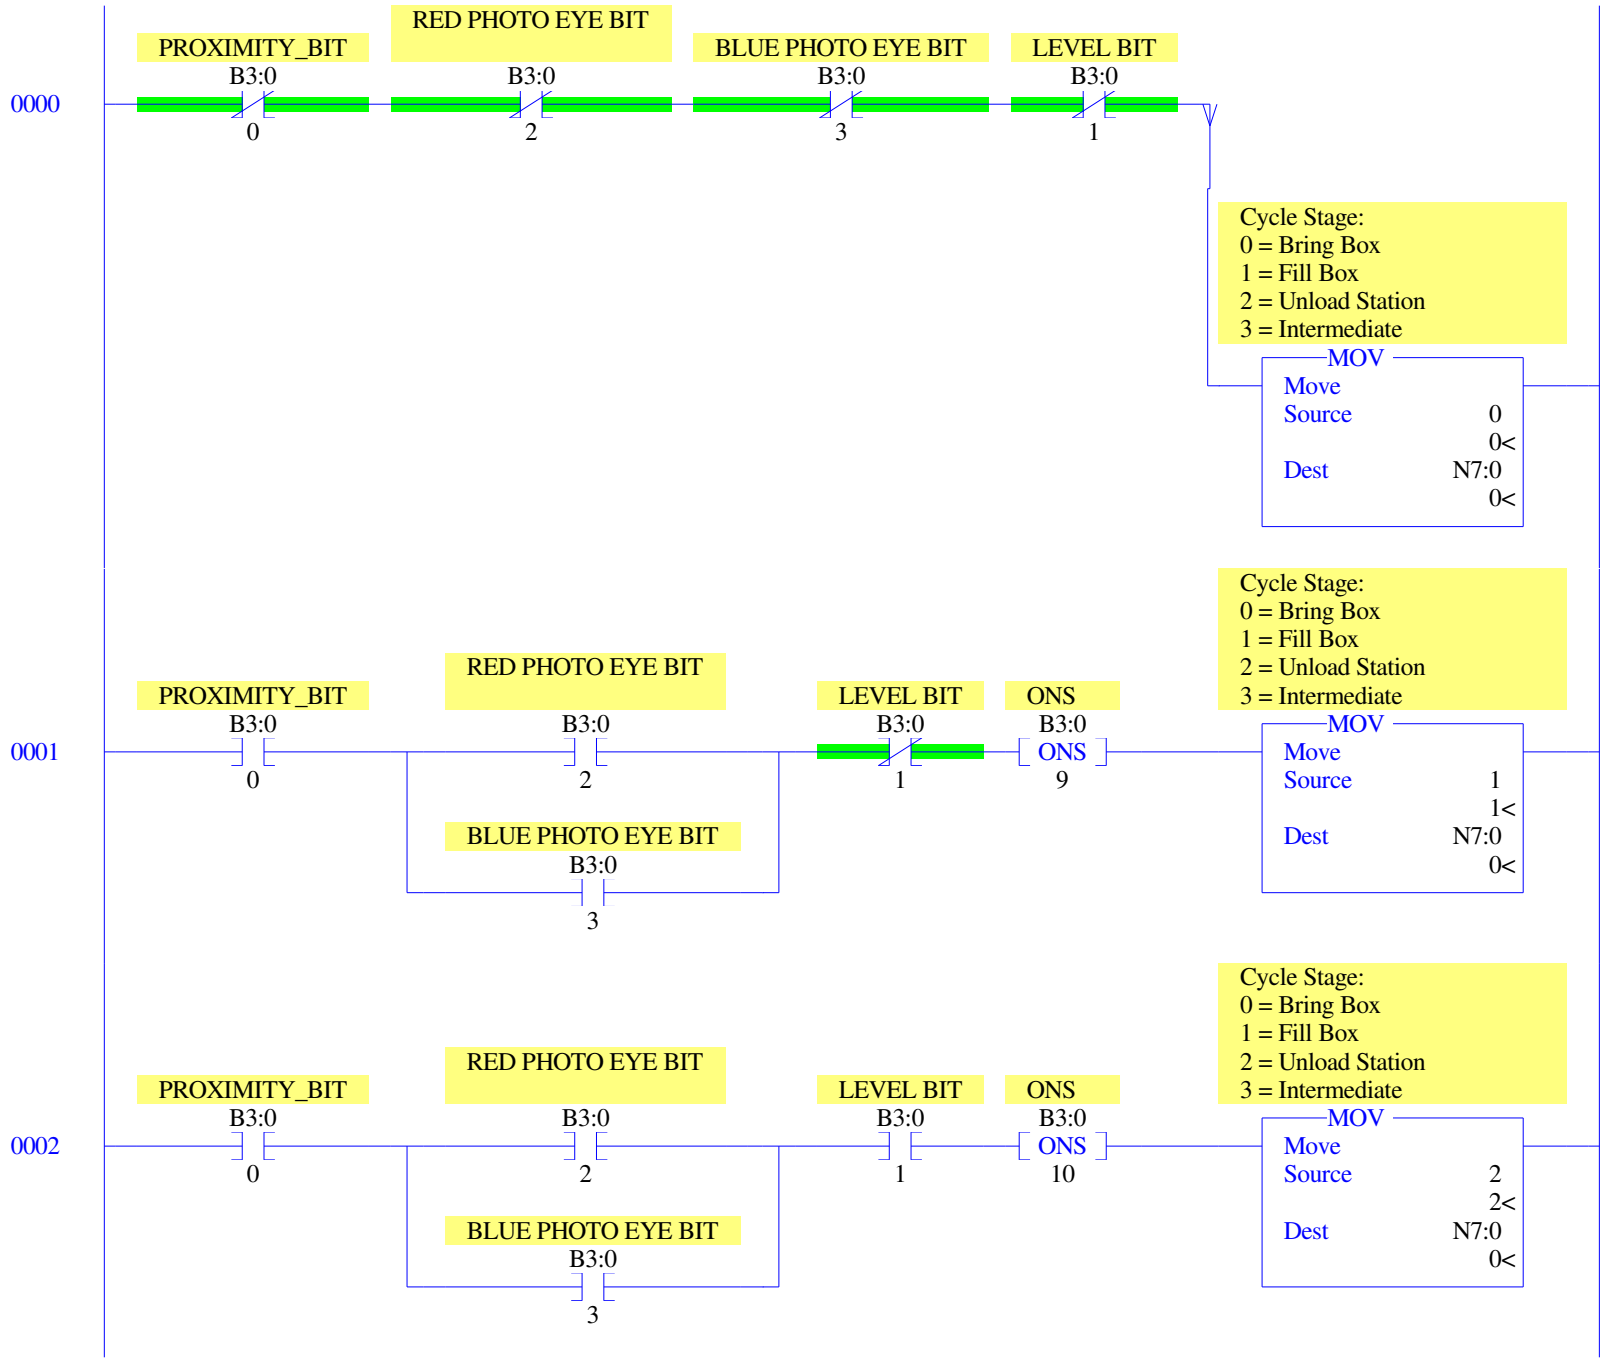
0000
PROXIMITY_BIT
B3:0
0
RED PHOTO EYE BIT
B3:0
2
BLUE PHOTO EYE BIT
B3:0
3
LEVEL BIT
B3:0
1
Cycle Stage:
0 = Bring Box
1 = Fill Box
2 = Unload Station
3 = Intermediate
MOV
Move
Source
0
0<
Dest
N7:0
0<
0001
PROXIMITY_BIT
B3:0
0
RED PHOTO EYE BIT
B3:0
2
BLUE PHOTO EYE BIT
B3:0
3
LEVEL BIT
B3:0
1
ONS
B3:0
ONS
9
Cycle Stage:
0 = Bring Box
1 = Fill Box
2 = Unload Station
3 = Intermediate
MOV
Move
Source
1
1<
Dest
N7:0
0<
0002
PROXIMITY_BIT
B3:0
0
RED PHOTO EYE BIT
B3:0
2
BLUE PHOTO EYE BIT
B3:0
3
LEVEL BIT
B3:0
1
ONS
B3:0
ONS
10
Cycle Stage:
0 = Bring Box
1 = Fill Box
2 = Unload Station
3 = Intermediate
MOV
Move
Source
2
2<
Dest
N7:0
0<

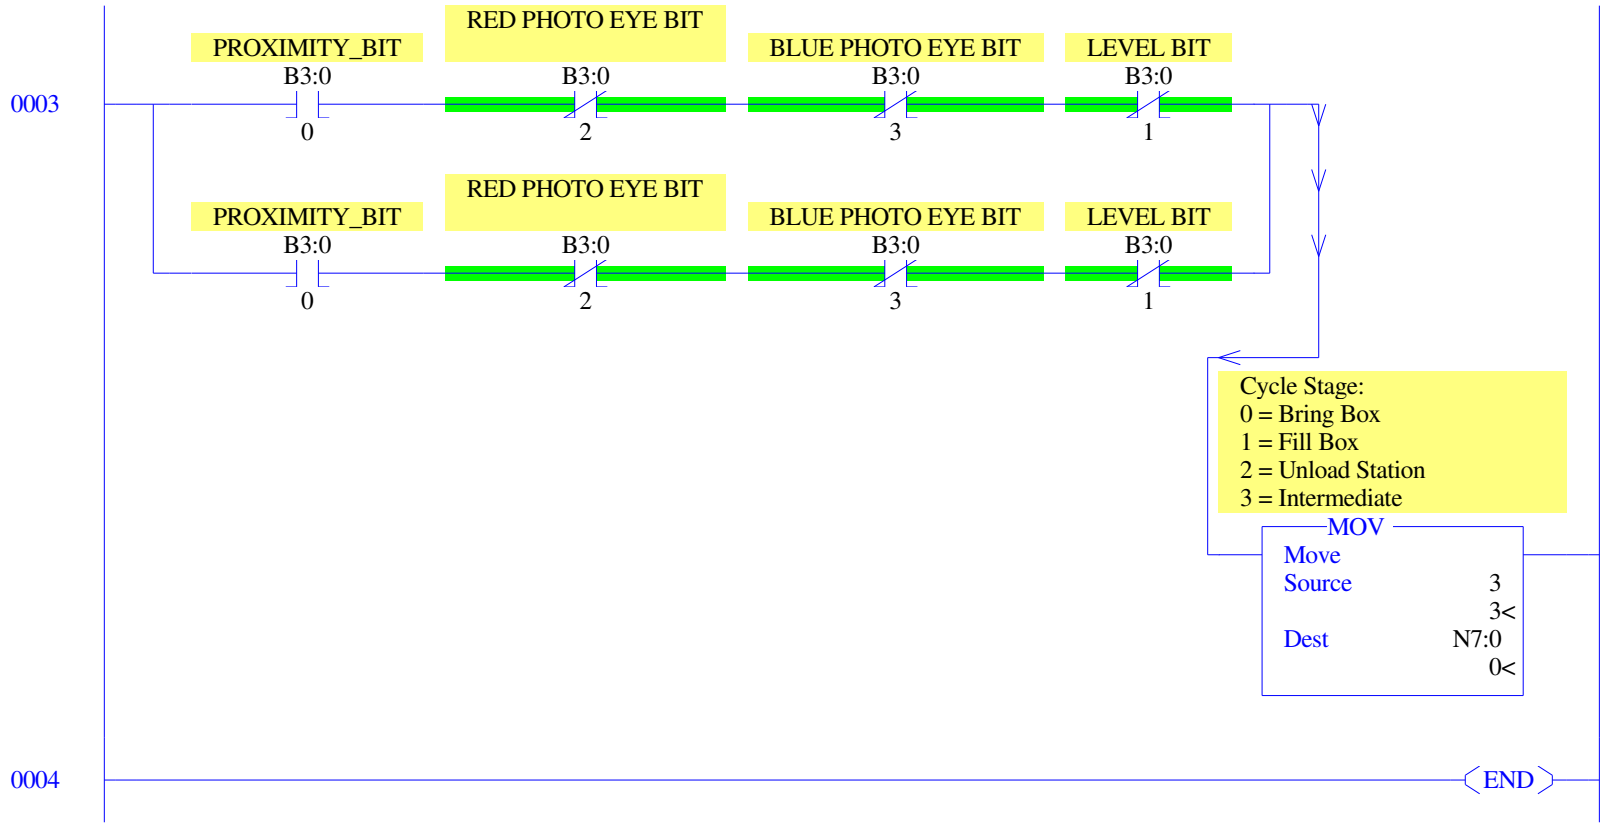
0003
PROXIMITY_BIT
B3:0
0
RED PHOTO EYE BIT
B3:0
2
BLUE PHOTO EYE BIT
B3:0
3
LEVEL BIT
B3:0
1
PROXIMITY_BIT
B3:0
0
RED PHOTO EYE BIT
B3:0
2
BLUE PHOTO EYE BIT
B3:0
3
LEVEL BIT
B3:0
1
Cycle Stage:
0 = Bring Box
1 = Fill Box
2 = Unload Station
3 = Intermediate
MOV
Move
Source 3
3<
Dest N7:0
0<
0004
END

Data File O0 (bin) -- OUTPUT

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
O:0.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
O:0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
O:0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
O:0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B

Data File I1 (bin) -- INPUT

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0		
I:0.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
I:0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
I:0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
I:0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B
I:0.4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B-Analog
I:0.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763	MicroLogix 1100 Series B-Analog

Main

Processor Mode S:1/0 - S:1/4 = Remote Program Mode
On Power up Go To Run (Mode Behavior) S:1/12 = 0
First Pass S:1/15 = No
Free Running Clock S:4 = 0000-0000-0000-0000

Proc

OS Catalog Number S:57 = 1100 User Program Type S:63 = 8001h
OS Series S:58 = A Compiler Revision Number S:64 =
OS FRS S:59 =
Processor Catalog Number S:60 =
Processor Series S:61 = A
Processor FRN S:62 =

Scan Times

Maximum (x10 ms) S:22 = 0
Watchdog (x10 ms) S:3 (high byte) = 10
Last 100 uSec Scan Time S:35 = 0
Scan Toggle Bit S:33/9 = 0

Math

Math Overflow Selected S:2/14 = 0 Math Register (lo word) S:13 = 0
Overflow Trap S:5/0 = 0 Math Register (high word) S:14-S:13 = 0
Carry S:0/0 = 0 Math Register (32 Bit) S:14-S:13 = 0
Overflow S:0/1 = 0
Zero Bit S:0/2 = 0
Sign Bit S:0/3 = 0

Chan 0

Processor Mode S:1/0- S:1/4 = Remote Program Mode
Node Address S:15 (low byte) = 0 Outgoing Msg Cmd Pending S:33/2 = 0
Baud Rate S:15 (high byte) = ?
Channel Mode S:33/3 = 0
Comms Active S:33/4 = 0
Incoming Cmd Pending S:33/0 = 0
Msg Reply Pending S:33/1 = 0

Debug

Suspend Code S:7 = 0
Suspend File S:8 = 0

Errors

Fault Override At Power Up S:1/8 = 0 Fault Routine S:29 = 0
Startup Protection Fault S:1/9 = 0 Major Error S:6 = 0h
Major Error Halt S:1/13 = 0
Overflow Trap S:5/0 = 0 Error Description:
Control Register Error S:5/2 = 0
Major Error Executing User Fault Rtn. S:5/3 = 0
Battery Low S:5/11 = 0
Input Filter Selection Modified S:5/13 = 0
ASCII String Manipulation error S:5/15 = 0

Protection

Deny Future Access S:1/14 = No
Data File Overwrite Protection Lost S:36/10 = False

Mem Module

Memory Module Loaded On Boot S:5/8 = 0
Password Mismatch S:5/9 = 0
Load Memory Module On Memory Error S:1/10 = 0
Load Memory Module Always S:1/11 = 0
On Power up Go To Run (Mode Behavior) S:1/12 = 0
Program Compare S:2/9 = 0
Data File Overwrite Protection Lost S:36/10 = 0

Forces

Forces Enabled S:1/5 = Yes
Forces Installed S:1/6 = No

Data File B3 (bin) -- BINARY

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	(Symbol) Description
B3:0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

Data File T4 -- TIMER

Offset	EN	TT	DN	BASE	PRE	ACC	(Symbol)	Description
T4:0	0	0	0	.01 sec	0	0		

Data File C5 -- COUNTER

Offset	CU	CD	DN	OV	UN	UA	PRE	ACC	(Symbol)	Description
C5:0	0	0	0	0	0	0	0	0		

Data File R6 -- CONTROL

Offset	EN	EU	DN	EM	ER	UL	IN	FD	LEN	POS	(Symbol)	Description
R6:0	0	0	0	0	0	0	0	0	0	0		

Data File N7 (dec) -- INTEGER

Offset	0	1	2	3	4	5	6	7	8	9
N7:0	0									

Data File F8 -- FLOAT

Offset	0	1	2	3	4
F8:0	0				

Address/Symbol Database

Address	Symbol	Scope	Description	Sym Group
B3:0/0			PROXIMITY_BIT	
B3:0/1			LEVEL BIT	
B3:0/2			RED PHOTO EYE BIT	
B3:0/3			BLUE PHOTO EYE BIT	
B3:0/4			CONVEYOR MOTOR BIT	
B3:0/5			WALNUT HOPPER BIT	
B3:0/6			PECAN HOPPER BIT	
B3:0/8			WALNUT HOPPER OPEN TRIGGER	
B3:0/9			ONS	
B3:0/10			ONS	
B3:0/12			ONS	
B3:0/13			ONS	
B3:0/14			PECAN HOPPER OPEN TRIGGER	
I:0/0			PROXIMITY SWITCH	
I:0/1			LEVEL SWITCH	
I:0/2			RED PHOTO EYE	
I:0/3			BLUE PHOTO EYE	
N7:0			Cycle Stage: 0 = Bring Box 1 = Fill Box 2 = Unload Station 3 = Intermediate	
O:0/0			CONVEYOR MOTOR	
O:0/1			WALNUT HOPPER	
O:0/2			PECAN HOPPER	
S:0			Arithmetic Flags	
S:0/0			Processor Arithmetic Carry Flag	
S:0/1			Processor Arithmetic Underflow/ Overflow Flag	
S:0/2			Processor Arithmetic Zero Flag	
S:0/3			Processor Arithmetic Sign Flag	
S:1			Processor Mode Status/ Control	
S:1/0			Processor Mode Bit 0	
S:1/1			Processor Mode Bit 1	
S:1/2			Processor Mode Bit 2	
S:1/3			Processor Mode Bit 3	
S:1/4			Processor Mode Bit 4	
S:1/5			Forces Enabled	
S:1/6			Forces Present	
S:1/7			Comms Active	
S:1/8			Fault Override at Powerup	
S:1/9			Startup Protection Fault	
S:1/10			Load Memory Module on Memory Error	
S:1/11			Load Memory Module Always	
S:1/12			Load Memory Module and RUN	
S:1/13			Major Error Halted	
S:1/14			Access Denied	
S:1/15			First Pass	
S:2/0			STI Pending	
S:2/1			STI Enabled	
S:2/2			STI Executing	
S:2/3			Index Addressing File Range	
S:2/4			Saved with Debug Single Step	
S:2/5			DH-485 Incoming Command Pending	
S:2/6			DH-485 Message Reply Pending	
S:2/7			DH-485 Outgoing Message Command Pending	
S:2/15			Comms Servicing Selection	
S:3			Current Scan Time/ Watchdog Scan Time	
S:4			Time Base	
S:5/0			Overflow Trap	
S:5/2			Control Register Error	
S:5/3			Major Err Detected Executing UserFault Routine	
S:5/4			M0-M1 Referenced on Disabled Slot	
S:5/8			Memory Module Boot	
S:5/9			Memory Module Password Mismatch	
S:5/10			STI Overflow	
S:5/11			Battery Low	
S:6			Major Error Fault Code	
S:7			Suspend Code	
S:8			Suspend File	
S:9			Active Nodes	
S:10			Active Nodes	
S:11			I/O Slot Enables	
S:12			I/O Slot Enables	
S:13			Math Register	
S:14			Math Register	
S:15			Node Address/ Baud Rate	
S:16			Debug Single Step Rung	
S:17			Debug Single Step File	
S:18			Debug Single Step Breakpoint Rung	
S:19			Debug Single Step Breakpoint File	
S:20			Debug Fault/ Powerdown Rung	
S:21			Debug Fault/ Powerdown File	
S:22			Maximum Observed Scan Time	
S:23			Average Scan Time	
S:24			Index Register	
S:25			I/O Interrupt Pending	
S:26			I/O Interrupt Pending	
S:27			I/O Interrupt Enabled	

Address	Symbol	Scope	Description	Sym Group
S:28			I/O Interrupt Enabled	
S:29			User Fault Routine File Number	
S:30			STI Setpoint	
S:31			STI File Number	
S:32			I/O Interrupt Executing	
S:33			Extended Proc Status Control Word	
S:33/0			Incoming Command Pending	
S:33/1			Message Reply Pending	
S:33/2			Outgoing Message Command Pending	
S:33/3			Selection Status User/DF1	
S:33/4			Communicat Active	
S:33/5			Communicat Servicing Selection	
S:33/6			Message Servicing Selection Channel 0	
S:33/7			Message Servicing Selection Channel 1	
S:33/8			Interrupt Latency Control Flag	
S:33/9			Scan Toggle Flag	
S:33/10			Discrete Input Interrupt Reconfigur Flag	
S:33/11			Online Edit Status	
S:33/12			Online Edit Status	
S:33/13			Scan Time Timebase Selection	
S:33/14			DTR Control Bit	
S:33/15			DTR Force Bit	
S:34			Pass-thru Disabled	
S:34/0			Pass-Thru Disabled Flag	
S:34/1			DH+ Active Node Table Enable Flag	
S:34/2			Floating Point Math Flag Disable,Fl	
S:35			Last 1 ms Scan Time	
S:36			Extended Minor Error Bits	
S:36/8			DII Lost	
S:36/9			STI Lost	
S:36/10			Memory Module Data File Overwrite Protection	
S:37			Clock Calendar Year	
S:38			Clock Calendar Month	
S:39			Clock Calendar Day	
S:40			Clock Calendar Hours	
S:41			Clock Calendar Minutes	
S:42			Clock Calendar Seconds	
S:43			STI Interrupt Time	
S:44			I/O Event Interrupt Time	
S:45			DII Interrupt Time	
S:46			Discrete Input Interrupt- File Number	
S:47			Discrete Input Interrupt- Slot Number	
S:48			Discrete Input Interrupt- Bit Mask	
S:49			Discrete Input Interrupt- Compare Value	
S:50			Processor Catalog Number	
S:51			Discrete Input Interrupt- Return Number	
S:52			Discrete Input Interrupt- Accumulat	
S:53			Reserved/ Clock Calendar Day of the Week	
S:55			Last DII Scan Time	
S:56			Maximum Observed DII Scan Time	
S:57			Operating System Catalog Number	
S:58			Operating System Series	
S:59			Operating System FRN	
S:61			Processor Series	
S:62			Processor Revision	
S:63			User Program Type	
S:64			User Program Functional Index	
S:65			User RAM Size	
S:66			Flash EEPROM Size	
S:67			Channel 0 Active Nodes	
S:68			Channel 0 Active Nodes	
S:69			Channel 0 Active Nodes	
S:70			Channel 0 Active Nodes	
S:71			Channel 0 Active Nodes	
S:72			Channel 0 Active Nodes	
S:73			Channel 0 Active Nodes	
S:74			Channel 0 Active Nodes	
S:75			Channel 0 Active Nodes	
S:76			Channel 0 Active Nodes	
S:77			Channel 0 Active Nodes	
S:78			Channel 0 Active Nodes	
S:79			Channel 0 Active Nodes	
S:80			Channel 0 Active Nodes	
S:81			Channel 0 Active Nodes	
S:82			Channel 0 Active Nodes	
S:83			DH+ Active Nodes	
S:84			DH+ Active Nodes	
S:85			DH+ Active Nodes	
S:86			DH+ Active Nodes	
U:3			INPUT-OUTPUT	
U:4			CONTROL LOGIC	
U:5			CYCLE	

Instruction Comment Database

Address	Instruction	Description

Symbol Group Database

Group_Name	Description