

Formula E Interior Permanent Magnet Motor Design

Improvement of the Formula Student Team Car's Performance

EJ223VT26 Students Cohort

August 24, 2026

Contents

1	Background: Current Motor and Inverter Analysis	3
1.1	Motor	3
1.2	Inverter	5
2	Part A: Requirements Definition And Analytical Design	5
2.1	Boundary Requirements	6
2.2	First Design Objectives	6
2.2.1	Ricca's Paper Methodology	12
3	Part B: Finite Element Analysis and Validation	19
3.1	Electromechanical Power Modeling	19
3.2	Simulation Framework	19
3.3	Energy Efficiency Map	22
4	Thermal and Mechanical Analysis	23
5	Conclusion	24

1 Background: Current Motor and Inverter Analysis

The KTH Formula Student team has an already working racing car that has been used in different competitions. This section analyses both Motor and Inverter in order to define a baseline for the new design, focusing on reducing the current motor's limitations and improving the overall performance, tailored to the needs of the team.

1.1 Motor

The team currently utilizes 4 **DD5-14-10-POW-18600-B5** motors to power their vehicle. This vehicle is used in different competitions with different terrains. From a flat long track where speed is needed, to auto-cross scenarios where torque is critical. Due to that reason, the car should be able to perform in a variety of conditions. From data-sheets[2] and pictures, the following characteristics were identified:

Winding Configuration: 86 wire ends, indicating a total number of turns per tooth of 43. See Figure 1 (left).

Slot Number: 12 slots, which gives a slot per pole ratio of 1.2 (12 slots / 10 poles), indicating a non-integer slot winding configuration. See Figure 1 (center).

Rotor Topology: Interior permanent magnet (IPM) topology. See Figure 1 (right): embedded magnet pockets are visible under the pole shoes, rather than magnets glued to the rotor surface. The topology cannot be confirmed from the datasheet alone, and some internal team notes instead describe this motor as SPM with a slight rotor anisotropy; we adopt the IPM reading here since it is consistent with both the rotor picture and the measured saliency below ($L_q < L_d$), which a plain SPM rotor would not exhibit.

Saliency Profile: $L_d = 0.24$ mH and $L_q = 0.12$ mH ($L_q < L_d$).

Stack Length (l_e): **85.2 mm**, from the mechanical drawing [3] (Fig. 2, left: $12.4 + 61 + 11.8$ mm).

Stator Outer Diameter (D_{os}): **89.9 mm**, from the mechanical drawing; housing diameter - 3 mm minimal wall thickness. [3] (Fig. 2, right: $95.9 - 2(3) = 89.9$ mm).

Stator Inner Diameter (D_{is}): **- mm**. No drawing dimensions the bore.

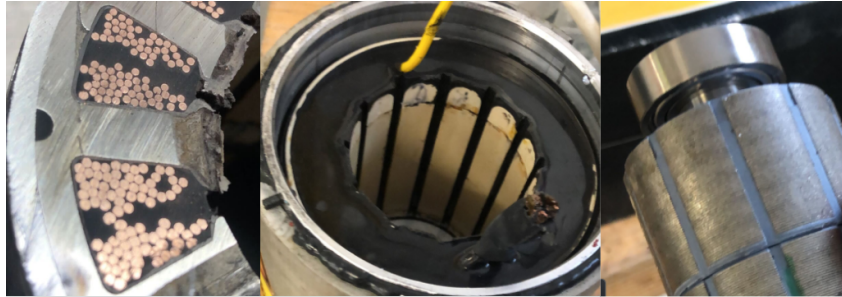


Figure 1: *Left:* Traversal cut of the stator. *Center:* Stator. *Right:* Rotor.

Note that the same motor/inverter configuration is used for the 4 wheels, but the team considers an uneven power distribution (80/20). A further discussion on this will be made in this document.

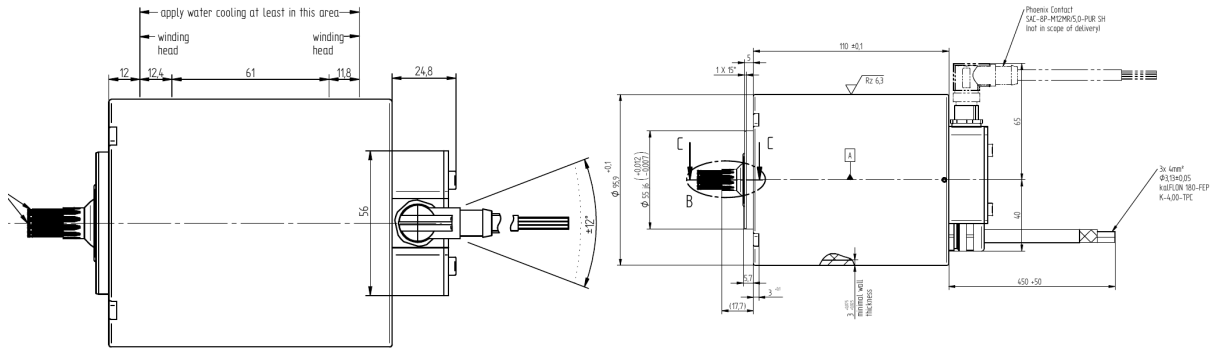


Figure 2: Side view of the current motor.

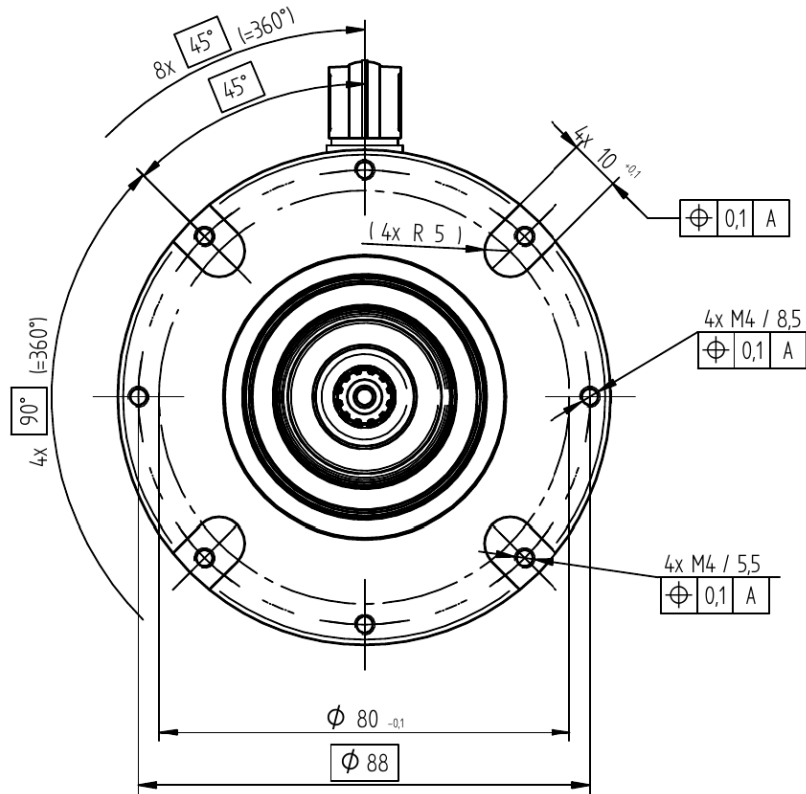


Figure 3: Front view of the current motor.

Moreover, each motor is connected to a fixed gearbox with a 14:1 ratio, which will be kept for the new design. Thus, any further speed calculation has to consider that the motor rotates 14 times faster than the wheel. Also, note from Fig. 4 how the current motor can operate in field-weakening mode only from 16000 rpm up to the 20000 rpm limit, meaning the machine has a "Flux-weakening ratio" of 1.52 (20,000 rpm / 13,200 rpm). We will briefly see in section 1.2 that the KW26-S5-FSE-4Q inverter only allows for a max. speed of 14,400 rpm, thus leaving a real flux-weakening ratio of only 1.1 (14,400 rpm / 13,200 rpm). For the new design, we aim to increase this ratio up to a value around 1.2.

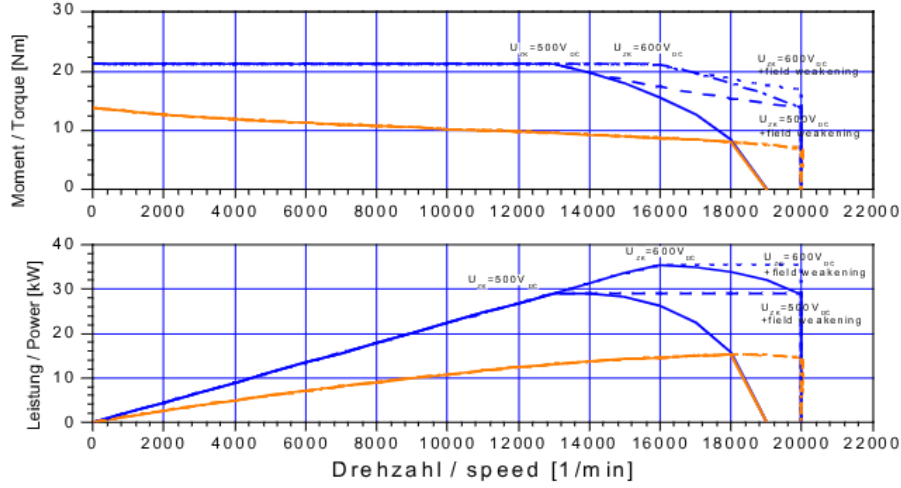


Figure 4: From datasheet: Power and Torque vs Speed for the current motor.

1.2 Inverter

The inverter used to drive this motor is the **KW26-S5-FSE-4Q**. This inverter consists of 4 independent channels. Notice how the inverter is a bottleneck in this configuration, since the 1200 Hz limit gives a 14,400 rpm for a 10-pole machine. This means that the motor enters field-weakening mode only on the last 10% range of operation.

The following table summarizes the previously analyzed motor/inverter parameters.

Table 1: Current motor parameters (DD5-14-10-POW)

<i>Parameter</i>	<i>Symbol</i>	<i>Value</i>
Pole Number	P	10
Slot Number	N_s	12
Line Voltage	V_{line}	540 V
Nominal Power	P_n	12.3 kW
Peak Power	P_{max}	28 kW
Nominal Torque	M_n	9.8 Nm
Nominal Speed	N_n	12,000 rpm
Max. Speed	N_{max}	14,400 rpm
Corner Speed Point	N_{char}	13,200 rpm
Gear Ratio	G	14:1
Stack Length	l_e	85.2 mm
Stator Outer Diameter	D_{os}	89.9 mm
Aspect ratio	l_e/D_{is}	0.888
Flux-weakening Ratio (inverter constrained)	N_m/N_c	1.1
Rotor Topology	—	Interior Permanent Magnet

2 Part A: Requirements Definition And Analytical Design

This section will define the initial values and limitations that will guide the design of the new motor. Then, using different analytical methods, we will reach some design results without

simulation. After this iteration, we will use FEA to validate the design and iterate until we reach a final design that meets the requirements.

2.1 Boundary Requirements

The following table summarizes those design boundaries, which are constrained by the inverter properties, mechanical enclosure and the Formula Team itself. The new design should stick to these requirements, and any design deviation should be justified.

Table 2: Boundary requirements for the new propulsion motor design.

General requirements	
Max dimensions including cooling (outer diameter $\times$ length)	120 mm $\times$ 110 mm
Hub compatible	Must
Motor topology	Radial in-runner (rotor inside the stator)
Weight	≤ 2800 g
Power density (mass)	≥ 10 kW/kg
IP protection	IP65
Mechanical requirements	
Peak torque (for 5 s)	21.5 Nm
Maximum speed	20000 rpm
Nominal torque	9.8 Nm
Nominal speed	12000 rpm
Electrical requirements	
Operating Voltage ($V_{LL,RMS}$)	235 V to 420 V
Peak power	28 kW
Average power	12 kW
Three-phase cable diameter	11 mm $\pm$ 0.5 mm
Sensor requirements	
Rotor position	Must
Stator temperature	Must
Rotor temperature	Preferred
Cooling requirements	
Coolant	Liquid or air
Cooling circuit	External or internal
Compatibility	
Rotary encoder	ECI1118, P-type
Output spline	DIN 5480 - W11x0,8x30°x30x12x7h

2.2 First Design Objectives

Now, we will define our design target parameters, using the current motor parameters (Table 1) as a starting point, and aiming to respect the boundary requirements (Table 2). Similarly to the old design, we will use permanent magnets due to their high power density, taking into consideration the thermal limits. We will avoid surface permanent magnets (SPM) because

the use of glue introduces mechanical challenges. On the other hand, the interior permanent magnet (IPM) topology allows a more robust mechanical design and the possibility to have a higher saliency ratio (L_q/L_d). Moreover, **We aim to invert the saliency in order to make $L_q > L_d$** ; This new topology will allow a wider field-weakening operation mode, shifting the knee point we saw in 4 to the left.

The embedded PM structure also provides slightly higher torque density per unit volume, since reluctance torque from the d - and q -axis inductance difference adds to the magnet torque [9].

Pole/Slot Number

For the number of poles, we will use $P = 10$ as the previous motor, because it is already optimized for the 1200 Hz inverter limit: ($N_n = 12,000$ rpm). The corresponding electrical frequency is

$$f_{el} = \frac{P/2 \cdot N_n}{60 \text{ s}} = \frac{10/2 \cdot 12,000}{60 \text{ s}} = 1000 \text{ Hz} \quad (1)$$

For the number of slots, we will use $N_s = 12$ as the previous motor. $\gcd(N_s, P) = 2$ means the slot/pole pattern has two-fold rotational symmetry, repeating every $360^\circ/2 = 180^\circ$, i.e. after 5 of the 10 poles [6]. Concretely, this is what keeps the winding balanced around the machine; when $\gcd(N_s, P) = 1$ (no repetition at all, i.e. no diametric symmetry) severe unbalanced magnetic pull (UMP) and bearing wear happens at high speed. The same $\gcd(N_s, P)$ also sets the cogging-torque periodicity, $N_{cog} = \text{lcm}(N_s, P) = N_s P / \gcd(N_s, P) = 60$ cycles per mechanical revolution: a higher N_{cog} spreads the slot/pole interaction over more, smaller torque ripples per revolution, which is the standard cogging-torque design guideline for choosing a slot/pole combination [10].

A 12-slot/10-pole machine is also a common fractional-slot concentrated-winding (FSCW) combination. With $q = N_s/(P \cdot 3) = 0.4$ slots per pole per phase (below the $q = 1$ threshold) each coil can be wound around a single stator tooth without overlapping its neighbors, unlike a conventional distributed winding whose coils span several slots. That single-tooth, non-overlapping construction is exactly what makes $q < 1$ valuable: much shorter end turns (each coil only reaches around one tooth, not across the stator to a distant slot), a higher achievable copper slot-fill factor, and better fault tolerance from the phases' greater magnetic independence [5]. On top of the low cogging torque above, attractive properties for a compact, high-torque-density traction machine. The same 12-slot/10-pole FSCW combination was found in an EV traction machine design, confirming this design choice as feasible [7]. Also, we will consider increasing the winding turns from the current 43, to allow for higher magnetic flux linkage and thus letting the back-EMF reach the DC bus voltage limit at a lower speed, while reducing $I^2 R$ losses for the nominal speed, and enabling us to use the motor in the field-weakening mode for a wider speed range.

Analytical Calculations

To translate the performance requirements into initial physical dimensions, we utilize two independent, complementary formulas from Esson's rule family [8]. Formula 1 goes from a torque target to a bore/stack-length estimate, treating the outer diameter as a free output; Formula 2 goes the other way, fixing the outer diameter (our real housing constraint) and solving for the bore that best uses it. Then, we will use a reference paper.

Formula 1: Esson's Rule

This formula estimates the size of the rotor, given a torque target and an assumed magnetic shear stress and aspect ratio. We start from a conservative shear stress value, with the objective that this should yield a first bore estimate, a minimum *for these particular shear-stress and aspect-ratio assumptions*, not an absolute physical minimum. Formula 2 below reaches a smaller

bore once both assumptions are relaxed.

Esson's rule estimates a machine's mechanical power from its geometry and electromagnetic loading [8]:

$$P_{mech} = \frac{\pi^2}{120} \omega_r (D_{is}^2 l_e) B_{g,1} K_{s,1} \eta_{gap} \cos(\phi_{gap})$$

where D_{is} is the stator bore (inner) diameter, l_e the effective (magnetic) stack length, $\omega_r [rpm]$ the shaft speed, η_{gap} the air-gap efficiency (accounting for rotor-side losses), and $\cos(\phi_{gap})$ the power factor at the air gap. Dividing by the shaft speed turns this directly into torque.

$$T_{mech} = (D_{is}^2 l_e) B_{g,1} K_{s,1} \eta_{gap} \cos(\phi_{gap})$$

notice the result does not depend on the pole number. Grouping the flux density $B_{g,1}$ (peak fundamental air-gap flux density) and linear current density $K_{s,1}$ (total stator ampere-turns per unit bore circumference) into a single **magnetic shear stress** term,

$$\sigma_m = \frac{B_{g,1} K_{s,1}}{2} [\text{N/m}^2],$$

the torque becomes proportional to twice the rotor volume $V_{rotor} = \frac{\pi}{4} D_{is}^2 l_e$:

$$T = 2V_{rotor} \sigma_m \eta_{gap} \cos(\phi_{gap}) = \frac{\pi}{2} \eta_{gap} \cos(\phi_{gap}) \cdot \sigma_m D_{is}^2 l_e$$

For this first pass we don't yet have converged $\eta_{gap}/\cos(\phi_{gap})$ estimates, so we treat $\eta_{gap} \cos(\phi_{gap}) \approx 1$ – dropping only that efficiency/power-factor derating, not the geometric $\pi/2$ prefactor itself, giving the working equation actually implemented in `EssonsSizer.solveD2L`:

$$T = \frac{\pi}{2} \sigma_m \cdot D_{is}^2 \cdot l_e \quad (2)$$

Now we have to select the magnetic shear stress value. Permanent magnet machines which do not have a rotor current disadvantage typically fall in the range from 40,000 to 60,000 N/m^2 . As an upper limit, liquid-cooled machines having a shear stress of up to 100,000 N/m^2 have been reported [6]. `EssonsSizer.solveD2L` fixes $\sigma_m = 70,000 \text{ N/m}^2$, toward the upper end of that range. We can allow this design choice thanks to the cooling loop, and the fact that transient nature of racing will have transient peaks in loading, compared to continuous-duty industrial applications. We still have two degrees of freedom, the rotor diameter and the stack length. Rather than fix the bore-referenced ratio l_e/D_{is} directly, `EssonsSizer.solveD2L` takes the *pole-pitch* aspect ratio ($\lambda = l_e/\tau_p$) as its actual free input (`MotorSpec.AspectRatio`), which is known to fall in the range 1.1 to 2.0 for a 10-pole machine [6]. A large λ is beneficial for weight (and thus cost) reduction, but the stator current density increases, making harder to cool down the machine; a smaller λ trades the other way, losing torque to the end-winding leakage inductance [8]. `main.m` fixes $\lambda = 2.0$, the top of that range, favoring the lighter, easier-to-wind option. This converts into the mechanical ratio ($k = l_e/D_{is}$) used by Eq. 2 via $k = \lambda\pi/P$: with $P = 10$, the $\lambda \in [1.1, 2.0]$ band maps to $k = l_e/D_{is} \in [0.35, 0.628]$, and our $\lambda = 2.0$ choice lands at $k = 0.628$. Solving Eq. 2 for l_e and D_{is} :

$$\begin{aligned} k &= \lambda \frac{\pi}{P} = 2.0 \cdot \frac{\pi}{10} = 0.628 \\ D_{is} &= \sqrt[3]{\frac{2T}{\pi \sigma_m k}} = \sqrt[3]{\frac{2 \cdot 9.8 \text{ Nm}}{\pi \cdot 70,000 \cdot 0.628}} = 52.15 \text{ mm} \\ l_e &= k \cdot D_{is} = 0.628 \cdot 52.15 \text{ mm} = 32.77 \text{ mm} \end{aligned}$$

We can see that both values result within the design (Tab.2) limits (stack length $32.77 \text{ mm} < 110 \text{ mm}$ and diameter $52.15 \text{ mm} < 120 \text{ mm}$). This gives us an idea that the new design is feasible, and even more, it can be noticeably smaller in size than the current one on both axes. Nevertheless, it is important to keep in mind during the design that we are assuming a σ_m target of 70,000 N/m^2 and a $\lambda = 2.0$ pole-pitch aspect ratio, both of which depend on the magnet material selection and a relatively high magnetic flux linkage.

Formula 2: The D^3L Output Coefficient

Formula 1 sizes the machine purely from a torque target and an assumed shear stress, treating the stator outer diameter D_{os} as a free output. We now go the other direction: fix $D_{os} = 89.9$ mm, the current motor's stator outer diameter, with the rationale that a better design's stator core should not be larger than the older one's, and use the D^3L output coefficient method [8] to find the bore D_{is} that best fills that envelope, for our fixed $P = 10$, $N_s = 12$ topology.

The split between stator teeth and yoke is governed by two flux-density ratios:

$$\beta_t = \frac{B_{g,1}}{k_{is}B_{ts}}k_{st}, \quad \beta_c = \frac{2}{P} \frac{B_{g,1}}{k_{is}B_{cs}}k_{st}$$

β_t is the fraction of a stator slot pitch a tooth must occupy to carry the peak air-gap flux at its target density B_{ts} ; β_c plays the same role for the yoke, as a fraction of the bore radius ($d_{cs} = \frac{1}{2}\beta_c D_{is}$), with an explicit $1/P$ since more poles means less flux per pole and thus a thinner yoke. These feed a normalized output function, maximized (for a given D_{os}) subject to a maximum allowed RMS surface current density $K_{s,rms,max}$ [8]:

$$f_o(\rho) = a\rho^3 - 2b\rho^2 + \rho, \quad \rho = \frac{D_{is}}{D_{os}}, \quad K_{s,rms,max} - \frac{k_{Cu}J_{s,rms}}{4} \left(aD_{is} - 2bD_{os} + \frac{D_{os}^2}{D_{is}} \right) \geq 0$$

where $a = (\beta_t + \beta_c)^2 - (1 - \beta_t)^2$ and $b = \beta_t + \beta_c$. Solving this constrained optimization for D_{is} (the unconstrained maximizer of f_o if it already satisfies the constraint, otherwise the constraint-boundary solution) feeds the corresponding D^3L output equation – the Formula-2 analogue of Esson's rule (Eq. 2):

$$\frac{P_{out}}{\omega_r[rpm]} = \frac{\sqrt{2}\pi^2}{480} k_1 k_{Cu} \eta_{gap} \cos(\theta_{gap}) f_o(\rho) D_{os}^3 l_e B_{g,1} J_{s,rms} \quad (3)$$

which we solve for the stack length l_e that hits our torque target.

This procedure needs more design targets than Formula 1's single σ_m ; we define:

Air-gap flux density ($B_{g,1}$): 0.95 T, typical peak fundamental flux for a NdFeB IPM machine operating below core saturation.

Tooth/yoke flux density targets (B_{ts} , B_{cs}): 1.415 T and 1.00 T. These values are set below typical because of the high electrical frequency of the design. Also, cross-compared with the reference paper's values [4].

Iron fill / stacking factors (k_{is} , k_{st}): 0.97 each, typical for thin electrical-steel laminations.

Copper slot fill factor (k_{Cu}): 0.40, typical for round-wire windings in PM machines.

Winding factor (k_1): 0.91, a generic two-layer winding factor, using reference

Air-gap efficiency and power factor (η_{gap} , $\cos\theta_{gap}$): 0.95 and 0.90, generic estimates.

Max. RMS linear current density ($K_{s,rms,max}$): 90 kA/m, the cooling-headroom limit, within range for liquid-cooled machines (150 - 200 kA/m) [8].

RMS current density ($J_{s,rms}$): 8 A/mm². Within the the 7–10 A/mm² range presented in [8].

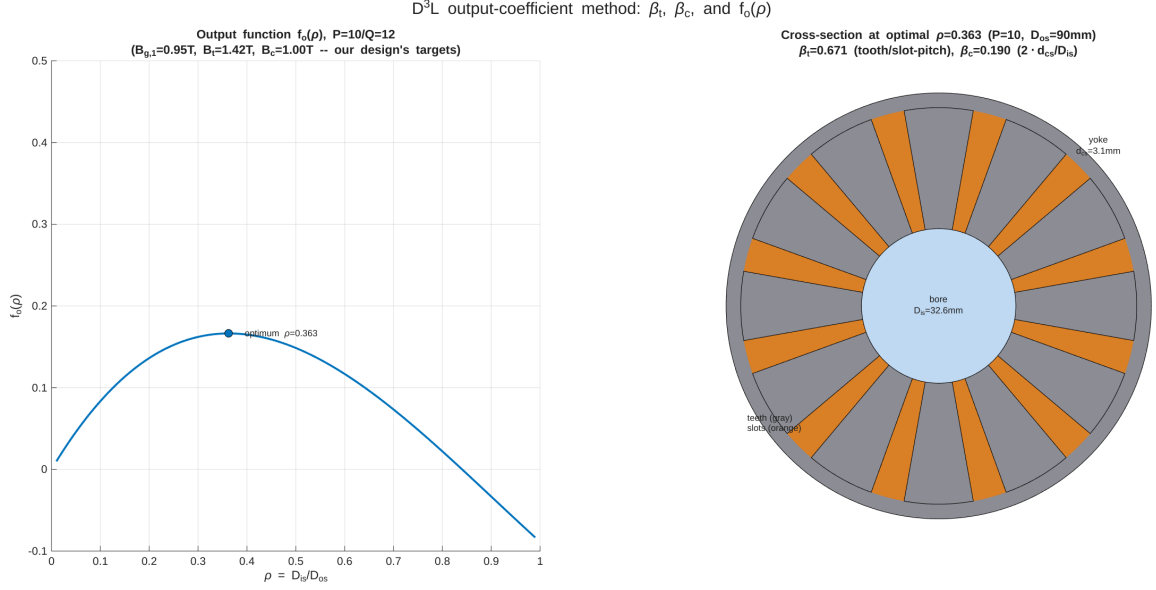


Figure 5: Left: output function $f_o(\rho)$ at our design's flux-density targets, dot marking the optimum. Right: cross-section schematic at that optimal ratio.

Solving Eq. 3 for l_e at these targets (EssonsSizer.solveD3L gives $D_{is} = 32.8\text{mm}$ and $l_e = 123.5\text{mm}$). The result **exceeds the requirement table's 110 mm stack limit** (Table 2), and we are not even accounting for the winding heads ($\approx 33\text{mm}$) or a cooling-jacket allowance. The sensitivity check (plot_D3L_current_density_sensitivity.m) shows that raising $J_{s,rms}$ from 8A/mm^2 to $\approx 12\text{A/mm}^2$ brings l_e down to 85.2mm ($D_{is} \approx 39.5\text{mm}$). Note that this means that the new motor needs to handle a considerable higher current density than the industry standard.

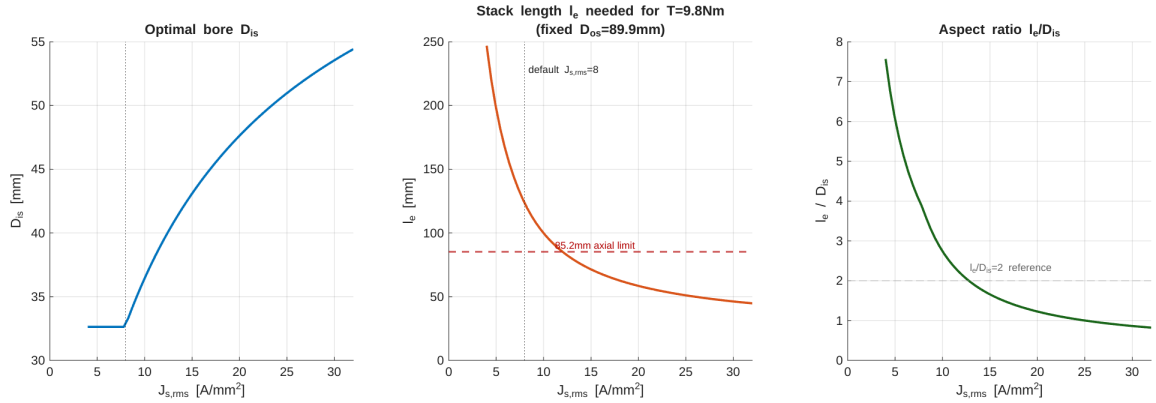


Figure 6: Sensitivity of the Formula 2 to the current density J_s . Raising it to $\approx 12\text{A/mm}^2$ brings l_e down to our 85.2mm target.

Formula 2's bore (32.8mm) comes out noticeably smaller than Formula 1's 52.15mm . The two land on different rotor shapes as a result: Formula 1's $\lambda = 2.0$ choice gives a fairly squat $l_e/D_{is} = 0.628$, while Formula 2 independently derives a much longer, thinner $l_e/D_{is} \approx 3.8$.

Table 3: Formula 1 vs. Formula 2 dimensions.

	Formula 1	Formula 2 ($J_{s,rms} = 8 \text{ A/mm}^2$)	Formula 2 ($J_{s,rms} = 12 \text{ A/mm}^2$)
D_{is}	52.15 mm	32.8 mm	39.46 mm
l_e	32.77 mm	123.5 mm	85.2 mm
l_e/D_{is}	0.628	3.8	2.16

Magnet Material Selection

The choice of permanent magnet material sets the remanent flux density B_r that feeds every downstream calculation, from Formula 1’s magnetic shear stress σ_m to the flux-linkage target below and Ricca’s saturation model (Section 2.2.1) – so it needs to be pinned down before those. We select **sintered NdFeB, grade N48** [1]: NdFeB gives the highest energy product of common magnet families, which this application needs for torque density within the fixed 95.9 mm/110 mm envelope, and N48 sits at a good remanence/cost balance – higher grades (N52, N54) push B_r only marginally higher at a steeper cost and availability penalty for a first design iteration.

Remanence at 20°C ($B_{r,20}$): 1.37 T, from the datasheet [1] – in line with N48’s typical 1.37–1.42 T remanence range, and the value used throughout this project’s sizing pipeline.

PM operating temperature (T_{PM}): 140°C, set by the existing 4 l/min liquid cooling loop’s expected margin above ambient plus I^2R /core losses reaching the rotor. Standard N48 (no suffix) is typically only rated to ≈ 80 – 100°C before accelerated, irreversible demagnetization risk; sustaining 140°C safely calls for a high-temperature-stable variant (N48SH or better, rated $\gtrsim 150^\circ\text{C}$) – to be confirmed against the specific part ordered, an open item for the next design iteration.

Temperature-corrected remanence (B_r): using a typical reversible temperature coefficient $\alpha_{Br} = -0.10\%/^\circ\text{C}$,

$$B_r = B_{r,20} \left[1 + \frac{\alpha_{Br}}{100} (T_{PM} - 20) \right] = 1.37 [1 - 0.001(140 - 20)] \approx 1.21 \text{ T} \quad (4)$$

This is the value the flux-linkage/saturation model actually sees – about 12% below the room-temperature datasheet rating, and the reason $B_r = 1.37 \text{ T}$ can’t be used directly.

Recoil permeability (μ_{rec}): 1.05, typical for sintered NdFeB, used in the reluctance/anisotropy terms of Ricca’s model (Section 2.2.1).

Corner Speed and Required Flux Linkage

The point where torque begins to fall is defined as the Corner Speed (ω_{base}), occurring when the motor’s internal Back-EMF (Back-EMF) reaches the maximum voltage available from the inverter. This relationship is governed by:

$$\omega_{m,base} \approx \frac{V_{\text{phase,peak,max}}}{p \Psi_m} \quad (5)$$

Where $V_{\text{phase,peak,max}}$ is the maximum achievable *phase* fundamental peak voltage, p is the number of pole pairs, and Ψ_m is the permanent magnet flux linkage.

The currently used AMK inverter considers a maximum continuous modulation index of $M_i = 0.917$, which limits the maximum fundamental phase voltage to:

$$V_{\text{phase,peak,max}} = M_i \frac{V_{DC}}{\sqrt{3}} \approx 0.917 \times \frac{515}{\sqrt{3}} \approx 273 \text{ V} \quad (6)$$

To trigger the torque fall at an earlier speed, we must increase Ψ_m (e.g., by increasing stator turns or selecting higher remanence magnets), thereby reducing $\omega_{m,base}$.

`main.m` fixes n_{max} directly at the inverter's full 1200 Hz / 14,400 rpm cap (Table 1, Section 1.2) and derives the corner speed as a fraction below it, $n_{base} = 0.85 n_{max} \approx 12,240$ rpm. With $p = 5$ this gives a mechanical speed of $\omega_{m,base} \approx 1282$ rad/s. Using the available $V_{phase,peak,max} \approx 273$ V yields a required order-of-magnitude flux linkage of:

$$\Psi_m \approx \frac{V_{phase,peak,max}}{p \omega_{m,base}} \approx \frac{273}{5 \cdot 1282} \approx 0.0426 \text{ Wb} \quad (7)$$

Ricca's procedure (Section 2.2.1) now converges for this design point and gives $\Psi_{PM1} = 0.0176$ Wb (IPMRotorSizer.PsiPM1_Wb) – only $\approx 40\%$ of the Ψ_m target above, even with the N48 magnet (Eq. 4, $B_r \approx 1.21$ T at 140°C). This tracks the no-load flux-density shortfall flagged in Section 2.2.1: with $B_{g,1o}$ itself running low for this pole pitch, Ψ_{PM1} falls short too, so at the current turns/magnet geometry the machine reaches its corner point later than the 12,240 rpm targeted here. Closing this gap (more turns, a wider magnet, etc.) is an open item for the next design iteration.

2.2.1 Ricca's Paper Methodology

Formulas 1 and 2 give a fast first-pass envelope (D_{is} , l_e) from generic shear-stress/output-coefficient assumptions, but neither captures the distinctive properties of a V-shape rotor: PM flux leaks through the rotor bridges, there is magnetic saturation cross-coupling between the d - and q -axes, and reluctance-torque ($L_q > L_d$) is possible. For that, we implement the full analytical procedure of Di Gerlando & Ricca [4] (IPMRotorSizer.m), used throughout the remaining subsections of Part A.

The procedure consists of five stages, each corresponding to a section of the paper:

1. **Rotor geometry** (Section IV, eqs. 8–18): bridges, magnet width/thickness, V-angle and pole-shoe dimensions from the stator bore and pole pitch.
2. **No-load saturation model** (Section II and III, eqs. 3–7, 38–42): air-gap flux, Carter factor and bridge leakage, giving the no-load flux density $B_{g,1o}$.
3. **Torque sizing and reaction coefficients** (Section V, eqs. 57–64, 96–110): the alignment/reluctance torque split and optimal current phase advance (Section 2.2.1).
4. **Stator winding and core sizing** (Section VI, eqs. 65–94): slot count, conductor count/gauge, tooth/yoke dimensions from the corner-point EMF and current density.
5. **Electrical parameters** (Section VII, eqs. 95–120): L_d , L_q , Ψ_{PM} .

Since geometry feeds saturation, saturation feeds torque sizing, and torque sizing feeds stator sizing, IPMRotorSizer.solve() iterates all five stages to convergence rather than solving once through.

The paper's headline result is that torque splits into an alignment (PM) term and an anisotropy (reluctance) term, both functions of the current phase advance γ :

$$f_T(\Delta, \gamma) = \underbrace{\eta_\phi \cos \gamma}_{f_{T,al}} + \underbrace{\frac{\sqrt{2}\pi}{6} \frac{c_d \lambda_{is}}{k_w B_{g,1o}} \Delta (\sigma_{an} \sigma_s - 1) \sin(2\gamma)}_{f_{T,an}} \quad (8)$$

where Δ is the linear current density, c_d and σ_{an} are geometric reaction coefficients from stage 3, λ_{is} is the stator leakage inductance, k_w the winding factor, and η_ϕ/σ_s the PM-flux and iron saturation factors from stage 2. Maximizing Eq. 8 over γ gives the optimal phase advance γ_{opt} used in Section 2.2.1.

Stage 1: Rotor Geometry

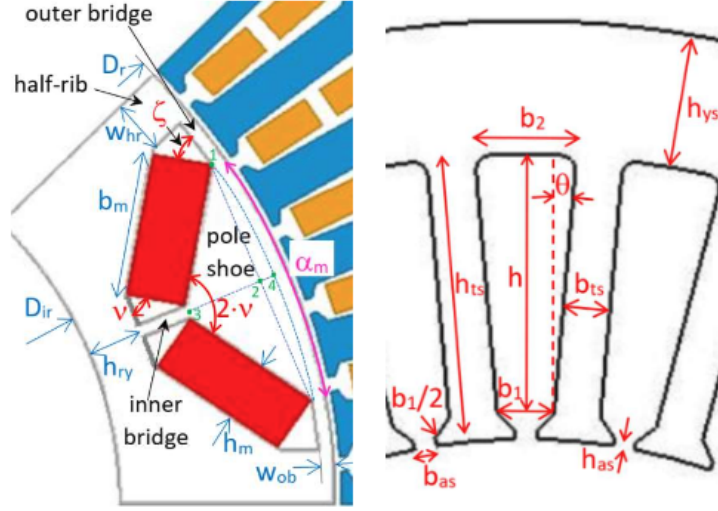


Figure 7: V-Shape IPM Motor Layout

Stage 1 turns the stator bore and five chosen shape ratios into the rotor's V-cavity dimensions. **We choose Formula 1's bore** $D_{is} = 52.15 \text{ mm}$ and air gap $g = 1 \text{ mm}$, the rotor outer diameter, pole pitch and stator slot pitch follow:

$$D_r = D_{is} - 2g = 50.15 \text{ mm}, \quad \tau_r = \frac{\pi D_r}{P} = 15.76 \text{ mm}, \quad \tau_s = \pi D_{is} / N_s = 13.65 \text{ mm}$$

Five quantities are chosen directly, each setting one part of the cavity shape:

- $\alpha_m = 0.80$: magnet embrace ratio. Share of the pole pitch the pole shoe spans.
- $k_{rib} = 0.1$: rib width as a fraction of the stator slot pitch (τ_s).
- $w_{hr} = k_{rib} \tau_s = 1.365 \text{ mm}$: half-rib width.
- $h_{ry} = 1.5 w_{hr} = 2.05 \text{ mm}$: rotor rib depth.
- $t_m = 3 \text{ mm}$: Magnet segment height.
- $\alpha_v = 78^\circ$: Magnet V-tilt angle.
- $w_{ib} = 2.5 \text{ mm}$ and $w_{ob} = 0.5 \text{ mm}$: Bridge widths. Structural.

These set the pole-shoe's tangential extension (eq. 9) and the inner bridge's radial length (eq. 10):

$$b_{ps} = \alpha_m \tau_r = 12.61 \text{ mm} \quad (9)$$

$$h_{ib} = t_m \sin \alpha_v = 2.93 \text{ mm} \quad (10)$$

A shared auxiliary length, the shoe's tangential half-width at the bridge corner, radius $D_r/2 - w_{ob}$ (eq. 11) then feeds both the pole-shoe's radial depth (eq. 12) and the magnet width below (eq. 14):

$$d_{12} = \left(\frac{D_r}{2} - w_{ob} \right) \sin \left(\alpha_m \frac{\pi}{P} \right) = 6.11 \text{ mm} \quad (11)$$

$$d_{ps} = \underbrace{\frac{d_{12} - w_{ib}/2}{\tan \alpha_v}}_{= 1.03 \text{ mm}} + \underbrace{\left(\frac{D_r}{2} - w_{ob} \right) - \frac{d_{12}}{\tan(\alpha_m \pi / P)}}_{= 0.77 \text{ mm}} + w_{ob} = 2.31 \text{ mm} \quad (12)$$

Two results close the stage. Eq. 13 checks the rotor bore clears the pole shoe, inner bridge, and ribs – keeping the d-axis flux from short-circuiting across the shaft:

$$D_{ir} = D_r - 2(d_{ps} + h_{ib} + h_{ry}) = 50.15 - 2(2.31 + 2.93 + 2.05) = 35.58 \text{ mm} \quad (13)$$

Eq. 14 gives the magnet segment width, reused in Section 2.2.1's magnet-mass estimate:

$$w_m = \frac{d_{12} - w_{ib}/2}{\sin \alpha_v} = 4.97 \text{ mm} \quad (14)$$

Rotor Bridge Sizing and Structural Integrity

The structural integrity of the IPM rotor is heavily dependent on the sizing of the inner (w_{ib}) and outer (w_{ob}) iron bridges. In this project the operating cap is $n_{max} = 14,400$ rpm (Table 4, Section 2.2), and the bridge stress check is performed at this speed. Electromagnetically, these bridges must be as thin as possible to minimize permanent magnet (PM) flux leakage. Mechanically, they must withstand the centrifugal forces exerted by the PM segments and the iron pole shoe.

Following the analytical model, the outer bridge is fixed to a minimum practical manufacturing thickness. In the current COMSOL/FEMM iteration this is set to $w_{ob} = 0.5$ mm (Table 5), while the inner bridge is sized to sustain the primary centrifugal load.

The maximum angular velocity for a mechanical speed n_{max} is:

$$\Omega_{max} = \frac{2\pi n_{max}}{60} \quad (15)$$

For $n_{max} = 14,400$ rpm, $\Omega_{max} \approx 1508$ rad/s.

The specific maximum centrifugal force (f_{max}) is calculated based on the mass of the pole shoe and magnets (m_{1p}) at average radius (R_{av}):

$$f_{max} = m_{1p} \cdot R_{av} \cdot \Omega_{max}^2 \quad (16)$$

As a first-order estimate, the magnet contribution to m_{1p} can be computed from the present geometry (two magnets per pole) as:

$$m_{pm,1p} \approx 2 \rho_{pm} w_m t_m L \quad (17)$$

where ρ_{pm} is the magnet density, $w_m = 4.97$ mm (derived, eq. 14 – Table 6), $t_m = 3$ mm, and l_e is the active stack length.

The stress on the inner bridge is then evaluated against the lamination yield strength ($\sigma_{y,lam}$) using a stress concentration factor (K_t):

$$\sigma_{ib} = K_t \cdot \frac{f_{max}}{w_{ib} \cdot k_{st}} \leq \sigma_{y,lam} \quad (18)$$

At the converged design point (`rotorSizer.summary()`, eqs. 19–22), this gives $f_{max} \approx 12,168$ N/m and $\sigma_{ib} \approx 8.33$ MPa – only 1.8% of $\sigma_{y,lam}$, i.e. comfortably safe (`IPMRotorSizer.BridgeSafe = true`) with the current $w_{ib} = 2.5$ mm inner bridge (`Wib_mm`, class default).

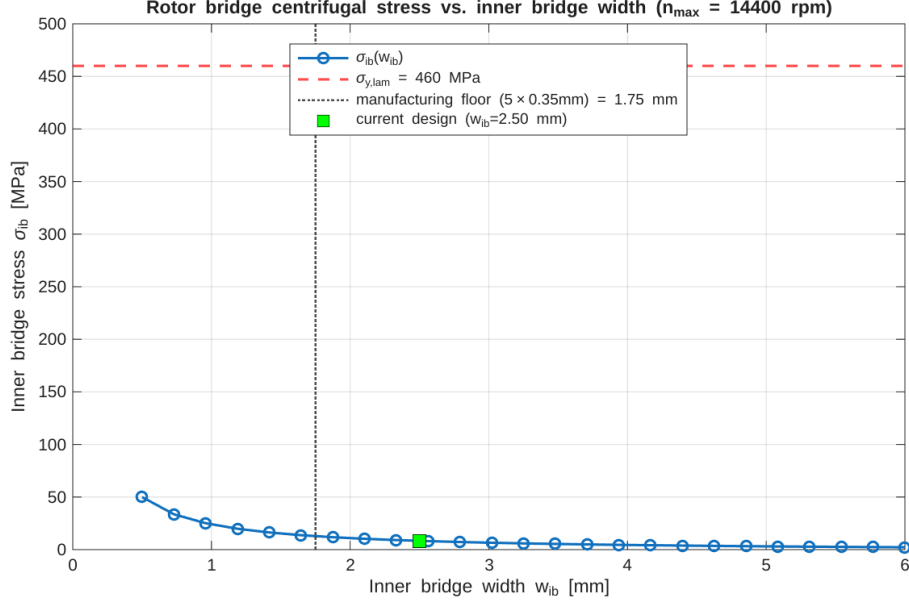


Figure 8: Inner bridge stress σ_{ib} vs. bridge width w_{ib} (`rotor_bridge_stress_sweep.m`) at this project’s own design point and $n_{max} = 14,400$ rpm, against the M235-35A yield line and the paper’s $w_{ib} = 5w_{ob}$ manufacturing-floor rule. The margin to yield stays large across the whole swept range – the bridge is not the constraining factor for this design.

Magnetic Saturation and Optimal Phase Advance

Due to the highly saturated nature of the V-shape IPM design at the peak 107 A inverter limit, the d-q axis inductances cannot be treated as constant. The procedure utilizes a q-axis saturation model (σ_{sM}) and a PM flux cross-coupling saturation factor ($\eta_{\phi M}$) to account for the reduction of fundamental PM flux under heavy q-axis reaction current (M_{pq}).

The total electromagnetic torque is expressed as the sum of the alignment and anisotropy components:

$$T(\Delta, \gamma) = T_{al}(\Delta, \gamma) + T_{an}(\Delta, \gamma) \quad (19)$$

To maximize torque output within the current limit, the optimal phase advance angle (γ_{opt}) is dynamically calculated as a function of the linear current density (Δ). This analytical γ_{opt} provides the initial current angle for the FEA magnetostatic spatial sweep, ensuring the COMSOL model evaluates the motor at its Maximum Torque Per Ampere (MTPA) operating point.

Both the M235-35A BH curve and the resulting saturation factor $\sigma_{sM}(M_q)$ that feed this stage were validated against the reference paper’s own Fig. 2/Fig. 3 at its worked-example design point (Section 2.2.1), not this project’s much smaller machine – shown here for that reason.

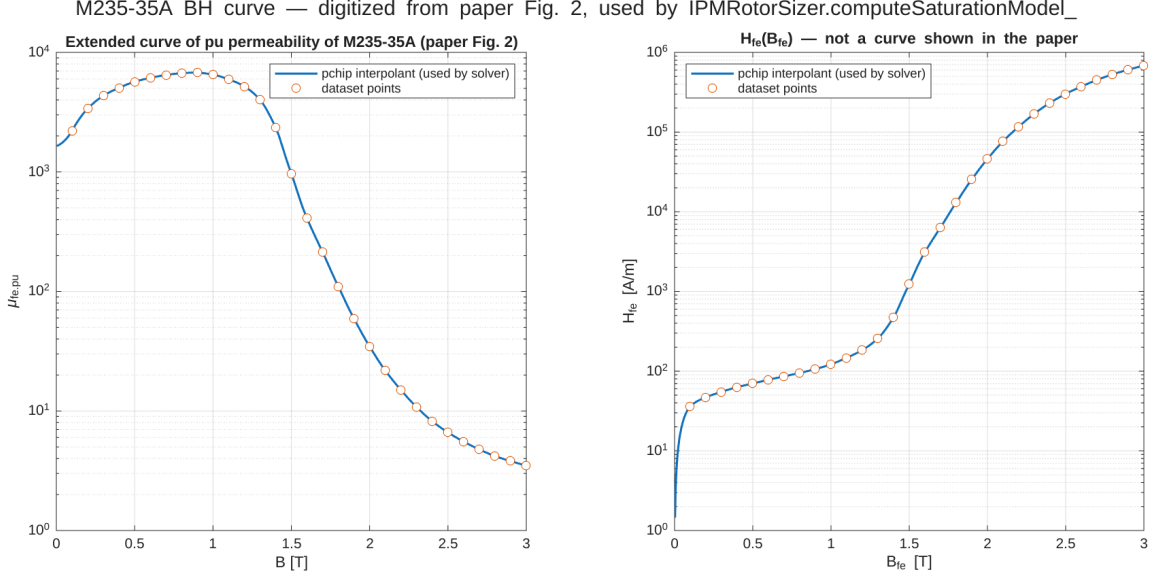


Figure 9: M235-35A BH curve digitized from the paper’s Fig. 2 (IPMRotorSizer.BFE_DATA/HFE_DATA), used internally by the saturation model. Left: $\mu_{fe,pu}$ vs. B , same axes as the paper’s own figure. Right: $H_{fe}(B)$, the orientation the solver actually interpolates on.

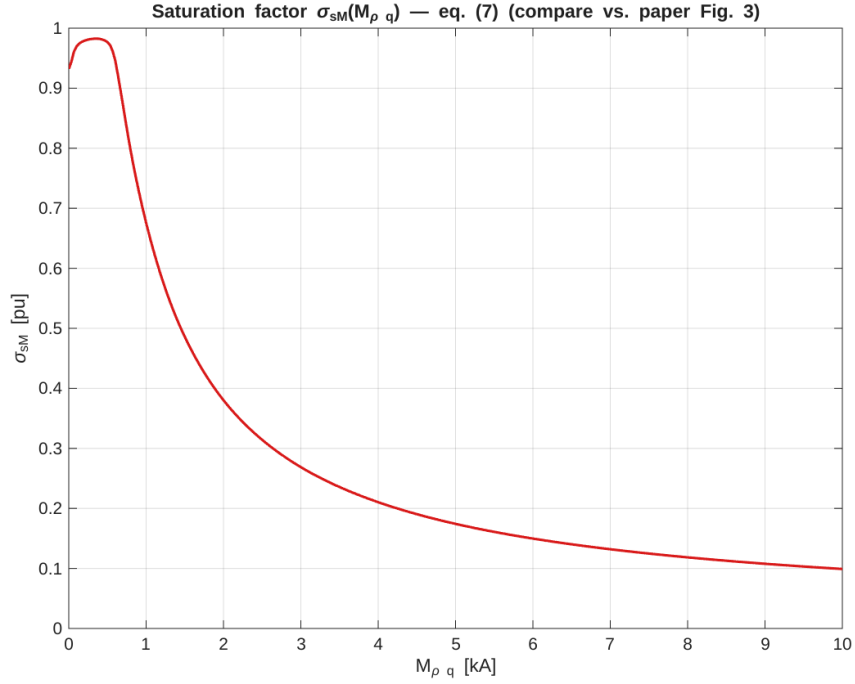


Figure 10: q-axis saturation factor $\sigma_{sM}(M_q)$ (eq. 7), eye-comparable against the paper’s own Fig. 3.

Numerically maximizing Eq. 8 over γ at this design’s operating point ($B_{g,1o} = 0.77$ T from stage 2, $\Delta = 90,000$ A/m peak linear current density, $D_{is} = 52.15$ mm) gives the optimal phase advance $\gamma_{opt} = 23.8^\circ$ and, evaluating the same equation there, the per-unit torque $f_{T,c} = 1.107$. These convert to a specific torque (torque per unit stack length) and, dividing the target torque by it, the stack length:

$$T_\ell = f_{T,c} \cdot \frac{\pi k_w}{2\sqrt{2}} B_{g,1o} \Delta D_{is}^2 = 1.107 \times \frac{\pi \times 0.91}{2\sqrt{2}} \times 0.77 \times 90,000 \times 0.05215^2 \approx 210.5 \text{ Nm/m} \quad (20)$$

$$l_e = \frac{T_{nom}}{T_\ell} = \frac{9.8}{210.5} \approx 46.6 \text{ mm} \quad (21)$$

The same converged design point also fixes the phase current the rest of Part A and the FEM pipeline use. With $I_d = 0$ (no field weakening at the corner/base torque point) and the converged $\Psi_{PM1} = 0.0176 \text{ Wb}$ (Section 2.2), the I_q needed to produce the rated torque, and the resulting peak phase current, are:

$$I_q = \frac{T_{nom}}{1.5 \cdot (P/2) \cdot \Psi_{PM1}} = \frac{9.8}{1.5 \times 5 \times 0.0176} \approx 74.2 \text{ A}, \quad I_{pk} = \sqrt{I_d^2 + I_q^2} = I_q \approx 74.2 \text{ A} \quad (22)$$

This $I_{pk} = 74.2 \text{ A}$ is a different quantity from the $I_{peak} \approx 75.8 \text{ A}$ of Section 3: that one is an independent sanity check against the peak-power requirement's assumed efficiency/power-factor, while I_{pk} here is the actual current this specific converged rotor design needs to hit its rated torque, given its real (flux-linkage-limited) Ψ_{PM1} – it is what actually gets pushed to the FEM (Table 7). Both stay comfortably under the 107 A inverter limit.

The following table summarizes the first design objectives.

Table 4: New Design Objectives

<i>Parameter</i>	<i>Symbol</i>	<i>Value</i>	<i>Engineering Justification</i>
Pole Number	P	10	Sized to maximize the AMK RACING KIT inverter frequency limit.
Slot Number	N_s	12	Low cogging torque when combined with the 10 poles.
Stack Length	l_e	46.6 mm	Ricca's converged torque-sizing result (eq. 21, Sec. 2.2.1).
Stator Outer Diameter	D_{os}	89.9 mm	Re-use the cooling jacket from the previous design.
Line Voltage	V_{line}	515 V	It is within the nominal range of the inverter.
Target Nominal Power	P_{nom}	$\approx 12.6 \text{ kW}$	$P_{nom} = T_{nom} \cdot \omega_{base} = 9.8 \text{ Nm} \times 1281.8 \text{ rad/s}$ at the corner speed.
Target Peak Power	P_{peak}	26 kW	Sized to maximize the inverter capacity (26 kVA/channel).
Magnet Material	B_r	N48 NdFeB: 1.37 T (20°C) / 1.21 T (140°C)	Selected in Magnet Material Selection (Sec. 2.2) for its remanence/cost balance; the temperature-corrected value is what Ricca's saturation model (Sec. 2.2.1) actually uses.
Required Flux Linkage	Ψ_m	$\approx 0.0426 \text{ Wb}$	From the corner-speed back-EMF constraint at $n_{base} = 12,240 \text{ rpm}$ (Sec. 2.2).
Target Nominal Torque	T_{nom}	9.8 Nm	Matches both (Table 1) and (Table 2).
Peak Torque	M_{clip}	21.5 Nm	Boundary requirement (Table 2, 5 s rating).
Target Max Speed	n_{max}	14,400 rpm	Set directly to the inverter's full 1200 Hz / 14,400 rpm cap (Table 1, Sec. 1.2).
Target Corner Speed	n_{base}	12,240 rpm	Target ≈ 1.18 flux-weakening ratio (Sec. 2.2).
Rotor Topology	—	IPM	Selected to achieve reluctance-torque contribution (Eq. 8).

For traceability, this section funnels the design pipeline through three views of the same design point: what we **define** directly (Table 5), what the sizing chain then **calculates** from

those choices (Table 6), and finally the subset of both that actually gets **pushed to COMSOL** (Table 7) as Global Parameters for the FEA model. `IPMRotorSizer.solve()` converges end-to-end for this design point (`main.m`: `AlphaM=0.80`, `Whr_fraction=0.1`, `Hm_mm=3`), so every value below is its actual solved output, not a placeholder. The stack length here ($l_e = 46.6$ mm, eq. 21) is Ricca’s own electromagnetically-driven result, distinct from Formula 1/2’s Esson-rule estimates (Section 2.2.1 reconciliation discussion) – the two sizing passes have not yet been cross-checked against each other.

Table 5: Design choices – defined directly

Parameter	Symbol	MATLAB Variable	Value
Number of poles	N_p	<code>spec.Poles</code>	10
Number of slots	N_s	<code>spec.Slots</code>	12
Airgap	g	<code>spec.Airgap_mm</code>	1 mm
Speed (operating cap)	n_{max}	<code>spec.MaxSpeed_rpm</code>	14,400 rpm
Magnet height	t_m	<code>rotorSizer.Hm_mm</code>	3 mm
V-angle	α_v	<code>rotorSizer.Vtilt_deg</code>	78°
Outer bridge thickness	w_{ob}	<code>rotorSizer.Wob_mm</code>	0.5 mm

Table 6: Sizing results – calculated from the choices above

Parameter	Symbol	MATLAB Variable	Value
Rotor diameter	D_r	<code>rotorSizer.RotorOD_mm</code>	50.15 mm
Shaft diameter	D_{ir}	<code>rotorSizer.RotorID_mm</code>	35.58 mm
Stator diameter	d_{st}	<code>rotorSizer.StatorOD_mm</code>	108.8 mm
Stator yoke height	h_{sy}	<code>rotorSizer.StatorYoke-Height_mm</code>	3.97 mm
Stack length	l_e	<code>rotorSizer.StackLength_mm</code>	46.6 mm
Corner speed	n_{base}	<code>spec.CornerSpeed_rpm</code>	12,240 rpm
Phase current	I_{pk}	<code>hypot(motorGeometry.Id_A, motorGeometry.Iq_A)</code>	74.2 A (phase peak, eq. 22)
Magnet width (slab)	w_m	<code>rotorSizer.Bm_mm</code>	4.97 mm

Table 7: Values pushed to COMSOL as Global Parameters

Parameter	COMSOL Param	Value	Source	Pushed by
Number of poles	<code>Np</code>	10	Table 5	<code>pushGeometry</code>
Number of slots	<code>Ns</code>	12	Table 5	<code>pushGeometry</code>
Airgap	<code>airgap</code>	1 mm	Table 5	<code>pushGeometry</code>
Speed (structural sweep)	<code>w_rot</code>	14,400 rpm	Table 5	<code>pushGeometry</code>
Rotor diameter	<code>d_r</code>	50.15 mm	Table 6	<code>pushGeometry</code>
Shaft diameter	<code>d_s</code>	35.58 mm	Table 6	<code>pushGeometry</code>
Stator yoke height	<code>h_sy</code>	3.97 mm	Table 6	<code>pushGeometry</code>
Stack length	<code>L</code>	46.6 mm	Table 6	<code>pushGeometry</code>
Phase current (peak)	<code>Ipk</code>	74.2 A	Table 6	<code>pushExcitation</code>

Not currently pushed: magnet height t_m , V-angle α_v , magnet width w_m , and outer bridge thickness w_{ob} have no corresponding `pushGeometry` input – the rotor part’s magnet/bridge dimensions in the `.mph` template stay at whatever was last set by hand in COMSOL Desktop, not synced from `rotorSizer`. This is the same class of gap as the shaft-diameter one fixed above, still open for these four.

3 Part B: Finite Element Analysis and Validation

To validate the Part A results, a simulation loop has been established using a MATLAB interface. The objective is to verify the results and make necessary adjustments to the design parameters, taking the simulation results as more accurate than the analytical model.

3.1 Electromechanical Power Modeling

Since the motor is not 100% efficient, we represent the electrical input power (P_{elec}) relative to the mechanical shaft power (P_{mech}) through the overall efficiency (η).

$$P_{elec} = \frac{P_{mech}}{\eta} \quad (23)$$

The electrical power for a 3-phase system is defined as:

$$P_{elec} = \frac{3}{2} V_{peak} I_{peak} \cos(\phi) \quad (24)$$

Here, V_{peak} and I_{peak} refer to *phase* sinusoidal peak quantities. Using SVPWM, a common approximation for the maximum achievable fundamental phase voltage is $V_{peak} \approx V_{dc}/\sqrt{3}$.

Rearranging for the current limit validation, and plugging in the peak power target $P_{mech} = 28$ kW, this project’s DC-link voltage $V_{dc} = 515$ V, $\eta = 0.92$ and $\cos(\phi) = 0.90$:

$$I_{peak} = \frac{2 \cdot P_{mech}}{\sqrt{3} \cdot V_{dc} \cdot \eta \cdot \cos(\phi)} = \frac{2 \times 28 \text{ kW}}{\sqrt{3} \times 515 \text{ V} \times 0.92 \times 0.90} \approx 75.8 \text{ A} \quad (25)$$

3.2 Simulation Framework

In `main.m`, a single driver class, `ComsolPrebuiltInterface` (`RUN_COMSOL_PREBUILT`), takes the `MotorGeometry` built from the converged sizing results (Section 2.2.1) and pushes the eight design values that actually change between design iterations – pole/slot count, air gap, stator yoke height, rotor diameter, shaft (rotor bore) diameter, stack length, and the rotation speed the structural sweep runs at ($w_{rot} = n_{max}$) – as Global Parameters into a pre-built COMSOL AC/DC Application-Library model, then rebuilds only the geometry sequence. Its read-only template (`interior_pm_motor_stress_analysis_original.mph`) is never written to; results save to a separate output file. Pushing parameters into a template this way avoids the meshing/physics setup overhead of a from-scratch geometric redraw on every design iteration. Study results are cached by design point (`ComsolPrebuiltInterface.runStudyCached`, `COMSOL_models/cache/`): re-running `main.m` at an unchanged design point reuses the previous ≈ 20 -minute coupled EM/structural solve instead of repeating it, while a genuinely new design point still triggers a fresh solve automatically.

Exercising this pipeline end-to-end for the converged design point (Table 7) gives the results in Table 8. The FEM-predicted average torque, 8.48 Nm, comes in 13.5% below the 9.8 Nm analytical target – consistent with, and roughly the same order as, the flux-linkage shortfall already flagged in Section 2.2: since the converged Ψ_{PM1} falls short of the target the analytical torque sizing assumes, that sizing is itself optimistic, and the FEM, seeing the true (lower) flux at the same pushed current ($I_{pk} = 74.2$ A, Table 7), produces correspondingly less torque.

Torque ripple is a modest 4.9%. The coupled structural solve puts peak von Mises stress at 63.0 MPa – 13.7% of $\sigma_{y,lam} = 460$ MPa (Section 2.2.1) – and peak displacement at $69\text{ }\mu\text{m}$, both comfortably within margin. The FEM stress is notably higher than the analytical bridge-only check (8.33 MPa, Section 2.2.1): the FEM captures the full 2D stress field (geometric concentrations, electromagnetic force contributions) rather than just the idealized centrifugal-load bridge model, so this is expected and not a contradiction.

Table 8: Coupled EM/structural transient study results (ComsolPrebuiltInterface.resultsSummary), converged design point

Result	Value
Average axial torque (rmm.Tark_1, Arkkio method)	8.48 Nm
Torque ripple	4.9%
Peak von Mises stress	63.0 MPa (13.7% of $\sigma_{y,lam}$)
Peak displacement	0.069 mm

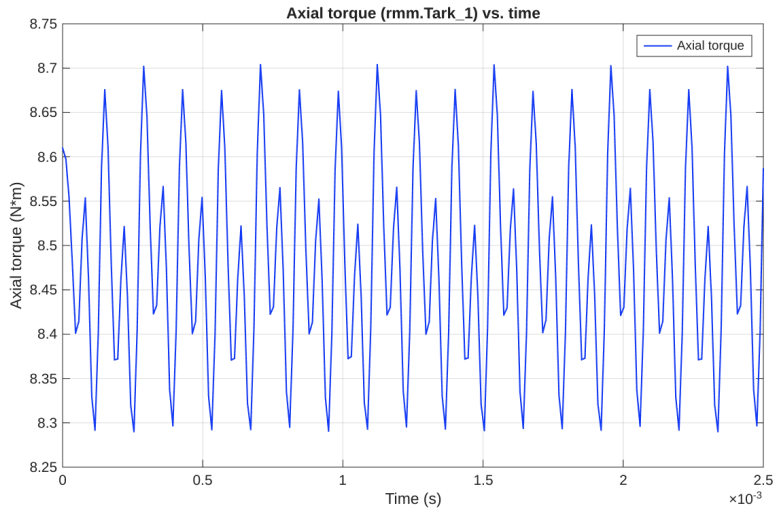


Figure 11: Axial torque (`rmm.Tark_1`) over the time-dependent sweep.

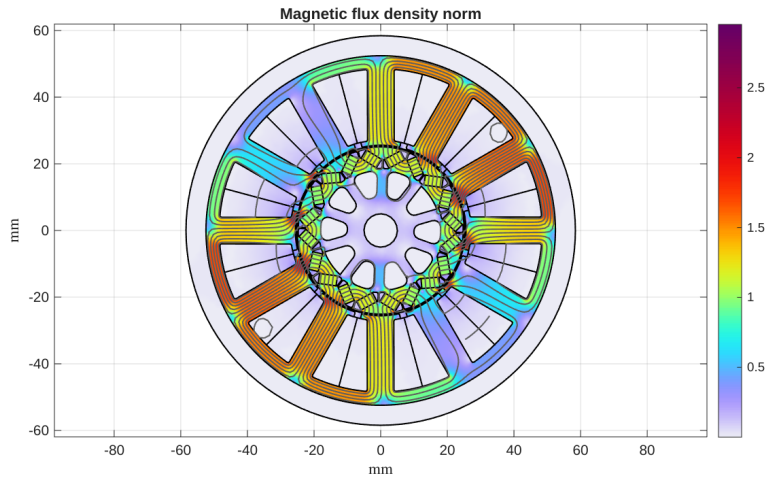


Figure 12: Magnetic flux density norm with field lines, at the swept operating point.

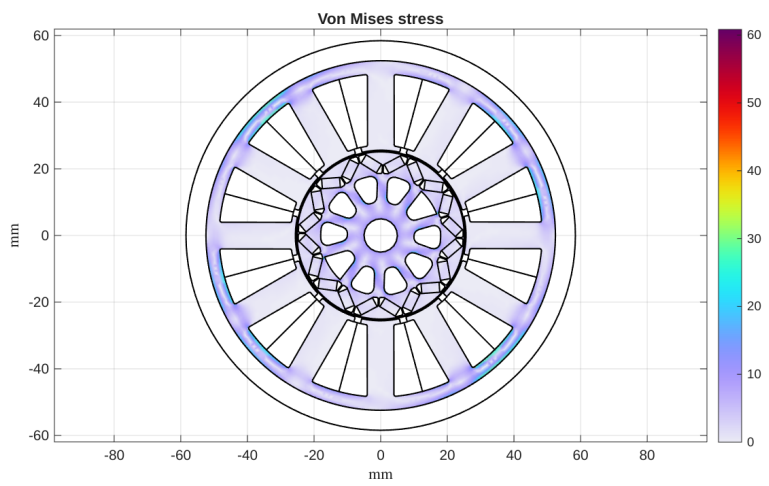


Figure 13: Von Mises stress distribution from the coupled structural solve.

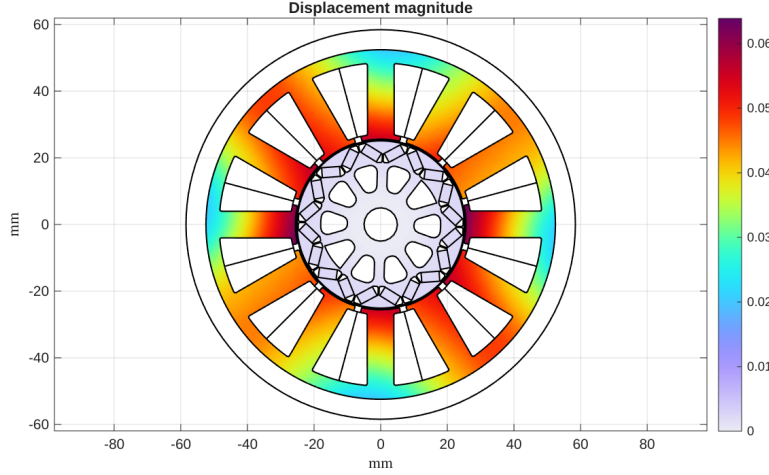


Figure 14: Displacement magnitude from the coupled structural solve.

3.3 Energy Efficiency Map

`EfficiencyMapSizer.m` builds a rough analytical loss model directly from the converged `IPMRotorSizer` geometry and winding data, sanity-checked at the rated point against the same current pushed into the FEM above, and sweeps it over the achievable torque-speed envelope:

- **Copper loss:** phase resistance from a geometric mean-turn-length estimate (twice the stack length plus a semicircular end-turn bridging one slot pitch on each end, appropriate for this design's non-overlapping, single-tooth-wound coils, Section 2.2), evaluated at an assumed 100 °C hot winding temperature. This gives $R_s \approx 604 \text{ m}\Omega/\text{phase}$ over a 1.22 kg stator core (teeth+yoke).
- **Core loss:** a two-term (hysteresis+eddy) Steinmetz fit calibrated to the M235-35A lamination's single datasheet point ($P_{1.5/50} = 2.35 \text{ W/kg}$ – literally what "235" means in the EN 10106 grade name), extrapolated up to this design's much higher electrical frequency ($f_c = 1020 \text{ Hz}$, a $20\times$ extrapolation past the 50 Hz reference point) – flagged as the map's single biggest source of uncertainty; treat core-loss numbers as order-of-magnitude, not precise.
- **Excluded:** mechanical (windage/bearing) losses – no validated model at this design stage.

At the rated point (9.8 Nm, $n_{base} = 12,240 \text{ rpm}$, $I_{pk} = 74.2 \text{ A}$ – the same current validated by FEM above), this gives $P_{cu} \approx 4.99 \text{ kW}$, $P_{fe} \approx 0.33 \text{ kW}$, and an efficiency of $\approx 70\%$. This is markedly lower than the $\eta = 0.92$ assumed in Section 3's electromechanical power modeling, and traces directly to the same flux-linkage shortfall discussed throughout Part A and Section 3.2: with Ψ_{PM1} under target, more current ($I_{pk} = 74.2 \text{ A}$, eq. 22) is needed to produce the same torque than a fully-fluxed design would need, which raises I^2R loss directly. Closing the leakage-model gap (README.md's "Known issues" section) is therefore not just a torque/flux-linkage fix – it is the single highest-leverage change for this design's actual efficiency.

Figure 15 sweeps this loss model over the full torque-speed grid ($T \in [0, 9.8] \text{ Nm}$, $n \in [0, 14,400] \text{ rpm}$, the design's own continuous rating and inverter-limited speed cap), with $I_d = 0$ below corner speed (matching Section 2.2.1's own corner-point assumption) and a simplified voltage-limited flux-weakening solve above it. The narrow infeasible band immediately above corner speed is a direct, honest consequence of the same flux-linkage shortfall: at this design's actual (low) Ψ_{PM1} , sustaining full torque needs more current than the voltage budget allows

once speed rises even slightly, so this map’s flux-weakening range is narrower than the $1.18\times$ ratio Section 2.2 targets. The assignment’s peak-torque (5s, 21.5 Nm) and spec max-speed (20,000 rpm) targets are marked for context only – neither is evaluated by this continuous-duty loss model.

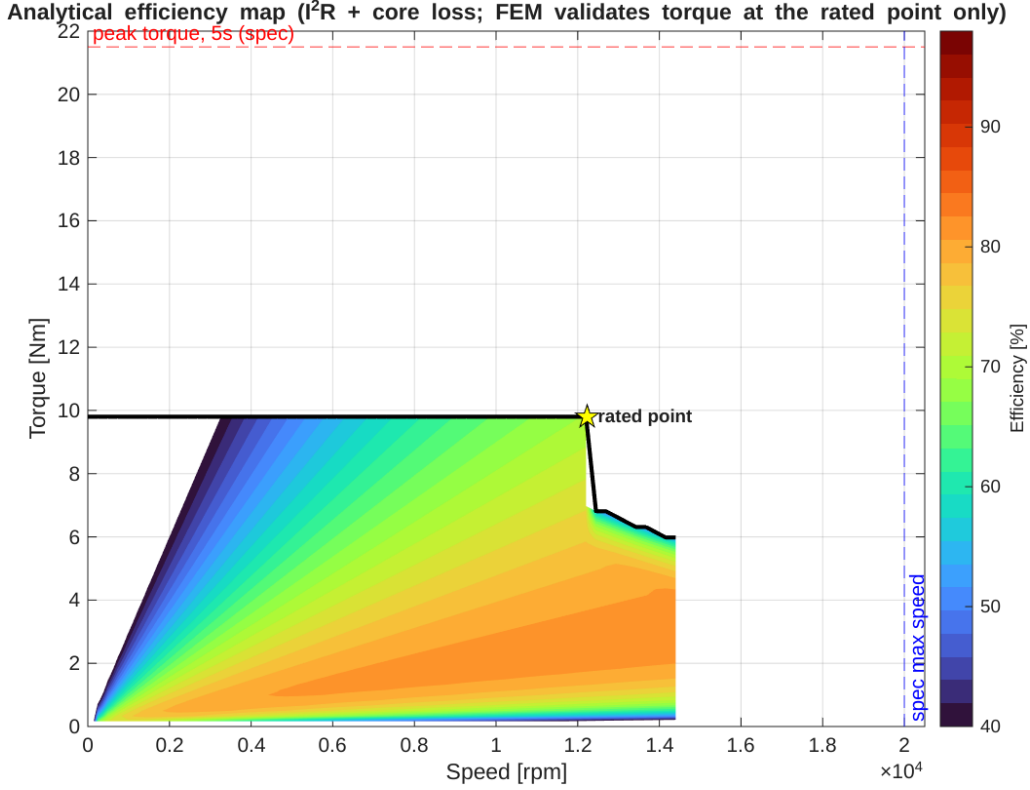


Figure 15: Analytical efficiency map over the torque-speed envelope (EfficiencyMapSizer.plotMap). Black line: achievable envelope. Star: rated design point.

4 Thermal and Mechanical Analysis

A critical design constraint is the existing **4l/min liquid cooling loop**, originally sized for the current motor’s 12.4kW rating. The mechanical side of this section is already covered by full FEM in Section 3.2 (peak von Mises stress and displacement, Table 8); this section covers the thermal side, which stops short of a full thermal FEM or lumped-parameter model in this design iteration.

The analytical loss model from Section 3.3 puts total loss at the rated point at $P_{cu} + P_{fe} \approx 5.32$ kW (4.99 kW copper, 0.33 kW core) against an ≈ 12.6 kW mechanical output (Table 4) – a substantial heat load, dominated by copper loss, and itself inflated by the same flux-linkage shortfall discussed throughout this report (Sections 2.2, 3.3). Whether the existing 4l/min loop can hold this load within the magnets’ demagnetization limit and the winding insulation’s temperature class depends on convective/conductive thermal resistances not modeled here; sizing a lumped-parameter or thermal-FEM model against this loss figure is the natural next step before the design can be considered thermally validated. The 140 °C PM operating temperature already assumed in Section 2.2 (and the resulting need for a high-temperature-stable magnet variant) reflects an expectation that this loss level runs hot, not a validated steady-state result.

5 Conclusion

Starting from the current 10-pole/12-slot DD5-14-10-POW motor and its inverter-limited 1.1 flux-weakening ratio (Section 1.2), Part A defined boundary requirements (Table 2) and, keeping the pole/slot count for its proven cogging-torque and winding benefits (Section 2.2), sized a V-shape IPM rotor targeting $L_q > L_d$ for added reluctance torque. Two independent Esson's-rule estimates (Sections 2.2.1) bracket a feasible bore/stack-length envelope inside the 120 mm/110 mm boundary, and the full Di Gerlando & Ricca sizing procedure (`IPMRotorSizer`) converges end-to-end for this design point, giving a complete geometry, winding, and rated operating point (Table 4) together with a rotor-bridge stress check that is comfortably safe at the 14,400 rpm operating cap (Section 2.2.1).

Part B (Section 3) exercised this pipeline end-to-end: `ComsolPrebuiltInterface` pushed the converged design into the prebuilt COMSOL model and ran the coupled EM/structural transient study, giving 8.48 Nm average torque (4.9% ripple), 63.0 MPa peak von Mises stress, and 0.069 mm peak displacement (Section 3.2, Table 8) – structurally safe with margin, though the torque undershoots the 9.8 Nm analytical target for the reason discussed below. An analytical loss model (Section 3.3) additionally swept the full torque-speed envelope, giving the energy efficiency map and a quantified rated-point efficiency of $\approx 70\%$.

Two related open items should be resolved before the design is considered converged: (1) the no-load leakage constant inside `IPMRotorSizer` is calibrated to the reference paper's larger pole pitch and underestimates leakage by roughly 4–6 $\times$ at this project's tighter 10-pole/12-slot geometry (README.md's "Known issues" section), which is the most likely cause of the required flux linkage $\Psi_m \approx 0.0426$ Wb (Section 2.2) not yet being met by the converged $\Psi_{PM1} = 0.0176$ Wb – and, now quantified, the direct cause of the FEM torque shortfall (Section 3.2) and the $\approx 70\%$ rated-point efficiency (Section 3.3), since hitting the intended torque with too little flux means drawing more current than planned, at a direct I^2R cost; and (2) the resulting stator outer diameter ($D_{es} = 108.8$ mm) still exceeds the old motor's own 89.9 mm stator-core OD (Section 1.1) by about 19 mm, though it remains within the 120 mm boundary requirement including cooling. Closing the leakage-model gap first is the natural next step, since it directly affects all three figures.

References

- [1] ACH Magnets, Inc. N48 sintered neodymium magnet datasheet. <https://datasheets.globalspec.com/ds/ach-magnets/n48/5779689f-9ede-4f4b-b358-155fbaa0cfb0>.
- [2] AMK. Motor Datasheet: DD5-14-10-POW (A2370DD), Nov. 27 2018.
- [3] Arnold Müller GmbH & Co. KG (AMK). Mechanical drawing: Dd5-14-pow-19000, formula student (a2370, drawing no. 12703-01260), Oct. 29 2014. Rev. 4, 2015-03-30.
- [4] A. Di Gerlando and C. Ricca. Design modeling and sizing equations of v-shape IPM motors. In *2022 International Conference on Electrical Machines (ICEM)*, 2022.
- [5] Ayman M. El-Refaie. Fractional-slot concentrated-windings synchronous permanent magnet machines: Opportunities and challenges. *IEEE Transactions on Industrial Electronics*, 57(1):107–121, 2010.
- [6] Thomas A. Lipo. *Introduction to AC Machine Design*. IEEE Press / Wiley, 2017.
- [7] Mohamed Y. Metwly, Ahmed Hemeida, Ayman S. Abdel-Khalik, Mostafa S. Hamad, and Shehab Ahmed. Design and multi-objective optimization of a 12-slot/10-pole integrated obc using magnetic equivalent circuit approach. *Machines*, 9(12):329, 2021.

- [8] Luca Peretti. Lecture 6 - design process of rotating electrical machines, 2026. EJ2223 course material, KTH Royal Institute of Technology.
- [9] Lei Xu. Indirect analytical modeling and analysis of v-shaped pm synchronous machine. IEEE Access, 2019.
- [10] Z. Q. Zhu and D. Howe. Influence of design parameters on cogging torque in permanent magnet machines. *IEEE Transactions on Energy Conversion*, 15(4):407–412, 2000.