

Features

- Compact, streamlined one-piece smart toilet with integrated personal cleansing
- Compact elongated bowl offers added comfort while requiring less space
- Dual-flush offers a choice of .92 or 1.32 gpf (3.5 or 5.0 lpf)
- Fully skirted trapway simplifies cleaning
- Quiet-Close™ elongated lid and seat prevents slamming
- Stainless steel wand offers adjustable spray shape, position, water pressure, temperature, pulsate, and oscillate functions
- Front and rear wash modes provide warm water for cleansing
- Self-cleaning function uses UV light to automatically sanitize the wand surfaces
- Motion-activated, hands-free opening/closing of cover
- Bowl is automatically misted prior to use for more effective rinsing while flushing
- Heated seat with adjustable temperature settings
- Warm-air drying system
- Automatic deodorization system
- LED lighting illuminates the bowl to serve as a nightlight
- Energy Save feature monitors usage and adjusts heated seat settings to save energy
- Includes complete toilet and seat, supply stop valve, braided inlet supply hose, power cord, and remote control
- Mounting hardware is completely concealed, giving a sleek, seamless look that is easy to clean
- Automatic flushing after every use; flush can also be controlled by the remote control or backup button

Installation

- Standard 12" (305 mm) rough-in
- Requires dedicated electrical GFCI circuit (220-240 V, 10 A, 50-60 Hz)




Codes/Standards

None Applicable

KOHLER® India Vitreous and bathing Product Limited Warranty

See website for detailed warranty information.

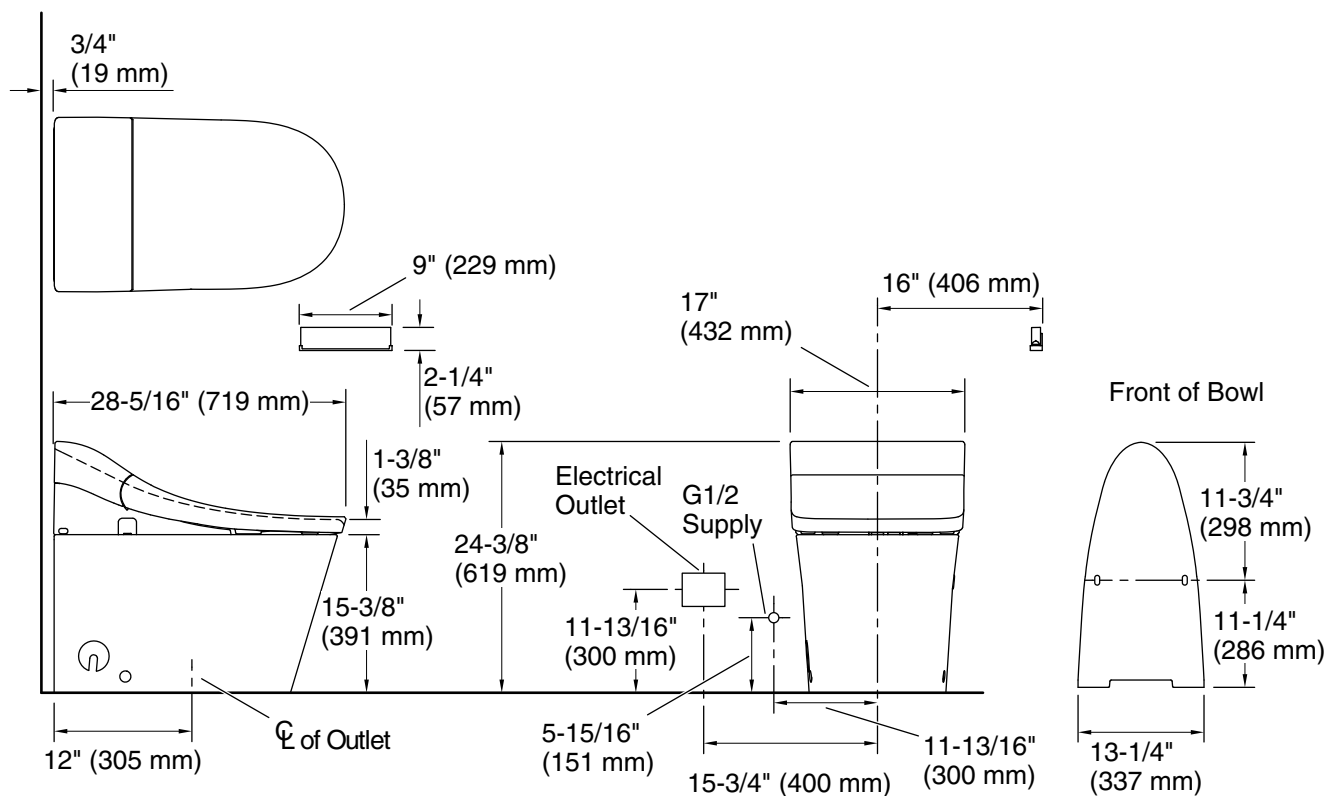

Required Electrical Service

One circuit required.

Cleansing toilet seat: 220-240 V, 10 A, 50 Hz

Technical Information

All product dimensions are nominal.

Toilet type: Floor-mount

Waste Outlet: Floor

Flush type: Class Five

Trap passageway: 1-15/16\" (49 mm)

Rim to water surface: 6-3/16\" (158 mm)

Electrical component rating: Cleansing toilet seat: 220-240 V, 10 A, 50 Hz

Notes

Install this product according to the installation instructions.

The minimum water inlet pressure is 10 Psi (0.07 Mpa) dynamic. The maximum water inlet pressure is 107 Psi (0.74 Mpa).