SHEETAL GROUP

SHEETAL ELECTROTECH PRIVATE LIMITED

Daman Integrated Manufacturing Campus • Mumbai Corporate Office

OFFICIAL OEM CATALOGUE



TURNKEY OEM & ODM SOLUTIONS 2026

Industrial & Commercial Product & Packaging Matrix

Single-roof vertically integrated manufacturing for LED Lighting, SMT Driver Electronics, and Precision Rigid Plastic Packaging. Engineered for leading enterprise brands and national distributor networks.

25+ Years	30,000+	9 In-House	100% Tested
Manufacturing Excellence	Sq. Ft. Plant Area	Turnkey Capabilities	BIS & ISO 9001 Process

FOUR CORE MANUFACTURING DIVISIONS:

1. LED Lighting OEM
Bulbs, Battens, Downlights, Street

2. SMT Electronics
Automated Pick-&-Place, Drivers

3. Rigid Packaging
HDPE/PP Bottles, Jars, Jerrycans

4. CNC Tool Room
In-House VMC, EDM, P20 Dies

PRIMARY INTEGRATED CAMPUS: DAMAN, U.T., INDIA | CORPORATE: MUMBAI

Direct OEM Hotline: +91 93273 45295 / +91 99254 39405 | info@sheetalelectrotech.com

www.sheetalelectrotech.com

TURNKEY MANUFACTURING

The Sheetal Advantage: Single-Roof Manufacturing

With over 25+ years of engineering excellence, Sheetal Electrotech brings raw polymer compounding, automated electronic PCB assembly, die tooling, and finished goods testing under a single coordinated manufacturing campus in Daman.

Direct Factory Pricing

Eliminates 3 to 4 layers of subcontractor markup by executing moulding, electronics and assembly in-house.

' Zero Middlemen

Strict IP & Tool Protection

Enforced NDA contracts, dedicated client tool ownership, and secured digital CAD vaults protect designs.

' 100% Client Ownership

In-House Tool Room Agility

On-site CNC VMC and wire-cut EDM allow tool maintenance and cavity alterations in days, not weeks.

' ±0.01mm Tolerance

9 Verified In-House Manufacturing Capabilities

#	CAPABILITY	EQUIPMENT & INFRASTRUCTURE	APPLICATIONS & OUTPUT
01	**Injection Moulding**	High-tonnage injection machines (up to 250T)	Housings, diffusers, bobbins, engineering plastics (PP, PC, ABS)
02	**SMT Electronics**	Automated high-speed pick-&-place, nitrogen reflow, AOI	Driver boards, linear batten MCPCBs, smart IoT modules
03	**Precision Tool Room**	CNC Vertical Machining Centers, wire-cut EDM, spark erosion	Multi-cavity injection dies, extrusion calibration tooling
04	**Continuous Extrusion**	High-precision profile extrusion lines with cooling tanks	LED batten diffusers, optical profiles, formed tubes
05	**Hollow Blow Moulding**	Continuous extrusion blow moulding with parison wall calibration	Pharmaceutical bottles, chemical jerrycans (50ml to 5L)
06	**Conveyor Assembly**	Sequential balanced flow lines with ultrasonic welding	Turnkey assembled luminaires, blister-packed electricals
07	**Burn-In Aging Carousel**	Cyclic on/off continuous voltage stress testing conveyors	100% infant mortality screening before boxing
08	**Through-Hole Insertion**	Manual ESD-protected insertion stations with wave soldering	Radial/axial capacitors, inductors, heavy transformers
09	**Photometric & BIS Lab**	Integrating sphere, spectroradiometer, 6KV surge generator	Optical efficacy (>100 lm/W), thermal mapping, BIS compliance

Turnkey OEM Execution Roadmap (From Blueprint to Bulk Delivery)

STAGE 1
CAD & BOM Review
DFM feasibility & costing
24-48 Hours

STAGE 2
Tooling & Prototype
In-house CNC & SLA samples
7-15 Days

STAGE 3
Pilot & BIS Testing
Dark room & surge validation
Photometry OK

STAGE 4
Automated SMT
Pick-&-place & wave soldering
Scalable Shifts

STAGE 5
100% Aging & Dispatch
Conveyor burn-in & drop test
Zero Defect

LIGHTING PRODUCTS PORTFOLIO

LED Bulbs & High-Lumen Retrofit Lamps

Engineered with high-power isolated constant current drivers, high-purity aluminium heatsinks, and optical polycarbonate diffusers for superior thermal longevity and >100 lm/W luminous efficacy.

Standard A-Type LED Bulb



3W, 5W, 7W, 9W, 12W, 15W, 18W

- Efficacy: >100 Lumens / Watt
- Base Cap: B22d / E27 Nickel Plated
- Driver: High-Surge 4KV Isolated Driver
- CCT: 3000K / 4000K / 6500K & 3CCT

BIS CRS Certified • 25,000h Life

High-Power Commercial Hammer / T-Bulb



15W, 18W, 24W, 30W, 36W, 40W, 50W

- High Output: Up to 5,250 Lumens
- CCT Spectrum: 3000K / 4000K / 6500K
- Wide Beam: 180°-220° Glare-Free Spread
- Surge Protection: 4KV / 440V Cutoff

Heavy-Duty Thermal Housing

Inverter Emergency AC/DC Bulb



9W & 12W Emergency Modes

- Backup: Up to 4 Hours Battery Backup
- Battery: High-Grade 2200mAh Li-ion
- Auto-Switch: Instant switchover on power cut
- Overcharge & Deep Discharge Protection

Dual AC/DC Sensing Circuit

Smart IoT WiFi / BLE Tunable Bulb



9W & 12W RGB + Tunable White

- Control: WiFi 2.4GHz + BLE Mesh
- Palette: 16 Million RGB Colors
- Tunable CCT: 2700K to 6500K Smooth Dimming
- Ecosystem: Tuya, Smart Life, Alexa, Google

BIS Certified IoT Module

Detailed Technical & Photometric Specifications

MODEL NO	POWER	BASE	LUMENS	VOLTAGE	PF	THD	SURGE	CARTON
SE-BLB-05W	5W	B22 / E27	>500 lm	220-240V	>0.90	<15%	4 KV	100 pcs
SE-BLB-09W	9W	B22 / E27	>900 lm	220-240V	>0.95	<12%	4 KV	100 pcs
SE-BLB-12W	12W	B22 / E27	>1200 lm	220-240V	>0.95	<12%	4 KV	50 pcs
SE-BLB-15W	15W	B22 / E27	>1500 lm	220-240V	>0.95	<12%	4 KV	50 pcs
SE-BLB-18W	18W	B22 / E27	>1800 lm	220-240V	>0.95	<10%	4 KV	50 pcs
SE-BLB-24W-T	24W	B22 / E27	>2400 lm	140-300V	>0.95	<10%	4 KV	30 pcs
SE-BLB-30W-H	30W	B22 / E27	>3000 lm	140-300V	>0.95	<10%	4 KV	20 pcs
SE-BLB-40W-H	40W	B22 / E27	>4000 lm	140-300V	>0.95	<10%	4 KV	16 pcs
SE-BLB-50W-H	50W	B22 / E27	>5000 lm	140-300V	>0.95	<10%	4 KV	12 pcs
SE-EMG-09W	9W AC / 3W DC	B22	>900 lm	140-280V	>0.90	<15%	4 KV	50 pcs

*** CCT Spectrum Available:** 3000K (Warm White), 4000K (Natural / Neutral White), 6500K (Cool Daylight) & 3CCT Tunable Driver across all models.

LINEAR ILLUMINATION PORTFOLIO

LED Battens & Continuous Profile Systems

Manufactured using continuous in-line optical polycarbonate extrusion dies and automated pick-and-place linear MCPCB lines. Features anti-yellowing UV diffusers and high-voltage sustained surge immunity.

Slim Polycarbonate Batten (PC Series)

18W, 20W, 22W, 24W | Length: 4 Feet (1200 mm)

Sleek, lightweight all-polycarbonate co-extruded batten for domestic, commercial retail, and office corridors. Zero shadows and seamless end-to-end illumination.

- Rated 2,200 Lumens @ 20W (102 mA, 220-240V)
- CCT: 3000K, 4000K, 6500K & 7000K (Ultra Day)
- Wide voltage operation: 140V to 300V AC
- Easy snap-fit mounting bracket system
- UV-resistant anti-yellowing PC diffuser



Aluminium Heat Sink Batten (ALU Heavy Series)

28W, 36W, 40W, 50W | Length: 4 Feet & 5 Feet

Industrial-grade batten designed with heavy aircraft-grade 6063 aluminium extrusion back-channel for rapid thermal dissipation in high-ambient factories and warehouses.

- Output: Up to 5,500 Lumens heavy throw
- Heavy aluminium channel for extended LED life
- High power factor: >0.98, THD <10%
- Class-A isolated constant current driver
- Suitability: Textile units, workshops, basements



Compact 1Ft / 2Ft Utility Battens

5W (1 Foot) & 10W (2 Feet)

Compact linear fittings engineered for cove lighting, wardrobe under-cabinet illumination, stairwells, and compact utility areas.

- Compact cross-section for concealed cove pockets
- Available in Warm White (3000K), Neutral (4000K) & Day Light (6500K)
- High color rendering index (CRI >85)
- Pre-wired with quick-connect terminal clips
- Low harmonic distortion (THD <15%)



Linear Batten Technical Specifications

MODEL NO	RATED WATT	LENGTH	LUMEN OUTPUT	BODY HOUSING	SURGE	PACKING
SE-BAT-05W-1F	5 Watt	1 Foot (300mm)	>600 lm	PC Co-Extrusion	4 KV	50 Pcs
SE-BAT-10W-2F	10 Watt	2 Feet (600mm)	>1,100 lm	PC Co-Extrusion	4 KV	40 Pcs
SE-BAT-20W-4F	20 Watt	4 Feet (1200mm)	2,200 lm (102mA)	Slim PC Extrusion	4 KV	25 Pcs
SE-BAT-22W-4F	22 Watt	4 Feet (1200mm)	2,420 lm (108mA)	PC High Efficiency	4 KV	25 Pcs
SE-BAT-24W-4F	24 Watt	4 Feet (1200mm)	>2,640 lm	PC High-Lumen	4 KV	25 Pcs
SE-BAT-28W-AL	28 Watt	4 Feet (1200mm)	>3,080 lm	6063 ALU Extrusion	4 KV	20 Pcs
SE-BAT-36W-AL	36 Watt	4 Feet (1200mm)	>3,960 lm	6063 ALU Extrusion	4 KV	20 Pcs
SE-BAT-40W-AL	40 Watt	4 Feet (1200mm)	>4,400 lm	Heavy ALU High Bay	4 KV	16 Pcs
SE-BAT-50W-AL	50 Watt	5 Feet (1500mm)	>5,500 lm	Heavy ALU High Bay	4 KV	12 Pcs

*** CCT Spectrum Available:** 3000K (Warm), 4000K (Neutral), 6500K (Daylight) & 7000K (Ultra Daylight / CW) • 220-240V AC 50Hz rated driver operation.

ARCHITECTURAL DOWNLIGHTS

Recessed Downlights, Spots & Surface Panels

Engineered with micro-prismatic PMMA light guide diffusers, deep anti-glare reflectors (UGR <19), and thermal engineered aluminium/thermoplastic composite housings.

Slim Recessed Panel Downlight



Round & Square | 3W, 6W, 12W, 15W, 18W

Ultra-thin 15mm low-profile luminaire with side-lit optics for modern false ceilings. Smooth glare-free light distribution.

- Cutout: 75mm to 200mm
- Efficacy: >90 lm/W
- Spring clip mount
- BIS CRS Certified

Deep Anti-Glare Spotlight (COB)



Deep Baffle | 3W, 6W, 9W, 12W

Precision beam angles (24° / 36°) with dark reflector cup. Ideal for retail showrooms, art galleries, and accent ceilings.

- CRI >90 True Color
- UGR <19 Glare Defense
- Adjustable swivel head
- 3000K / 4000K / 6500K

Surface Mounted Ceiling Downlight



Direct Ceiling | 6W, 12W, 18W, 24W

Surface-mount circular and square architectural luminaires for RCC ceilings without false ceiling provisions.

- Surface bracket plate
- Zero cutout required
- Powder-coated finish
- High PF isolated driver

Decorative Ambient Ceiling Lights



Edge Glow | 6W, 12W, 18W

Dual-color edge glow architectural downlights with multi-mode toggle switching for mood and functional lighting.

- Dual-color driver switch
- Modern acrylic trim
- Even light dissipation
- Aesthetic interior look

Architectural Downlights Engineering Specifications

MODEL NO	WATTAGE	FORM FACTOR	CUTOUT	OUTER DIA	LUMEN OUTPUT	VOLTAGE	PACKING
SE-DL-03W	3 Watt	Round / Square	65 mm	85 mm	>270 lm	220-240V	50 Pcs
SE-DL-06W	6 Watt	Round / Square	100 mm	120 mm	>540 lm	140-280V	40 Pcs
SE-DL-12W	12 Watt	Round / Square	150 mm	170 mm	>1,100 lm	140-280V	30 Pcs
SE-DL-15W	15 Watt	Round / Square	175 mm	195 mm	>1,400 lm	140-280V	20 Pcs
SE-DL-18W	18 Watt	Round / Square	200 mm	225 mm	>1,700 lm	140-280V	20 Pcs
SE-SPOT-06W	6 Watt (COB)	Deep Baffle Round	70 mm	85 mm	>550 lm (36°)	140-280V	40 Pcs
SE-SRF-12W	12W Surface	Surface Cylinder	N/A	140 mm	>1,100 lm	140-280V	30 Pcs

OUTDOOR LIGHTING INFRASTRUCTURE

Heavy-Duty IP65 Street & High-Bay Flood Lights

Built with high-pressure die-cast aluminium housings, toughened safety glass, secondary optical distribution lenses, and multi-stage 4KV / 6KV lightning surge protection.

Heavy-Duty IP65 Street Light (Roadway Series)

30W, 50W, 70W, 100W, 120W | Die-Cast Aluminium

Engineered for municipal roads, highways, industrial compounds, and gated townships. Features Type II/III polarized roadway beam optics for uniform illumination without dark zones.

- Efficacy: Up to 120 Lumens / Watt
- Ingress Protection: IP65 / IP66 Waterproof
- Surge Protection: 4KV / 6KV SPD Integrated
- Pole Entry: 40mm to 60mm Spigot Mount
- Corrosion Resistance: Salt Spray Tested 500h



IP65 High-Power Industrial Flood & Well Light

50W, 100W, 150W, 200W | Toughened Glass Front

High-intensity area lighting for building facades, billboards, sports arenas, parking complexes, and industrial yards. High-conductivity finned rear cooling sink.

- High throw beam: 90° & 120° Symmetric Optics
- Mounting: 180° Heavy Heavy Swivel Bracket
- Impact Resistance: IK08 Mechanical Strength
- Driver: Constant Current Isolated 4KV Surge
- Thermal: Safe operation up to 50°C ambient



Outdoor Luminaires Detailed Performance Matrix

MODEL NO	TYPE	RATED WATT	LUMEN OUTPUT	IP RATING	SURGE (SPD)	MOUNTING	PACKING
SE-STR-030W	Street Light	30 Watt	>3,600 lm	IP65	4 KV / 6 KV	40 mm	10 Pcs
SE-STR-050W	Street Light	50 Watt	>6,000 lm	IP65	4 KV / 6 KV	45 mm	8 Pcs
SE-STR-070W	Street Light	70 Watt	>8,400 lm	IP65	4 KV / 6 KV	50 mm	6 Pcs
SE-STR-100W	Street Light	100 Watt	>12,000 lm	IP66	6 KV / 10 KV	50 mm	4 Pcs
SE-STR-120W	Street Light	120 Watt	>14,400 lm	IP66	6 KV / 10 KV	60 mm	4 Pcs
SE-FLD-050W	Flood Light	50 Watt	>5,500 lm	IP65	4 KV	Bracket	10 Pcs
SE-FLD-100W	Flood Light	100 Watt	>11,000 lm	IP65	4 KV / 6 KV	Bracket	6 Pcs

ELECTRONICS & PCB ASSEMBLY

Automated SMT Lines, LED Drivers & Power Strips


Operating state-of-the-art automated Surface Mount Technology lines equipped with intelligent vision pick-and-place, multi-zone nitrogen reflow ovens, and Automated Optical Inspection (AOI).

Isolated Constant-Current LED Driver Modules

5W to 120W | High Surge 4KV & 440V Protection

Engineered specifically for harsh and erratic voltage fluctuations common in rural and industrial grid conditions across India. Tested to survive sustained 440V phase-to-phase faults.

- Power Factor: >0.98 high efficiency
- Total Harmonic Distortion (THD): <10%
- Over-voltage, short-circuit, and thermal foldback
- Compact form factors custom-fitted to luminaire housings

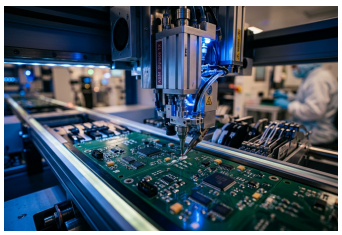


High-Speed MCPCB Surface Mount Assembly

Up to 25,000 Components / Hour Placement

Automated high-speed placement of high-efficiency SMD LED packages (2835, 3030, 5050) onto FR4 glass epoxy and aluminium metal-core circuit boards with micron precision.

- High thermal conductivity aluminium MCPCBs (1.0W/mK - 2.0W/mK)
- Lead-free SAC305 automated solder stencil printing
- In-line 100% camera Automated Optical Inspection (AOI)
- Zero bridging, zero tombstoning solder joint integrity

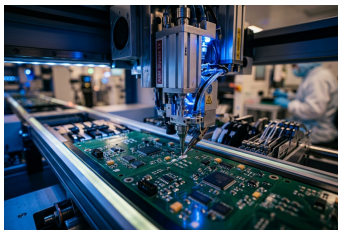

Surge-Protected Multi-Socket Extension Boards

6A & 16A Heavy Duty | Master Switch & Indicator

Precision injection-moulded fire-retardant housings with heavy solid brass/copper busbars, master overload reset breaker, and child safety shutters.

- 3-Socket, 4-Socket, and 6-Socket configurations
- Heavy-duty 100% pure copper power cord (1.5m to 3.0m)
- MOV surge suppression for sensitive electronics & laptops
- In-house moulded flame-retardant virgin polycarbonate casing



Driver Modules & Electrical Parameters

MODEL NO	APPLICATION	INPUT VOLTAGE	OUTPUT VDC	CURRENT	PF	THD	PROTECTION
SE-DRV-09W	9 Watt Bulb	100-300V AC	75-90V DC	100 mA	>0.95	<12%	4 KV
SE-DRV-20W	20 Watt Batten	100-300V AC	60-80V DC	260 mA	>0.98	<10%	4 KV
SE-DRV-36W	36 Watt Batten	100-300V AC	90-120V DC	320 mA	>0.98	<10%	4 KV
SE-DRV-50W	50W Street/Flood	140-300V AC	30-42V DC	1400 mA	>0.98	<10%	6 KV
SE-EXT-4WAY	4-Socket Board	250V AC, 6A	N/A	Max 1500W	N/A	N/A	MOV Spike Suppr.
SE-EXT-6WAY	6-Socket Board	250V AC, 10A	N/A	Max 2500W	N/A	N/A	Overload Breaker

PLASTICS & PACKAGING PORTFOLIO

Blow Moulded Containers, Pharma Bottles & Jars

Comprehensive plastic manufacturing capabilities covering Continuous Extrusion Blow Moulding (EBM), Injection Blow Moulding (IBM), and Injection Moulding for pharmaceuticals, cosmetics, FMCG, and chemicals.

Pharmaceutical Liquid Bottles & Dropper Vials

50 ml to 500 ml | Pharma Grade HDPE / LDPE

Manufactured under clean hygienic conditions using virgin food and medical grade polymers. Precision neck calibration ensures 100% leak-tight seal with induction wads, tamper-evident caps, and dropper plugs.

- High chemical resistance and dimensional uniformity
- Standard neck finishes: 20mm, 24/410, 28/410, 32mm
- 100% in-line pressure decay leak testing
- Suitable for syrups, suspensions, and sanitizers



Industrial & Chemical Jerrycans / Containers

1 Litre, 2 Litre, 5 Litres | High-ESCR HDPE

Heavy-duty industrial containers designed for agro-chemicals, lubricants, pesticides, and cleaning reagents. Multi-point parison wall thickness control ensures structural strength and drop-test survival.

- UN-Drop test compliant heavy-wall construction
- Integrated ergonomic sturdy carrying handles
- Tamper-evident vented or induction-sealed closure options
- High environmental stress crack resistance (ESCR)



Cosmetics Cream Jars & FMCG Containers

30g, 50g, 100g, 250g, 500g | PP / PET / SAN

Double-wall and single-wall luxury cosmetic jars with high-gloss mirror surface finish. Available with custom masterbatch pigments, screen printing, and hot foil stamping.

- Precision threaded screw caps with EPE foam wads
- Aesthetic crystal-clear PET and high-gloss PP options
- Smooth radii corners and zero sink mark surfaces
- Wide-mouth easy dispensing geometry



Packaging Specifications & Polymer Properties

MODEL NO	CONTAINER TYPE	CAPACITY	POLYMERS	NECK / CLOSURE	TYPICAL USE	MOQ
SE-BTL-050	Round Pharma Bottle	50 ml	HDPE / PET	20 mm Tamper-Evident	Syrups, Chemicals	500 Pcs
SE-BTL-100	Round Pharma Bottle	100 ml	HDPE / PET	24/410 Neck	Liquids, Lotions	400 Pcs
SE-BTL-200	Oval Cosmetic Bottle	200 ml	HDPE / PP	24/410 Dispenser	Shampoo, Lotions	250 Pcs
SE-CAN-1000	Square Jerrycan	1,000 ml (1L)	High-ESCR HDPE	32mm Seal Cap	Oils, Reagents	100 Pcs
SE-CAN-5000	Heavy Jerrycan	5,000 ml (5L)	High-ESCR HDPE	42mm Vented Seal	Agro-Chemicals	40 Pcs
SE-JAR-100G	Double-Wall Cream Jar	100 Grams	PP / SAN	Screw Cap + EPE Wad	Cosmetic Creams	200 Pcs

ADVANCED TOOLING & TESTING

In-House Precision Tool Room & Photometric Testing Lab

Maintaining complete sovereign control over tooling assets, mould modifications, and rigorous electrical, photometric, and environmental quality assurance inside our Daman complex.


IN-HOUSE PRECISION TOOL ROOM



Tooling Infrastructure & Capabilities:

- High-Speed CNC Vertical Machining Centers (VMC 3-Axis & 4-Axis)
- CNC Spark Erosion (Die Sinking) & Wire-Cut EDM detailing
- Hardened Tool Steels: P20, DIN 1.2316, H13 & Beryllium Copper
- Precision Machining Tolerance: ±0.01 mm repeatability
- Fast-track 7 to 15-day turnaround from 3D CAD to pilot sample
- Preventive ultrasonic tool cleaning & cavity polishing after runs

IN-HOUSE PHOTOMETRIC & TESTING LAB

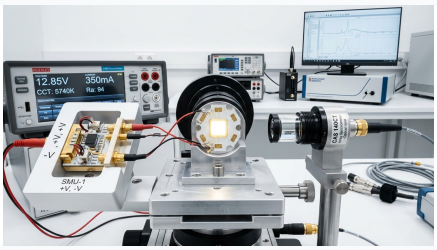

Optical, Surge & Reliability Testing:

- Calibrated Integrating Sphere & Dark Room Spectroradiometer
- Spectral analysis, total lumen flux, CCT chromaticity & CRI mapping
- 6KV Lightning Surge Simulation Generator (IEC 61000-4-5)
- High-voltage cyclic burn-in voltage stress conveyor line
- FLIR thermal imaging & multi-channel thermocouple temperature logs
- In-line pressure decay leak testing for blow-moulded packaging

Regulatory Certifications & Quality Accreditations

BIS CRS Certified

Compulsory Registration Scheme compliant for safety & energy ratings

ISO 9001:2015

Certified Quality Management System with complete lot traceability

ESD-Safe Cleanroom

Grounded workstation wrist straps, conductive flooring & static defense

Transit Drop Tested

Drop-tested master corrugated export packaging ensuring zero field damage

PARTNERSHIP FRAMEWORK

Start Your OEM Project With Sheetal Electrotech

We welcome brand principals, electrical distributors, product developers, and procurement directors to collaborate on customized turnkey manufacturing.

TURNKEY OEM PROCUREMENT & ENGAGEMENT PROTOCOL

STEP 1
CAD / Spec Submission
Share 3D STEP, Gerber, or requirement brief under strict NDA

STEP 2
24h DFM & Costing
Engineering review of moldability, driver topology, and volume pricing

STEP 3
Tooling & Prototyping
In-house CNC tool fabrication and functional SLA pilot samples

STEP 4
Lab & BIS Certification
Full photometric dark room characterization and sample sign-off

STEP 5
Mass SMT & Dispatch
Full-scale conveyor assembly, 100% burn-in aging, and freight dispatch

DAMAN INTEGRATED COMPLEX (PRIMARY PLANT

30,000+ Sq. Ft. Manufacturing & Tooling Campus

Address: Survey No. / Plot C-1/1, 2, 3,
GIDC Industrial Area,
Daman - 396215, U.T., India

Key Facilities On-Site:
- SMT Cleanroom Lines & Wave Soldering
- High-Tonnage Plastic Injection Moulding
- Continuous Profile Extrusion Lines
- CNC Tool Room & Spark Erosion EDM
- Photometric Dark Room Integrating Sphere

MUMBAI CORPORATE HEADQUARTERS

Corporate Affairs & Client Liaison Office

Address: 204, Western Edge II,
Off Western Express Highway,
Behind Metro Station, Borivali / Goregaon (East),
Mumbai - 400066, Maharashtra, India

Logistics Connectivity:
- 18 km from Vapi Railway Junction
- Direct access to NH-48 Mumbai-Surat Corridor
- 160 km from Nhava Sheva (JNPT) Container Port
- Surat Airport: 125 km | Mumbai Airport: 165 km

Direct Engineering Intake & RFQ Desk

Our senior engineering team reviews STEP, IGES, Gerber, and PDF specifications with a guaranteed 4-hour initial response SLA.

DIRECT PHONE HOTLINES:
+91 93273 45295 / +91 99254 39405

OFFICIAL TECHNICAL EMAIL:
info@sheetalelectrotech.com

ONLINE CAD PORTAL:
sheetalelectrotech.com/rfq