



50W Module Technical Data sheet (GaN)

1.RF DATA

Item No.	Spec.	Remarks
1	100-200 MHz	Bandwidth Range+10MHz
2	200-300 MHz	Bandwidth Range+10MHz
3	300-400 MHz	Bandwidth Range+10MHz
4	320-470 MHz	Bandwidth Range+10MHz
5	400-500 MHz	Bandwidth Range+10MHz
6	470-600 MHz	Bandwidth Range+10MHz
7	500-600 MHz	Bandwidth Range+10MHz
8	600-700 MHz	Bandwidth Range+10MHz
9	700-800 MHz	Bandwidth Range+10MHz
10	730-910 MHz	Bandwidth Range+10MHz
11	910-1100 MHz	Bandwidth Range+10MHz
12	1100-1300 MHz	Bandwidth Range+10MHz
13	1300-1500 MHz	Bandwidth Range+10MHz
14	1500-1700 MHz	Bandwidth Range+10MHz

WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN



15	1700-1900 MHz	Bandwidth Range+10MHz
16	1900-2100 MHz	Bandwidth Range+10MHz
17	2100-2300 MHz	Bandwidth Range+10MHz
18	2300-2500 MHz	Bandwidth Range+10MHz
19	2500-2800 MHz	Bandwidth Range+10MHz
20	2800-3000 MHz	Bandwidth Range+10MHz
21	3000-3300 MHz	Bandwidth Range+10MHz
22	3200-3400 MHz	Bandwidth Range+10MHz
23	3300-3500 MHz	Bandwidth Range+10MHz
24	3300-3600 MHz	Bandwidth Range+10MHz
25	3600-3900 MHz	Bandwidth Range+10MHz
26	3900-4200 MHz	Bandwidth Range+10MHz
27	4200-4500 MHz	Bandwidth Range+10MHz
28	5100-5300 MHz	Bandwidth Range+10MHz
29	5100-5400 MHz	Bandwidth Range+10MHz

WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN



30	5150-5350 MHz	Bandwidth Range+10MHz
31	5400-5700 MHz	Bandwidth Range+10MHz
32	5700-5900 MHz	Bandwidth Range+10MHz
33	5800-6000 MHz	Bandwidth Range+10MHz
Working Voltage	28V	26-30V
Working current	≤ 4.0A	output 50W
Analog sweeping speed	Customized 33-900KHz Standard 120 KHz	8μ/s
Output Power (Max)	47±0.5 dBm	50W
Gain (Max)	47±0.5 dB	
Ripple in Band	≤ 2 dB	Peak
Bandwidth adjustment	Yes	By screw
Center adjustment	Yes	By screw
Enable control	Customize	26-28V
Input power (Max)	≤ +10dBm	Optional (If signal source from Subscriber)
Output VSWR	≤1.5	Inside circulator, VSWR protect
High Low Temperature test	Working Temperature	-30~+65℃
	Gain Stability	±1 dB
	Power stability	±1 dB
Power supply Port	Positive and negative lines and switch control	26-28V; GND; (optional:switch control wire)

WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018


PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN



Control line voltage rang	3~28v	H/ON L/OFF
Shell Material	Aluminum with natural color oxide sand blasting	
Vibration Need	Meet the load need of moving vehicle	
RF output connector	SMA-Female	
LED indicator light	Power ON/OFF	
Dimension	115*54*18mm($\leq 1.3G$)	96*40*17mm(1.3~2.8G)
	129*55*23mm(3.3G)	125*50*22 mm (5.2G,5.8G)
Screw Size	M3.2	
Weight	225g	

2. Size

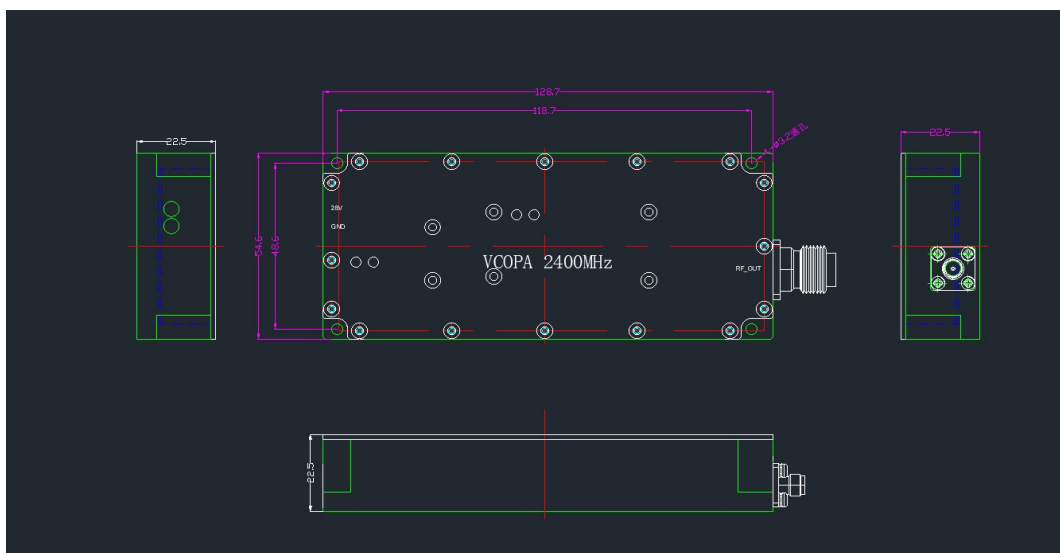

WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349


EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN




3.Voltage&Current




4.Output Power

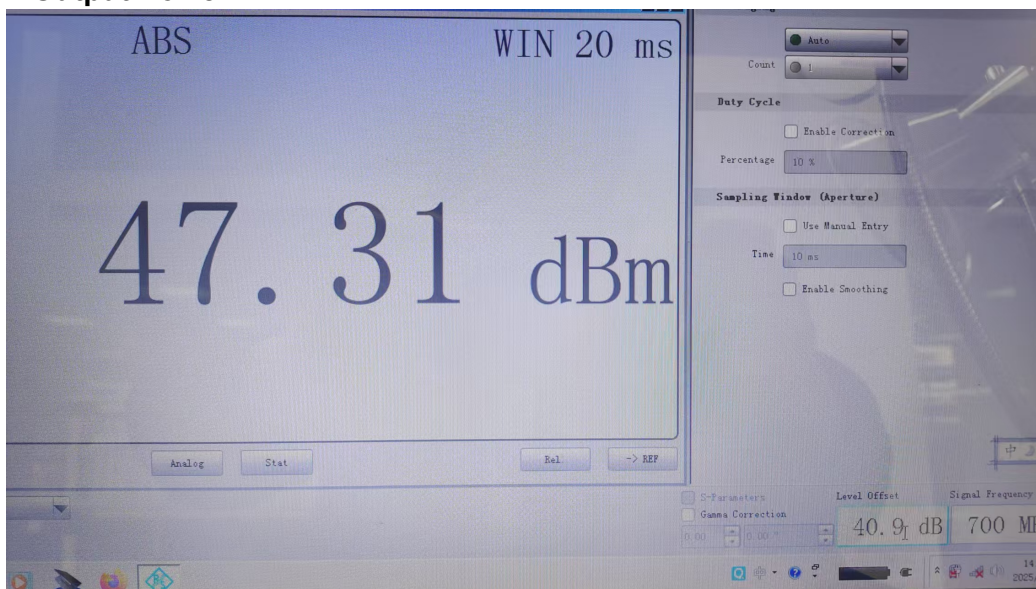

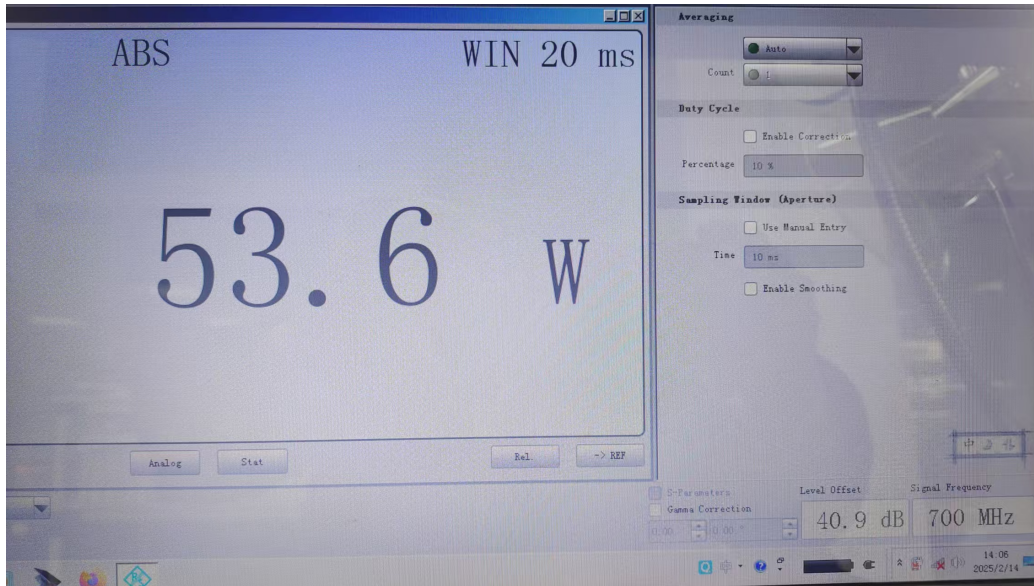


5.

Bandwidth

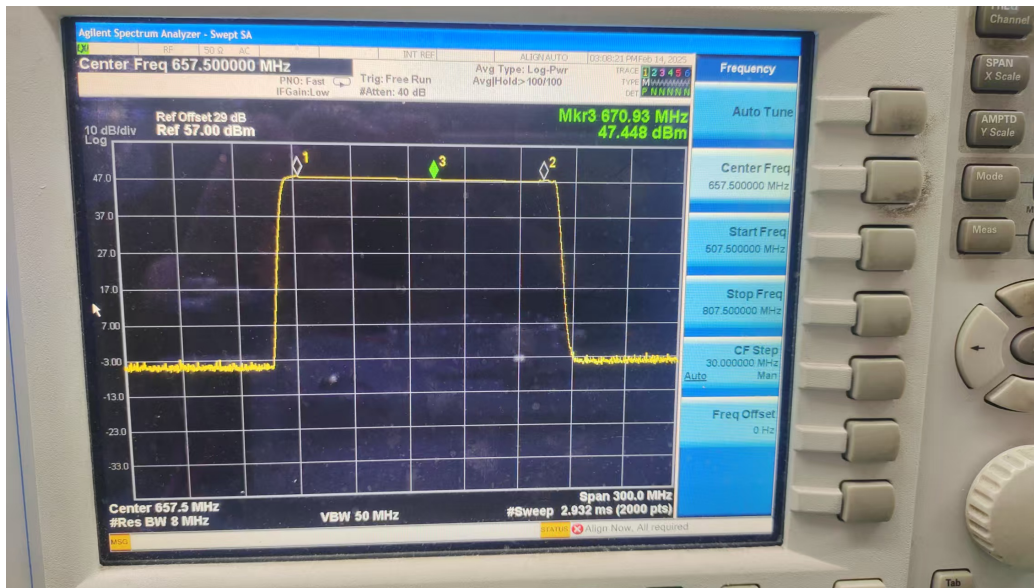




SYNERGY TELECOM PVT LTD

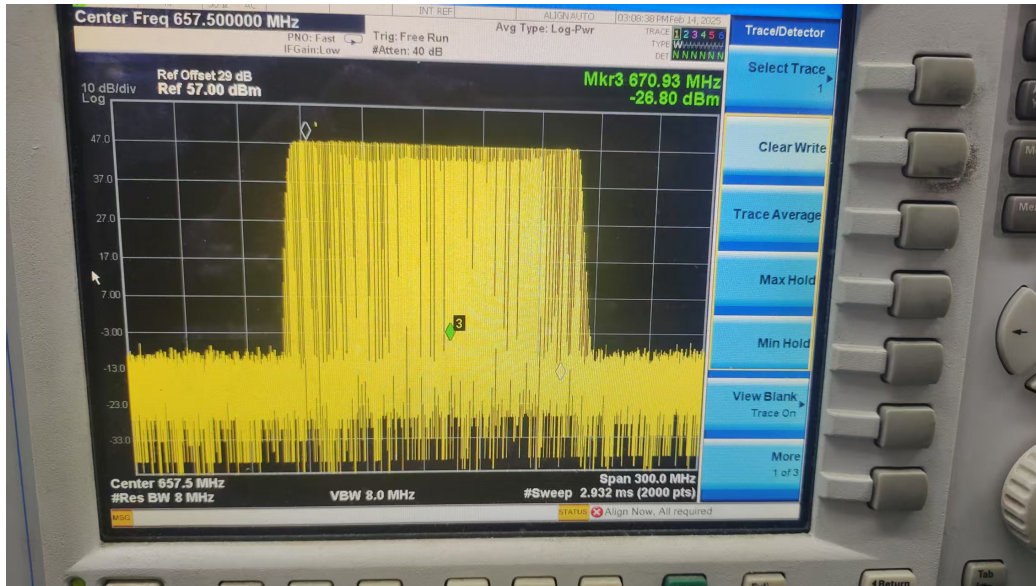

6. Oscilloscope (sweep speed)

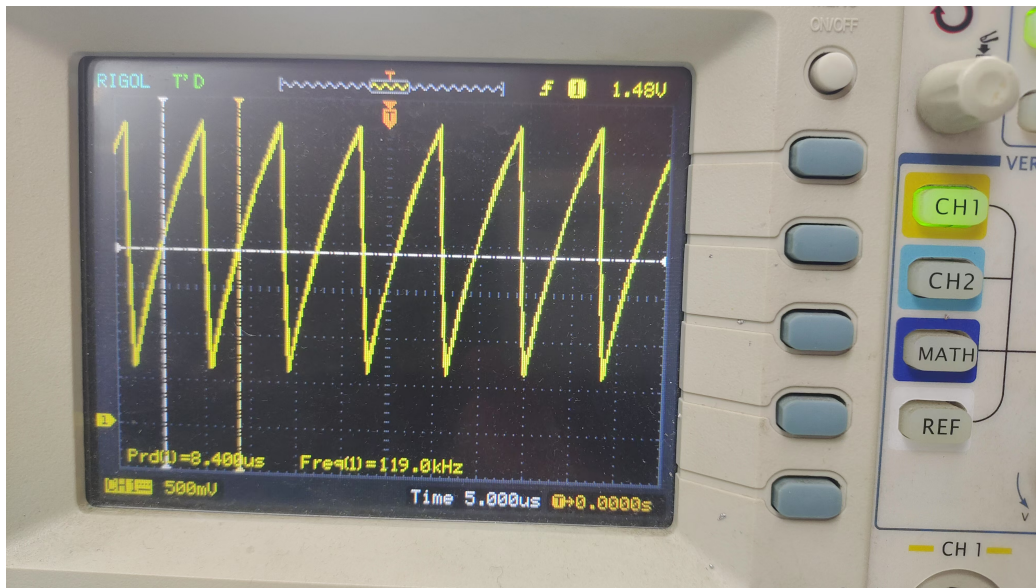

WZ-47, BASEMENT, BUDDHELLA VILAGE VIKAS PURI NEW DELHI - 110018

PH:- 011-28533349, MOB:- 91-7217885948, FAX:- 011-28533349

EMAIL:- INFO@SYNERGYTPL.COM, WEBSITE:- WWW.RFCONNECTOR.IN