




## Soil Moisture Sensor Module

The soil moisture sensor or the hygrometer is usually used to detect the humidity of the soil. So, it is perfect to build an automatic watering system or to monitor the soil moisture of your plants. The sensor is set up by two pieces: the electronic board and the sensor probe with two pads, that detects the water content.

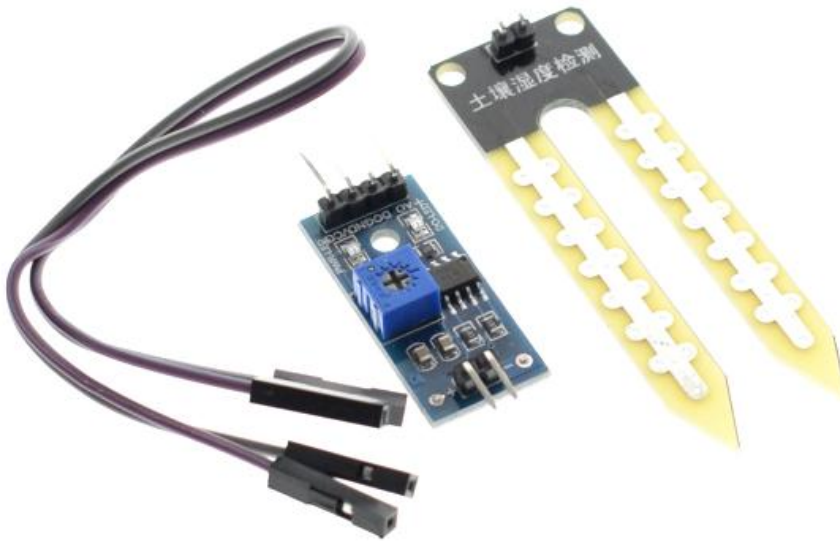


SKU: [SSR1025](#)

### Description:


- Interface: 4-Wire.
- Operating Voltage: 3.3V~5Vdc.
- Output: Digital and Analogue.
- Cable Length: ~21cm.
- Panel PCB Dimension: 3cm x 1.5cm.
- Soil Probe Dimension: 6cm x 3cm.

## Connection Pins Assignment:

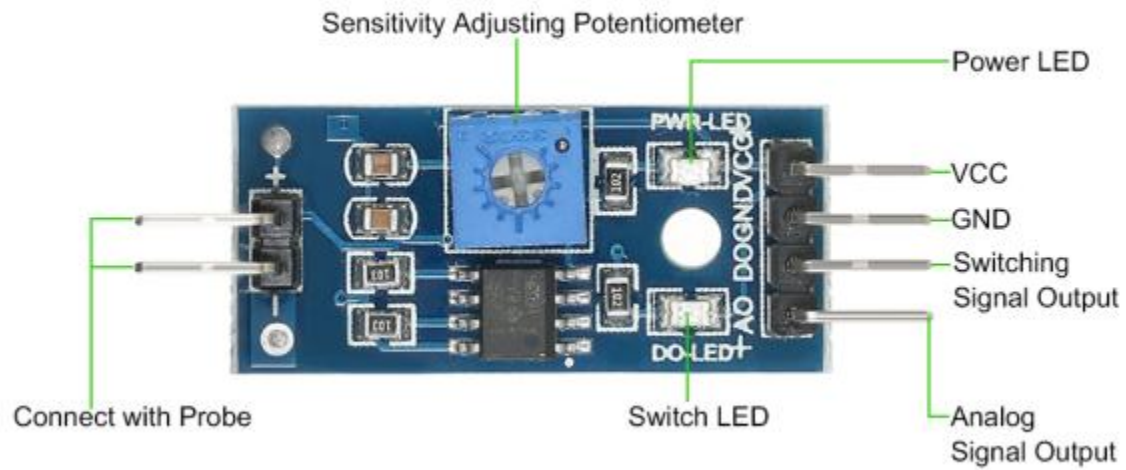

## Mechanical Dimension:

Unit: mm

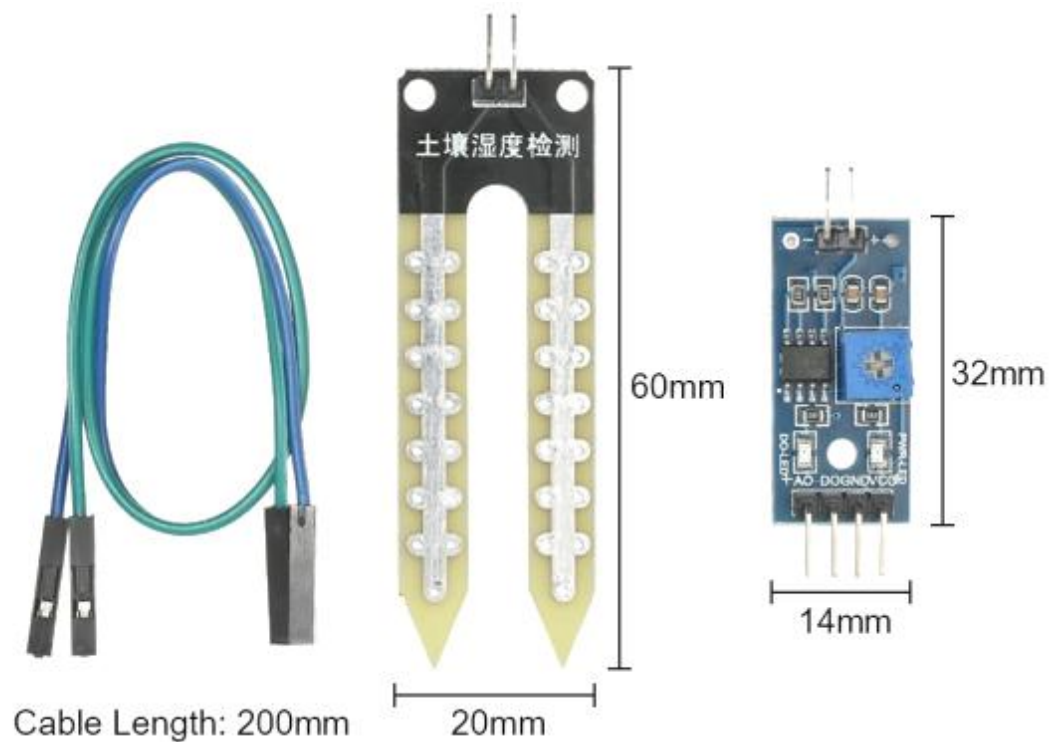


## How does it work?

The voltage that the sensor outputs changes accordingly to the water content in the soil.

When the soil is:


- Wet: the output voltage decreases.
- Dry: the output voltage increases.

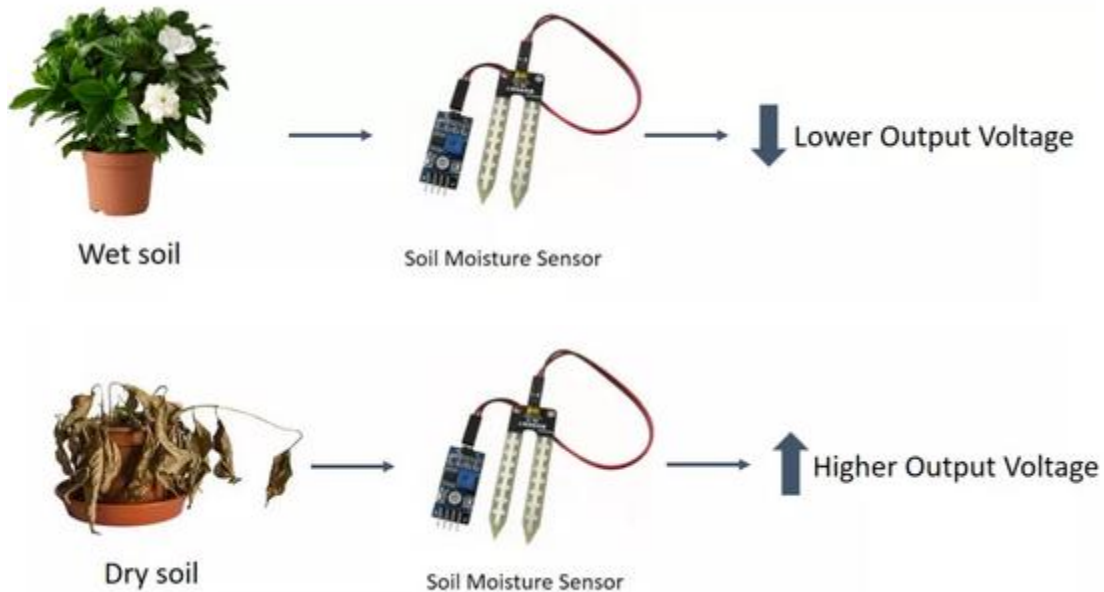

The output can be a digital signal (D0) LOW or HIGH, depending on the water content. If the soil humidity exceeds a certain predefined threshold value, the module outputs LOW, otherwise it outputs HIGH. The threshold value for the digital signal can be adjusted using the on-board potentiometer. The output can be an analog signal and so you'll get a value between 0 and 1023.

## Application Examples with Arduino:

Connect up the sensor to Arduino Uno board as shown in below schematic:

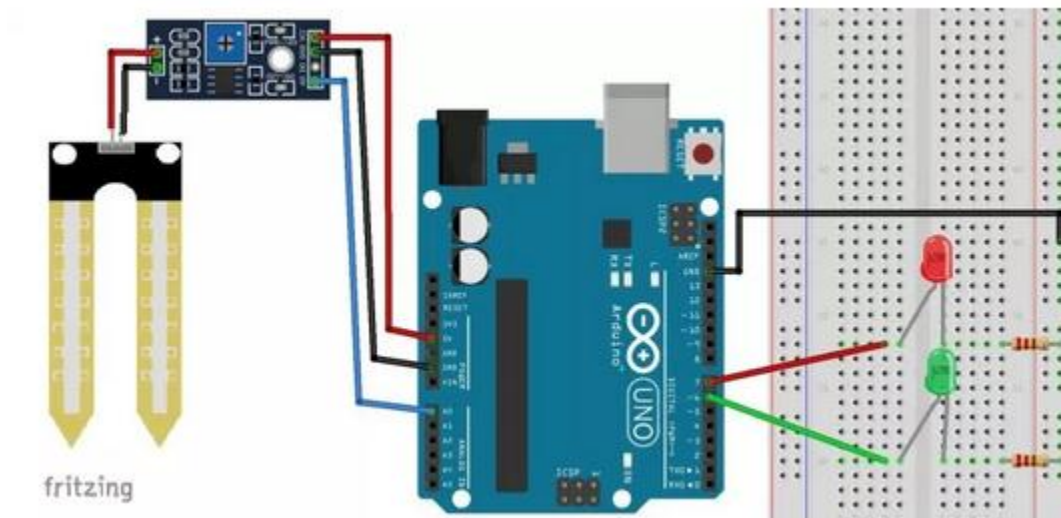

Pin	Wiring to Arduino Uno
A0	Analog Pins
D0	Digital Pins
GND	GND
VCC	5V

## Arduino Sketch:

Upload the following sketch to your Arduino board:

```
/*
// Author      : Handson Technology
// Project     : Soil Moisture Sensor with Arduino Uno
// Source-Code : Soil_Moisture.ino
//=====
*/

int rainPin = A0;
int greenLED = 6;
int redLED = 7;
// you can adjust the threshold value
int thresholdValue = 800;

void setup() {
```

```

pinMode(rainPin, INPUT);
pinMode(greenLED, OUTPUT);
pinMode(redLED, OUTPUT);
digitalWrite(greenLED, LOW);
digitalWrite(redLED, LOW);
Serial.begin(9600);
}

void loop() {
  // read the input on analog pin 0:
  int sensorValue = analogRead(rainPin);
  Serial.print(sensorValue);
  if(sensorValue < thresholdValue){
    Serial.println(" - Doesn't need watering");
    digitalWrite(redLED, LOW);
    digitalWrite(greenLED, HIGH);
  }
  else {
    Serial.println(" - Time to water your plant");
    digitalWrite(redLED, HIGH);
    digitalWrite(greenLED, LOW);
  }
  delay(500);
}

```

Open the Arduino IDE serial monitor to see the values. Then, try your sensor in a wet and in a dry soil and see what happens. When the analog value goes above a certain threshold, a red LED will turn on (indicates that the plant needs watering), and when the value goes below a certain threshold, a green LED will turn on (indicates that the plant is ok).

The moisture sensor allows to monitor the water content in the soil. This is useful if you want to build an automatic watering system. You can also use it to just monitor your plants soil moisture.



# **Handsontec.com**

*We have the parts for your ideas*

---

HandsOn Technology provides a multimedia and interactive platform for everyone interested in electronics. From beginner to diehard, from student to lecturer. Information, education, inspiration and entertainment. Analog and digital, practical and theoretical; software and hardware.




open source  
hardware

HandsOn Technology support Open Source Hardware (OSHW) Development Platform.

*Learn : Design : Share*

*[handsontec.com](http://handsontec.com)*



**The Face behind our product quality...**

**In a world of constant change and continuous technological development, a new or replacement product is never far away – and they all need to be tested.**

**Many vendors simply import and sell without checks and this cannot be the ultimate interests of anyone, particularly the customer. Every part sold on Handsontec is fully tested. So when buying from Handsontec products range, you can be confident you're getting outstanding quality and value.**

**We keep adding the new parts so that you can get rolling on your next project.**



[www.handsontec.com](http://www.handsontec.com)

[Breakout Boards & Modules](#)



[Connectors](#)



[Electro-Mechanical Parts](#)



[Engineering Material](#)



[www.handsontec.com](http://www.handsontec.com)

[Mechanical Hardware](#)



[Electronics Components](#)

P



[www.handsontec.com](http://www.handsontec.com)

[Power Supply](#)



[Arduino Board & Shield](#)

Tools & Accessory



[www.handsontec.com](http://www.handsontec.com)

[Tools & Accessory](#)