Uniform mesh refinement underestimates the frequencies of the DeviceLayout.jl transmon: an independent finite-element cross-check and re-optimization

Robb Walters
Independent Researcher

October 2026

Abstract

The SingleTransmon example of DeviceLayout.jl publishes the qubit and resonator frequencies of an initial and an optimized transmon design, computed with Palace. We reproduce them with Palace to within 0.7% and cross-check Palace with geode-fem, an independently implemented finite-element solver; on shared meshes the two agree to 10^{-4}% on the qubit and to 0.03% on the resonator. On the initial design the qubit of an adaptive Palace run reaches 4.4297 GHz, 7.0% above the published 4.14 GHz, with no extrapolation. Extrapolated at order 1 in the mesh size, the two qubits lie 7–9% and the resonators 2.7% above their published values. Order 1 is the fastest rate the sheet-edge singularity allows, so these estimates lean low. A certified bracket on the island capacitance, read through a circuit model, is consistent with that shift. At the extrapolated frequencies the 3.0/4.0 GHz design needs a capacitor about 19–20% longer than published (about +17% to +39% within the extrapolation band). Counting every Palace run, probes included, Newton's method meets DeviceLayout's stopping criterion in 3 runs with geode-fem's shape derivative, or a scaling law with geode-fem's resonator calibration, in the Jacobian, and in 4 with no geode-fem input at all; PRIMA takes 10 in the same environment.

1 Introduction

Superconducting-qubit layouts are designed by iterating field solves against frequency targets, a loop that QDesignOptimizer (Eriksson et al., 2025) steers with analytic models. DeviceLayout.jl (AWS Center for Quantum Computing, 2025a) builds the layout and its mesh, and Palace (Palace developers, AWS Center for Quantum Computing, 2023), an MFEM-based solver (Anderson et al., 2021), computes the eigenmodes. DeviceLayout's SingleTransmon example (AWS Center for Quantum Computing, 2025b; Peairs and Carson, 2025) runs the loop end to end. It publishes an initial transmon-plus-resonator design at 4.14 and 5.591 GHz and a design optimized for targets of 3.0 and 4.0 GHz, at 3.005 and 3.982 GHz, found with a derivative-free optimizer in nine Palace runs.

Those frequencies come from one discretization, and the example's authors say what that implies. They run Palace at second order "to reduce sensitivity to the discretization" and note that this "does not mean that the eigenfrequencies found by Palace will have converged to their true values" (AWS Center for Quantum Computing, 2025b). This paper measures how far from converged the published frequencies are. Our main result is that the published frequencies are discretization-limited. Palace's adaptive refinement of the initial design reaches a qubit 7.0% above the published value without extrapolation, and its uniform ladders extrapolate to qubits 7–9% above both published values; every uniform level we could afford lies below those estimates. geode-fem reproduces every level of those ladders it can reach to 10^{-4}% on the qubit, and a certified bound on the island capacitance,

read through a circuit model, is consistent with that shift and caps the initial qubit under that model.

The second code is GEODE-FEM ("geode-fem"), a Rust finite-element solver on the Burn tensor framework (Tracel AI, 2024). It solves the same $H(\mathrm{curl})$ eigenproblem as Palace with a separate implementation, and it computes design derivatives, among them the shape derivative of an eigenfrequency. On a mesh of DeviceLayout's initial design, given as the same input file to both codes, geode-fem reproduces Palace's six eigenmodes above 4.5 GHz to $\leq 0.033\%$ and the qubit mode to $5 \times 10^{-5}\,\%$ (Section 4), although Palace bisects some elements on the metal sheets there. On the $h/2$ meshes of Section 5 both codes solve the same discrete problem apart from the junction term, and agree to 0.0000% on the resonator and $10^{-4}\%$ on the qubit. This gives an independent same-mesh cross-check of the Palace/DeviceLayout.jl transmon stack, complementing the earlier checks of Palace by SQDMetal (Sommers et al., 2025) and Ye et al. (2025).

Our contributions are:

- **A refinement study of a published design example**, with a second refinement family and an adaptive run checking the qubit estimate (Section 5).
- **Certified capacitance brackets with the sapphire tensor.** An equilibrated-flux lower bound and a conforming upper bound bracket the island capacitance of the unmodified device in $[79.56, 79.76]$ fF; under a two-node circuit model they cap the initial qubit at 4.477 GHz (Section 6).
- **A re-optimized design, with controls.** At the extrapolated frequencies the 3.0/4.0 GHz design needs $c \approx 1451$–$1466\,\mu$m against the published $1217.678\,\mu$m. Counting every Palace run a method uses, probes included, Newton's method meets DeviceLayout's criterion in 3 runs with the shape derivative or a scaling law in its Jacobian, and in 4 with no geode-fem input at all; Broyden's method takes 5 and PRIMA 10, one trajectory each, in the same environment (Section 7).
- **Same-input-mesh agreement with Palace** on six eigenmodes and the qubit mode, with the 17.49 GHz mode that both codes share traced to the distributed port model (Section 4).

2 Related Work

Cross-checks of Palace. SQDMetal (Sommers et al., 2025) cross-checks a Palace workflow against COMSOL and Ansys with mesh-convergence studies, and Ye et al. (2025) compare a Palace workflow with cryogenic measurement at the ∼0.3% level. Both use models built independently for each tool. Our comparison instead holds the input mesh and the junction model fixed and changes the solver implementation, and it adds a refinement study of a published design: code-to-code comparison and solution verification (Oberkampf and Roy, 2010), not validation against measurement. As of October 2026, neither Palace nor DeviceLayout.jl has a methods publication; we cite their repositories and documentation.

Design sensitivities and qubit-design optimization. Adjoint sensitivity analysis of frequency-domain electromagnetic solvers is an established field (Nikolova et al., 2004), including shape adjoints for Maxwell cavity eigenvalues (Akçelik et al., 2005); Palace exposes no derivatives. In qubit design, SQcircuit (Rajabzadeh et al., 2023) and SuperGrad (Wang et al., 2025) differentiate circuit Hamiltonians, SQuADDS (Shanto et al., 2024) looks designs up in a validated database, and Eun et al. (2023) shape-optimize transmon pads with FEM and a derivative-free optimizer. DeviceLayout's example optimizes with PRIMA (Zhang, 2023), a reference implementation of

Powell's model-based derivative-free methods, which build an interpolation model of the objective from function values; with bounds only it runs BOBYQA (Powell, 2009).

Certified two-sided capacitance bounds. Bracketing a capacitance between complementary energy principles is classical (Specogna, 2011). Our lower bound uses the hypercircle idea of Prager and Synge (1947) with Raviart–Thomas fluxes (Raviart and Thomas, 1977) equilibrated patch by patch (Braess and Schöberl, 2007; Ern and Vohralík, 2015). The method is not new; we apply it to an island capacitance with a floating conductor on a production qubit layout, and we have found no certified capacitance bound in the qubit-design literature.

3 Solvers, Device and Models

3.1 geode-fem

geode-fem assembles first-order Nédélec (Nédélec, 1980) and scalar P1/P2 element operators as batched $[n_{\text{elem}}, k, k]$ tensor operations on Burn. Its eigensolver is shift-invert Lanczos (Lehoucq et al., 1998) on a real symmetric pencil, factorized with faer (Kazdadi, 2026). The two codes share the formulation, the lumped junction port, the materials and the input mesh, and geode-fem follows a specification of Palace's operators (Section 8); assembly, the eigensolver and the linear algebra are separate implementations.

The eigenfrequency derivative used in Section 7 needs no adjoint solve, because the pencil is symmetric: for a simple eigenpair (λ, x) with $x^{\mathsf{T}} M x = 1$,

$$\frac{d\lambda}{d\theta} \;=\; x^{\mathsf{T}}\Big(\frac{\partial K}{\partial \theta} - \lambda\,\frac{\partial M}{\partial \theta}\Big)x, \tag{1}$$

the classical eigenvalue derivative of a symmetric generalized eigenproblem (Fox and Kapoor, 1968). Here K and M include the junction terms of Eq. (2); the junction does not move under the capacitor-length motion of Section 7, so those terms do not contribute. geode-fem evaluates $\partial K/\partial\theta$ and $\partial M/\partial\theta$ along a node velocity $\partial X/\partial\theta$ with a hand-written forward-mode dual-number twin of its Nédélec kernel (tested against it to 10^{-10}); Burn's autodiff tape is not used.

3.2 Device, mesh and materials

The device is DeviceLayout.jl v1.15.0's SingleTransmon example (AWS Center for Quantum Computing, 2025a): a transmon (Koch et al., 2007) with a meander readout resonator and a feedline on sapphire, in a vacuum box (Figure 1). Its two design parameters are the transmon's `capacitor_length` c and the resonator's `total_length` L; the published initial design has $c = 620\,\mu$m and $L = 5000\,\mu$m. The sapphire permittivity is $\mathrm{diag}(9.3, 9.3, 11.5)$ with the optic axis normal to the chip; the configuration rotates the material axes about that normal, which leaves a uniaxial tensor unchanged, so the lab tensor is diagonal. Where a scalar model is used it is the trace average $\bar{\varepsilon} = 10.03$.

Two kinds of mesh appear. The *fixture* is a first-order mesh of the initial geometry written by an earlier DeviceLayout.jl v1.15.0 driver, `reference/julia/generate_transmon_fixture.jl` (22,684 nodes, 133,314 tetrahedra), pinned by SHA-256; Section 4 and the capacitance brackets of Section 6 use it and its refinements, which leave its polygonal surfaces unchanged. For the cross-check and the re-optimization, DeviceLayout meshes each geometry with the two parameters exposed, at first order for the ladders and at its own second order for the runs that reproduce its discretization; curving the faces changes the qubit by at most 0.0001% and the resonator by about 0.05%. On the initial geometry the fixture and DeviceLayout's mesh give the same Palace qubit at h (3.4527 against 3.4520 GHz, 0.02%). PEC is applied on the metal sheets and the box; the readout ports are left open in every eigenproblem except the DeviceLayout-configuration runs of Section 5.

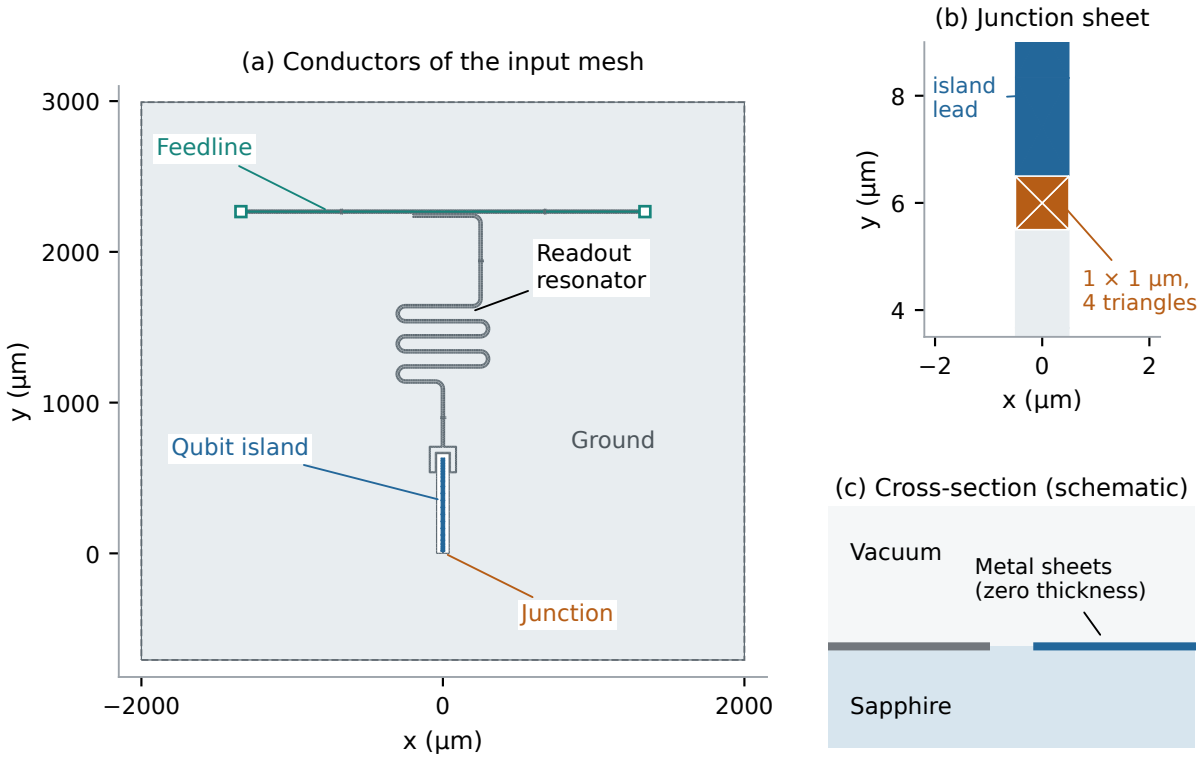


Figure 1: Benchmark geometry, drawn from the SHA-256-pinned MSH 4.1 input mesh of the DeviceLayout.jl v1.15.0 `SingleTransmon` device. (a) Top view of the three metal conductors of Section 6: the feedline (teal), the qubit island (blue), and the ground plane with the meander resonator (gray); squares mark the two readout ports. (b) The $1 \times 1\,\mu$m junction `lumped_element` sheet with its four-triangle triangulation. (c) Material cross-section, schematic and not to scale. Both solvers read this file (22,684 nodes; 133,314 tetrahedra).

3.3 Junction and circuit models

The Josephson junction is a linear lumped element, $L_J = 14.860\,\text{nH}$ in parallel with $C_J = 5.5\,\text{fF}$, on the four-triangle sheet Γ of Figure 1b, as in DeviceLayout's Palace configuration. With port length ℓ and width w the uniform lumped-port construction adds

$$K_{\text{port}} = \frac{\ell}{w\,L_J}\,S_\Gamma \qquad \text{and} \qquad M_{\text{port}} = \frac{C_J\,\ell}{w}\,S_\Gamma \tag{2}$$

to the pencil $(K + K_{\text{port}})x = \omega^2(M + M_{\text{port}})x$, where S_Γ is the isotropic surface matrix on Γ. Palace's `LumpedPort` adds the same terms with the same scalings. geode-fem's rank-1 port-voltage shunt replaces S_Γ by $b\,b^{\mathsf{T}}$, with $b_i = (1/w)\int_\Gamma N_i \cdot \hat{e}\,dS$ the port-voltage functional; it keeps the physical modes to four decimals on the fixture, removes the artifact mode of Section 4, and is the junction model of every geode-fem eigensolve in Sections 5 and 7.

The electrostatic model splits the metal into three conductors: ground with the resonator, the floating feedline, and the island. Its island capacitance with the feedline floating and neutral, $C_\Sigma = C_{ii} - C_{if}^2/C_{ff}$, excludes C_J; it sets the charging energy $E_C = e^2/2(C_\Sigma + C_J)$ of the

transmon (Koch et al., 2007). A two-node circuit connects it to the eigenproblem: a bare qubit $1/(2\pi\sqrt{(L_J + L_s)(C_\Sigma + C_J)})$, with L_s the series inductance of the junction's current path, coupled with coefficient k to the resonator. On the fixture L_s and k were measured on three and two discretizations; extrapolated, they give bands of 0.113–0.125 nH and 0.0227–0.0310, which are estimates.

4 Same-Input-Mesh Agreement With Palace

Both codes read the fixture with the same materials and junction model at first order (Table 1). Palace's source shows that its eigensolver searches above its target, so the six modes above 4.5 GHz come from a run with `Target` = 4.5 GHz and the qubit from one with `Target` = 2 GHz. All six agree to $\leq 0.033\%$ (worst case 0.032%), and the qubit mode to 5×10^{-5} %, with port participation 0.9942 in geode-fem and port EPR 0.99424 in Palace, the energy-participation ratio of the junction, the fraction of the mode's inductive energy stored in it (Minev et al., 2021). Both codes use the isotropic sheet term of Eq. (2) here.

The two codes read the same input mesh but do not solve the same unknowns. Palace cracks each metal sheet, but not the junction sheet, into two sides by duplicating its vertices. Where an edge inside a sheet joins two outline vertices, which are not duplicated, the sides cannot be separated, and Palace bisects the elements on both sides of that edge, in two passes on the fixture ("local bisection for under-resolved interior boundaries" in its log; `palace/utils/geodata.cpp`). Such edges lie where a sheet is one element wide: the 1,007 on the fixture, one per vertex Palace adds, are 741 on the ground-plane sheet that carries the resonator, 252 on the feedline and 14 on the island. The 4,913 added tetrahedra are thus concentrated on the resonator and feedline, though some touch the island. The closer qubit agreement is consistent with where the bisection sits, not explained by it.

Table 1: Eigenmode agreement from the identical input mesh (22,684 nodes, 133,314 tetrahedra), first order in both solvers, junction as the lumped $L_J \parallel C_J$ shunt. geode-fem solves 156,863 Nédélec unknowns (133,108 interior); Palace cracks the metal sheets, bisects 4,913 elements on them and solves 183,891. Both codes are printed to geode-fem's archived three decimals (six for the qubit); Δ is the archived relative difference, computed from Palace's full-precision value. Sources: `benchmarks/transmon_eigen/results.toml` and `benchmarks/transmon_eigen/palace_crack/`.

Mode		geode-fem (GHz)	Palace (GHz)	Δ (%)
qubit	transmon qubit	3.452751	3.452749	0.00005
resonator	readout resonator	5.153	5.151	0.032
mode 2	box/cavity	15.465	15.461	0.029
port sheet	port-sheet artifact	17.490	17.490	0.001
mode 4	box/cavity	18.693	18.692	0.007
mode 5	box/cavity	20.703	20.698	0.026
mode 6	box/cavity	26.088	26.081	0.027

The 17.49 GHz mode is a shared artifact of the isotropic sheet term: the junction patch has one free node whose hat-function gradient carries no port voltage but still stores energy in S_Γ, with Rayleigh quotient $1/(L_J C_J)$, or $f_{LC} = 17.60$ GHz, lowered to 17.49 GHz by the adjacent volume mass; Palace gives it a port EPR of 2.49×10^{-8}. This mechanism is our inference, supported by a synthetic test; the rank-1 shunt removes the mode, and its 0.001% agreement tests only the port operator.

The fixture is coarse. Palace's own refinements of it move the qubit from 3.4527 GHz to 3.9528 GHz at $h/2$ (+14.5%) and to 4.1721 GHz at second order on h (+20.8%), and the resonator

by +6.1% at $h/2$. The agreement above is a code-to-code comparison on one discretization; Section 5 measures the discretization error.

5 The DeviceLayout Cross-Check

The published designs. The DeviceLayout.jl blog (Peairs and Carson, 2025) reports the initial design ($c = 620\,\mu$m, $L = 5000\,\mu$m) at $[4.14, 5.591]$ GHz and the final design ($c = 1217.678\,\mu$m, $L = 7243.955\,\mu$m) at $[3.005, 3.982]$ GHz, reached by PRIMA in nine Palace runs "within 1% of our target frequencies". The example source (AWS Center for Quantum Computing, 2025b) sets the targets to $[3.0, 4.0]$ GHz, works in the variables $x_1 = \sqrt{620\,\mu\text{m}/c}$ and $x_2 = 5000\,\mu\text{m}/L$, and stops when $\text{err} = \frac{1}{2}\sum_m (f_m - t_m)^2/t_m^2 < 10^{-4}$. Its frequencies are computed with Palace on DeviceLayout's mesh at mesh order 2 and solver order 2, with a first-order absorbing far field and two $50\,\Omega$ readout ports.

Reproduction at DeviceLayout's discretization. Palace on DeviceLayout's second-order mesh with the example's configuration file gives $[4.1683, 5.6132]$ GHz for the initial design and $[3.0164, 3.9956]$ GHz for the final one, 0.68% and 0.40% above the published initial pair and 0.38% and 0.34% above the final pair. The same cells with the PEC-box model used everywhere else differ from the configuration-file runs by at most 0.003%.

The ladder and its rate. For each geometry, Palace runs at order 1 on DeviceLayout's first-order mesh h and its uniform refinements $h/2$ and $h/4$ (gmsh's eight-way split, up to 12.6 million unknowns), and at order 2 on h and $h/2$; geode-fem runs at order 1 on h and $h/2$, on the same meshes. Every computed series rises under refinement (Figure 2); this is an observation, not a guarantee. At the edge of a zero-thickness metal sheet the field behaves as $E \sim r^{-1/2}$ (Meixner, 1972), so near the edge the eigenfunctions lie in H^s only for $s < 1/2$, and on uniform meshes the eigenvalue error decays as h^{2s} at any element order (Boffi, 2010), slower than $O(h)$. The order-1 ladders show pre-asymptotic orders of 0.61 (qubit) and 0.70–0.73 (resonator).

Extrapolation rule. The *estimate* is the mean of two extrapolations at order 1 in the frequency, $2f_2 - f_1$: one from the order-1 pair ($h/2$, $h/4$) and one from the order-2 pair (h, $h/2$). Order 1 is the fastest rate the theory allows, so the rule makes the smallest correction consistent with it, and its estimates lean low; for the order-2 pair the order is taken from theory, because two levels give no observed order. The *band* spans six values: those two; the same pairs extrapolated at order 1 in the eigenvalue variable $\lambda \propto f^2$, $\sqrt{2f_2^2 - f_1^2}$, which set the low side; and the same pairs at the observed order, which set the high side. The band is an extrapolation range, not a bound. For the initial qubit, the circuit-model cap of Section 6 trims the band at 4.477 GHz. The rule was fixed after the static route had been computed: extrapolation at the observed order alone, the rule used before, puts the initial qubit at 4.63 GHz, above the circuit-model cap, and the observed-order values are kept only as the band's high side. The agreement of the two routes is therefore a consistency check, not a blind prediction.

Result. The initial qubit extrapolates to 4.444 GHz and the final qubit to 3.265 GHz, 7.3% and 8.7% above the published values; both resonators extrapolate to 2.7% above theirs (Table 2). Every published value lies below its band. Measured against the estimates, DeviceLayout's discretization sits 6.2% and 7.6% low on the two qubits and 2.2% and 2.3% low on the resonators. With no extrapolation, the finest uniform levels already lie 4.1% and 4.7% above the published qubit values. The estimates rest on Palace's order-1 $h/4$ and order-2 levels, which geode-fem did not run. On the

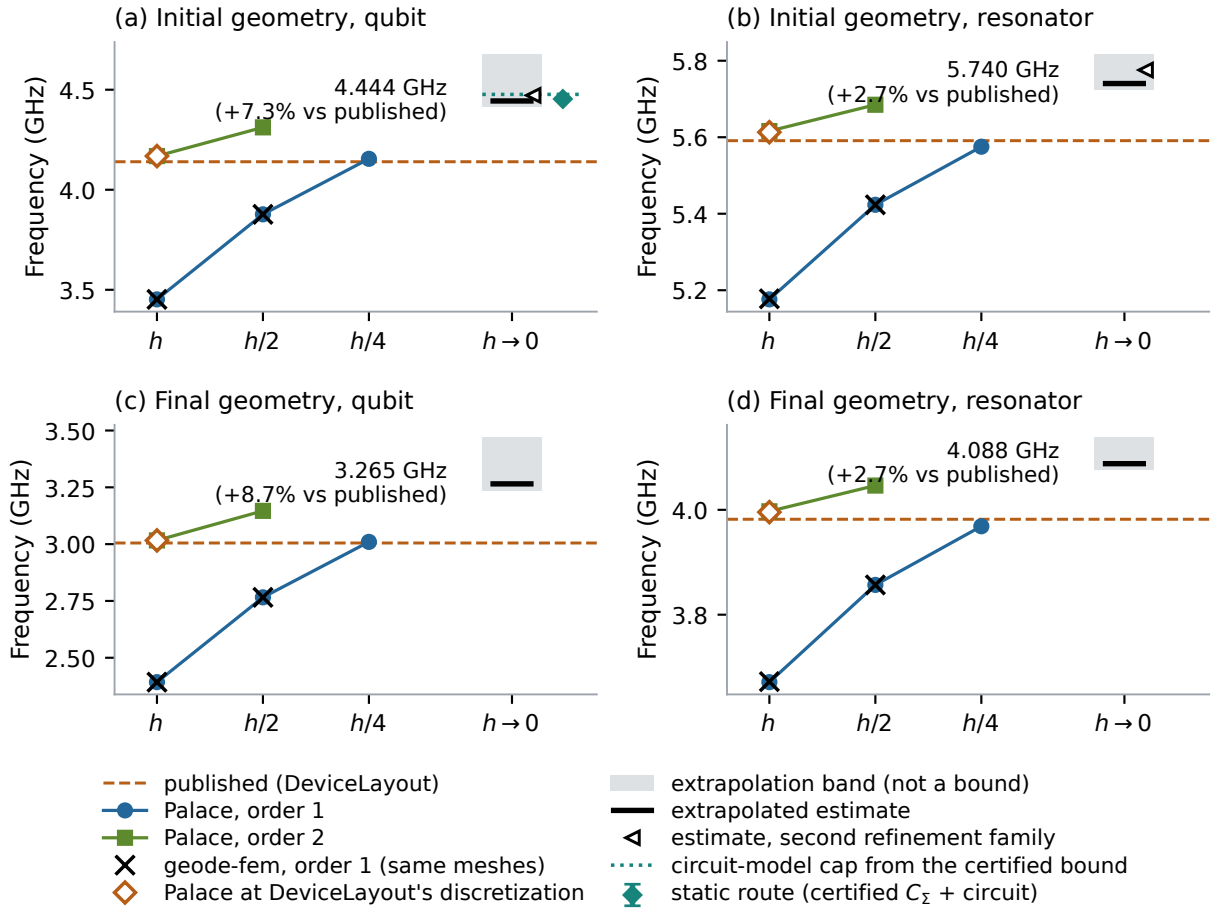


Figure 2: Resolution ladders of the two published DeviceLayout.jl SingleTransmon designs: Palace at orders 1 and 2 on DeviceLayout's mesh h and its uniform refinements, and geode-fem at order 1 on the same meshes (crosses); the open diamond is Palace at DeviceLayout's own discretization, that of the published values (dashed). The "$h \to 0$" column is categorical: the extrapolated estimate with its band and, for the initial geometry, the estimate of the second refinement family (open triangle). In (a), the static route of Section 6 and the circuit-model cap. Sources: `benchmarks/transmon_devicelayout_crosscheck/results.toml` and `benchmarks/transmon_devicelayout_controls/results.toml`.

Table 2: Published frequencies, Palace at DeviceLayout's discretization, and the extrapolated estimates with their bands, in GHz, from the first refinement family. Percentages are relative to the published value. Source: `benchmarks/transmon_devicelayout_crosscheck/results.toml`.

	Published	At DeviceLayout's discretization	Extrapolated estimate	Band
Initial qubit	4.14	4.1683 (+0.68%)	4.444 (+7.3%)	$[4.415, 4.677]^*$
Initial resonator	5.591	5.6132 (+0.40%)	5.740 (+2.7%)	$[5.723, 5.817]$
Final qubit	3.005	3.0164 (+0.38%)	3.265 (+8.7%)	$[3.236, 3.471]$
Final resonator	3.982	3.9956 (+0.34%)	4.088 (+2.7%)	$[4.077, 4.139]$

*Under the circuit model of Section 6, the cap of 4.477 GHz trims the band to $[4.415, 4.477]$. The second refinement family gives 4.472 $[4.458, 4.510]$.

levels it did run, geode-fem and Palace agree on the qubit to 10^{-4} % on both geometries. On the resonator they differ by 0.03% at h, where Palace adds 4,946 (initial) and 5,944 (final) elements by local bisection, and by 0.0000% at $h/2$, where both codes solve the same mesh and differ only in the junction term (rank-1 shunt against isotropic sheet). On the fixture the shunt moves the qubit, whose inductive energy sits almost entirely in the junction, by 6×10^{-5} % and leaves the other modes unchanged to four decimals. Three checks test the initial-geometry estimate, and all three concern the qubit (Figure 3).

A second refinement family. The first check is a second refinement family, family b, beside the gmsh ladder, family a: Palace's own uniform refinement of the same h mesh, which first bisects the elements at the metal sheet. Its $h/2$ qubit is 3.9469 GHz against gmsh's 3.8771 GHz, and on the fixture the two refinements give 3.9528 and 3.8939 GHz, so the refinement scheme accounts for 1.5–1.8% of the $h/2$ level and the choice of h mesh for only 0.15–0.43%. The rule gives 4.472 $[4.458, 4.510]$ GHz for the qubit, at an observed order of 0.91 against the first family's 0.61, and 5.776 $[5.768, 5.800]$ GHz for the resonator. The two estimates lie 0.64% apart and the second band lies inside the first, so we quote the initial qubit as 4.444–4.472 GHz, 7.3–8.0% above the published value. The final geometry has family a only. Family b came out higher wherever it was run (0.64% on the initial geometry and 0.52% at step 2 of Section 7), so the final qubit's +8.7% rests on one family and is more likely low than high.

Adaptive refinement. A further check comes from Palace's adaptive mesh refinement, run from the same h mesh at order 2, with the error indicator summed over the qubit and resonator modes, Dörfler marking at 0.7 and nonconformal refinement. In five solves from 0.95 to 11.0 million unknowns the qubit rises from 4.1683 to 4.4297 GHz, 0.32% below the estimate and inside the band. The third solve, at 2.2 million unknowns, already exceeds the finest uniform level (4.3118 GHz at 7.0 million). The run has not reached a plateau (the last step moved the qubit by +0.55%; 3.1 h, 93 GiB peak on 32 ranks). A three-point fit $f_\infty - CN^{-\alpha}$ through the last three solves gives 4.4552 GHz ($\alpha = 0.80$), but +0.1% on the finest level moves it by 24 MHz. The adaptive resonator rises more slowly under this marking, and its finest level, 5.6986 GHz, is still below its band, so the adaptive run checks the qubit estimate only.

A common-limit fit. The last check fits the order-1 ($h/2$, $h/4$) and order-2 (h, $h/2$) series of each ladder with one common limit and order. This fit is exactly determined; it lies 0.5–1.3% above the rule's estimate on every first-family series, as the rule's leaning low predicts, and +0.1% on the order-2 $h/2$ level alone moves the initial-qubit fit by 20 MHz.

6 A Static Route: Certified Island Capacitance

The certificate. For the reduced electrostatic problem (island at potential 1, ground and resonator at 0, feedline floating with zero net charge), the potential ϕ satisfies $0 \le \phi \le 1$ by the maximum principle, and $C_\Sigma = \int \varepsilon \nabla\phi \cdot \nabla\phi$ with $\varepsilon = \varepsilon_0\varepsilon_r$. Every conforming finite-element energy is an upper bound on C_Σ, because C_Σ is the minimum of the energy over admissible potentials. For the lower bound, take any piecewise polynomial field D on the mesh cut along the zero-thickness sheets. Integrating by parts and using $0 \le \phi \le 1$ on every term gives

$$\int D \cdot \nabla\phi \;\ge\; N(D) \;=\; Q_{\text{island}}(D) - |Q_{\text{feed}}(D)| - \|\operatorname{div} D\|_{L^1} - \|[D \cdot n]\|_{L^1(\mathcal{F})}, \tag{3}$$

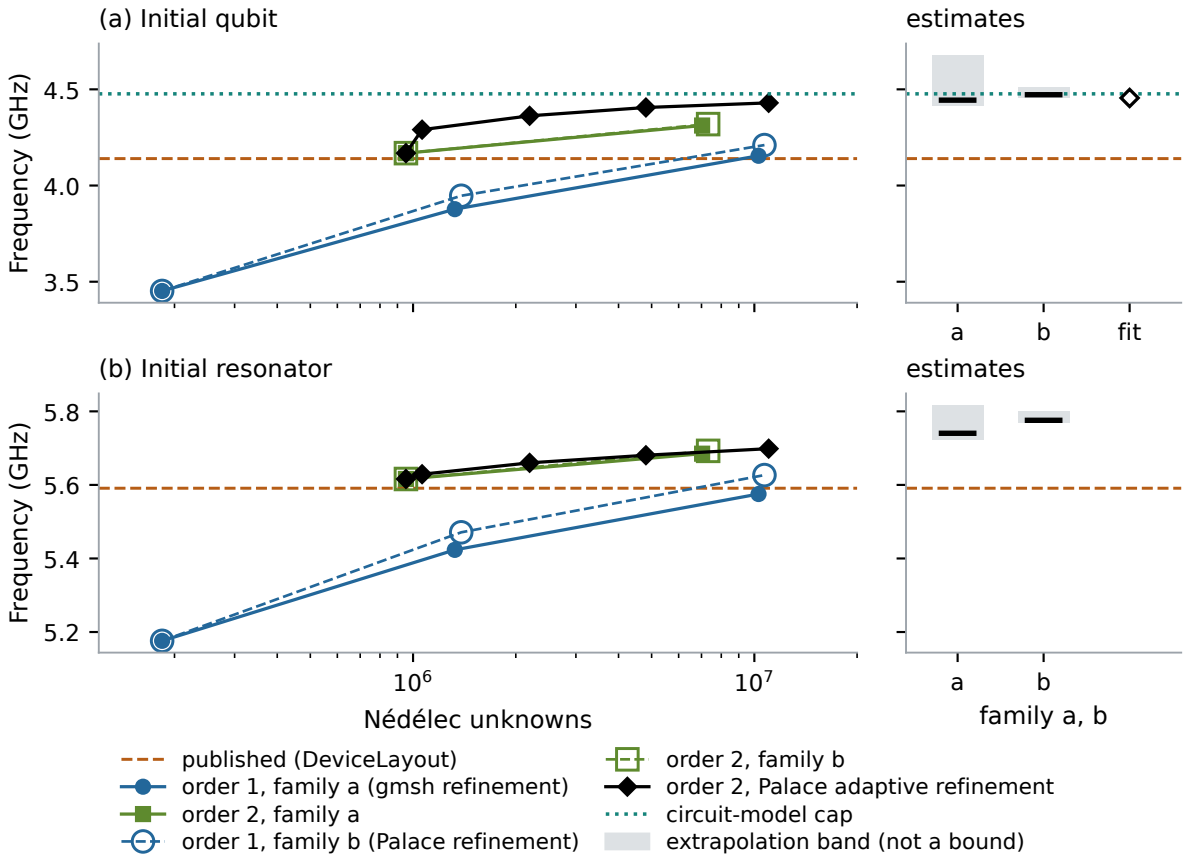


Figure 3: Checks of the extrapolated estimate on the initial geometry. In each panel, the left part plots every Palace level against the number of Nédélec unknowns, for the two refinement families of DeviceLayout's mesh h (filled: gmsh's eight-way split, the ladder of Figure 2; open: Palace's refinement) and Palace adaptive refinement from h at order 2 (diamonds); open markers are drawn larger, so that a family-b level coinciding with a family-a level stays visible. The right part, on the same frequency axis, shows the estimates of the two families with their bands and, for the qubit only, the adaptive run's ill-conditioned three-point fit; the resonator fit ($\alpha = 0.25$) is not reliable and not shown. In (a), the circuit-model cap. Sources: `benchmarks/transmon_devicelayout_crosscheck/results.toml` and `benchmarks/transmon_devicelayout_controls/results.toml`.

where Q are the fluxes of D into the two conductors and $[D \cdot n]$ is the normal jump on the interior faces $\mathcal{F}$ off the sheets. Cauchy–Schwarz, $\left(\int D \cdot \nabla\phi\right)^2 \le \int D \cdot \varepsilon^{-1} D \int \varepsilon \nabla\phi \cdot \nabla\phi$, then gives, whenever $N(D) > 0$,

$$C_\Sigma \;\ge\; \frac{N(D)^2}{\int D \cdot \varepsilon^{-1} D}. \tag{4}$$

The bound holds for any D, so solver tolerance can only weaken it. The L^1 norms are never integrated by quadrature of an absolute value: each is bounded above element by element and face by face with $\|p\|_{L^1(K)} \le |K|^{1/2} \|p\|_{L^2(K)}$, and the polynomial $\|p\|_{L^2}^2$ is integrated exactly (degree $2k$ for Raviart–Thomas order k, against rules exact to degree $2k+2$ or more). We take D from the P2 potential, equilibrated patch by patch into Raviart–Thomas fluxes of order one to three, with an independent Crouzeix–Raviart flux as a check. The construction is validated against an exact parallel plate and an analytic coaxial bracket, and mutation tests reject a grounded-feedline or jump-free certificate. *Certified* in this paper means rigorous for the discrete polygonal geometry

of the mesh, with lower bounds floored and upper bounds ceiled. The certificate is evaluated in plain f64, not interval arithmetic; the worst-case summation error is about 10^{-10} relative, far below the rounding. Refinement does not move the polygonal surfaces, so all meshes of one geometry bound the same exact capacitance, and a family bracket is the largest lower bound and the smallest upper bound.

The unmodified device. Uniform refinement of the fixture with P1 and P2 elements gives the upper bounds of Figure 4: with the scalar model, from 137.706752 fF at P1 on h to 83.015285 fF at P2 on $h/2$, and with the tensor from 136.684731 to 85.008425 fF. On adaptively refined meshes the certificate closes the gap: the island capacitance of the unmodified initial design lies in $[77.40, 77.61]$ fF with the scalar $\bar{\varepsilon}$ and in $[79.56, 79.76]$ fF with the sapphire tensor (Figure 4). The certified tensor-minus-scalar difference, computed from the unrounded bounds, is 1.95–2.35 fF, or 2.5–3.1% of the scalar value. The fixture itself overstates the tensor C_Σ by at least 56.92 fF, which is at least 71.3% of the exact value, and the scalar one by at least 77.4%.

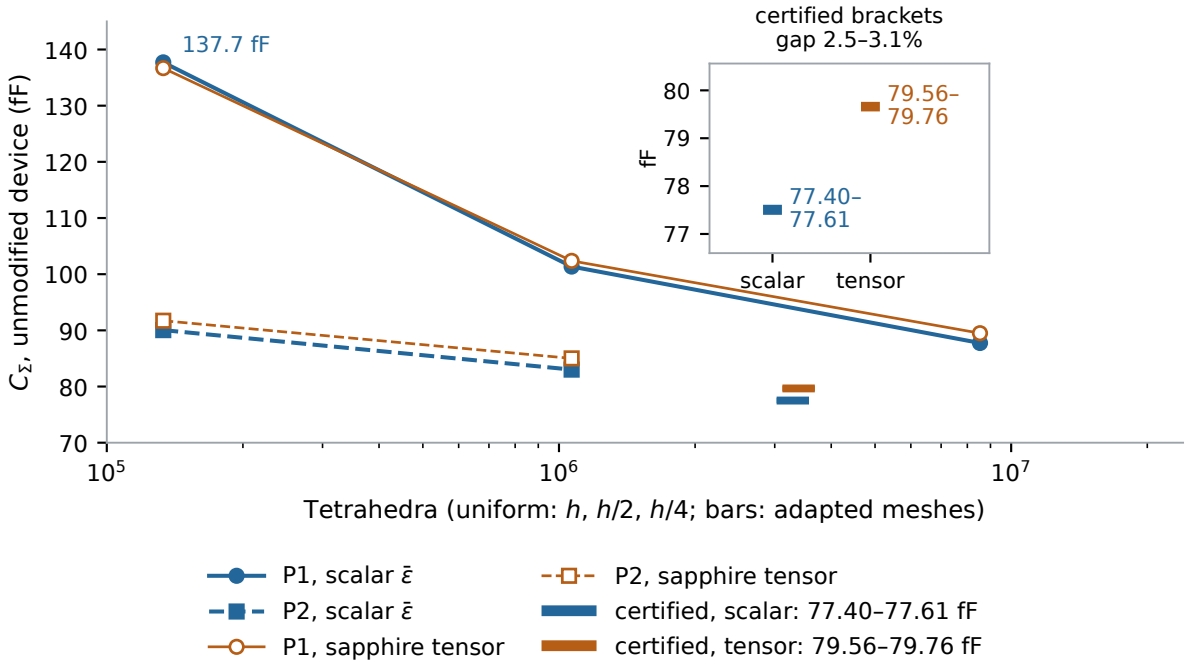


Figure 4: Mesh convergence of the island capacitance C_Σ of the unmodified device under uniform refinement of the fixture, with the scalar trace-averaged permittivity (blue) and the sapphire tensor (orange). Every marker is a conforming upper bound on the exact capacitance of the meshed polygonal geometry. The short bars are the certified two-sided brackets from adapted meshes, each drawn at the tetrahedron count of the mesh that sets its lower bound (3,289,543 and 3,388,197) and magnified in the inset on a fF scale; the inset title gives the certified tensor-minus-scalar gap. Sources: `c_sigma_convergence.toml`, `c_sigma_bracket.toml` and `c_sigma_bracket_tensor.toml`.

From capacitance to the qubit frequency. Reading the certified tensor bracket through the two-node circuit of Section 3.3, over every corner of the C_Σ, L_s and k bands, with the resonator at its extrapolated estimate, gives the initial dressed qubit in $[4.449, 4.458]$ GHz. That range lies inside the eigenmode band of Section 5 and inside the range of the two family estimates, and the first family's estimate is 0.22% below its midpoint. Because the extrapolation rule was chosen after this

range was known, the 0.22% is a consistency check, not an independent prediction. The range is an estimate, because L_s and k are.

A model-dependent cap. Under the circuit model, a series inductance and a coupling to a higher mode can only lower the qubit, so the certified lower bound $C_\Sigma \geq 79.56\,\mathrm{fF}$ caps it at $1/(2\pi\sqrt{L_J(C_\Sigma + C_J)}) = 4.477\,\mathrm{GHz}$. The cap is rigorous only given that model (one island node with $L_J \parallel C_J$, $L_s \geq 0$, coupling only to modes above the qubit, a quasi-static C_Σ) and rests on the fixture, not on the ladder meshes, which agree with it to 0.02% at h, so we list it as model-dependent, not certified. It trims the band's observed-order high side (4.677 GHz) and does not depend on the extrapolation rule. Every computed level and both family estimates lie below it; the first family's common-limit fit, 4.4802 GHz, exceeds it by 3.6 MHz, within that fit's conditioning. With no extrapolation, the adaptive level and the cap put the initial qubit between 4.4297 and 4.477 GHz, +7.0% to +8.1% over the published value. The lower end is a measured level, and a lower estimate only if the rise under refinement continues; the upper end holds only under the circuit model.

Why the qubit is approached from below. The qubit mode is quasi-static, with nearly all of its inductive energy in the junction, so its frequency is set by $C_\Sigma + C_J$, which a conforming discretization can only overstate, so the computed qubit should approach its limit from below. On the fixture the P1 bound (136.68 fF) overstates $C_\Sigma + C_J$ by a factor of 1.67, and the family estimates exceed the fixture's qubit by 1.66–1.68 in f^2. This is a heuristic, not a proof (it omits L_s, the coupling and the rotational field); for the distributed resonator the rise is an observation only.

7 Re-Optimization and Its Controls

At the extrapolated frequencies the published final design misses its targets. We repeat DeviceLayout's optimization against its own discretization, to compare optimizers in one environment, and against the extrapolated frequencies, to find the design that meets the targets.

The capacitor_length derivative. DeviceLayout builds the island upward from the fixed junction, so a change of c translates every node above the island and stretches the island band. geode-fem turns this motion into a node velocity $\partial X/\partial c$, checks that every metal outline node in a stretched band moves along its own edge (3,146 nodes on the initial mesh), and evaluates Eq. (1) with the sapphire tensor for both modes. The contraction takes 0.44 s. On the initial mesh it matches a central difference of two re-solves of the moved mesh ($\pm 0.5\,\mu$m) to every printed digit: $-2.443227 \times 10^{-3}\,\mathrm{GHz}/\mu\mathrm{m}$ for the qubit and $-3.964 \times 10^{-6}\,\mathrm{GHz}/\mu\mathrm{m}$ for the resonator.

The total_length column. DeviceLayout re-lays the meander when L changes, so no fixed-topology node motion represents it. A transmission-line model holds $f_r(L + \delta)$ constant and takes $\partial f_q/\partial L = 0$, with $\delta = 216\,\mu$m from one finite difference of two geode-fem order-1 solves ($L = 5000$ and $5250\,\mu$m). δ is weakly determined: remesh noise of about 0.15% in either f_r moves it by about $\pm 175\,\mu$m. The model enters only the Jacobian, and every iterate is evaluated on the true objective, so a poorer Jacobian costs steps, not accuracy.

Newton on the high-fidelity objective. DeviceLayout re-meshes every design, so the first-order objective is not smooth in the parameters. From $c = 620$ to $650\,\mu$m the remeshed first-order difference of the qubit frequency is $-5.23 \times 10^{-3}\,\mathrm{GHz}/\mu\mathrm{m}$, against -2.28×10^{-3} for the fixed-topology derivative averaged over the same interval (the mean of its values at the two ends). Remeshing alone moves the first-order qubit by about 2.6% over this step, more than the 2.0% the step itself moves it,

so this difference measures remesh noise, not the slope. The iteration therefore runs Newton directly on the high-fidelity objective F, in DeviceLayout's variables (x_1, x_2), in which the frequencies are close to linear and nearly decoupled: a probe in either variable moves its own mode by 4.5% and the other by at most 0.05%. The c column of the Jacobian is geode-fem's first-order derivative scaled by the fidelity ratio $S = F/f_h$ at the same design. Each step costs one geode-fem first-order solve with its gradient (19–25 s) and one high-fidelity evaluation; the one-time δ calibration is not counted.

Table 3: Palace runs to DeviceLayout's criterion (err $< 10^{-4}$) at its discretization, all in our Palace environment (build, mesher and platform) except the published PRIMA run. One counting rule holds for every row: each Palace run a method uses counts, with the initial design as run 1 and probes included, among them the probe that sets the Palace δ (Broyden's second probe, shared by the two rows); geode-fem solves are not counted. Each count is one trajectory. The Newton variants use the transmission-line L column with the stated δ. Sources: the `optimize` and `controls` artifacts under `benchmarks/transmon_devicelayout_*/`.

Method	c column	δ from	Runs	err after first step	Design at criterion (μm)
PRIMA, published	none	none	9	unpublished	(1217.678, 7243.955)
PRIMA, our environment	none	none	10	n/a	(1209.125, 7207.551)
Newton	shape derivative	geode-fem	3	7.9×10^{-4}	(1225.346, 7223.250)
Newton	scaling law	geode-fem	3	1.7×10^{-4}	(1232.664, 7221.270)
Newton	scaling law	Palace	4	2.1×10^{-4}	(1229.026, 7225.712)
Broyden	two probes	none	5	6.2×10^{-4}	(1224.847, 7232.447)

Against DeviceLayout's discretization. Table 3 and Figure 5(b) compare the optimizers on one objective. Newton with the shape-derivative column meets the criterion at its second step, after 3 Palace runs, and its three geode-fem solves add about 70 s, against about 4 min per Palace run on 32 ranks; a third step reaches err $= 1.4 \times 10^{-7}$ at $(1236.360, 7224.900)\,\mu$m. Two gradient-free controls test where the 3 runs come from. The first replaces the c column by the scaling law $\partial F_q/\partial x_1 = F_q/x_1$, which follows from $f_q \propto 1/\sqrt{C_\Sigma} \propto x_1$. With the geode-fem δ it also takes 3 runs, and its first step has an err 4.7 times lower (1.7×10^{-4} against 7.9×10^{-4}), about 2.2 times closer in frequency. With $\delta = 563.879\,\mu$m taken instead from a Palace probe (c fixed, L from 5000 to 5263 μm), so that no geode-fem input remains, it takes 4 runs: the same two steps, plus the probe. This δ is 2.6 times the geode-fem one, more than the $\pm 175\,\mu$m noise estimate, and costs no extra step. The second control, Broyden's method (Broyden, 1965) from two forward finite-difference probes, takes 5. DeviceLayout's own PRIMA call, re-run verbatim in our environment, takes 10: runs 1–5 are its initial interpolation set of $2n + 1 = 5$ points (Powell, 2009), and run 9 misses the criterion by 15% (err $= 1.15 \times 10^{-4}$). In this environment the published final design already meets the criterion (err $= 1.5 \times 10^{-5}$), so the environment moves PRIMA's trajectory, not the attainability of the target; the published count of 9 is from DeviceLayout's environment. In one environment, then, the comparison is 3 Newton runs against 10, or 4 with no geode-fem input.

Why the shape-derivative step lands farther. At the initial design the scaled shape derivative gives $\partial F_q/\partial x_1 = 3.66$ GHz, within about 1.5% of the 3.71 GHz of Broyden's Palace probe, so the derivative measures the local slope well. The probe steps x_1 by -0.05 (c to 686.981 μm) at DeviceLayout's second-order discretization and moves the qubit by 4.5%; the two slopes differ by 0.07% of the qubit over that step, so unlike the first-order difference above, this remeshed difference is consistent with the slope. Both local slopes are 11–12% shallower than the scaling law's $F_q/x_1 = 4.168$ GHz, because the frequency is not exactly proportional to x_1 near the initial design, and the first step is long (x_1 from 1 to about 0.7): the chord slope from the initial design

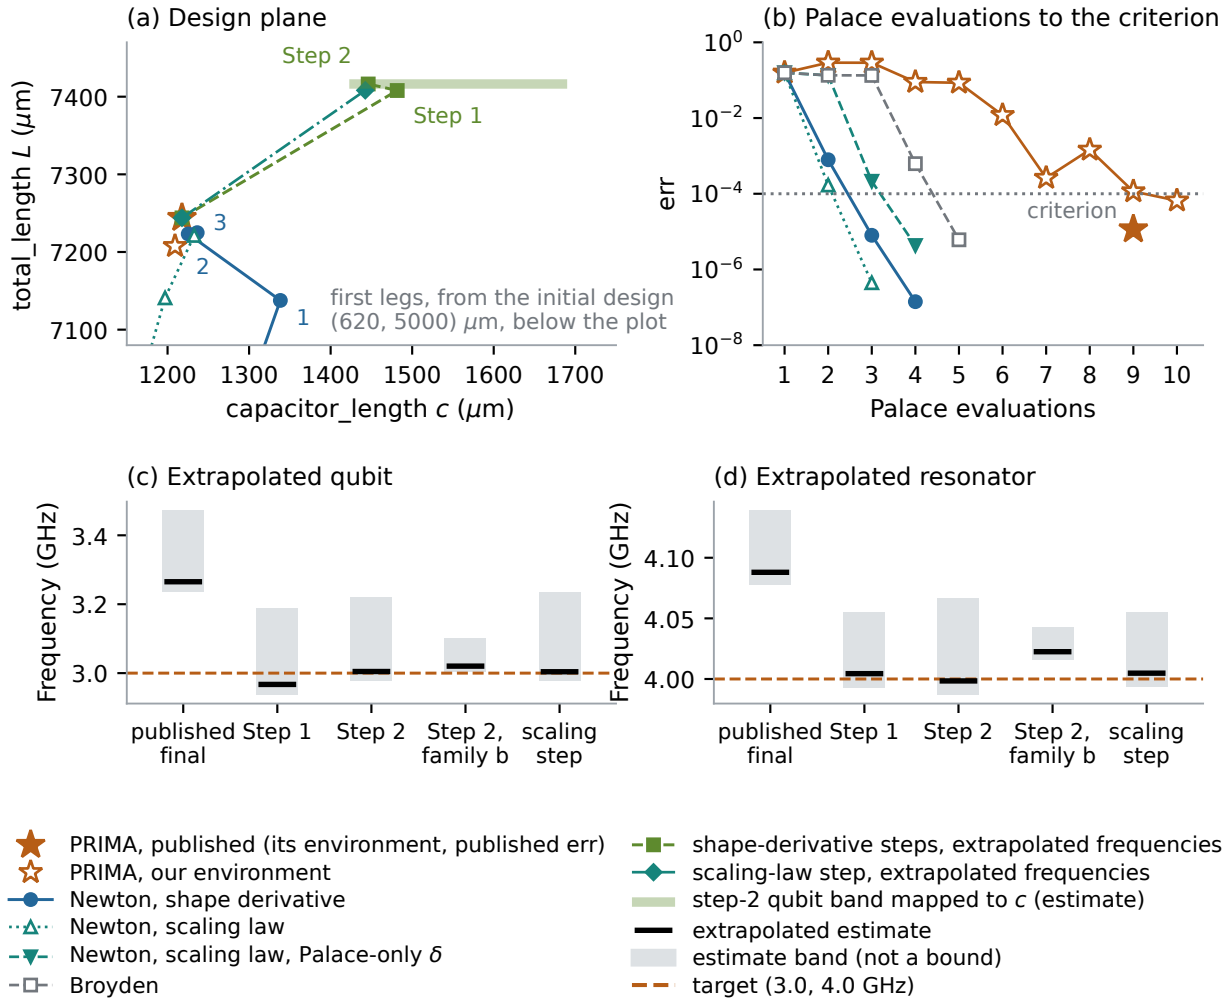


Figure 5: The re-optimization and its controls. (a) The design plane near the optimum: the published final design, PRIMA's end point in our environment, the Newton iterates against DeviceLayout's discretization (numbered: shape derivative; the first legs start off the plot), and the steps against the extrapolated frequencies, with the step-2 qubit band mapped linearly to capacitor_length around the 3.0 GHz target (an estimate). (b) DeviceLayout's err against the number of Palace evaluations at its discretization, in our environment, probes counted (the Palace-δ Newton's run 2 is the L probe it shares with Broyden). PRIMA's published end point is plotted at its 9 runs and at the err of its published frequencies, 1.15×10^{-5} (DeviceLayout's environment; the same design gives 1.5×10^{-5} in ours). This counts Palace evaluations, not total cost: each shape-derivative Newton point also costs one geode-fem solve. (c, d) Extrapolated estimates and bands against the targets, with step 2 in both refinement families. Sources: the `optimize`, `controls` and `crosscheck` artifacts under `benchmarks/transmon_devicelayout_*/`.

to the shape-derivative design at the criterion is 4.0 GHz, steeper than either tangent. A local tangent therefore overshoots: the shape-derivative step lands at $c = 1338.338\,\mu$m and Broyden's at $1320.522\,\mu$m, against about $1230\,\mu$m at the criterion, and the scaling law at $1196.933\,\mu$m.

Against the extrapolated frequencies. Starting from the published final design, each Newton step uses the extrapolated estimate and the geode-fem derivative at the current design, and each new design is evaluated by a full ladder with the rule of Section 5 (Table 4). The first overshoots the qubit by -1.09%; the second lands at $+0.16\%$ and -0.04% of the targets, with both targets

inside the bands. On both ladders geode-fem and Palace agree on the qubit to 2×10^{-4} %. One scaling-law step from the same start, evaluated by the Palace half of the ladder, lands 3.6 and 8.2 μm short of step 2 and at +0.13% and +0.12% of the targets: one gradient-free step does what the two shape-derivative steps did.

Table 4: Steps against the extrapolated frequencies, in GHz. Each design is evaluated by a full resolution ladder (the scaling-law step and the second family by Palace alone) and the rule of Section 5; values are estimates with their bands. Family b refines step 2's h mesh with Palace's uniform refinement instead of gmsh's. Sources: the `optimize`, `controls` and (published final) `crosscheck` artifacts under `benchmarks/transmon_devicelayout_*/`.

Design	c (μm)	L (μm)	f_q [band]	f_r [band]
Published final	1217.678	7243.955	3.265 [3.236, 3.471]	4.088 [4.077, 4.139]
Step 1	1481.657	7407.945	2.967 [2.938, 3.188]	4.004 [3.993, 4.055]
Step 2	1446.078	7416.352	3.005 [2.979, 3.221]	3.998 [3.987, 4.067]
Step 2, family b	1446.078	7416.352	3.020 [3.003, 3.101]	4.022 [4.016, 4.043]
Scaling-law step	1442.479	7408.181	3.004 [2.977, 3.235]	4.005 [3.994, 4.055]

The re-optimized design. Step 2 is the design whose extrapolated frequencies sit on the targets: $c = 1446.078\,\mu$m, 18.8% longer than published, with a resonator 2.4% longer (+172 μm). The second refinement family at step 2 gives 3.0203 [3.0033, 3.1014] GHz for the qubit and 4.0225 GHz for the resonator, 0.52% and 0.60% above the first family, the same spread as on the initial geometry; both targets lie just below its band, so on family b step 2 is slightly short. Mapped to 3.0 GHz by the scaling law $f_q \propto c^{-1/2}$, the two families' qubit estimates call for $c = 1451$ and 1466 μm, +19.1% and +20.4% over the published length. Mapped linearly through $dF/dc \approx S\,\partial f_h/\partial c = -9.05 \times 10^{-4}$ GHz/μm, the slope at the step-1 design where step 2 started, and centred on the 3.0 GHz target, the first family's qubit band corresponds to c between about 1423 and 1690 μm, about +17% to +39%, a range that contains family b's (+19.0% to +26.9% under the scaling law). Since the estimates lean low, the common-limit fit, which puts step 2 at 3.039 and 4.019 GHz, would call for a longer capacitor still.

8 How geode-fem Was Designed and Built

geode-fem implements the whiteroom L1–L4 operator specification of Crutcher Dunnavant (Dunnavant, 2026). He also gave design input on the solver's operator layer and contributed code: the migration to Rust 2024, the Metal (Apple GPU) backend, the present layout of the core crate and the examples, and the geode-util crate. The rest of the code, the experiments and the text of this paper were produced by AI models working as role-separated agents: Anthropic's Claude (Opus, Fable and Sonnet models, through Claude Code) and OpenAI's GPT Sol and GPT Astra models (via Codex). The agents were coordinated by Loom (Walters, 2025), an issue, worktree and pull-request workflow, and by a shared Squad room. Nearly every change was reviewed by a separate agent session. The agent reviews of this paper recomputed its numbers from the archived artifacts, reproduced runs, and mutation-tested the scripts that check the text and the figures against those artifacts. The human author directed the research, made every scoping and claim decision, and takes responsibility for the content.

9 Reproducibility

Every result in this paper is read from an archived, scripted artifact.[1] Each table and figure caption names its artifact; the circuit terms L_s and k come from `benchmarks/transmon_loop_inductance/` and `benchmarks/transmon_coupling/`, the Palace cells are under `reference/fixtures/transmon_palace/`, and the DeviceLayout meshes are generated by `reference/julia/generate_transmon_param.jl`. The versions are geode-fem commit `3174015` for the same-mesh agreement, with the commit of each later result recorded in its artifact, Palace `fba6a5b`, DeviceLayout.jl v1.15.0, PRIMA.jl 0.2.4 and Burn 0.21. The DeviceLayout ladders, the adaptive run and the controls ran on AWS Graviton4 hosts (`r8g.8xlarge`, 32 vCPU, and `r8g.4xlarge`, 16 vCPU); the capacitance brackets ran on a 28-core, 96 GiB workstation. geode-fem's direct solves at the ladders' $h/2$ peaked at 94 and 136 GB, which is why only Palace ran the larger cells.

Palace's ladder cells use SLEPc shift-invert at tolerance 10^{-8}, `Target` 3.0 (initial) or 2.0 GHz (final), and its default direct solver (order-1 h) or AMS-preconditioned GMRES at relative tolerance 10^{-9}, on 16 (order-1 h) or 32 MPI ranks; the fixture ran on 8, and the runs at DeviceLayout's discretization keep the example's tolerances (10^{-6} and 10^{-7}, `Target` 2.5 GHz). On the ladders geode-fem's Lanczos uses shifts of 5 (initial) and 4 GHz (final), with relative residuals below 4×10^{-8}. The h, $h/2$ and $h/4$ meshes have 133,355, 1,066,840 and 8,534,720 tetrahedra (initial) and 163,431, 1,307,448 and 10,459,584 (final). The meshes were made with gmsh 4.15.2 (`gmsh_jll`) under Julia 1.10.11, and Palace was built against the MPICH of the Rocky Linux 9 image in `reference/palace/docker/Dockerfile`.

10 Discussion

What is established, and how. Table 5 sorts the results by the kind of evidence behind them. The brackets are the only bounds, and the cap follows from a bracket only under a circuit model. Without extrapolation, the adaptive run's 4.4297 GHz is 7.0% above the published initial qubit, and the finest uniform levels, 4.1% and 4.7% above the two published qubits, are lower estimates if the rise continues.

Why the shape derivative gives no advantage here. The derivative is a central tool of the re-optimization, but three properties of this benchmark remove its advantage. First, the problem has two nearly decoupled parameters, close to linear in DeviceLayout's variables, so Newton's method converges with any reasonable Jacobian: the shape derivative, a two-probe secant, or the scaling law $f_q \propto x_1$, which costs nothing. Second, a finite-difference gradient costs only $N + 1 = 3$ solves. Third, the coarse-mesh, fixed-topology derivative is the slope of a different discrete problem from the one the iteration evaluates: DeviceLayout remeshes every design and Palace evaluates it at second order. Unscaled, it is less accurate than a remeshed second-order difference of the evaluated objective; it describes that objective only after scaling by the fidelity ratio S, and once scaled it lies about 1.5% below Broyden's probe, so it gives no more than one Palace run does (a remeshed first-order difference, Section 7, measures remesh noise). That the derivative is exact for its own discrete problem and cheap (0.44 s) does not change the number of Palace runs.

Derivatives pay off in other regimes. With N parameters, a discrete adjoint gives all N derivatives of one objective for about one extra solve, where finite differences need N more; coupled targets with no per-parameter scaling law need a computed Jacobian; and freeform shapes have many parameters by construction. A companion study (Walters, 2026) applies geode-fem's discrete shape

[1] The geode-fem source is public at https://github.com/rjwalters/geode-fem. Archival DOI to be added at deposit.

Table 5: Evidence tiers. Certified: a guaranteed bound for the meshed polygonal geometry. Model-dependent: a rigorous consequence of a certified bound under a stated circuit model. Measured: a solve on a stated discretization. Estimated: an extrapolation with a stated rule. Consistency: an agreement that is not independent evidence.

Tier	Results
Certified	C_Σ of the unmodified device: $[77.40, 77.61]$ fF (scalar), $[79.56, 79.76]$ fF (tensor); tensor-minus-scalar gap 2.5–3.1%
Model-dependent	The initial-qubit cap of 4.477 GHz: two-node circuit, quasi-static C_Σ, bracket certified on the fixture's polygonal geometry, not on the ladder meshes; with the adaptive level, the initial qubit between 4.4297 and 4.477 GHz (+7.0 to +8.1%) if the rise continues
Measured	Same-mesh agreement (Table 1); the reproduction within 0.7%; every ladder and adaptive level (adaptive initial qubit +7.0%, finest uniform levels +4.1% and +4.7%); the gradient check; Palace runs to DeviceLayout's criterion in one environment, probes counted, one trajectory each: 3 for each Newton variant with the geode-fem δ, 4 with the Palace δ, 5 for Broyden's method, 10 for PRIMA
Estimated	Extrapolated frequencies and bands (Table 2), the initial qubit 4.444–4.472 GHz over two refinement families; the adaptive fit and the common-limit fits; the static-route qubit range; L_s and k; the re-optimized capacitor, +19 to +20% over two families and about +17 to +39% within the band
Consistency	The two routes agree to 0.22% on the initial qubit; the extrapolation rule was fixed after the static route was known, so this is not a blind prediction
Not claimed	Agreement with measurement; a verified hit of 3.0/4.0 GHz in the $h \to 0$ limit; a global optimum; an advantage of the shape derivative on this problem; eigenmode-participation (EPR) derivatives; a speed advantage over Palace

adjoint to a conformal patch antenna with 38 shape parameters; its comparison with gradient-free search is still being run, so it does not yet show whether the derivative helps there.

Threats and limitations. Agreement between two codes is evidence against implementation error, not against shared modelling choices such as the port sheet behind the 17.49 GHz mode. The extrapolations assume the rate the sheet-edge singularity allows, their high sides are wide, and the adaptive run had not reached a plateau, and L_s and k were extrapolated from two or three discretizations. The estimates are for DeviceLayout's geometry under a lossless, linear model ($L_J \parallel C_J$, open readout ports in the ladders, zero-thickness metal), not for a fabricated device, and only one device is studied. The eigenmode branch is not yet differentiated with respect to participation ratios, which needs eigenvector derivatives (Nelson, 1976).

What the shift means for a design. Under the circuit model the adaptive level's 7.0% rise at fixed L_J means that the published discretization overstates $C_\Sigma + C_J$ by about 14% ($1.070^2 = 1.145$), so E_C and the anharmonicity, close to $-E_C$ (Koch et al., 2007), are about 14% larger than it implies. The choice of L_J can retune the qubit frequency but not these, which the capacitance alone sets.

What a practitioner can do. The slow rate comes from the sheet edges, and the standard remedy for an edge singularity is to refine toward it, with a mesh graded toward the edges or with hp refinement (Demkowicz, 2006), which recover faster convergence than uniform refinement. Palace's adaptive run is a measured instance: at 2.2 million unknowns it already exceeds the finest uniform level at 7.0 million.

11 Conclusion

Palace reproduces the published DeviceLayout.jl SingleTransmon frequencies at the example's own discretization, which sits 6–8% low on the qubits: an adaptive run puts the initial qubit 7.0% above its published value with no extrapolation, and the estimates, which lean low, put both qubits 7–9% above. geode-fem reproduces Palace's qubit on every level both codes ran, and a certified bracket on the island capacitance, read through a circuit model, is consistent with that shift and caps the initial qubit under that model. At the extrapolated frequencies the 3.0/4.0 GHz design needs a capacitor about 19–20% longer than published, and Newton's method reaches the example's criterion in 3 Palace runs with geode-fem's derivative or its resonator calibration, and in 4 with no geode-fem input at all, against PRIMA's 10. For design examples that are meant to be copied, the discretization is part of the result and belongs in the report beside it.

Acknowledgments. We thank Crutcher Dunnavant for the whiteroom specification, for his design input to the solver's operator layer and for his contributions to the codebase, and the Palace and DeviceLayout.jl developers for publishing the SingleTransmon example and its frequencies. The AI-orchestrated development of geode-fem and of this paper is described in Section 8.

References

Volkan Akçelik, George Biros, Omar Ghattas, David Keyes, Kwok Ko, Lie-Quan Lee, and Esmond G Ng. Adjoint methods for electromagnetic shape optimization of the low-loss cavity for the International Linear Collider. *Journal of Physics: Conference Series*, 16:435–445, 2005. doi: 10.1088/1742-6596/16/1/059.

Robert Anderson, Julian Andrej, Andrew Barker, Jamie Bramwell, Jean-Sylvain Camier, Jakub Cerveny, Veselin Dobrev, Yohann Dudouit, Aaron Fisher, Tzanio Kolev, Will Pazner, Mark Stowell, Vladimir Tomov, Ido Akkerman, Johann Dahm, David Medina, and Stefano Zampini. MFEM: a modular finite element methods library. *Computers & Mathematics with Applications*, 81:42–74, 2021. doi: 10.1016/j.camwa.2020.06.009.

AWS Center for Quantum Computing. DeviceLayout.jl: computer-aided design of quantum integrated circuits. https://github.com/aws-cqc/DeviceLayout.jl, 2025a. v1.15.0 used for geometry and mesh generation in this work.

AWS Center for Quantum Computing. Single-Transmon Simulation · DeviceLayout.jl. DeviceLayout.jl v1.15.0 documentation and `examples/SingleTransmon/SingleTransmon.jl`, https://aws-cqc.github.io/DeviceLayout.jl/stable/examples/singletransmon/, 2025b. Source of the optimization targets, variables and stopping criterion, and of the discretization settings.

Daniele Boffi. Finite element approximation of eigenvalue problems. *Acta Numerica*, 19:1–120, 2010. doi: 10.1017/S0962492910000012.

Dietrich Braess and Joachim Schöberl. Equilibrated residual error estimator for edge elements. *Mathematics of Computation*, 77(262):651–672, 2007. doi: 10.1090/s0025-5718-07-02080-7.

C. G. Broyden. A class of methods for solving nonlinear simultaneous equations. *Mathematics of Computation*, 19 (92):577–593, 1965. doi: 10.1090/S0025-5718-1965-0198670-6.

Leszek Demkowicz. *Computing with hp-Adaptive Finite Elements, Volume 1: One and Two Dimensional Elliptic and Maxwell Problems*. Chapman and Hall/CRC, 2006. doi: 10.1201/9781420011685.

Crutcher Dunnavant. palace_whiteroom. https://github.com/crutcher/palace_whiteroom, 2026. Software repository. Accessed 2026-10-13.

Axel M. Eriksson, Lukas J. Splitthoff, Harsh Vardhan Upadhyay, Pietro Campana, Niranjan Pittan Narendiran, Kunal Helambe, Linus Andersson, and Simone Gasparinetti. Automated, physics-guided, multi-parameter design optimization for superconducting quantum devices, 2025. URL https://arxiv.org/abs/2508.18027.

Alexandre Ern and Martin Vohralík. Polynomial-degree-robust a posteriori estimates in a unified setting for conforming, nonconforming, discontinuous galerkin, and mixed discretizations. *SIAM Journal on Numerical Analysis*, 53(2): 1058–1081, 2015. doi: 10.1137/130950100.

Sungjun Eun, Seong Hyeon Park, Kyungsik Seo, Kibum Choi, and Seungyong Hahn. Shape optimization of superconducting transmon qubits for low surface dielectric loss. *Journal of Physics D: Applied Physics*, 56(50): 505306, 2023. doi: 10.1088/1361-6463/acf7cf.

R. L. Fox and M. P. Kapoor. Rates of change of eigenvalues and eigenvectors. *AIAA Journal*, 6(12):2426–2429, 1968. doi: 10.2514/3.5008.

Sarah Quiñones El Kazdadi. faer: A linear algebra library for the Rust programming language. *Journal of Open Source Software*, 11(123):6099, 2026. doi: 10.21105/joss.06099.

Jens Koch, Terri M. Yu, Jay Gambetta, A. A. Houck, D. I. Schuster, J. Majer, Alexandre Blais, M. H. Devoret, S. M. Girvin, and R. J. Schoelkopf. Charge-insensitive qubit design derived from the Cooper pair box. *Physical Review A*, 76(4):042319, 2007. doi: 10.1103/PhysRevA.76.042319.

Richard B. Lehoucq, Danny C. Sorensen, and Chao Yang. *ARPACK Users' Guide: Solution of Large-Scale Eigenvalue Problems with Implicitly Restarted Arnoldi Methods*. SIAM, 1998. doi: 10.1137/1.9780898719628.

Josef Meixner. The behavior of electromagnetic fields at edges. *IEEE Transactions on Antennas and Propagation*, 20 (4):442–446, 1972. doi: 10.1109/TAP.1972.1140243.

Zlatko K. Minev, Zaki Leghtas, Shantanu O. Mundhada, Lysander Christakis, Ioan M. Pop, and Michel H. Devoret. Energy-participation quantization of Josephson circuits. *npj Quantum Information*, 7:131, 2021. doi: 10.1038/s41534-021-00461-8.

Jean-Claude Nédélec. Mixed finite elements in $\mathbb{R}^3$. *Numerische Mathematik*, 35(3):315–341, 1980. doi: 10.1007/BF01396415.

Richard B. Nelson. Simplified calculation of eigenvector derivatives. *AIAA Journal*, 14(9):1201–1205, 1976. doi: 10.2514/3.7211.

N.K. Nikolova, J.W. Bandler, and M.H. Bakr. Adjoint techniques for sensitivity analysis in high-frequency structure CAD. *IEEE Transactions on Microwave Theory and Techniques*, 52(1):403–419, 2004. doi: 10.1109/tmtt.2003.820905.

William L. Oberkampf and Christopher J. Roy. *Verification and Validation in Scientific Computing*. Cambridge University Press, 2010. doi: 10.1017/cbo9780511760396.

Palace developers, AWS Center for Quantum Computing. Palace: PArallel LArge-scale Computational Electromagnetics. https://github.com/awslabs/palace, 2023. Open-source 3D finite-element solver; git fba6a5b used in this work.

Greg Peairs and Hugh Carson. Design quantum integrated circuits with open-source software DeviceLayout.jl from AWS. https://aws.amazon.com/blogs/quantum-computing/design-quantum-integrated-circuits-with-open-source-software-devicelayout-jl-from-aws/, 2025. AWS Quantum Technologies Blog; source of the SingleTransmon designs and their published frequencies.

M. J. D. Powell. The BOBYQA algorithm for bound constrained optimization without derivatives. Technical Report DAMTP 2009/NA06, Department of Applied Mathematics and Theoretical Physics, University of Cambridge, 2009.

W. Prager and J. L. Synge. Approximations in elasticity based on the concept of function space. *Quarterly of Applied Mathematics*, 5(3):241–269, 1947. doi: 10.1090/qam/25902.

Taha Rajabzadeh, Zhaoyou Wang, Nathan Lee, Takuma Makihara, Yudan Guo, and Amir H. Safavi-Naeini. Analysis of arbitrary superconducting quantum circuits accompanied by a Python package: SQcircuit. *Quantum*, 7:1118, 2023. doi: 10.22331/q-2023-09-25-1118.

P. A. Raviart and J. M. Thomas. A mixed finite element method for 2-nd order elliptic problems. In *Mathematical Aspects of Finite Element Methods*, volume 606 of *Lecture Notes in Mathematics*, pages 292–315. Springer, 1977. doi: 10.1007/bfb0064470.

Sadman Shanto, Andre Kuo, Clark Miyamoto, Haimeng Zhang, Vivek Maurya, Evangelos Vlachos, Malida Hecht, Chung Wa Shum, and Eli Levenson-Falk. SQuADDS: A validated design database and simulation workflow for superconducting qubit design. *Quantum*, 8:1465, 2024. doi: 10.22331/q-2024-09-09-1465.

David Sommers, Zach Degnan, Divita Gautam, Yi-Hsun Chen, Chun-Ching Chiu, Arkady Fedorov, and Prasanna Pakkiam. Open-source highly parallel electromagnetic simulations for superconducting circuits, 2025. URL https://arxiv.org/abs/2511.01220.

Ruben Specogna. Complementary geometric formulations for electrostatics. *International Journal for Numerical Methods in Engineering*, 86(8):1041–1068, 2011. doi: 10.1002/nme.3089.

Tracel AI. Burn: a comprehensive deep-learning and tensor-computation framework in Rust. https://github.com/tracel-ai/burn, 2024. v0.21.0 used. No journal or arXiv paper; cited as software.

Robb Walters. Loom: AI-powered development orchestration. https://github.com/rjwalters/loom, 2025. Software repository. Accessed 2026-10-13.

Robb Walters. Shape-adjoint design of a curved conformal 2.4 GHz patch antenna on a fixed 1.6 mm board with a differentiable open-radiator FEM, 2026. Manuscript in preparation, `papers/conformal-antenna-diffopt/` in https://github.com/rjwalters/geode-fem.

Ziang Wang, Feng Wu, Hui-Hai Zhao, Xin Wan, and Xiaotong Ni. SuperGrad: a differentiable simulator for superconducting processors. *Quantum*, 9:1722, 2025. doi: 10.22331/q-2025-04-24-1722.

Jiale Ye, Jiaheng Wang, and Yu-xi Liu. Electromagnetic feature extraction in superconducting quantum circuits: An open-source finite-element workflow using Palace, 2025. URL https://arxiv.org/abs/2511.09041.

Zaikun Zhang. PRIMA: Reference implementation for Powell's methods with modernization and amelioration. http://www.libprima.net, 2023. Software.