PT3100 Series 48V

15 WATT 48V TO 5V/12V/15V ISOLATED DC-DC CONVERTER

Revised 8/13/98

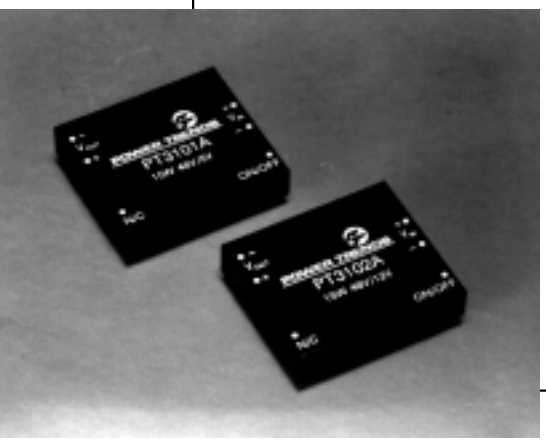

- Power Density 15 Watts/in³
- Wide Input Voltage Range 36V to 75V
- 80% Efficiency
- 500 VDC Isolation
- Industry's Smallest Footprint
- Fast Transient Response
- No External Components Required

Power Trends' PT3101A (5V), PT3102A (12V) and PT3103A (15V) Isolated DC-DC Converters advance the state-of-the-art for board-mounted converters by employing high switching frequencies greater than 650 KHz and planar magnetics and surface-mount construction. They feature the industry's smallest footprint, a power density of 15 Watts/in³, and operate at 80% efficiency. They are designed for Telecom, Industrial, Computer, Medical, and other distributed power applications requiring input-to-output isolation.

Specifications

Characteristics (T_a=25°C unless noted)	Symbols	Conditions	PT3100 SERIES Min	Typ	Max	Units
Output Current	I_o	Over V_{in} range V_o = 5V	0	—	3.0	A
		V_o = 12V	0	—	1.25	A
		V_o = 15V	0	—	1.0	A
Current Limit	I_{cl}	V_{in} = 36V V_o = 5V	—	4.00	—	A
		V_o = 12V	—	1.75	—	A
		V_o = 15V	—	1.4	—	A
On/Off Standby Current	$I_{in\ standby}$	V_{in} = 48V, Pin 1 = -V_{in}	—	7	10	mA
Short Circuit Current	I_{sc}	V_{in} = 48V V_o = 5V	—	5.5	—	A
		V_o = 12V	—	3.5	—	A
		V_o = 15V	—	2.0	—	A
Inrush Current	I_{ir}	V_{in} = 48V @ max I_o	—	0.6	1.0	A
	t_{ir}	On start-up	—	1.0	5.0	mSec
Input Voltage Range	V_{in}	I_o = 0.1 to max I_o	36.0	48.0	75.0	V
Output Voltage Tolerance	ΔV_o	Over V_{in} Range T_A= -20°C to 70°C	—	±1.0	±2.0	%V_o
Ripple Rejection	RR	Over V_{in} range @ 120 Hz	—	60	—	dB
Line Regulation	Reg_{line}	Over V_{in} range @ max I_o	—	±0.2	±1.0	%V_o
Load Regulation	Reg_{load}	10% to 100% of I_o max	—	±0.4	±1.0	%V_o
V_o Ripple/Noise	V_n	V_{in}=48V, I_o=3.0A, V_o=5V	—	75	100	mV_{pp}
		V_{in}=48V, I_o=1.25A, V_o=12V	—	120	150	mV_{pp}
		V_{in}=48V, I_o=1.0A, V_o=15V	—	100	200	mV_{pp}
Transient Response	t_{tr}	50% load change	—	100	200	µSec
		V_o over/undershoot	—	3.0	5.0	%V_o
Efficiency	η	V_{in}=48V, I_o=3.0A, V_o=5V	—	79	—	%
		V_{in}=48V, I_o=1.25A, V_o=12V	—	80	—	%
		V_{in}=48V, I_o=1A, V_o=15V	—	80	—	%
Switching Frequency	f_o	Over V_{in} and I_o, V_o=5V	800	850	900	kHz
		V_o=12V/15V	600	650	700	kHz
Recommended Operating Temperature Range	T_a	V_{in} = 48V @ max I_o Free air convection, (40-60LFM)	-20	—	+70*	°C
Thermal Resistance	θ_{ja}	Free Air Convection, (40-60LFM)	—	16	—	°C/W
Case Temperature	T_c	@ Thermal shutdown	—	—	100	°C
Storage Temperature	T_s	—	-40	—	110	°C
Mechanical Shock	—	Per Mil-STD-202F, Method 213B, 6mS, Half-sine, mounted to a PCB	—	50	—	G's
Mechanical Vibration	—	Per Mil-STD-202F, Method 204D, 10-500Hz, Soldered in a PCB	—	10	—	G's
Weight	—	—	—	28	—	grams
Isolation	—	—	500	—	—	V
Capacitance	—	—	—	1100	—	pF
Resistance	—	—	10	—	—	MΩ
Flammability	—	Materials meet UL 94V-0				
Remote On/Off	On	Open or 2.5 to 7.0 VDC above -V_{in}				
	Off	Short or 0 to 0.8 VDC above -V_{in}				

* See Thermal Derating Curves

Standard Application



Pin-Out Information

Pin	Function
1	Remote ON/OFF
2	-V_{in}
3	+V_{in}
4	-V_{out}
5	+V_{out}
6	Do not connect

Ordering Information

Through-Hole

PT3101A = 5 Volts
PT3102A = 12 Volts
PT3103A = 15 Volts

Surface Mount

PT3101C = 5 Volts
PT3102C = 12 Volts
PT3103C = 15 Volts

(For dimensions and PC board layout, see Package Style 700.)

PT3101, 5.0 VDC (See Note 1)

Efficiency vs Output Current

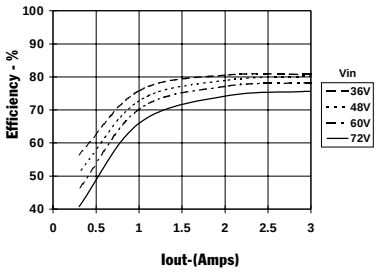

Ripple vs Output Current

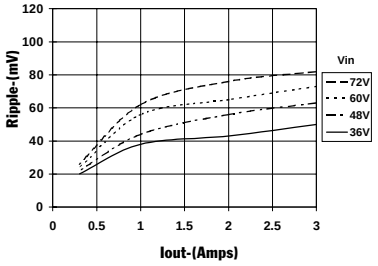

Thermal Derating (T_a) (See Note 2)

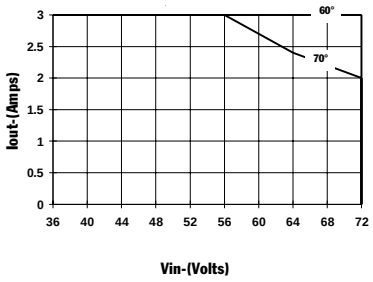

Power Dissipation vs Output Current

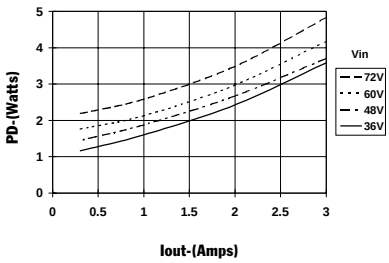

PT3102, 12.0 VDC (See Note 1)

Efficiency vs Output Current

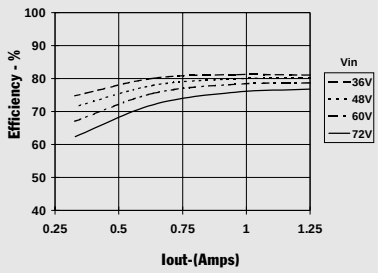

Ripple vs Output Current

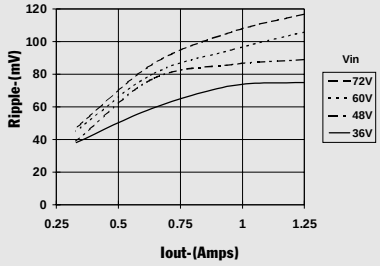

Thermal Derating (T_a) (See Note 2)

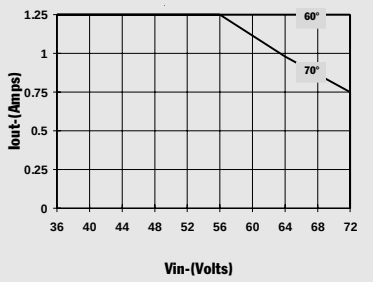

Power Dissipation vs Output Current

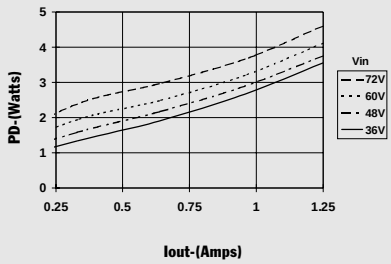

PT3103, 15.0 VDC (See Note 1)

Efficiency vs Output Current

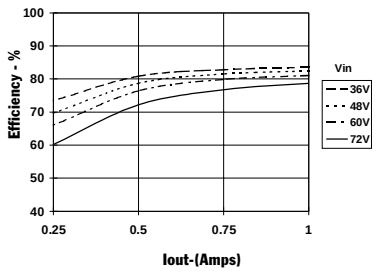

Ripple vs Output Current

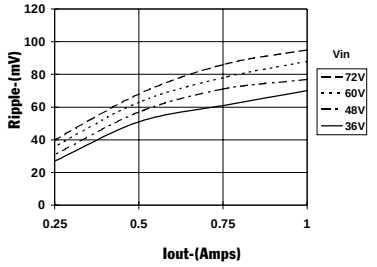

Thermal Derating (T_a) (See Note 2)

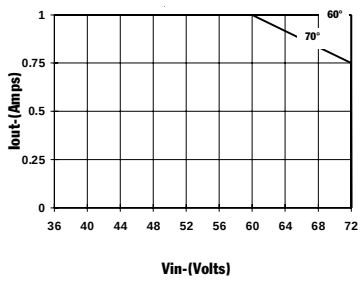

Power Dissipation vs Output Current

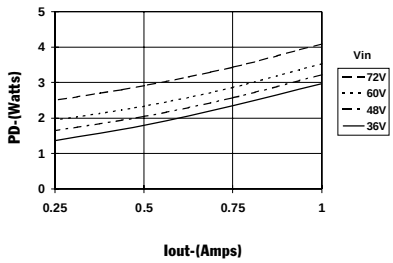

Note 1: *All data listed in the above graphs, except for derating data, has been developed from actual products tested at 25°C. This data is considered typical data for the DC-DC Converter.*
Note 2: *Thermal derating graphs are developed in free air convection cooling of 40-60 LFM.*

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

TI products are not authorized for use in safety-critical applications (such as life support) where a failure of the TI product would reasonably be expected to cause severe personal injury or death, unless officers of the parties have executed an agreement specifically governing such use. Buyers represent that they have all necessary expertise in the safety and regulatory ramifications of their applications, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of TI products in such safety-critical applications, notwithstanding any applications-related information or support that may be provided by TI. Further, Buyers must fully indemnify TI and its representatives against any damages arising out of the use of TI products in such safety-critical applications.

TI products are neither designed nor intended for use in military/aerospace applications or environments unless the TI products are specifically designated by TI as military-grade or "enhanced plastic." Only products designated by TI as military-grade meet military specifications. Buyers acknowledge and agree that any such use of TI products which TI has not designated as military-grade is solely at the Buyer's risk, and that they are solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI products are neither designed nor intended for use in automotive applications or environments unless the specific TI products are designated by TI as compliant with ISO/TS 16949 requirements. Buyers acknowledge and agree that, if they use any non-designated products in automotive applications, TI will not be responsible for any failure to meet such requirements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

Products		**Applications**	
Amplifiers	amplifier.ti.com	Audio	www.ti.com/audio
Data Converters	dataconverter.ti.com	Automotive	www.ti.com/automotive
DSP	dsp.ti.com	Broadband	www.ti.com/broadband
Clocks and Timers	www.ti.com/clocks	Digital Control	www.ti.com/digitalcontrol
Interface	interface.ti.com	Medical	www.ti.com/medical
Logic	logic.ti.com	Military	www.ti.com/military
Power Mgmt	power.ti.com	Optical Networking	www.ti.com/opticalnetwork
Microcontrollers	microcontroller.ti.com	Security	www.ti.com/security
RFID	www.ti-rfid.com	Telephony	www.ti.com/telephony
RF/IF and ZigBee® Solutions	www.ti.com/lprf	Video & Imaging	www.ti.com/video
		Wireless	www.ti.com/wireless

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2008, Texas Instruments Incorporated