Ex-09

Implementation of SUBNETTING in CISCO PACKET TRACER Simulator

Aim:-

* To implement the subnetting in CISCO packet Tracer simulator.

Creating A NETWORK TOPOLOGY:

* The first step in implementing classless IP subnetting is to create a network topology in packet Tracer.

Adding the devices:

*) once we have created our network topology we can add devices to it.


*) Here we will be adding routers, witchers & PCS

*) To add device, select the device from the bottom left corner & drag it onto the network topology

Subnetting:

* To subnet the network address of 192.168.1.0124 to provide enough spacl for atleast 6 address for and devices, the Switch & the router, we can use a 127 subnet mask.

* This will give us 8 subnets with 30 hosts address each.

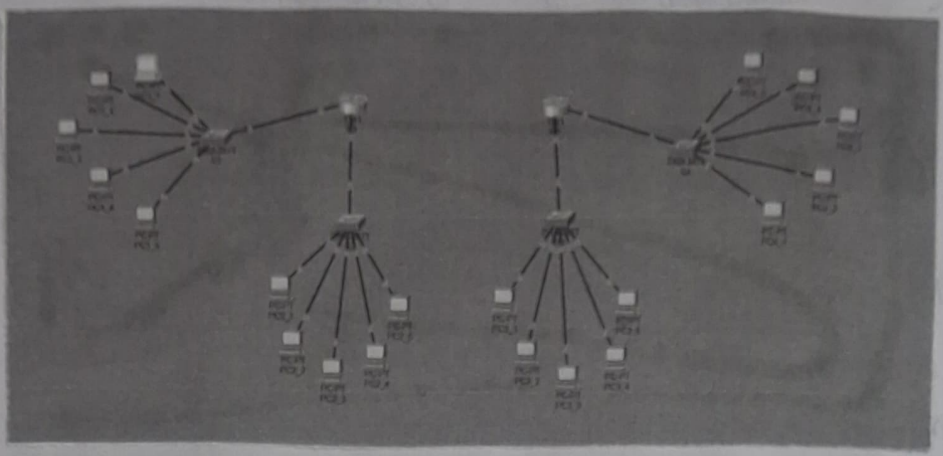

```
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms


C:\>ping 192.168.2.11

Pinging 192.168.2.11 with 32 bytes of data:

Reply from 192.168.2.11: bytes=32 time<1ms TTL=127
Reply from 192.168.2.11: bytes=32 time=0ms TTL=127
Reply from 192.168.2.11: bytes=32 time<1ms TTL=127
Reply from 192.168.2.11: bytes=32 time<1ms TTL=127

Ping statistics for 192.168.2.11:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>
```

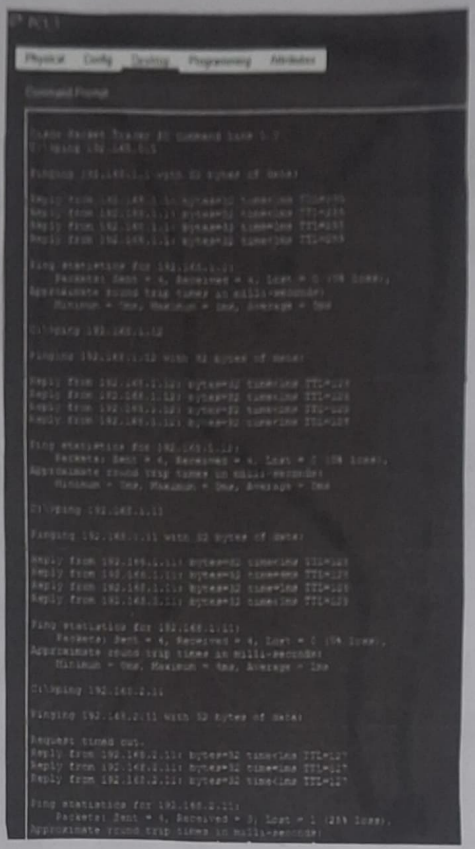

Result :-

* Implementation of Subnetting has been done successfully using cisco packet tracer.