


# OFFICIAL BUILD GUIDE

— FOR THE —

# *Polybar* SYSTEM

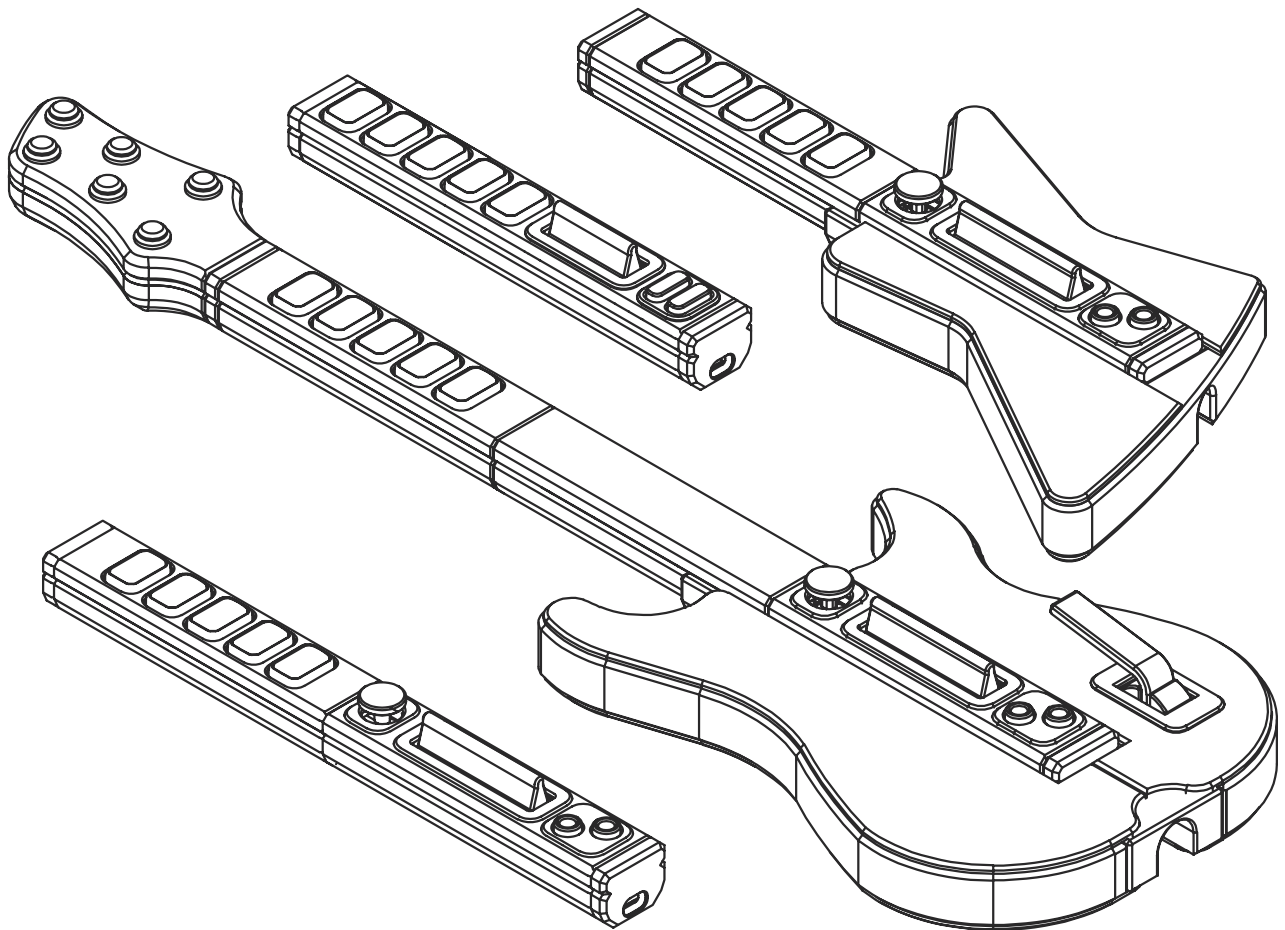

# INTRODUCTION

## THANK YOU FOR DOWNLOADING THE POLYBAR PROJECT!

This guide will assist you with assembling your guitar controller.

This guide assumes that you have a general understanding of soldering as a concept. This guide does not provide any soldering tutorials, it covers the assembly of the controller and placement of PCB components.

You can find soldering tutorials online for the various components you will find in this guide. Don't be afraid to ask for help in our Discord server!



**Join our  
Discord!**

**We are more than happy to help!**

# CREDITS

I have worked on the Polybar project for over four years at this point. I've met a lot of awesome people along the way. Contributors, friends and community members that I all appreciate so much.

Music games have always meant a lot to me, and my mission statement from the beginning was that, I wanted to create the best feeling music game controller you could get your hands on.

It had to be cheap, it had to be easy to build, and be totally free for everyone to make. The project has come a very long way since it's inception, and evolved to be so much greater than I could have imagined.

I hope the Polybar System can meet your highest expectations! I have spent hundreds of hours designing, testing and ensuring that when you hit print, the best guitar controller you have ever used comes out of your printer.

Thank you so much for downloading, and please enjoy the hard work that rest of the team and I have put in to this for you to enjoy.

## **CREDITS:**

Be sure to say thank you when you see these users on the Discord Server! From me to the contributors, thank you!

**roadsidebomb** - Creator

**HeuristicBishop** - PCB Contributor

**PtigaD** - PCB Contributor

**Pits** - Handwire components and build guide

**GetRektRyan** - PCB Contributor and wireless support designer

**PossumOG** - PCB Assembly and solderless kit designer

**Moose** - Build Guide design and layout

**My deepest thanks and gratitude to everyone that has contributed their ideas and time, you are the best! Thank you!**

# DISCLAIMERS

## LIABILITY AND USAGE:

Three Pieces Controllers, its owners, and affiliates are not liable for any consequences arising from the use or misuse of this product or its components. The information provided in this guide is offered without any expressed or implied warranty. The end user is responsible for errors in handling components, assembly, or information interpretation. Exercise caution when working with soldering equipment, 3D printers, and lithium polymer batteries.

## LICENSING AND RESTRICTIONS:

This product is distributed under the Creative Commons Attribution-NonCommercial-ShareAlike 4.0 International License, making it source-available. It is not classified as an open-source project and remains the exclusive property of Three Pieces Controllers. You are permitted to create and share remixes of this product online, provided you adhere to the same licensing terms. You may incorporate the concepts and ideas presented here into your personal projects. However, commercial reproduction or replication of this product is strictly prohibited.




### **NOTE: LIPO BATTERY**

**Due to the nature and characteristics of lithium-ion batteries, we are not responsible or liable for any damages, malfunction, injuries, fire, burns, or any other consequences or results that may occur with incorrect or correct use of this module or any battery, device, or item this module is used with, including following or using any instructions, guidance, or direction of any kind from the Three Pieces Controllers team or others. By using this product you accept the preceding.**

# CONTENTS

DIAGRAM VIEW - POLYBAR MINI/MAX	6
DIAGRAM VIEW - POLYBAR MICRO	7
DIAGRAM VIEW - CONTROLLER FRAME	8
DIAGRAM VIEW - HEADSTOCK & WHAMMY	9
COMPONENTS - STANDARD PARTS LIST	10
COMPONENTS - OPTIONAL PARTS LIST	11
STRUM BOARD - POLYBAR MINI/MAX	12
STRUM BOARD - POLYBAR MICRO	13
FRET BOARD - POLYBAR MICRO/MINI/MAX	14
COMPLETED PCB EXAMPLES	15
SOLDERED COMPONENT EXAMPLES	16
TOOLS & SUPPLIES	17
POLYBAR MINI/MAX ASSEMBLY	19
BODY FRAME, WHAMMY & HEADSTOCK ASSEMBLY	27
POLYBAR MICRO	36
PROGRAMMING & CONFIGURING	41

# DIAGRAM VIEW - POLYBAR MINI/MAX

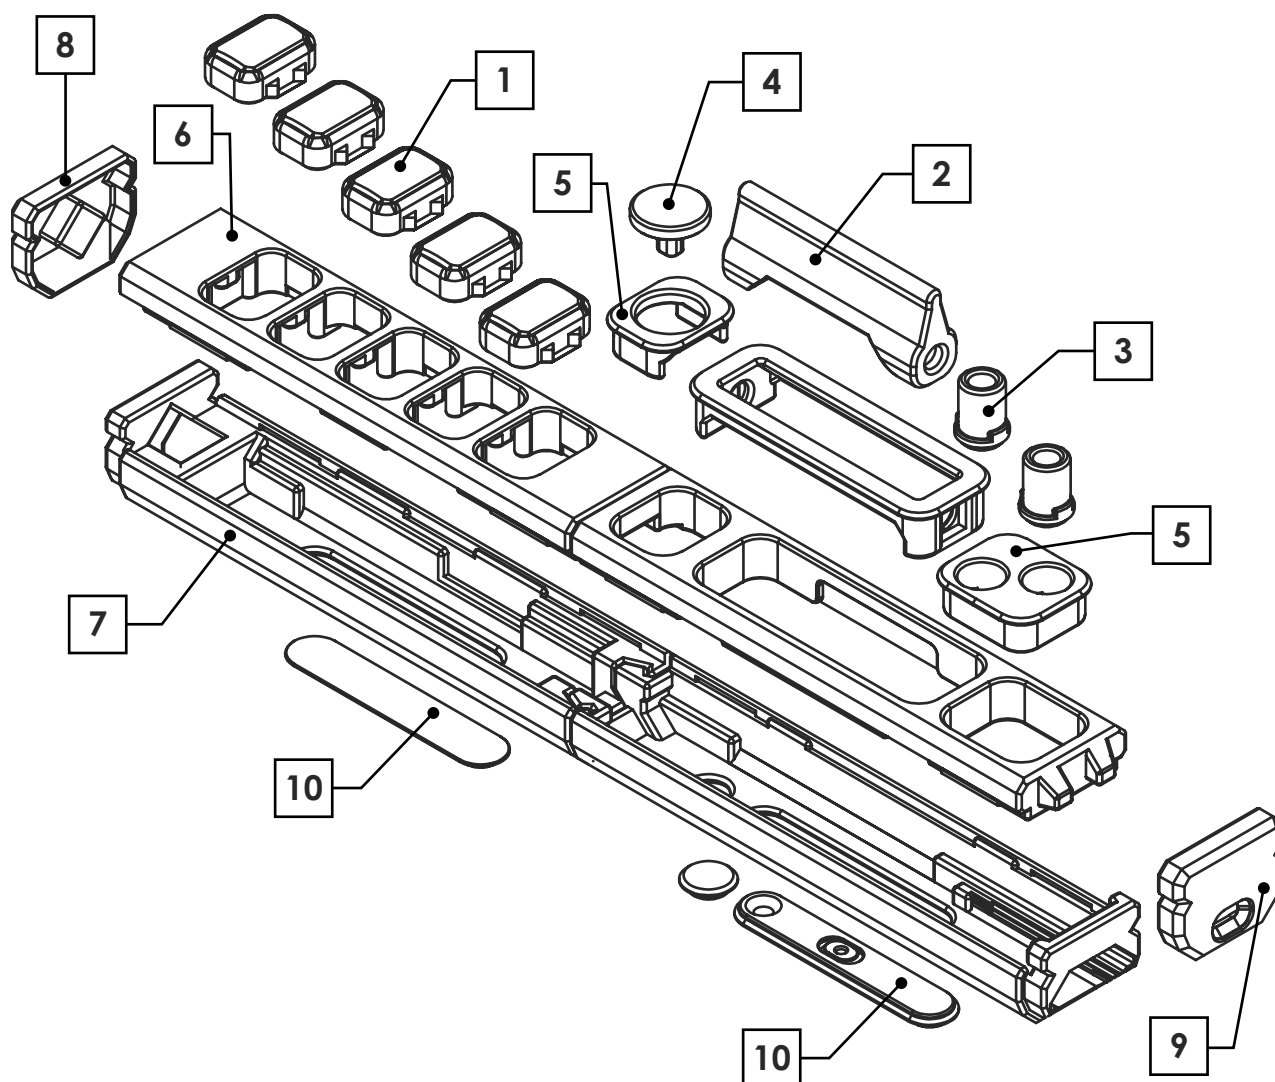


**NOTE:** MAX CONFIGURATION NOT SHOWN

## LEGEND:

1. Frets (Inserts not shown)
2. Strum Bar (Pins not shown)
3. Start/Select Buttons
4. Joystick
5. Joystick/Strum/Button Chassis
6. Top Shells (Fret/Strum)
7. Bottom Shells (Fret/Strum)
8. Fret Case Cap
9. Strum Case Cap
10. Accessory/Switch Plate

# DIAGRAM VIEW - POLYBAR MICRO

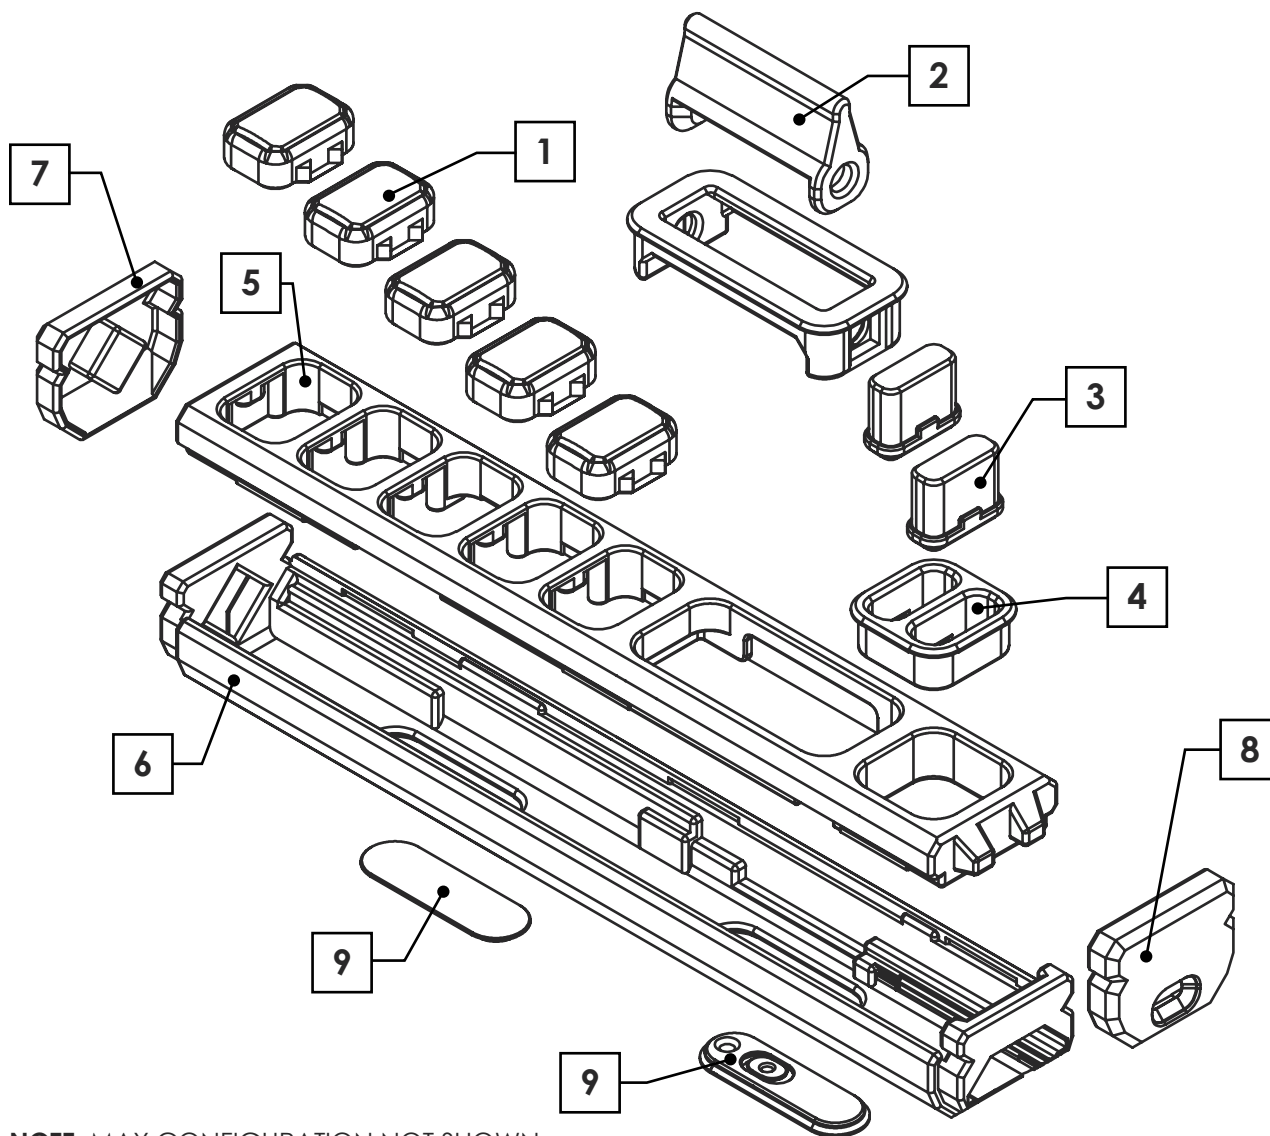


**NOTE:** MAX CONFIGURATION NOT SHOWN

## LEGEND:

1. Frets (Inserts not shown)
2. Strum Bar
3. Start/Select Buttons
4. Strum/Button Chassis
5. Top Shells (Fret/Extension/Strum)
6. Bottom Shells (Fret/Extension/Strum)
7. Fret Case Cap
8. Strum Case Cap
9. Accessory/Switch Plate

# DIAGRAM VIEW - CONTROLLER FRAME

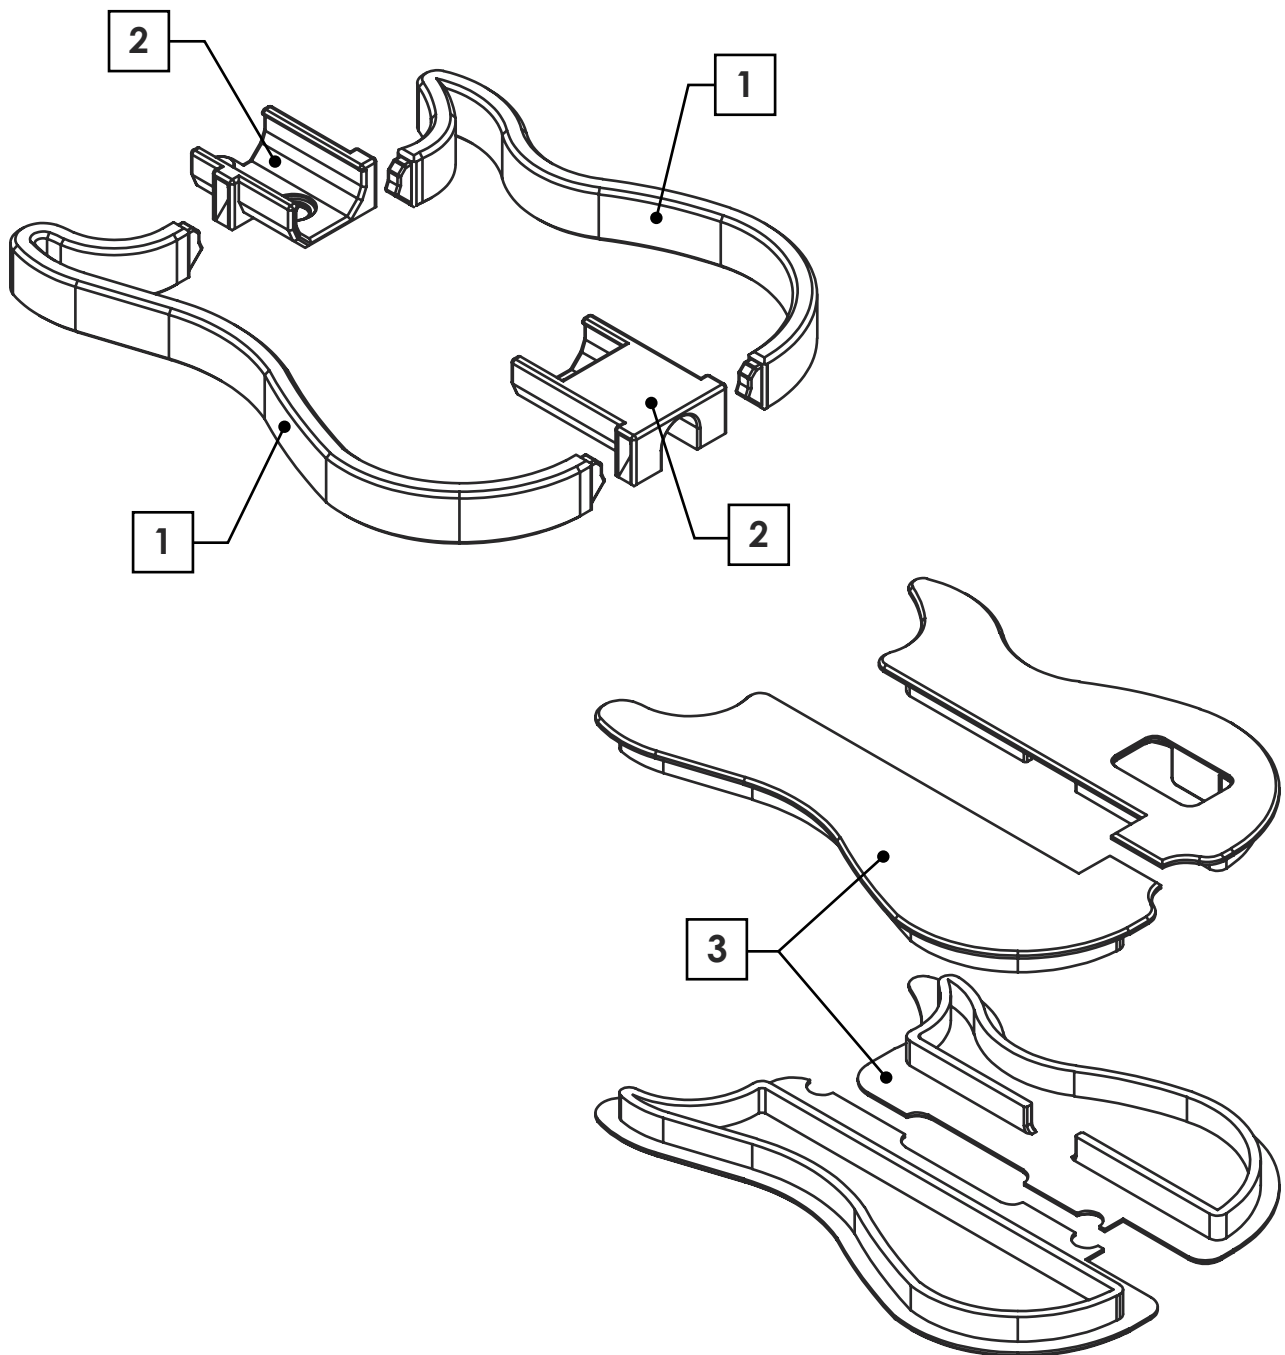


**NOTE:** MINI FRAME NOT SHOWN

## LEGEND:

- 1. Frame Wing
- 2. Controller Sleeve
- 3. Fill Plate (Optional)



# DIAGRAM VIEW - HEADSTOCK & WHAMMY

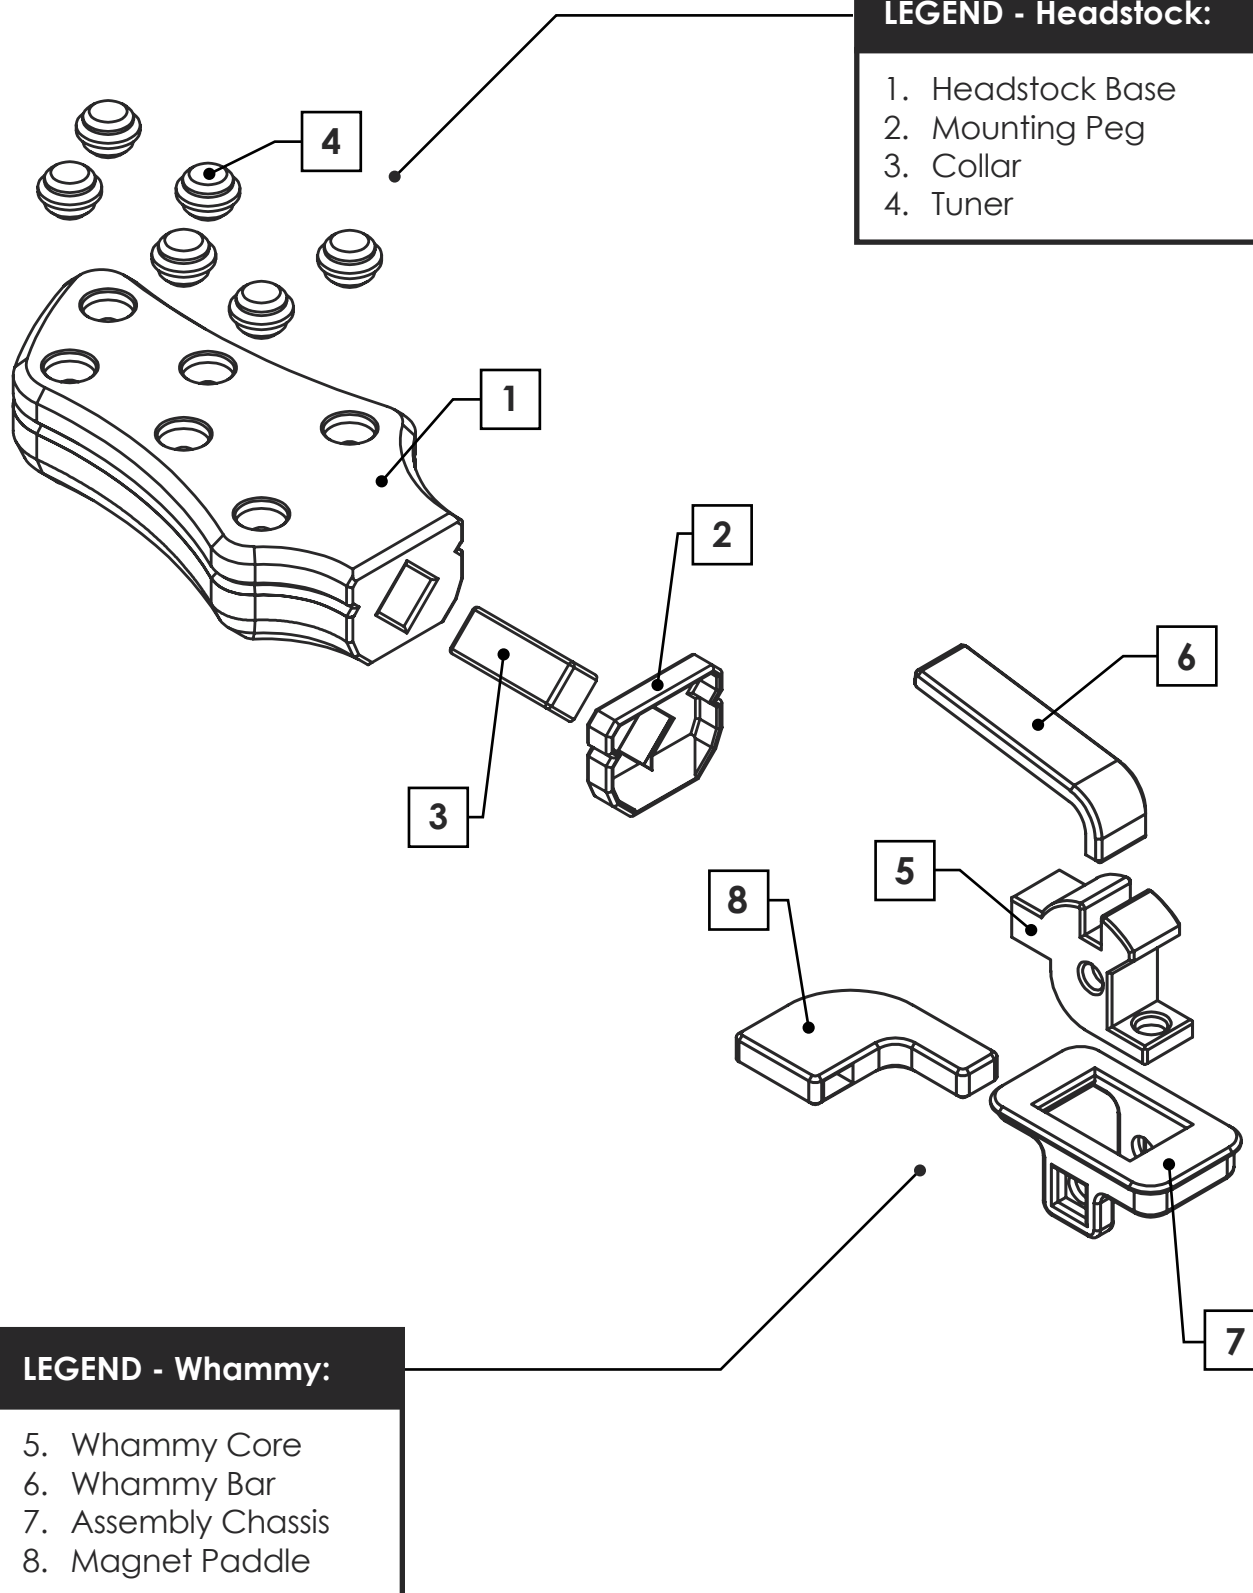

# COMPONENTS - STANDARD PARTS LIST

1



RASPBERRY PI PICO  
(PICO W OPTIONAL FOR  
WIRELESS CAPABILITY)

2



MX CHERRY  
HOTSWAP SOCKET

3



KAILH CHOC  
HOTSWAP SOCKET

4



KAILH CHOC LINEAR  
SWITCH **OR** MX CHERRY  
LINEAR SWITCH

5



KAILH BOX NAVY

6



JOYSTICK  
(MODERN STYLE)

7




TACTILE SWITCH  
(6X6X5)

8



BALL TILT SWITCH

9



SK9822 LEDs  
(OPTIONAL)

10



ADXL345  
ACCELEROMETER  
(OPTIONAL)

11



9-PIN HEADER  
(MICRO ONLY)

12



6x12x4mm BEARING  
(STRUM AND WHAMMY)

# COMPONENTS - OPTIONAL PARTS LIST

## OPTIONAL COMPONENTS FOR WIRELESS CONNECTIVITY

1



RASPBERRY PI PICO W  
(SEE NOTE AT BOTTOM)

13



1000mAh BATTERY  
10X20X50  
(READ DISCLAIMER)

14



2 PIN FEMALE JST  
CONNECTOR WITH  
LEADS

15



TP4056  
CHARGE CONTROLLER

16



TWO POSITION  
SLIDE SWITCH

## OPTIONAL COMPONENTS FOR WHAMMY

17



OH49E LINEAR  
HALL SENSOR  
(OPTIONAL)

18



20x5x2 MAGNETS  
(OPTIONAL)

19



7x20 SPRING  
(OPTIONAL)

!

### NOTE: RASPBERRY PI PICO COMPATIBILITY

Please use Official Pi Pico W boards ONLY. Clone boards from unofficial sources have wireless chips incompatible with our config tool and Santroller.

## 10 WIRE CONNECTION

## 6 JOYSTICK

## 10 ADXL345 ACCELEROMETER

**9 SK9822 LED (OPTIONAL)**

## 5 KAILH BOX NAVY SWITCH

## 9 SK9822 LEDs (OPTIONAL)

## 8 BALL TILT SWITCH

## 17 HALL SENSOR (OPTIONAL)

**9 SK9822 LEDs (OPTIONAL)**

**7 TACTILE SWITCH  
(6X6X5)**

## BATTERY LEAD PADS

**TP4056 CHARGE  
CONTROLLER  
(OPTIONAL)**


## MX CHERRY HOTSWAP SOCKET

**TWO POSITION  
SLIDE SWITCH  
(OPTIONAL)**

**RASPBERRY  
PI PICO (PICO  
W OPTIONAL)**


**NOTE:** The same principles apply for the KB2040 boards.  
Please use the Pi Pico boards for optimal support and functionality.

# STRUM BOARD - POLYBAR MICRO

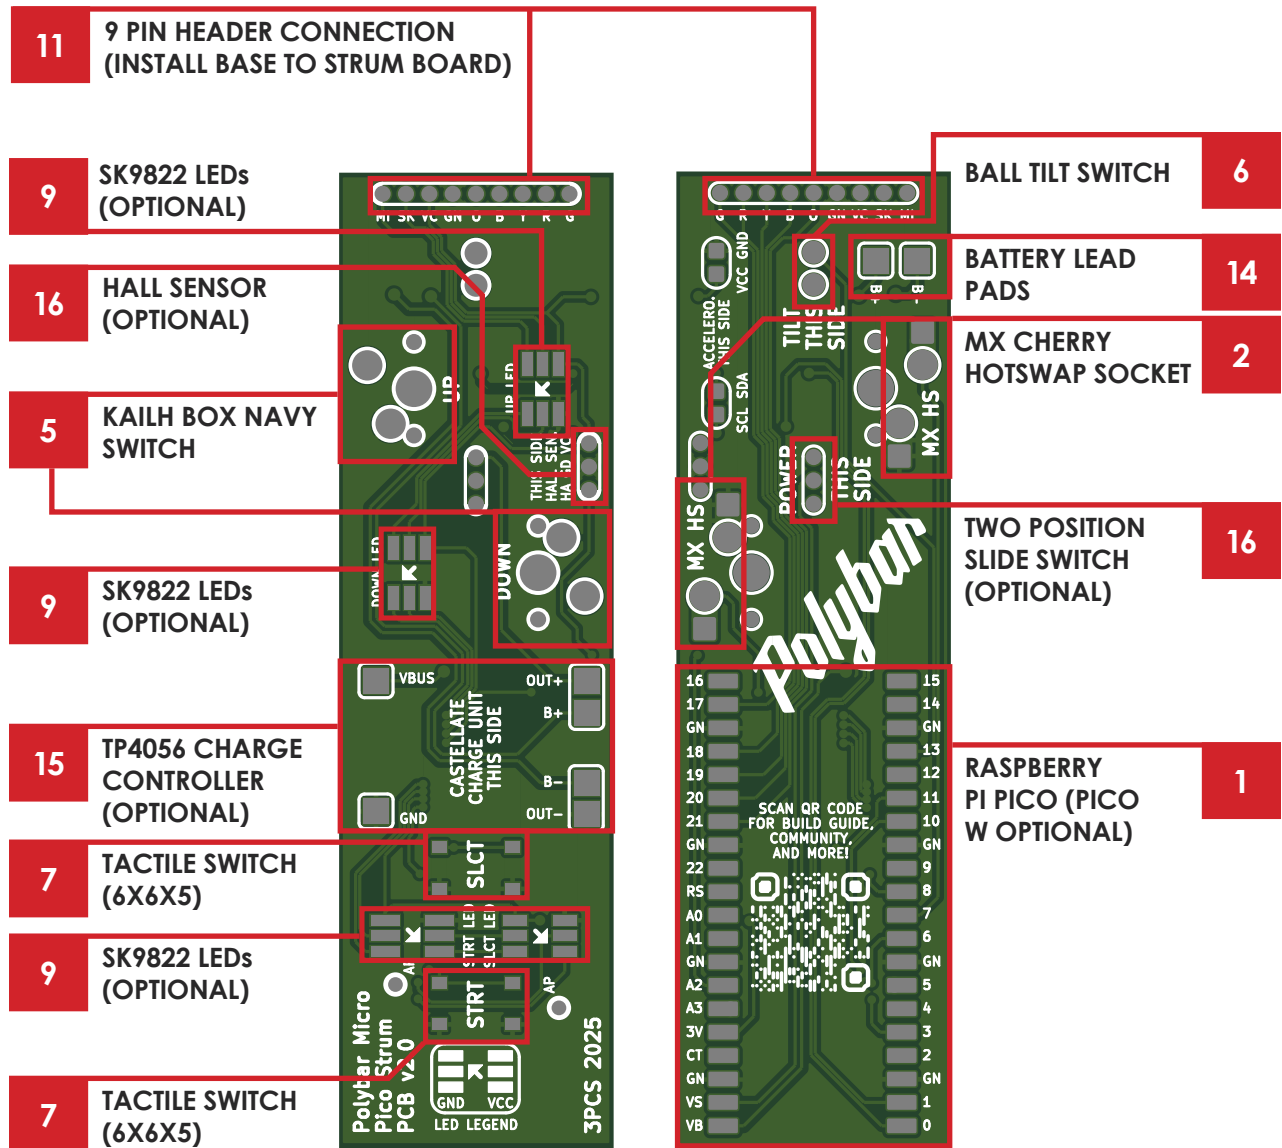

**NOTE:** The same principles apply for the KB2040 boards.  
Please use the Pi Pico boards for optimal support and functionality.



# FRET BOARD - POLYBAR MICRO/MINI/MAX

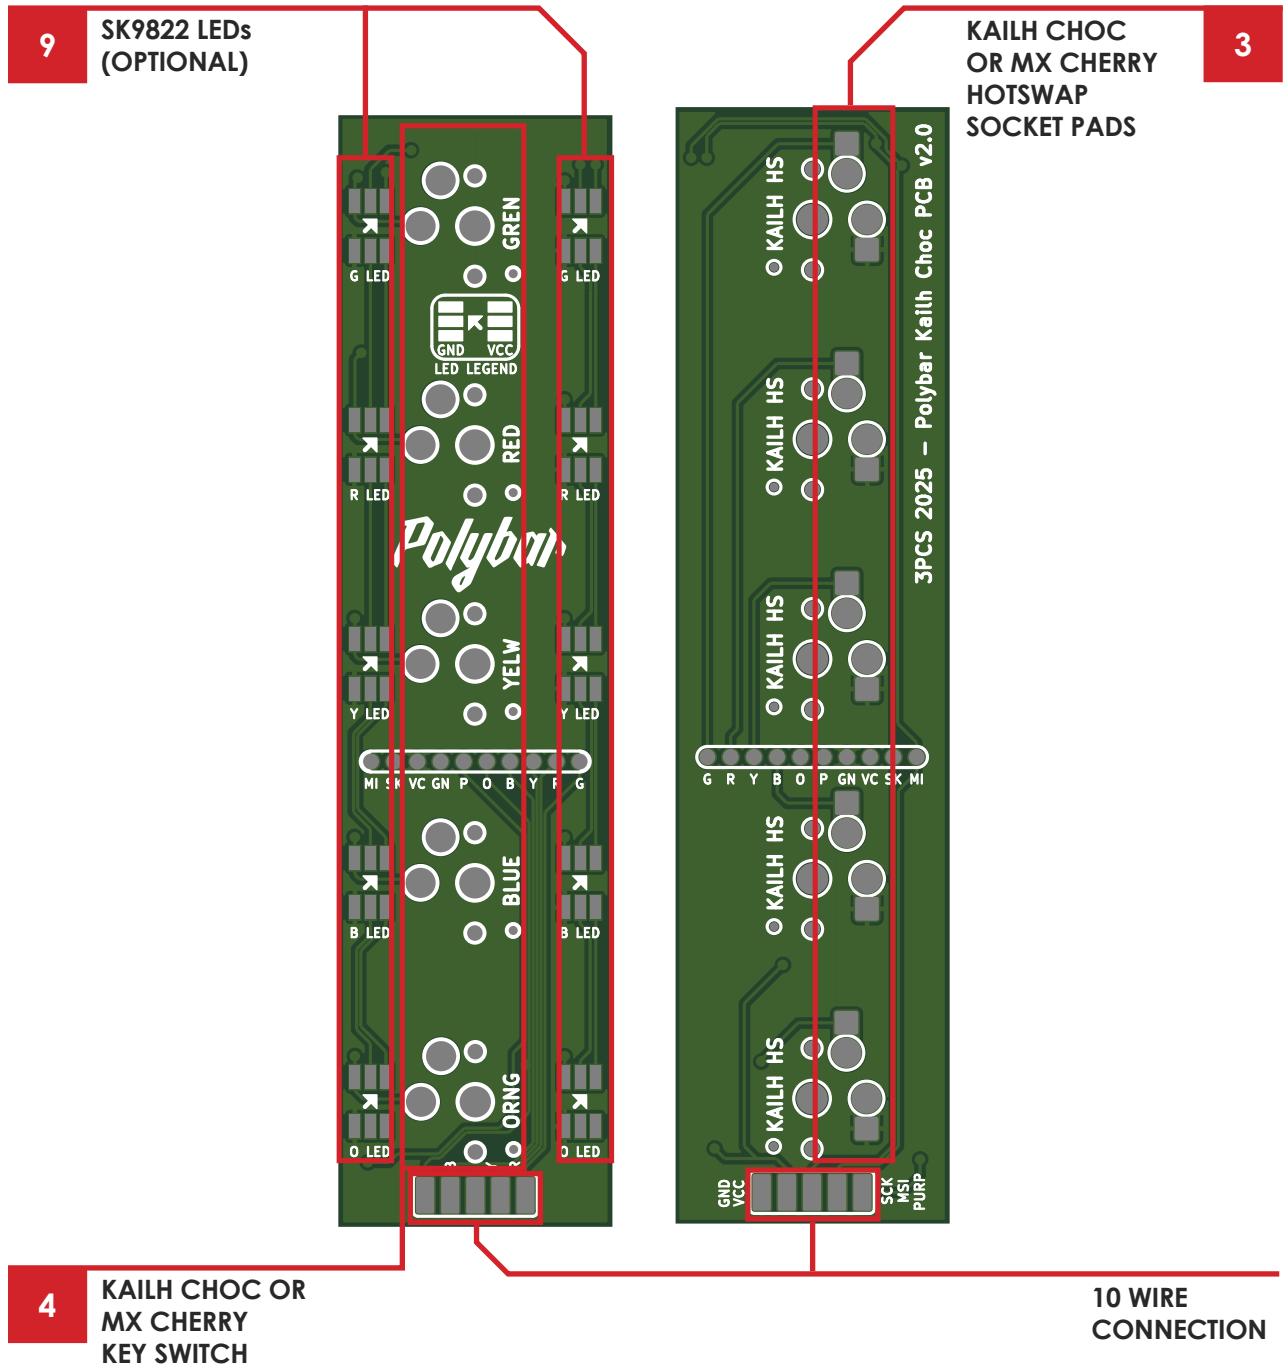

**NOTE:** The same principles apply for the MX Cherry board. Either option is optimal, but Kailh Chocs are required for smaller form factor wireless support. If using MX Cherry small form factor wireless builds, please add an extension to accommodate the battery.















# COMPLETED PCB EXAMPLES

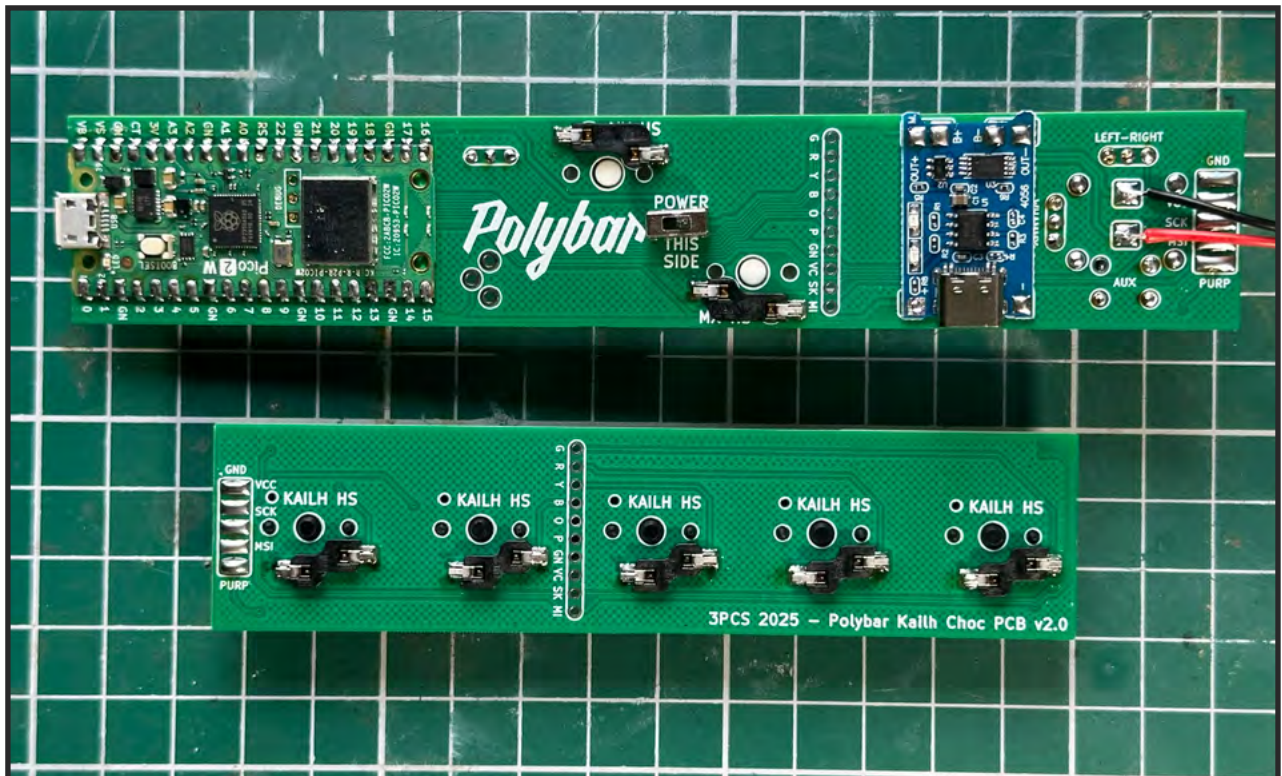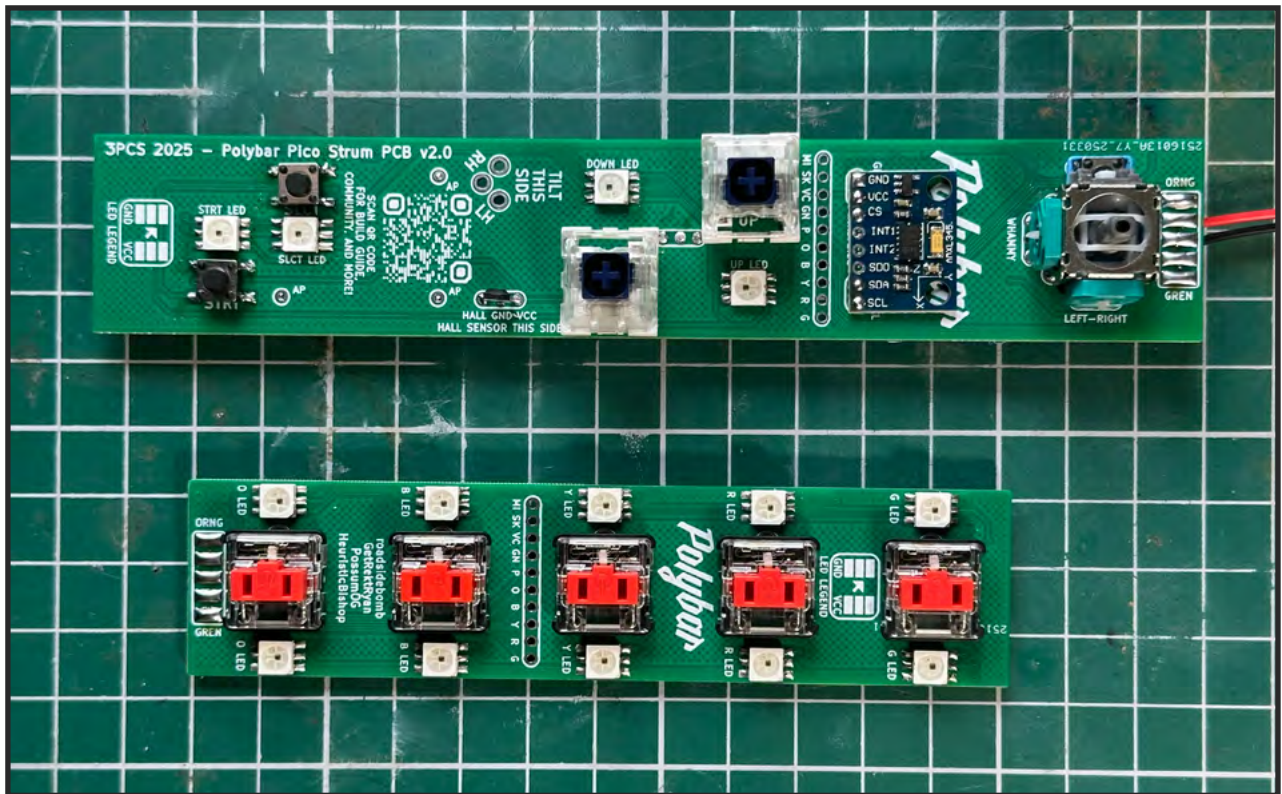



# SOLDERED COMPONENT EXAMPLES

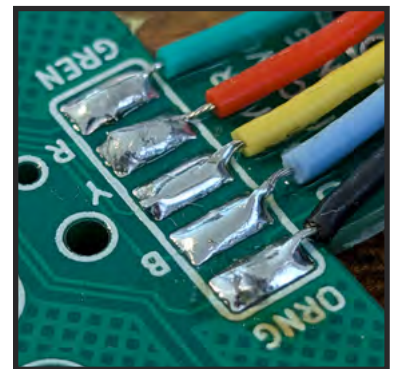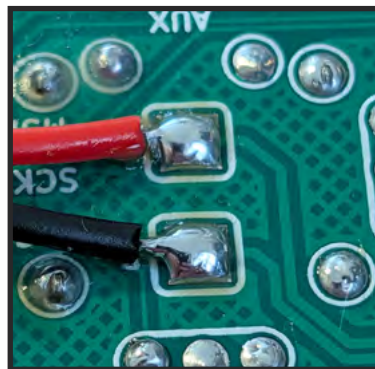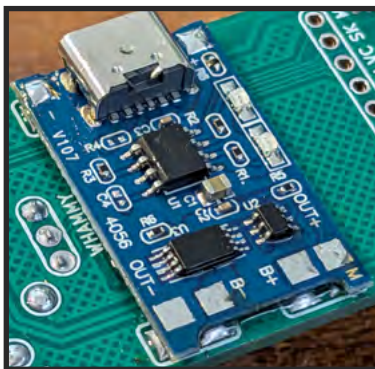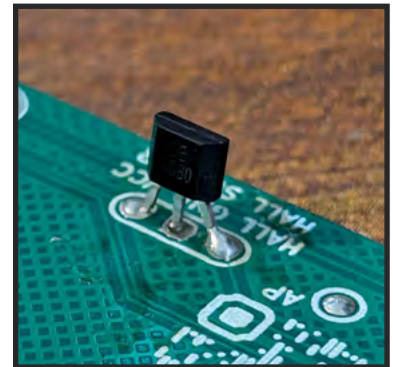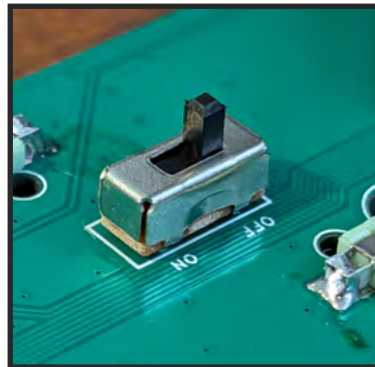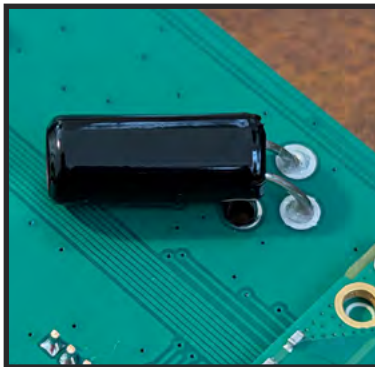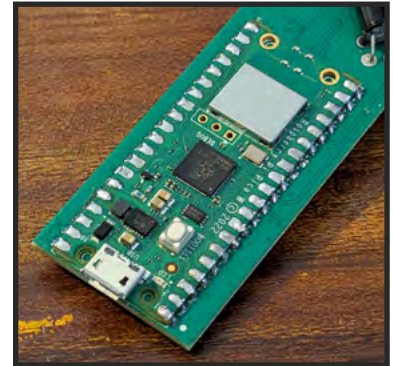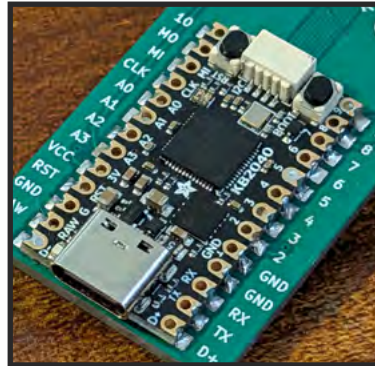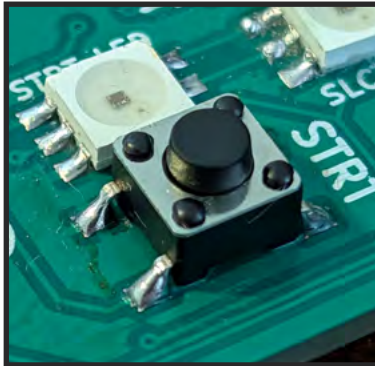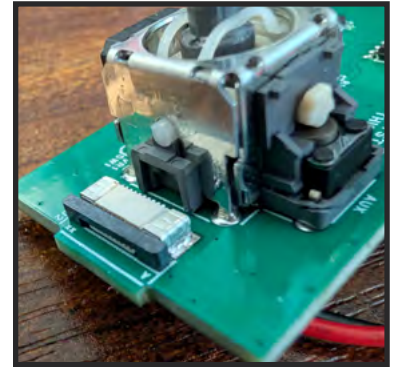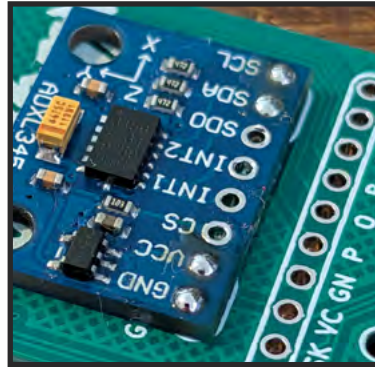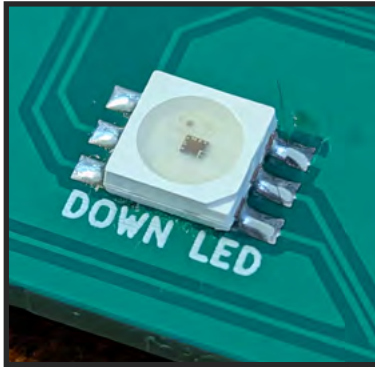



# TOOLS & SUPPLIES



**THE TOOLS SHOWN ABOVE ARE RECOMMENDED FOR BUILDING THE POLYBAR & MINIBAR.**


While all of these tools aren't completely necessary, it will save you time and headache if you plan on building multiple units.

You can build the polybar & minibar guitars with a basic soldering kit from online retailers such as Amazon or Aliexpress.

- Soldering iron
- Rosin core solder
- Soldering flux
- Flush cutters
- Tweezers
- Helping hands
- Misc. Wire
- Superglue


# *Polybar* MINI + *Polybar* MAX

## —— MAIN BODY ASSEMBLY ——

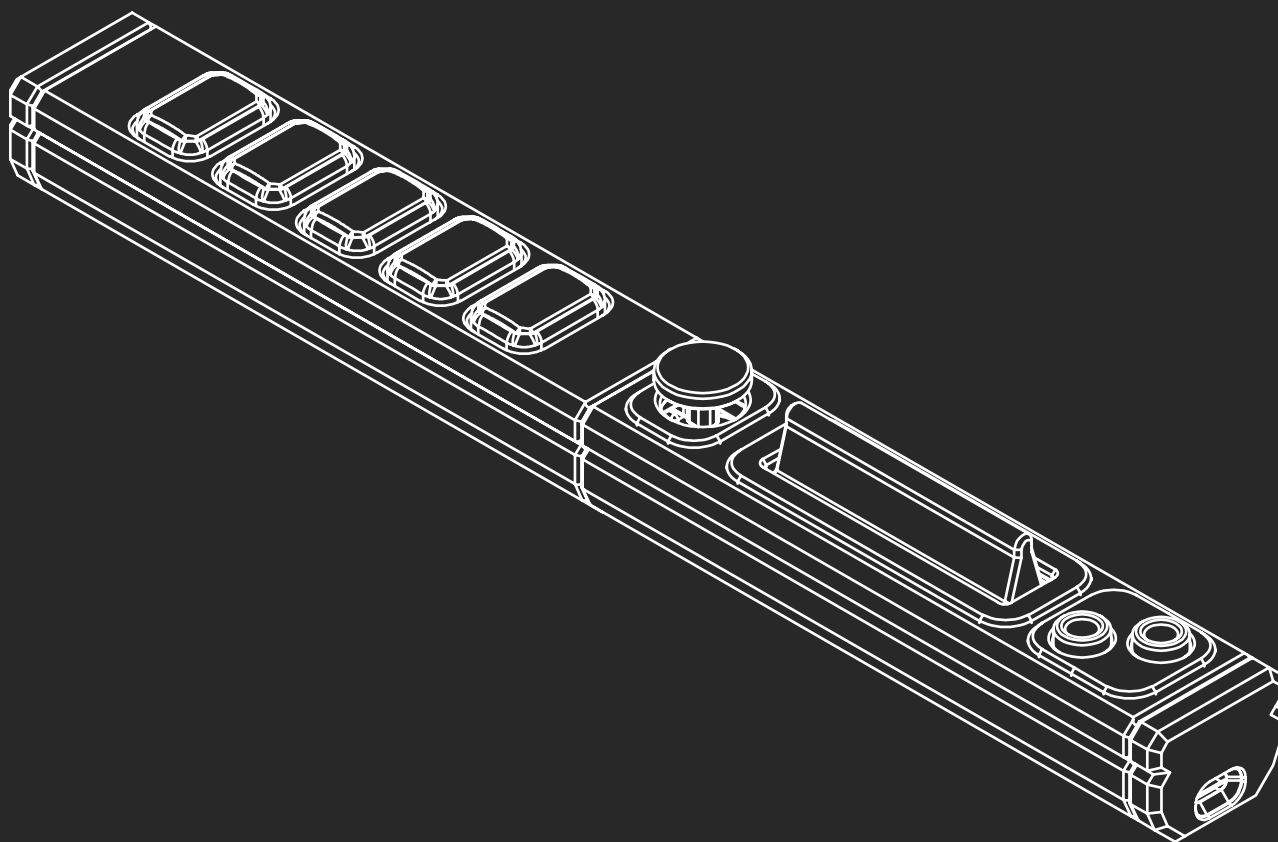


# POLYBAR MINI/MAX ASSEMBLY

## STEP 1

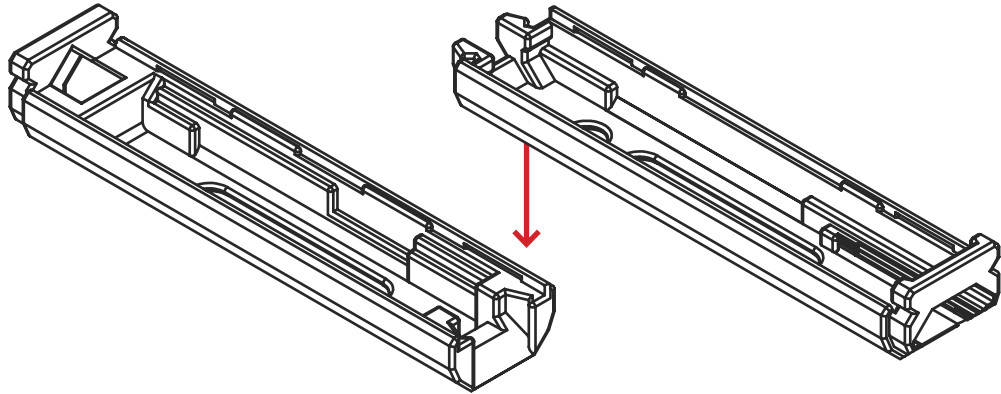

Start by using the dovetail joints to connect the two bottom shells.

## STEP 2

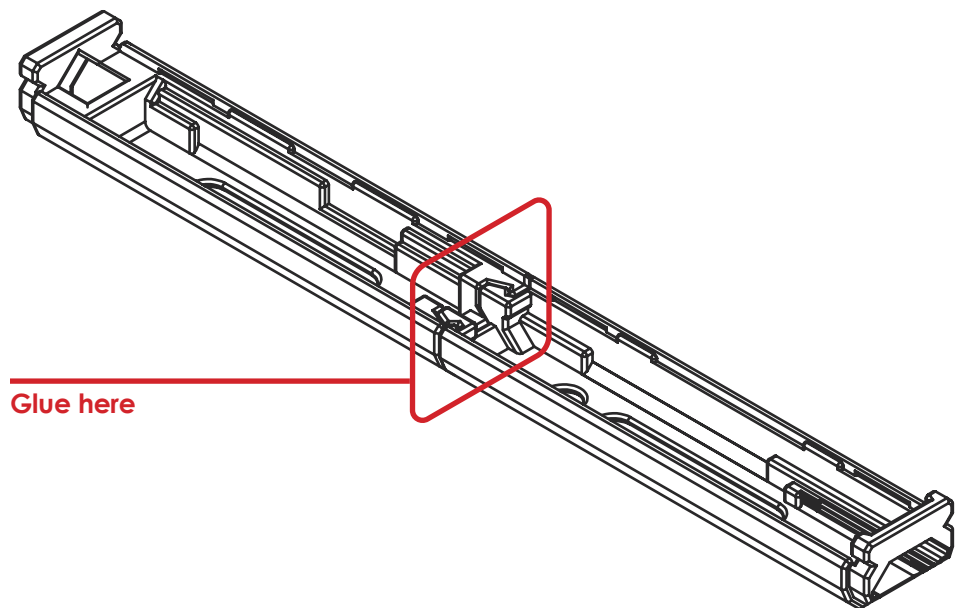


Add glue to the dovetail joint to secure the two bottom shells together.

**NOTE:** This may not be necessary depending on your specific filament or desired configuration.

**Note:** Max configuration not shown.  
Install shell extensions depending on your desired controller length.


# POLYBAR MINI/MAX ASSEMBLY (CONT.)

## STEP 3

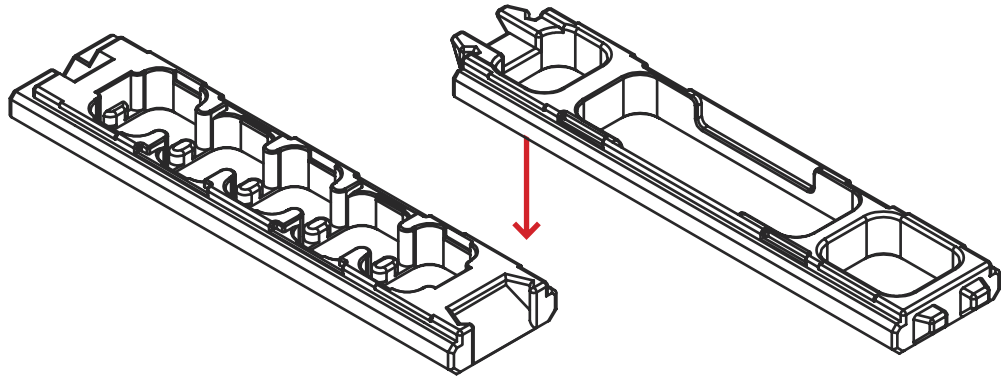

Use the dovetail joints to connect the two top shells.

## STEP 4

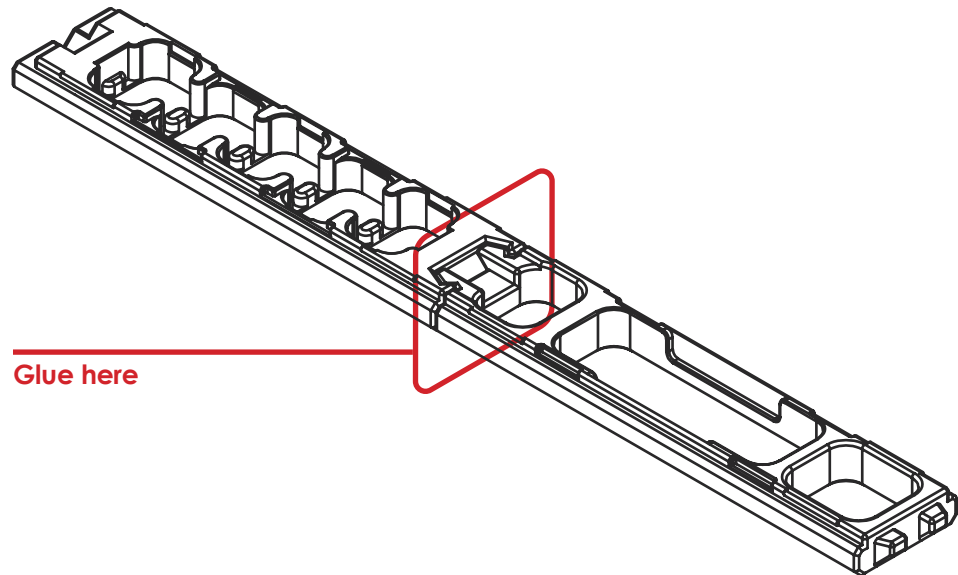


Add glue to the dovetail joint to secure the two top shells together.

**NOTE:** This may not be necessary depending on your specific filament or desired configuration.

**Note:** Max configuration not shown.  
Install shell extensions depending on your desired controller length.

# POLYBAR MINI/MAX ASSEMBLY (CONT.)

## STEP 5

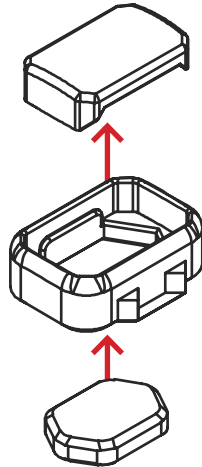


**NOTE:** Pro frets shown, glue as necessary for stability.

Build your five fret assemblies.


**NOTE:** If using "pro" fret inserts, you will need to force the keyswitch stuck, install the "pro" fret insert onto your keyswitch, then install the fret assembly onto the insert.

## STEP 6

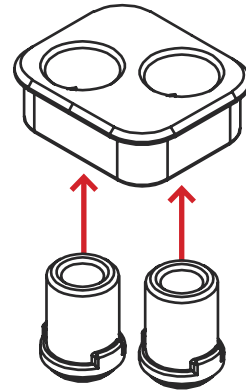


Install the start and select buttons into the chassis.

## STEP 7

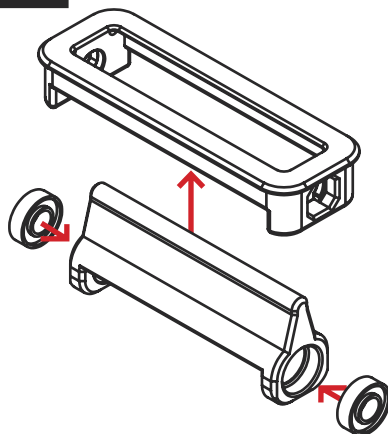

Push the ball bearings into the sides of the strum bar, and slide the strum bar into the chassis.

## STEP 8

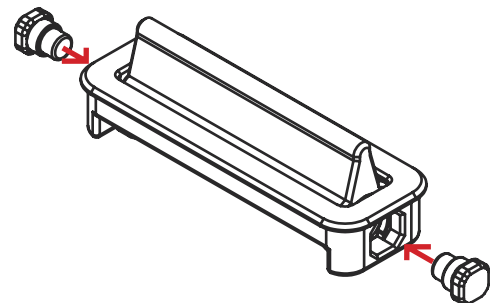


**NOTE:** If strum assembly has stiffness/play, try an alternate pin file. You may need to break in your prints, depending on printer calibration.

Push the rotation pins into the strum bar chassis and ball bearings, and ensure free and proper rotation of the strum bar.


# POLYBAR MINI/MAX ASSEMBLY (CONT.)

## STEP 9

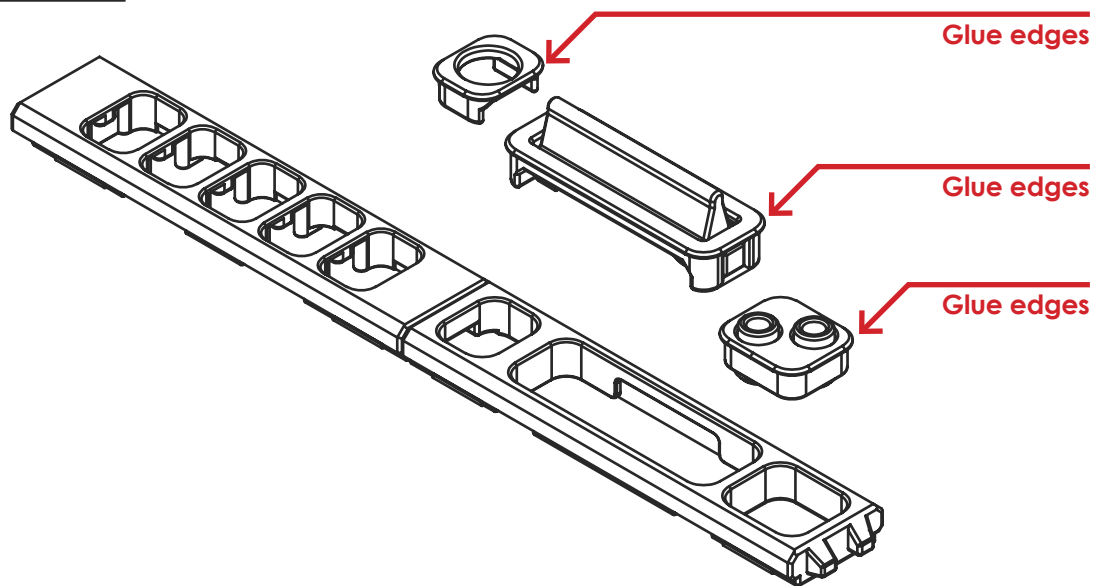


Insert all three chassis components into the front face of the top shell assembly. Glue is recommended to hold the chassis components into the top shell assembly.

## FRONT SHELL ASSEMBLY COMPLETE

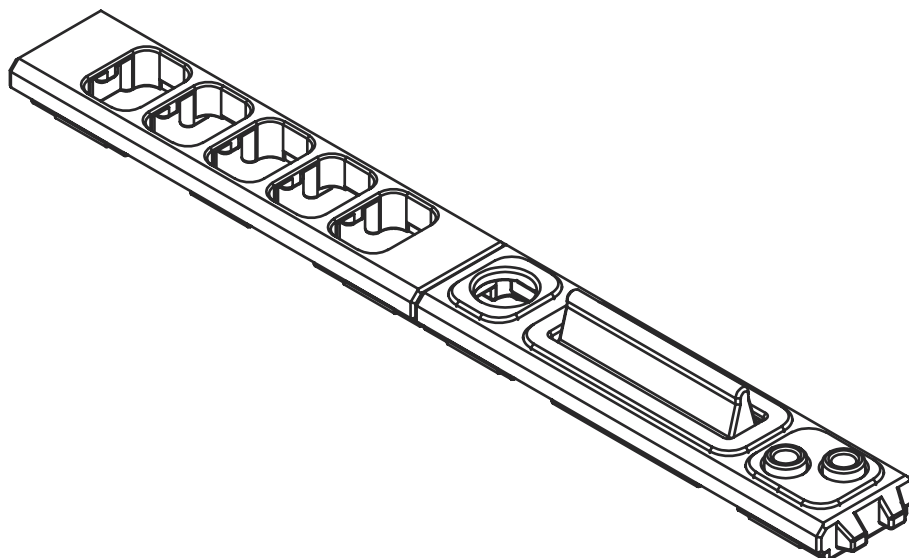

# POLYBAR MINI/MAX ASSEMBLY (CONT.)


## STEP 10

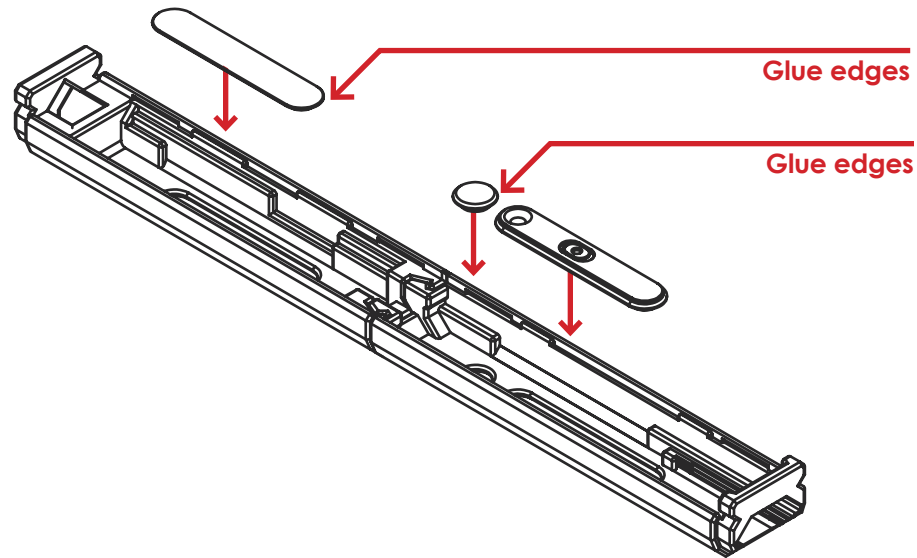

Install the three accessory cover plates into the bottom shell.

**NOTE:** Plates used will change depending on your desired configuration. Consider printing the circular plate in transparent filament as a battery readout. If using the power switch plate, ensure the dimple is facing the frets for proper alignment.

## STEP 11

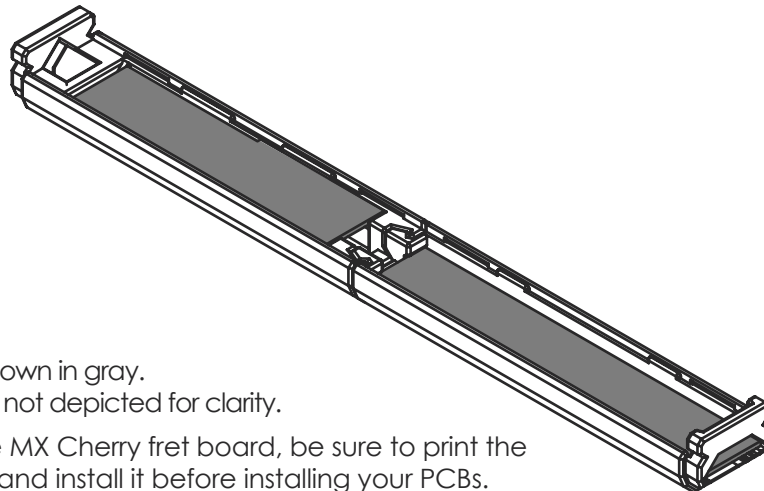

**NOTE:** PCBs are shown in gray.  
PCB components not depicted for clarity.

**NOTE:** If using the MX Cherry fret board, be sure to print the support bracket and install it before installing your PCBs.

Insert your PCBs into the bottom shell assembly.


**NOTE:** If opting for bluetooth and battery support, use the opening in the bottom fret shell as a battery caddy. Add support or tape as needed to secure battery.

**NOTE:** Ensure proper alignment of the power switch by sliding the switch on (towards the frets), then tilt the controller forward to allow the 3D printed switch to slide forward then install the PCB.




# POLYBAR MINI/MAX ASSEMBLY (CONT.)

## STEP 12

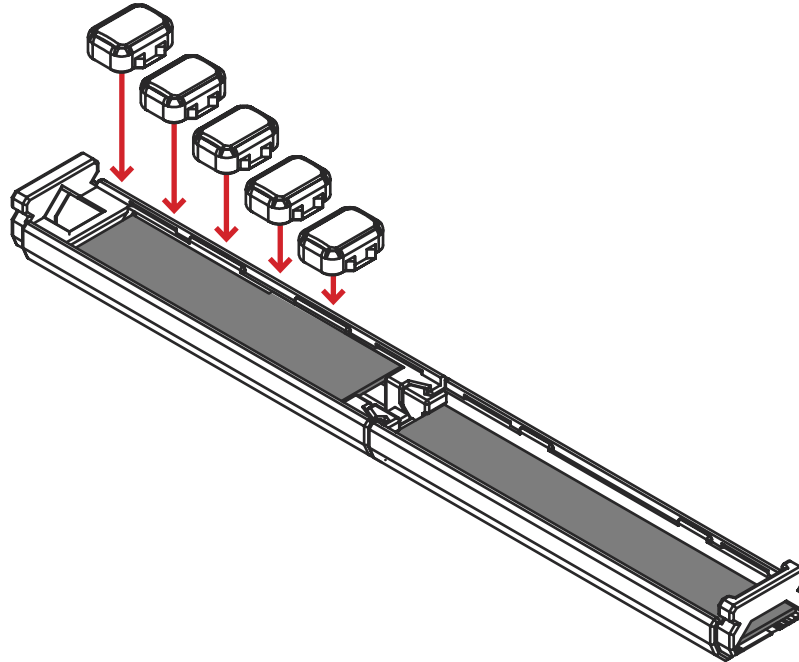

Install your five fret assemblies onto the PCB and keyswitches. Depending on your desired configuration in previous steps, this may vary.

## STEP 13

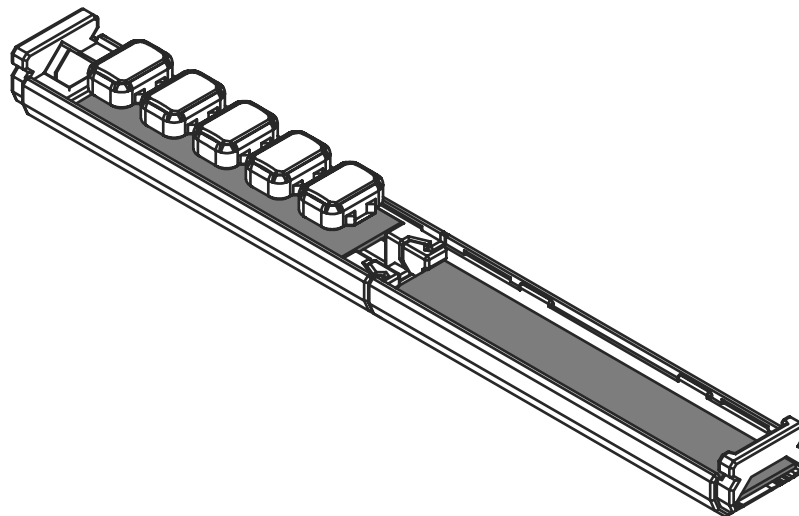


With your fret switches installed, test that all components and inputs function correctly, the battery functions, and adjust as needed with the firmware configurator tool.



## POLYBAR MINI/MAX ASSEMBLY (CONT.)

### STEP 14

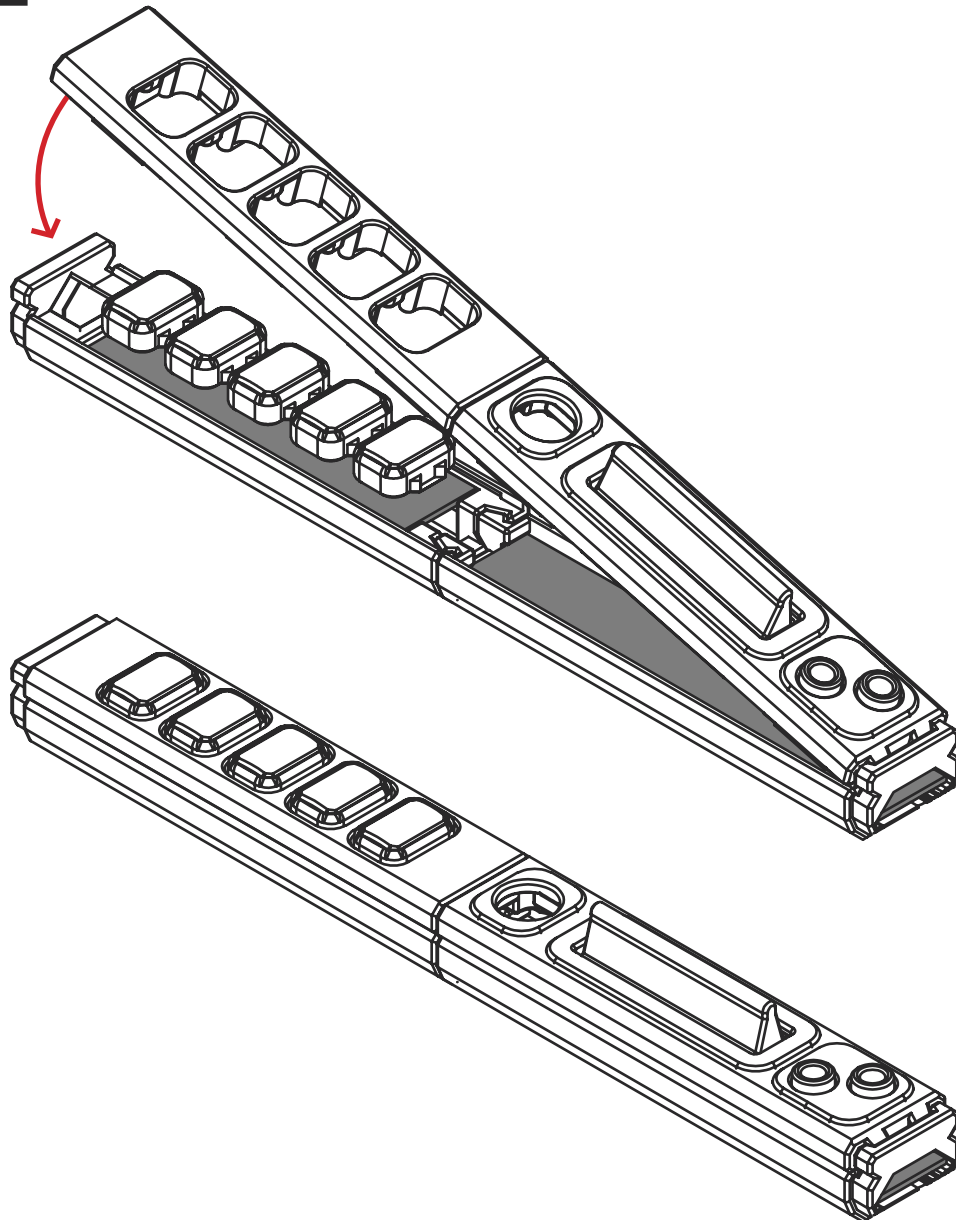


Install the top shell assembly of the controller into the bottom assembly.

Start by **pushing the top shell assembly into the hold down** near the end of the controller, and carefully close the shell while ensuring all components are secure.

**Press the shells closed firmly to engage snap clips** to seal the controller.

# POLYBAR MINI/MAX ASSEMBLY (CONT.)


## STEP 15

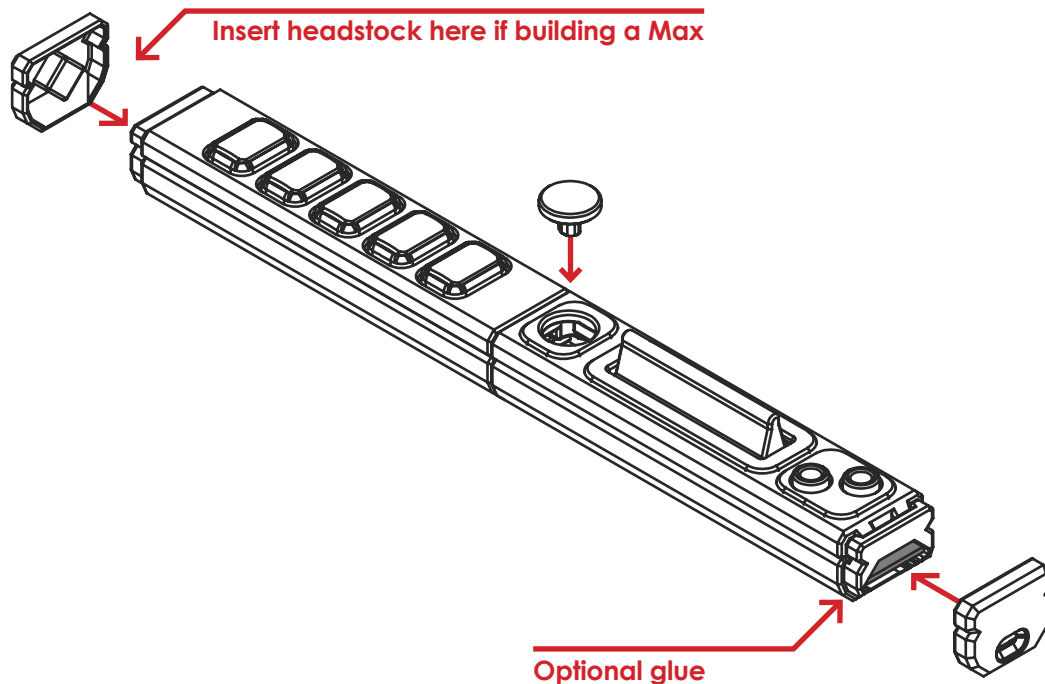

Install the finish caps and joystick onto your controller. Add glue to the finish caps where necessary. If using accessories, it is recommended to glue the end caps on.


**NOTE:** The top cap can be used for access to disassemble the housing, glue at your discretion.

## ENJOY YOUR COMPLETED POLYBAR MINI/MAX

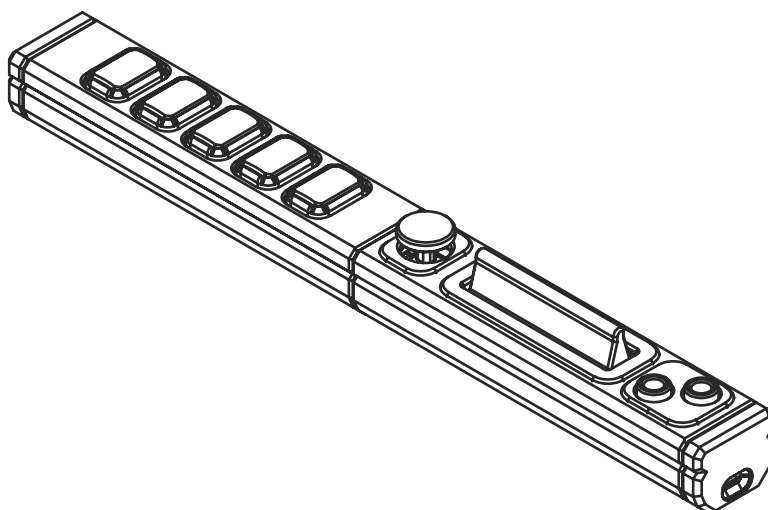


# *Polybar* MINI + *Polybar* MAX

BODY FRAME, WHAMMY  
& HEADSTOCK ASSEMBLY

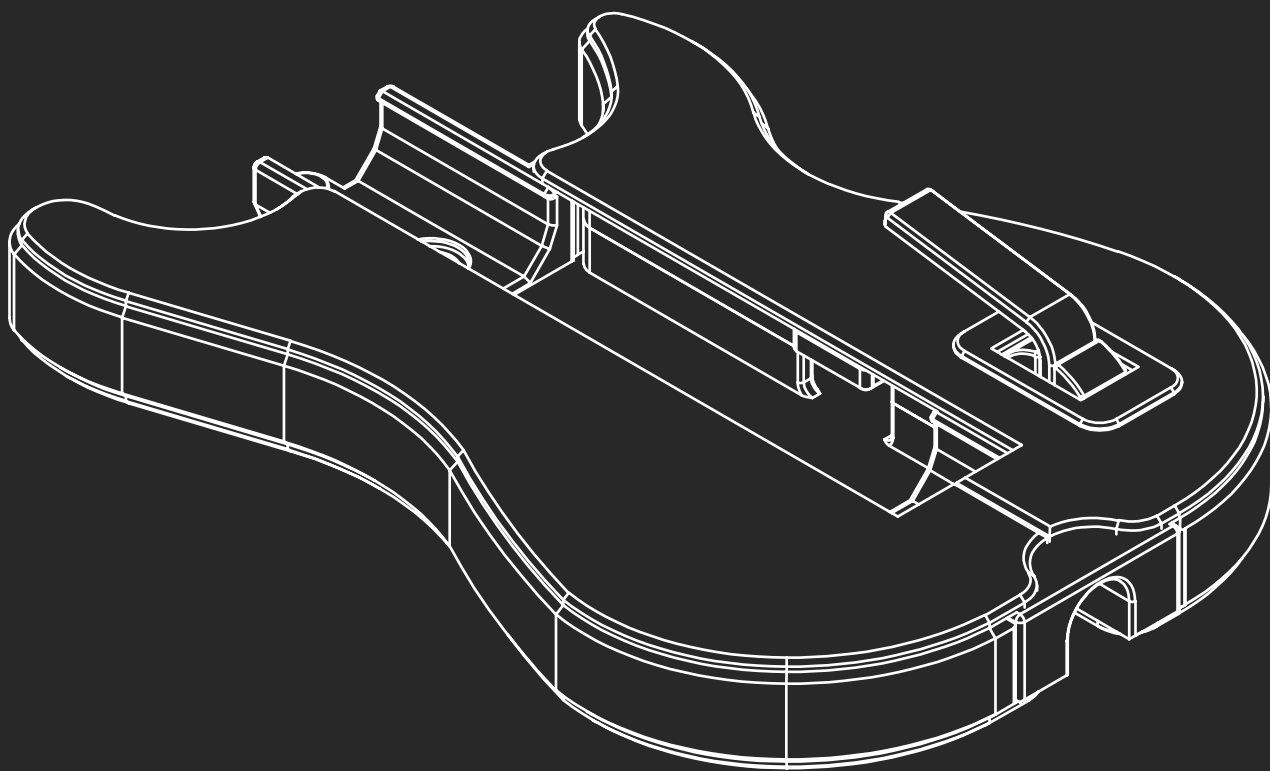

# POLYBAR BODY FRAME


## STEP 1

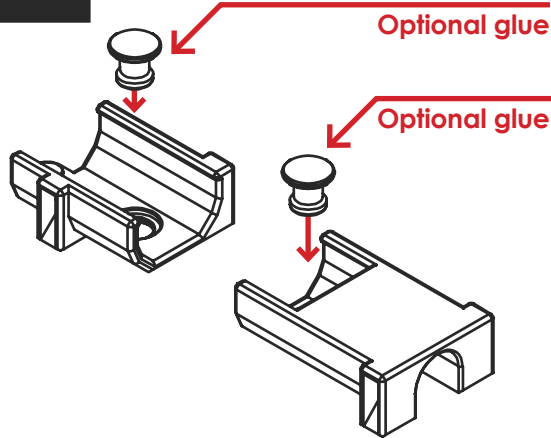

If using a strap, install the strap lugs. The main controller, once in position, will hold these in place but glue can be used for extra security.

**NOTE:** Use "Long" lugs where needed for clearance from body plates.

## STEP 2

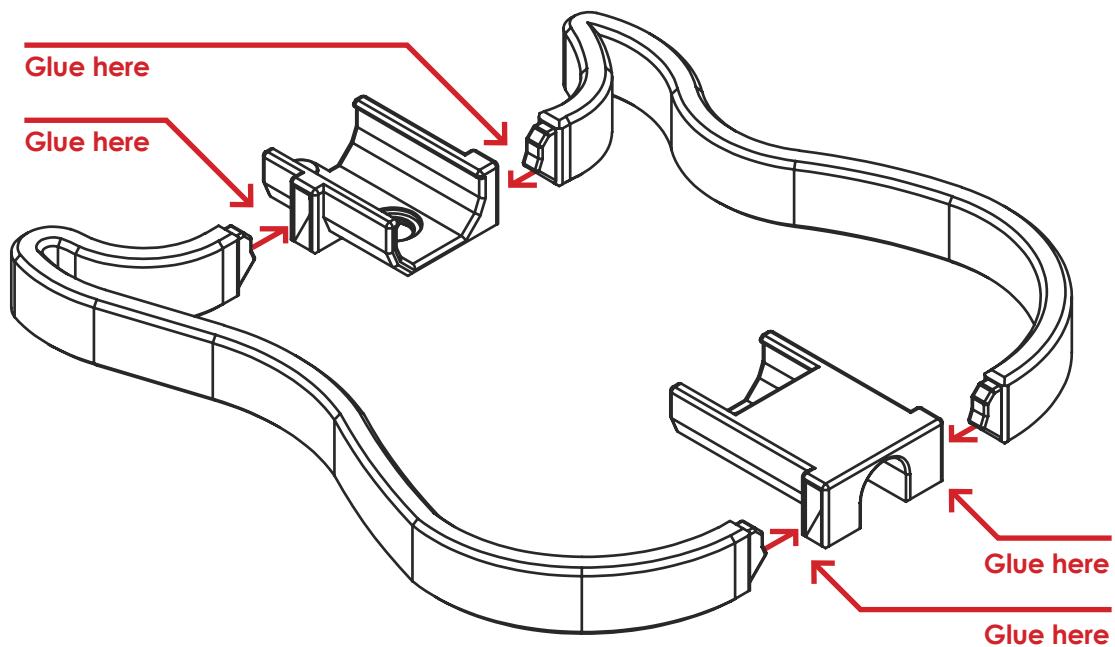


Apply glue to all 4 female wing attachment points, and connect the wings to the sleeves. Allow glue to properly dry.

**NOTE:** If you don't want to add a whammy bar or finish plates, this is the final step for hollow frames.

## POLYBAR BODY FRAME (CONT.)


### STEP 3

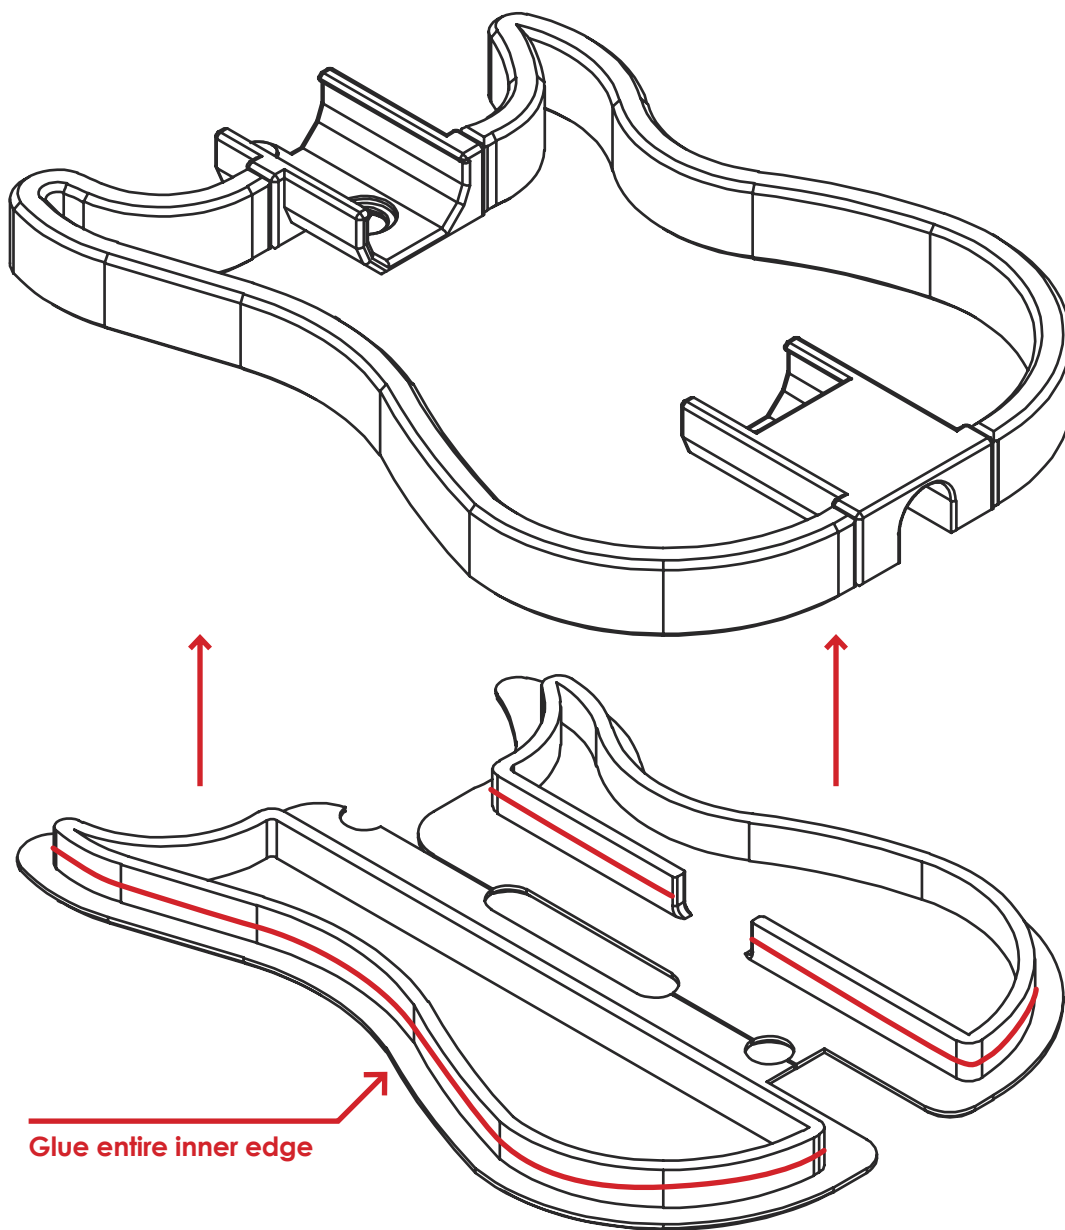

Insert the rear finish plates and glue the entire inner edge to the wings.  
Allow glue to properly dry.

# POLYBAR BODY FRAME (CONT.)

## STEP 4

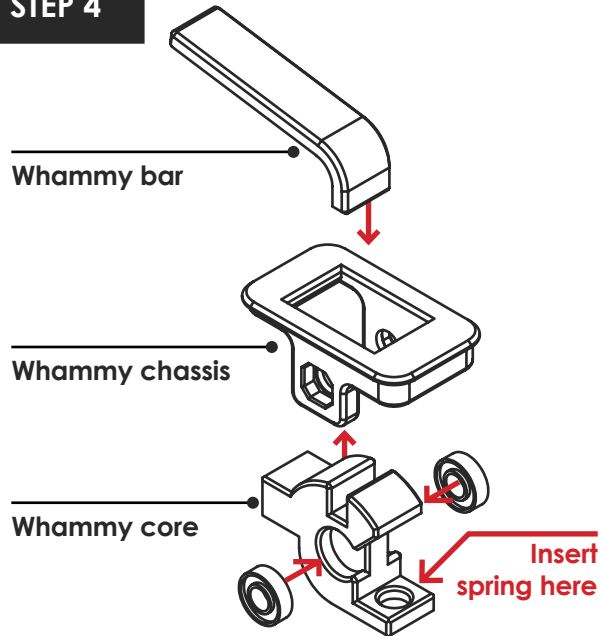


Push the ball bearings into the sides of the whammy core.

Build the whammy assembly as shown.

Add glue as necessary to hold the whammy bar into the whammy core, and insert your spring into the rear lug and hold down location.


**NOTE:** Spring not shown in diagram.

## STEP 5

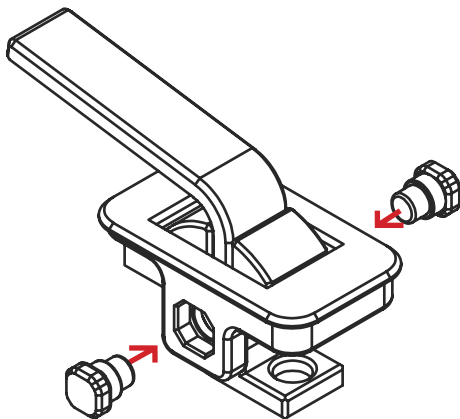

Push the rotation pins into the whammy chassis and ball bearings, and ensure free and proper rotation of the whammy bar.


## STEP 6

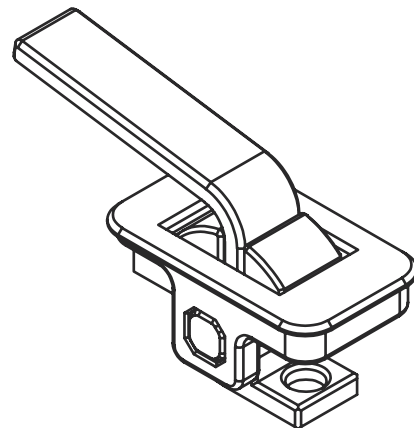

Whammy assembly complete. Test functionality and adjust components as needed.

## POLYBAR BODY FRAME (CONT.)


### STEP 7

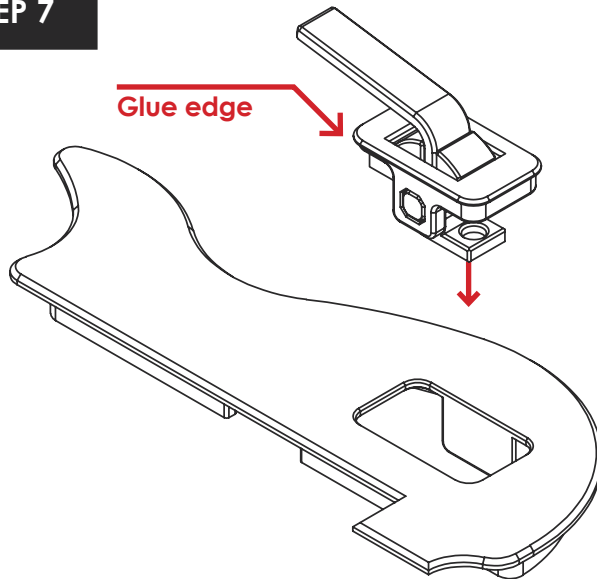

Insert the whammy assembly into the top finish plate.


It is recommended to glue the whammy assembly in place to keep it secure.

### STEP 8

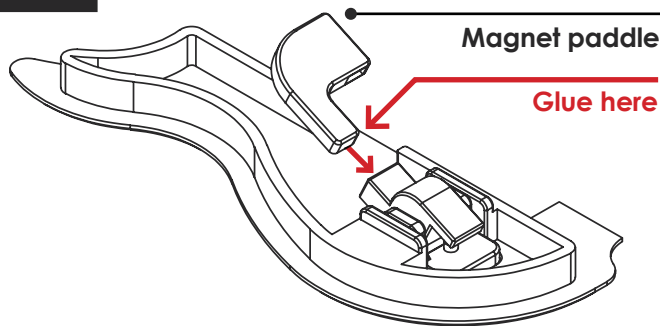

Flip the finish plate over, and press down and rotate the whammy core upwards. Insert five (20x5x2) magnets into the magnet paddle and insert and glue the whammy paddle into the whammy assembly.


### STEP 9

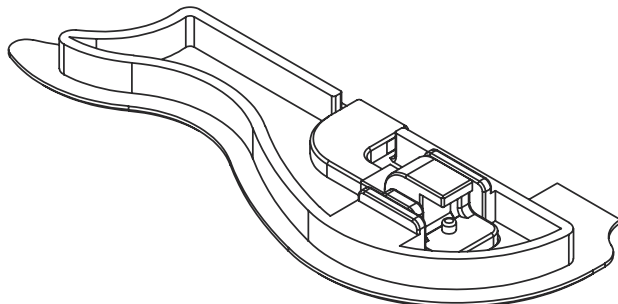

Ensure functionality and clear space of the whammy assembly, and test proper rotation and action, adjust as needed.

## POLYBAR BODY FRAME (CONT.)

### STEP 10

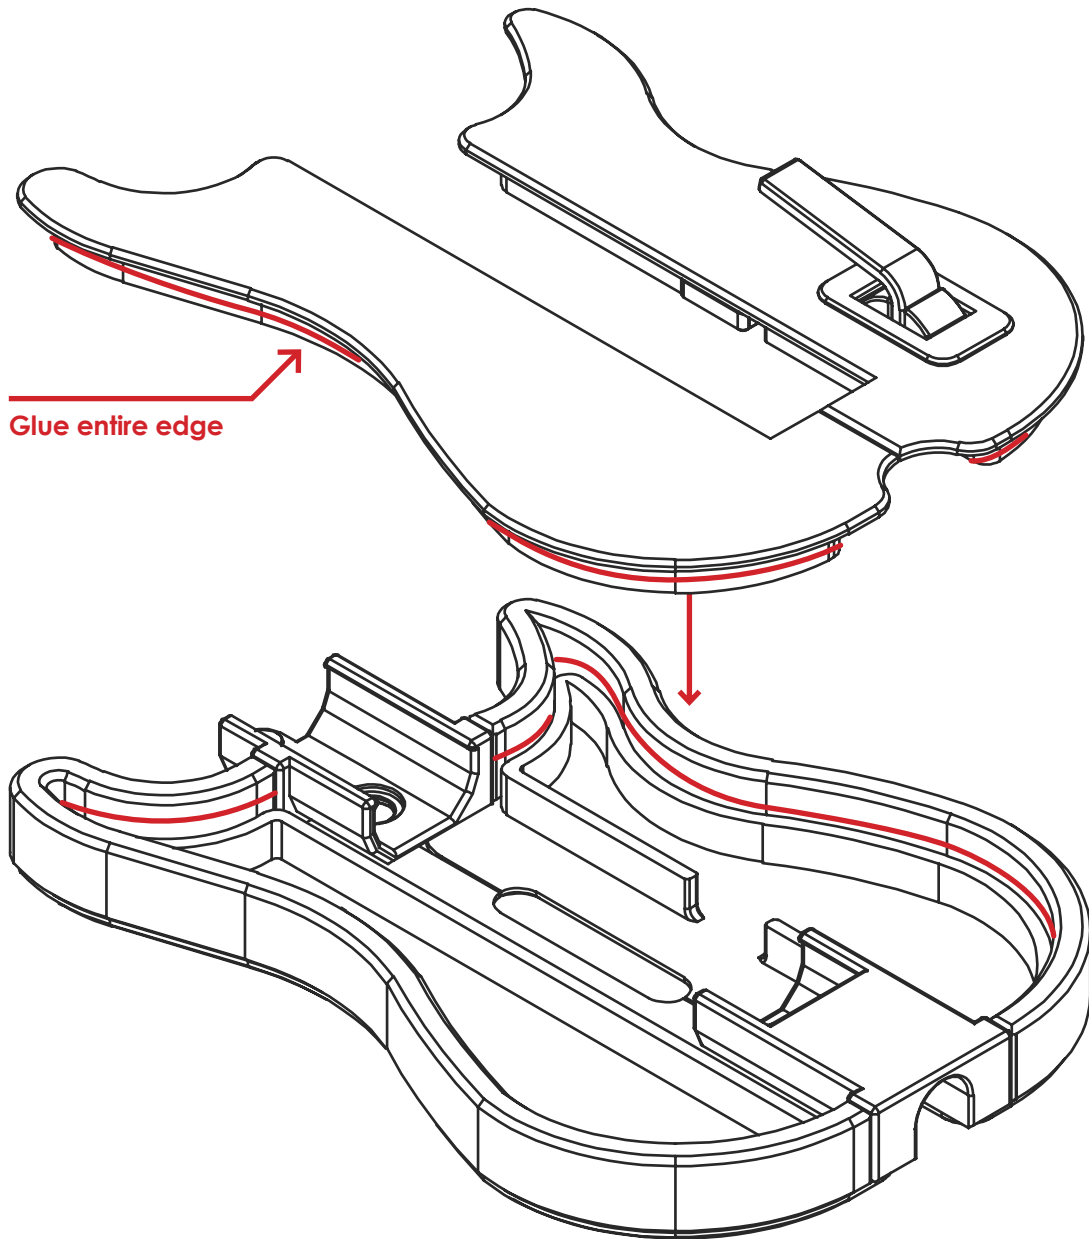


Insert the top finish plates and glue around the inner edge, and allow the glue to fully dry.

**NOTE:** The whammy assembly is a sealed mechanism. If you decide to glue the front whammy finish plate, destructive methods will be required to remove the magnet and spring.



## POLYBAR BODY FRAME (CONT.)


ENJOY YOUR COMPLETED FRAME

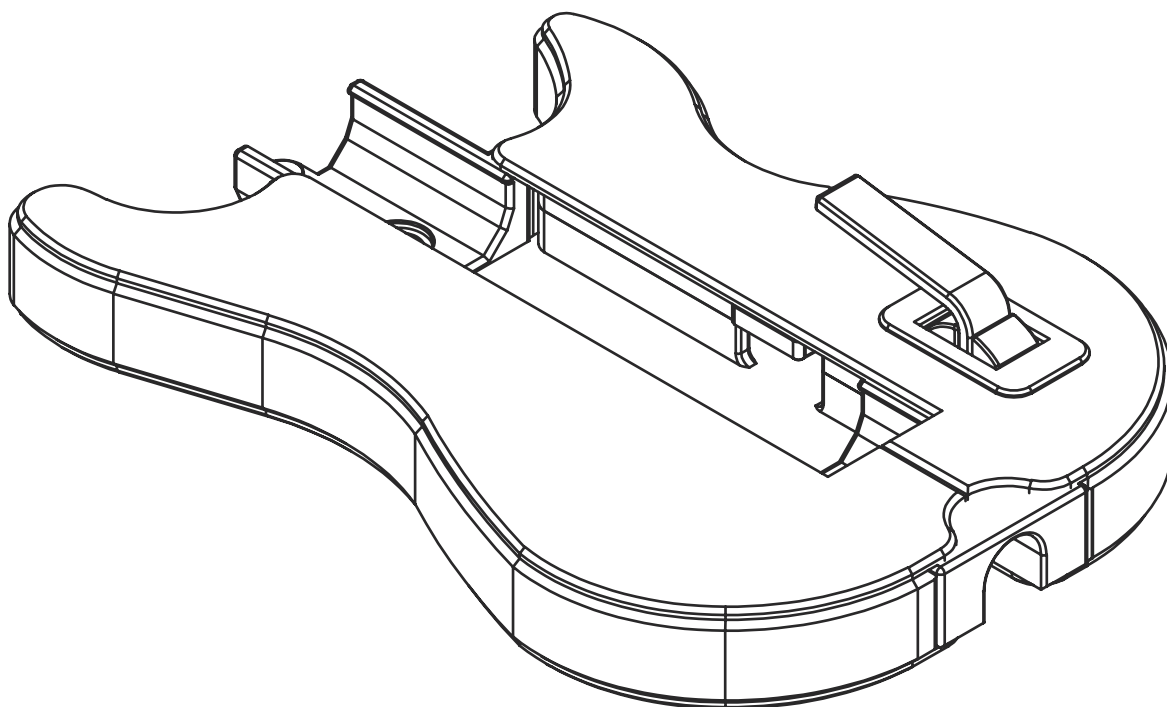

Insert your Polybar Max into the completed frame and use the programmer tool to calibrate the whammy. **Enjoy your completed frame!**

## POLYBAR BODY FRAME (CONT.)


### STEP 12

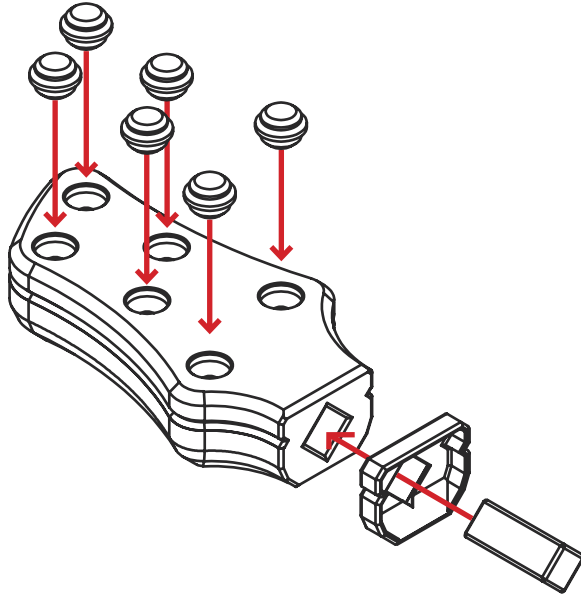

Connect all headstock components together as shown, and glue all components together.

Allow glue to fully dry.

### ENJOY YOUR COMPLETED HEADSTOCK

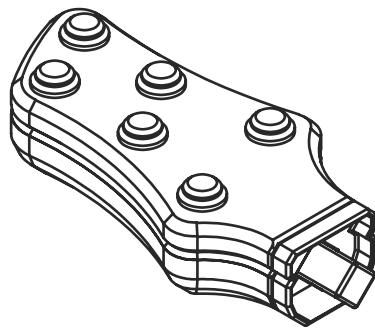


### Enjoy your completed headstock!

Insert the headstock in place of the top finish cap. You may glue the headstock in place, or choose to leave it unglued if using the top access hole for disassembly purposes.


*Polybar*  
MICRO

—— MAIN BODY ASSEMBLY ——

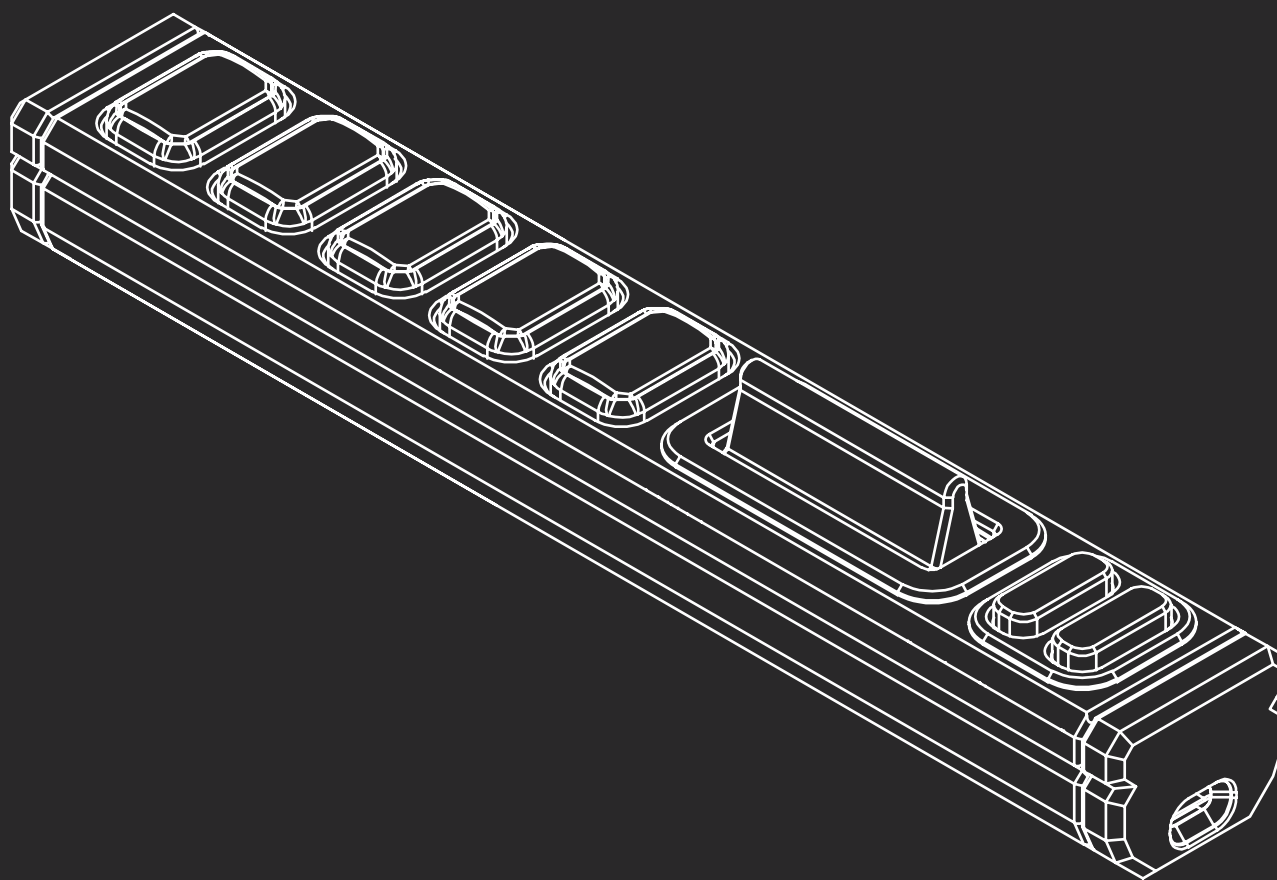

# POLYBAR MICRO


## STEP 1

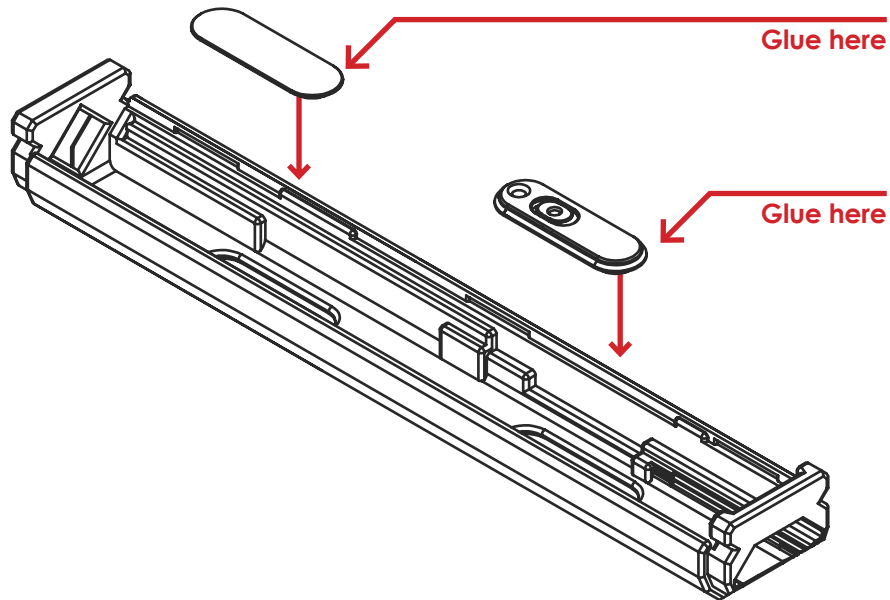

Insert and glue the accessory plates into the bottom of the shell.

**NOTE:** Plates used will change depending on your desired configuration. If using the power switch plate, ensure the dimple is facing the frets for proper alignment.

## STEP 2

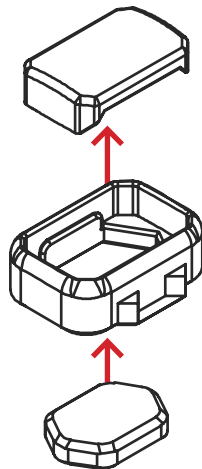


**NOTE:** Pro frets shown, glue as necessary for stability.

Build your five fret assemblies.

**NOTE:** If using "pro" fret inserts, you will need to force the keyswitch stuck, install the "pro" fret insert onto your keyswitch, then install the fret assembly onto the insert.


## STEP 3

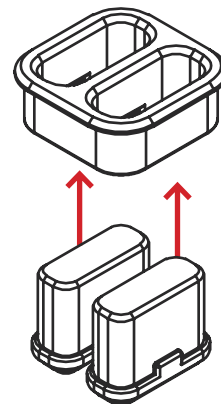

Install the start and select buttons into the chassis.

## POLYBAR MICRO (CONT.)


### STEP 4

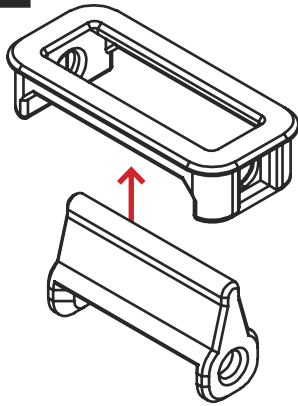

Slide the strum bar into the chassis.


### STEP 5

**NOTE:** Break in the pivot pins to match your strum bar

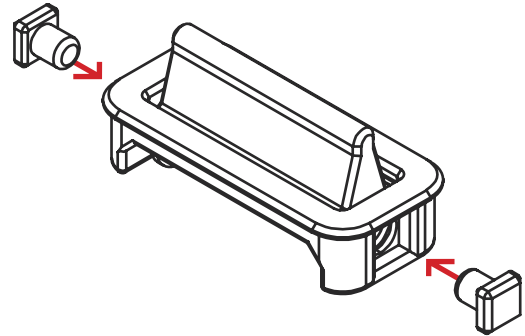

Push the rotation pegs into the strum bar chassis to secure the strum bar assembly. You may need to rotate the pins depending on the location of your print seams.

### STEP 6

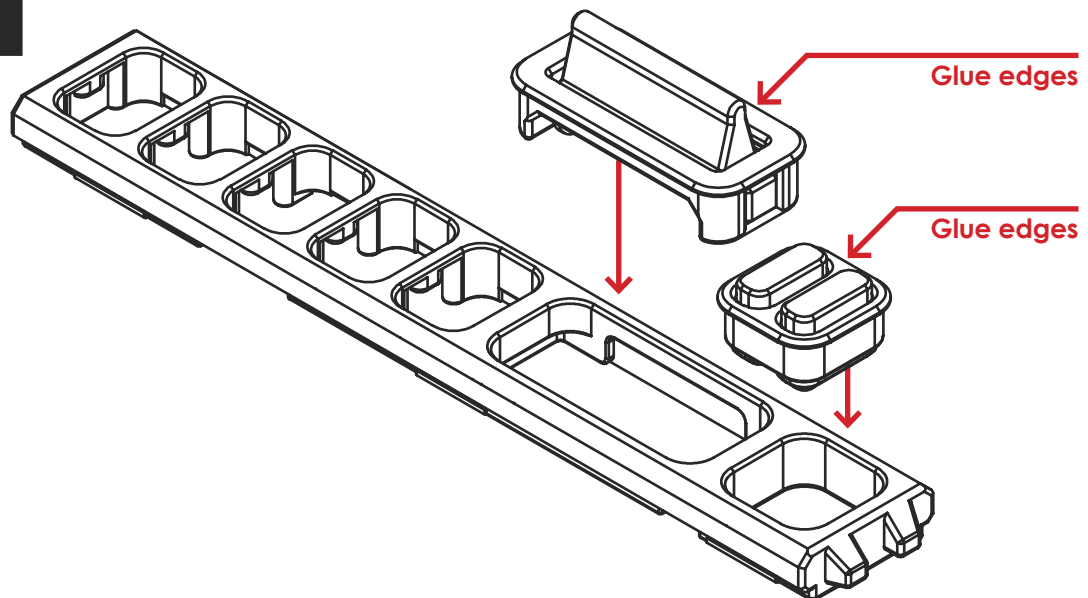


Insert the two chassis components into the front face of the top shell assembly. Glue is recommended to hold the chassis components into the top shell assembly.

# POLYBAR MICRO (CONT.)

## STEP 7

**NOTE:** PCBs are shown in gray. PCB components not depicted for clarity.

**PCB NOTE (MICRO ONLY):** Do not solder your PCBs together until you lay them in the controller. Ensure that your fret PCB is pushed back all the way into its tray before soldering your 9 pin header connection.

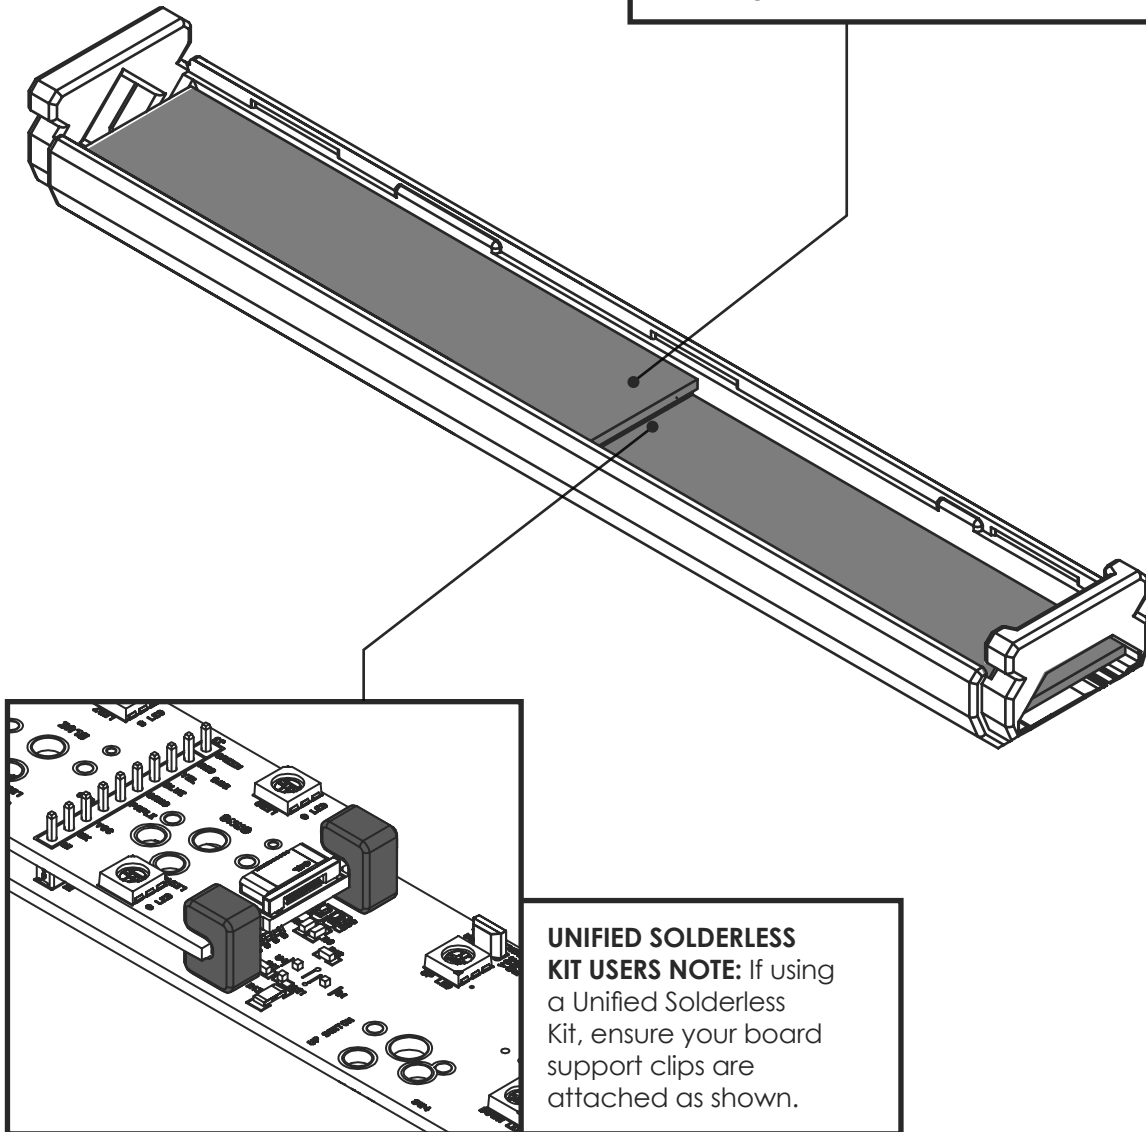

**UNIFIED SOLDERLESS KIT USERS NOTE:** If using a Unified Solderless Kit, ensure your board support clips are attached as shown.


Insert your PCBs into the bottom shell assembly.

**NOTE:** If opting for bluetooth and battery support, use the opening in the bottom fret shell as a battery caddy. Add support or tape as needed to secure battery.

**NOTE:** Ensure proper alignment of the power switch by sliding the switch on (towards the frets), then tilt the controller forward to allow the 3D printed switch to slide forward, then install the PCB.


## POLYBAR MICRO (CONT.)

### STEP 8

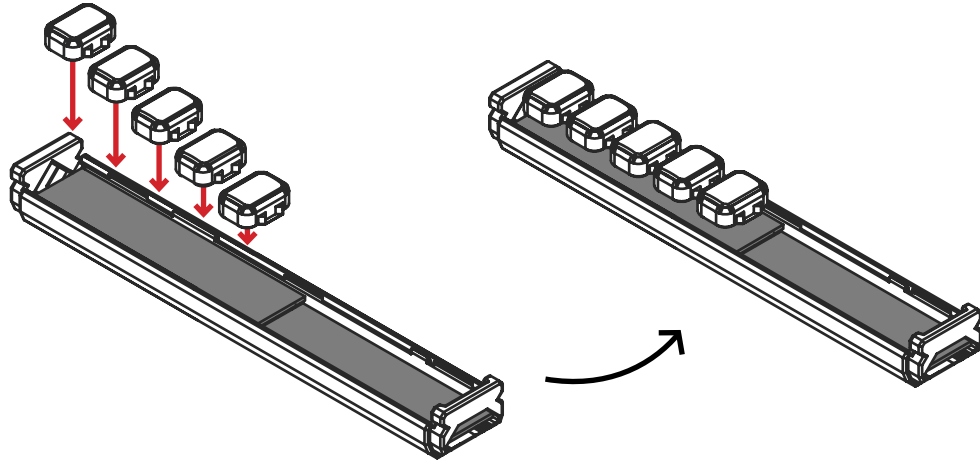

Install your five fret assemblies onto the PCB and keyswitches. Depending on your desired configuration in previous steps, this may vary. Then with your fret switches installed, test that all components and inputs function correctly, the battery functions, and adjust as needed with the firmware configurator tool.

### STEP 9

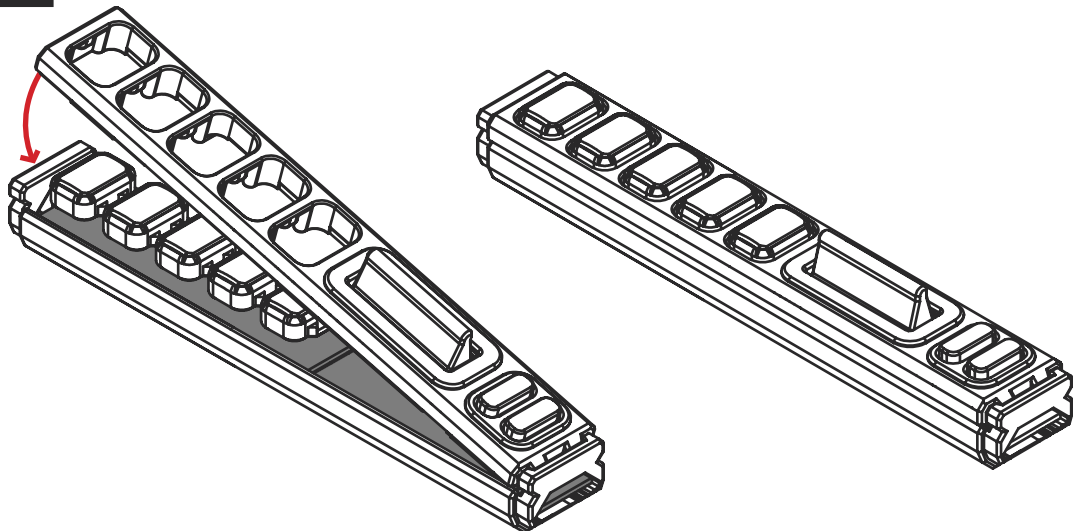


Install the top shell assembly of the controller into the bottom assembly.

Start by **pushing the top shell assembly into the hold down** near the end of the controller, and carefully close the shell while ensuring all components are secure.

**Press the shells closed firmly to engage the snap clips** to seal the controller.

# POLYBAR MICRO (CONT.)


## STEP 10

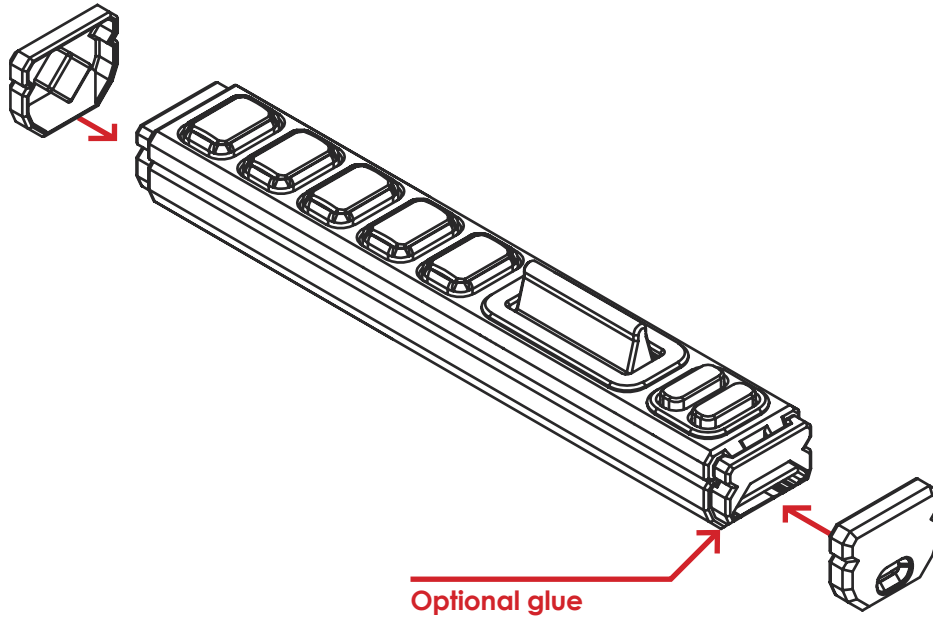

Install the finish caps and joystick onto your controller. Add glue to the finish caps where necessary. If using accessories, it is recommended to glue the end caps on.

**NOTE:** The top cap can be used for access to disassemble the housing, glue at your discretion.

## ENJOY YOUR COMPLETED POLYBAR MICRO

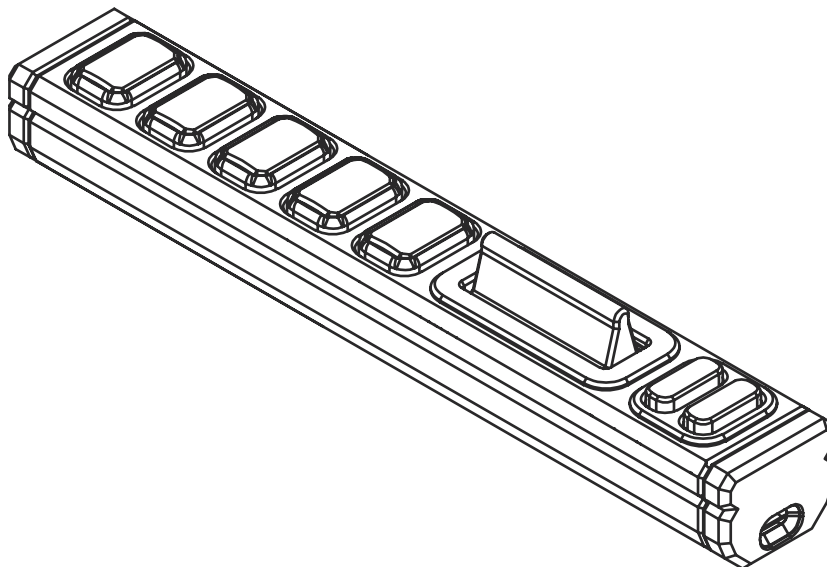



# PROGRAMMING & CONFIGURING

## SETTING UP YOUR CONTROLLER WITH CUSTOM FIRMWARE

Here's how to set up your controller with custom firmware. For the latest files and help, check out our Discord server.



Join our  
Discord!

### CONTROLLER SETUP:

You can either use our provided presets, or create your own:

#### USING OUR PRESETS

You can find official presets on our Discord server. Download them to get started.

#### NOTE

If you ever run into problems, you can always reset the controller to factory defaults and flash back our preset. **No harm no foul!**

#### MAKING YOUR OWN SETUP

For more control, you can download Sanjay900's Santroller firmware tool. It's the easiest way to customize your controller.

#### WHAT THE SANTROLLER TOOL DOES:

- It lets you import our setups and save your own.
- You can change things like the LED colors, button mapping, and add shortcuts.
- Play around with the settings to get it just right. You can import our setups, and then change them to your liking if need be.