

This document provides additional assistance with wiring your Extron IPL PRO enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instruction, refer to the user's manual for the specific Extron IPL PRO enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Audio Processor
Manufacturer: ClockAudio
Firmware Version: 2.1.0
Model(s): CDT 100, CDT 100-UDP, CDT 100 MK I, CDT 100 MK II

Tested on the Following Software and Firmware Versions:

GC (Plus, Pro) Version	2.7.3.11
IP Link Pro Control Processor Firmware	2.08.0002-b001
MediaLink Plus Controller Firmware	2.02.0000-b003
HC 400 Series Firmware	1.00.0000-b043
TLC Pro 521M Firmware	2.01.0002-b002

Version History

Driver Version	Date	Notes
1_3_0	8/9/2018	Extron Certified. Tested on CDT 100 MK II model. Fixed RGB command range for Red, Green, and Blue qualifier. Fixed supported Channel parameters for Switch Logic Status.
1_2_2	8/1/2018	Extron Certified. Tested on CDT 100 MK II model. Added CH32Brightness, TS Brightness, and TS State command. Fixed Switch Logic Status channel response.
1_2_1	7/24/2018	Extron Certified. Tested on CDT 100 MK II model. Added 6 to 9 Channels for Switch Logic Status. Added RGB command.
1_2_0	5/17/2018	Extron Certified. Tested on CDT 100 MK II model. Added CDT 100 MK I and CDT 100 MK II model. Added Firmware status and Phantom Power All command. Updated driver polling frequencies.
1_0_5	4/04/2018	Extron Certified. Tested on CDT 100. Fixed unsolicited status issue.

**IPL PRO Device Interface
Communication Sheet**

1_0_4	3/29/2018	Fixed status feedback for Phantom Power command and Switch Logic Status.
1_0_3	2/21/2018	Updated communication sheet with notes regarding UDP communication.
1_0_2	2/12/2018	Fixed Switch Logic Status response feedback. Added IP Address and Listening Port parameters for sending the Switch Logic Status Subscribe command.
1_0_1	1/30/2018	Adding CDT 100-UDP model and updated driver to the latest standard.
1_0_0	11/19/2015	Initial Version.

Driver Notes:


- User Defined command takes a string parameter and sends the string out of the port.
- For Commands requiring Channel Parameter, Emulated Status is only available when Channel parameter is configured to be 'All'
- Controller IP Address and Device Reply Port Number parameters are used only to send the subscribe command to enable unsolicited responses. They must be set first for the driver to work.
- Device Reply Port Number parameter should have a value from 1 to 65535.

Driver Timings:


- Recommended repeat rate for this driver is .1 seconds.

Configuration Parameters:

- The following examples are on how to configure the parameters 'Controller IP Address' and the 'Device Reply Port Number'.
- 'Controller IP Address' configuration parameter must match the IP address of the controller. Allowing the device to send any unsolicited response back to the specified IP address.

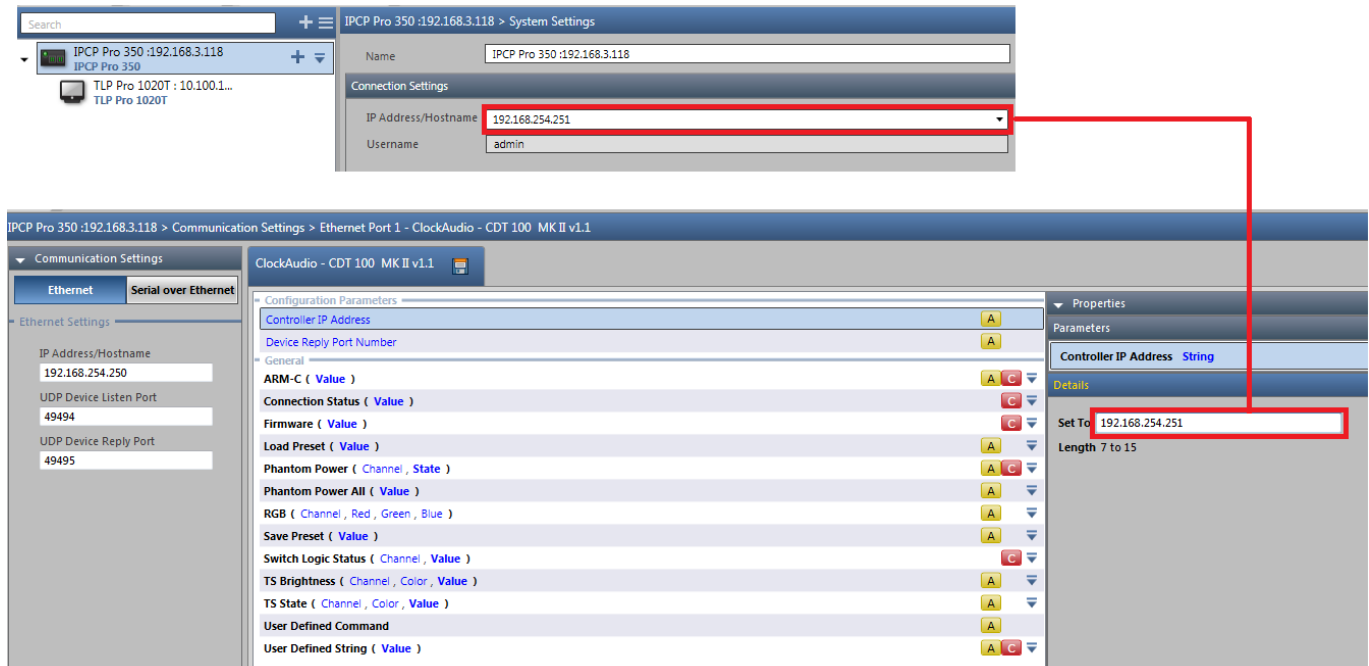

- 'Device Reply Port Number' configuration parameter must match the UDP Device Replay port of the actual device. Allowing the device to send any unsolicited response back to the specified Reply port number.

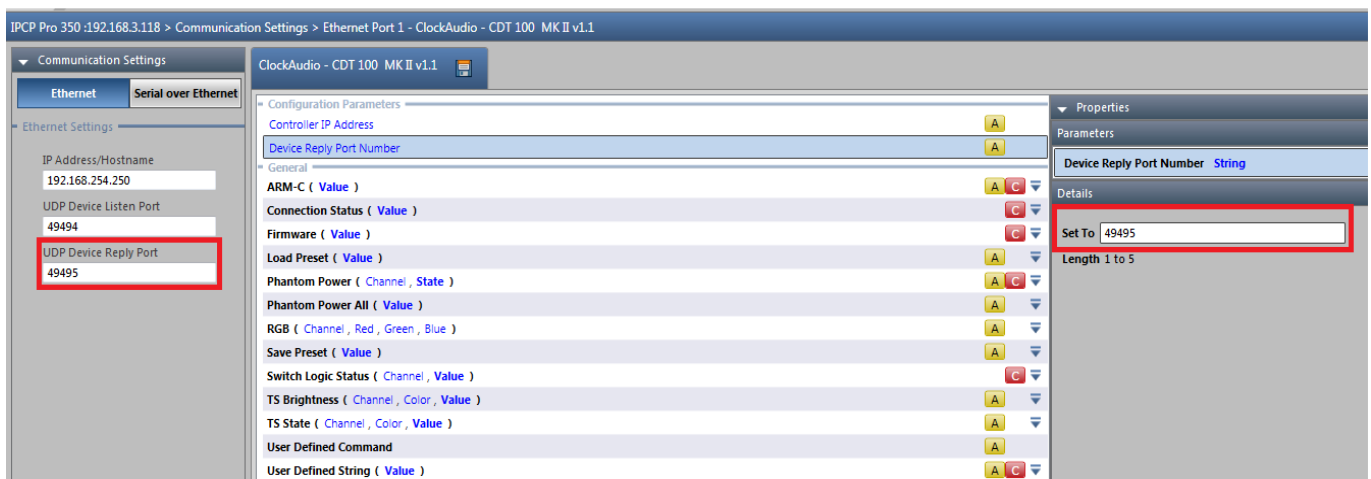

IPL PRO Device Interface Communication Sheet

Control Commands & States:

ARM-C	Off	On	
CH32 Brightness ^{1,4}	0	10	20
	30	40	50
	60	70	80
	90	100	
LED Light Control ^{1,4}	Off	On	
Load Preset	0 – 9		
Phantom Power ²	Off	On	
Phantom Power All	Off	On	
RGB ³	None		
Save Preset	0 – 9		
TS Brightness ^{1,5}	0	10	20
	30	40	50
	60	70	80
	90	100	
TS State ^{1,5}	On	Off	
User Defined Command	None		
User Defined String	String		

¹ This command requires Channel and Color parameters to be configured.

² This command requires Channel parameter to be configured.

³ This command requires Channel, Red, Green, and Blue parameters to be configured.

⁴ This command is not supported on CDT 100 MKII model.

⁵ This command is not supported on CDT 100 MKI model.

Status Available:

ARM-C	Off	On
Connection Status ^{RP}	Connected	Disconnected
Firmware	Value	
LED Light Control ^{1,4}	Off	On
Phantom Power ²	Off	On
Switch Logic Status ^{2,3}	Off	On
User Defined String	String	

¹ This command requires Channel and Color parameters to be configured.

² This command requires Channel parameter to be configured.

³ This consists of 1-4, and 6, 8, 10, 12 channels.

⁴ This command is not supported on CDT 100 MKII model.

^{RP} Connection Status is based off of the following string: VERSION\r

Network communication:

When configuring the Ethernet driver, be sure device settings match that of the GC configuration.

Port Type:	Ethernet
Device Listen Port:	49494
Device Reply Port:	49495
Logon Credentials Supported:	No
Multi-Connection Capabilities:	Yes
Port Changeability:	Yes

Ethernet Driver Configuration Description:

- Please refer to user manual for settings and changes to the network communication.
- When using multiple UDP drivers within the same configuration each driver should have a unique 'UDP Device Reply Port' number, this is due to the nature of UDP communication. If you have a driver with a fixed 'UDP Device Reply Port' only one instance of the driver can be used within the configuration.

Notes for the Device:

- Due to the way the device behaves, two or more drivers cannot be used to monitor Switch Logic Status command, as only one will receive unsolicited data. However, all other commands will work.
- For Switch Logic Status to work properly the driver sends out a subscription command every 30 seconds; because of the time the device takes to process this command, there is a potential that the unsolicited response from the device is not sent out.