

Motor Datasheet: WxF-60x23GT

Operating Point: Continuous | Temperature: 20 °C

Geometry (active elements only)

Parameter	Value	Unit
Machine Outer Diameter	58.0	mm
Machine Inner Diameter	30.5	mm
Machine Thickness / Width	22.2	mm
Air Gap	0.50	mm
Fill Factor (input)	0.60	-
Slot Fill Factor (calculated)	Not calculated	-
Slot Width (tooth to tooth)	4.132	mm
Available Coil Space	2.066	mm
Assumed Coil Width (simulation)	1.866	mm

Mass Properties (active elements only)

Parameter	Value	Unit
Machine Mass	236.2	g
Rotor Mass	66.9	g
Stator Mass	169.3	g
Rotor Structure Included	No	-
Rotor Moment of Inertia (active elements only)	347.3	g·cm ²

Electrical Properties

Parameter	Value	Unit
Supply Current (RMS)	7.303	A
Supply Current (Peak)	10.327	A
Id (Peak)	-0.000	A
Iq (Peak)	10.327	A
Phase Advance Angle	0.0	°elec
Phase Resistance	198.914	mOhm
D-Axis Inductance (Ld)	516.659	μH
Q-Axis Inductance (Lq)	410.275	μH
Terminal Inductance (Ltt = Ld + Lq)	926.934	μH
PM Flux Linkage	9.367	mWb
Frequency at operating point (electrical)	416.667	Hz
Winding Configuration	wye (star)	-
DC Supply Voltage	48.000	V
Power Factor	0.969	-

Performance

Parameter	Value	Unit
Torque (Continuous)	1.34	Nm
Speed	2500.0	rpm
BackEMF Constant (Ke, phase peak)	9.8	mV/rpm
Motor Constant (Km, only resistive losses)	236.9	mNm/√W
Specific Motor Constant (Km / mass)	1.00	Nm/√W/kg
Torque Constant (Kt, peak, no-load)	127.7	mNm/A
Torque Ripple	3.5	%

Saturation	0.0	%
------------	-----	---

Losses

Parameter	Value	Unit
Total Losses	37.1	W
Resistive Losses	31.8	W
Iron Core Losses	3.4	W
Magnet Eddy Current Losses	0.9	W
Rotor Structure Eddy Current Losses	0.0	W
Winding Eddy Current Losses	0.0	W


Configuration

Parameter	Value	Unit
Number of Stators	1	-
Number of Rotors	1	-
Number of Slots	18	-
Pole Pairs	10	-
Number of Parallel Paths	1	-
Number of Turns per Tooth (designed incl. parallel paths)	29.0	-
Number of Phase Turns (all phases in series)	174.0	-

Winding Configuration

Schema: **AaABbBCcCAaABbBCcC**

Concentrated Winding | Balanced | Cogging: 180/rev | Ripple: 180/rev

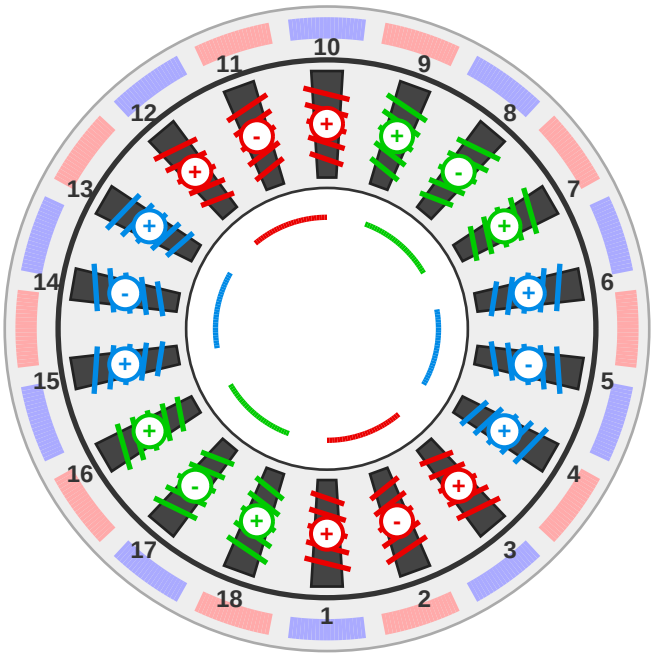

Materials


Component	Material	
Stator Core	N030-Cogent	-
Magnets	BMN-52SH (GBD)	-
Rotor Backiron	11SMn30	-
Coil	Copper	-

Voltage Breakdown at Operating Point (with integer turns)

Parameter	Value	Unit
Back-EMF Voltage (Phase, Peak)	22.293	V
Resistive Drop (Phase, Peak)	2.054	V
Inductive Drop Ld (Peak)	0.000	V
Inductive Drop Lq (Peak)	11.093	V

Inductive Drop Total (Peak)	11.093	V
Terminal Voltage (Phase, Peak)	27.589	V
Back-EMF Voltage (Line-to-Line, Peak)	38.612	V
Resistive Drop (Line-to-Line, Peak)	3.558	V
Inductive Drop (Line-to-Line, Peak)	19.213	V
Terminal Voltage (Line-to-Line, Peak)	47.786	V

Phasor Diagram Phase Values NOT Line-to-Line (d-q reference frame)

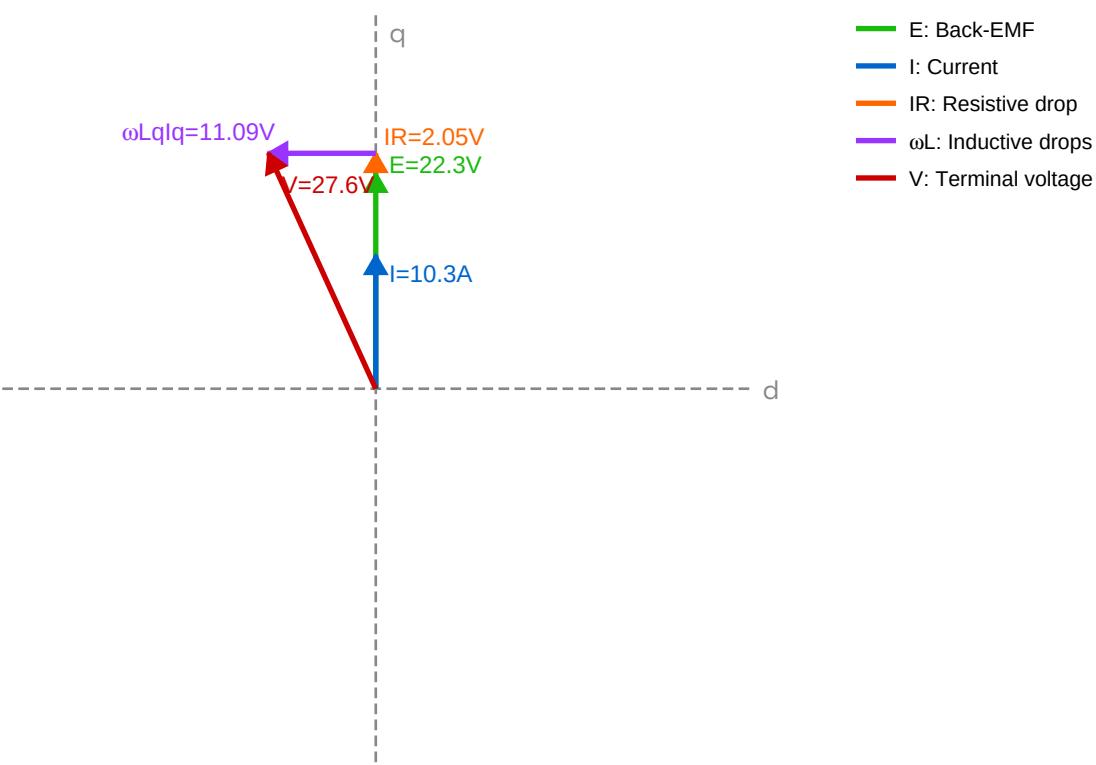

Mechanical Properties

Parameter	Value	Unit
Airgap Axial Force (Average)	206.17	N
Magnet Axial Force Positive Maximum	0.00	N
Magnet Axial Force Positive Minimum	0.00	N
Magnet Axial Force Negative Maximum	-52.66	N
Magnet Axial Force Negative Minimum	-30.75	N

Glossary

- Peak — Refers to 0-to-peak amplitude (NOT peak-to-peak). For sinusoidal waveforms: $\text{Peak} = \text{RMS} \times \sqrt{2}$.
- RMS — Root Mean Square, the equivalent DC value for power calculations.
- Line-to-Line (L-L) — Voltage measured between two phases. For wye connection: $V_{LL} = V_{\text{phase}} \times \sqrt{3}$.