

Motor Datasheet: WxF-85x28GT

Operating Point: Continuous | Temperature: 20 °C

Geometry (active elements only)

Parameter	Value	Unit
Machine Outer Diameter	83.0	mm
Machine Inner Diameter	35.4	mm
Machine Thickness / Width	28.1	mm
Air Gap	0.50	mm
Fill Factor (input)	0.60	-
Slot Fill Factor (calculated)	Not calculated	-
Slot Width (tooth to tooth)	4.811	mm
Available Coil Space	2.405	mm
Assumed Coil Width (simulation)	2.205	mm

Mass Properties (active elements only)

Parameter	Value	Unit
Machine Mass	752.0	g
Rotor Mass	255.3	g
Stator Mass	496.7	g
Rotor Structure Included	No	-
Rotor Moment of Inertia (active elements only)	2497.4	g·cm ²

Electrical Properties

Parameter	Value	Unit
Supply Current (RMS)	26.993	A
Supply Current (Peak)	38.173	A
Id (Peak)	-0.000	A
Iq (Peak)	38.173	A
Phase Advance Angle	0.0	°elec
Phase Resistance	35.041	mOhm
D-Axis Inductance (Ld)	121.299	μH
Q-Axis Inductance (Lq)	116.927	μH
Terminal Inductance (Ltt = Ld + Lq)	238.226	μH
PM Flux Linkage	9.211	mWb
Frequency at operating point (electrical)	416.667	Hz
Winding Configuration	wye (star)	-
DC Supply Voltage	48.000	V
Power Factor	0.915	-

Performance

Parameter	Value	Unit
Torque (Continuous)	5.40	Nm
Speed	2500.0	rpm
BackEMF Constant (Ke, phase peak)	9.6	mV/rpm
Motor Constant (Km, only resistive losses)	616.5	mNm/√W
Specific Motor Constant (Km / mass)	819.9	mNm/√W/kg
Torque Constant (Kt, peak, no-load)	137.1	mNm/A
Torque Ripple	4.4	%

Saturation	0.0	%
------------	-----	---

Losses

Parameter	Value	Unit
Total Losses	98.8	W
Resistive Losses	76.6	W
Iron Core Losses	11.2	W
Magnet Eddy Current Losses	7.0	W
Rotor Structure Eddy Current Losses	0.0	W
Winding Eddy Current Losses	0.0	W


Configuration

Parameter	Value	Unit
Number of Stators	1	-
Number of Rotors	1	-
Number of Slots	18	-
Pole Pairs	10	-
Number of Parallel Paths	1	-
Number of Turns per Tooth (designed incl. parallel paths)	11.0	-
Number of Phase Turns (all phases in series)	66.0	-

Winding Configuration

Schema: **AaABbBCcCAaABbBCcC**

Concentrated Winding | Balanced | Cogging: 180/rev | Ripple: 180/rev

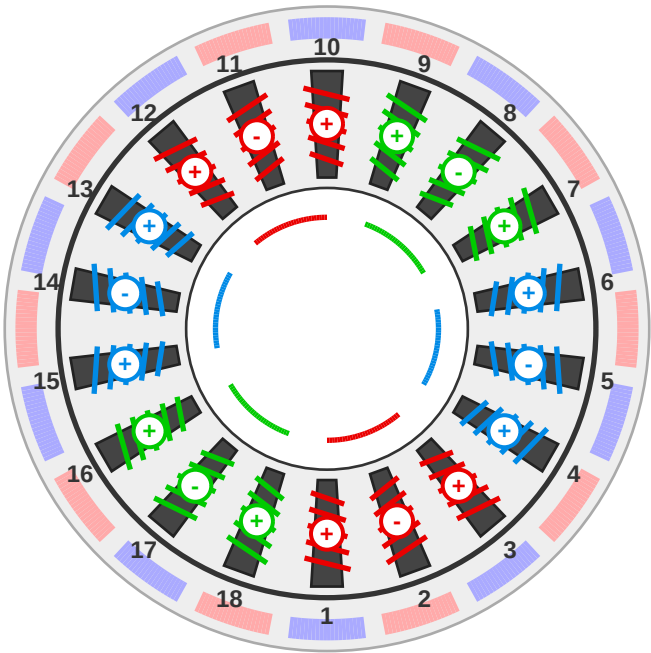

Materials


Component	Material	
Stator Core	N030-Cogent	-
Magnets	BMN-52SH (GBD)	-
Rotor Backiron	11SMn30	-
Coil	Copper	-

Voltage Breakdown at Operating Point (with integer turns)

Parameter	Value	Unit
Back-EMF Voltage (Phase, Peak)	23.926	V
Resistive Drop (Phase, Peak)	1.338	V
Inductive Drop Ld (Peak)	0.000	V
Inductive Drop Lq (Peak)	11.685	V

Inductive Drop Total (Peak)	11.685	V
Terminal Voltage (Phase, Peak)	27.530	V
Back-EMF Voltage (Line-to-Line, Peak)	41.441	V
Resistive Drop (Line-to-Line, Peak)	2.317	V
Inductive Drop (Line-to-Line, Peak)	20.240	V
Terminal Voltage (Line-to-Line, Peak)	47.683	V

Phasor Diagram Phase Values NOT Line-to-Line (d-q reference frame)

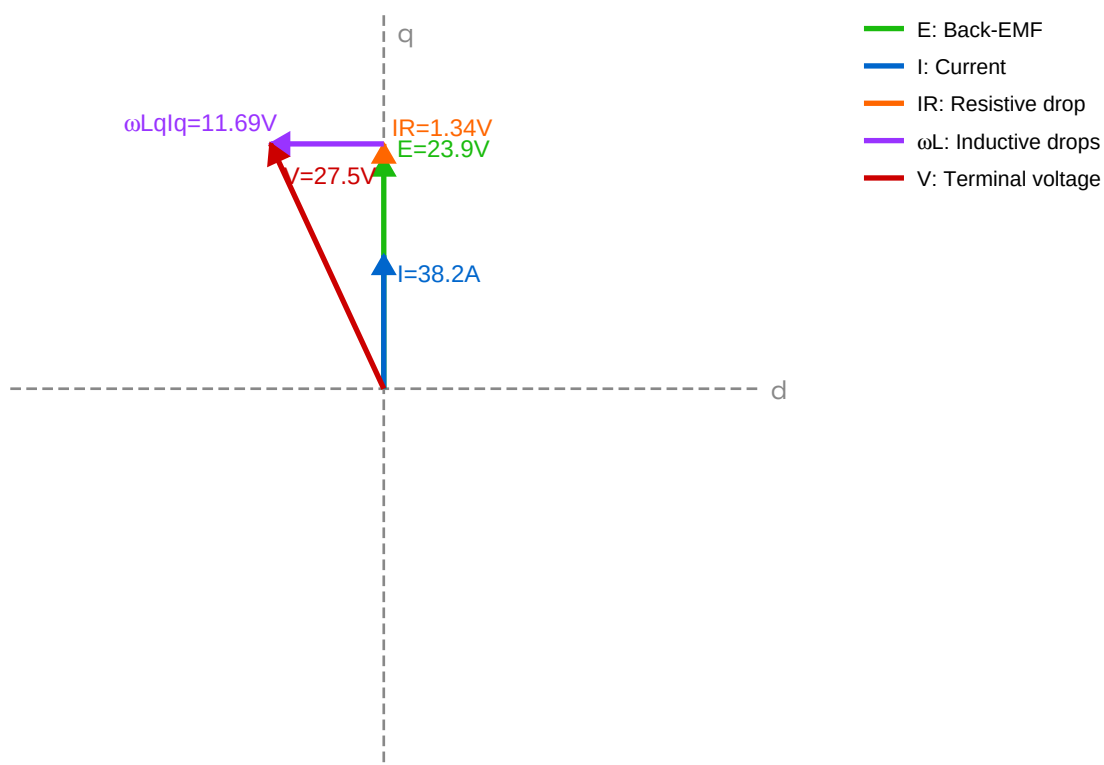

Mechanical Properties

Parameter	Value	Unit
Airgap Axial Force (Average)	487.36	N
Magnet Axial Force Positive Maximum	0.00	N
Magnet Axial Force Positive Minimum	0.00	N
Magnet Axial Force Negative Maximum	-151.47	N
Magnet Axial Force Negative Minimum	-94.94	N

Glossary

- Peak — Refers to 0-to-peak amplitude (NOT peak-to-peak). For sinusoidal waveforms: $\text{Peak} = \text{RMS} \times \sqrt{2}$.
- RMS — Root Mean Square, the equivalent DC value for power calculations.
- Line-to-Line (L-L) — Voltage measured between two phases. For wye connection: $V_{LL} = V_{\text{phase}} \times \sqrt{3}$.